

# *Storing Data: Disks and Files*

## Chapter 9

**ECS 165A – Winter 2026**



**Mohammad Sadoghi**

*Exploratory Systems Lab*

*Department of Computer Science*

**UC DAVIS**  
UNIVERSITY OF CALIFORNIA



# *Disks and Files*

- ❖ DBMS stores information on (“hard”) disks.
- ❖ This has major implications for DBMS design!
  - **READ:** transfer data from disk to main memory (RAM).
  - **WRITE:** transfer data from RAM to disk.
  - Both are high-cost operations, relative to in-memory operations, so must be planned carefully!

# *Why Not Store Everything in Main Memory?*


- ❖ *Costs too much.* \$100 will buy you either 32GB of RAM or 4TB of disk today.
- ❖ *Main memory is volatile.* We want data to be saved between runs. (Obviously!)
- ❖ Typical storage hierarchy:
  - Main memory (RAM) for currently used data.
  - Disk for the main database (secondary storage).
  - Tapes for archiving older versions of the data (tertiary storage).

# Disks

- ❖ Secondary storage device of choice.
- ❖ Main advantage over tapes: random access vs. *sequential*.
- ❖ Data is stored and retrieved in units called *disk blocks* or *pages*.
- ❖ Unlike RAM, time to retrieve a disk page varies depending upon location on disk.
  - Therefore, relative placement of pages on disk has major impact on DBMS performance!

# Components of a Disk

- ❖ The platters spin (say, 90rps).
- ❖ The arm assembly is moved in or out to position a head on a desired track. Tracks under heads make a *cylinder* (imaginary!).
- ❖ Only one head reads/writes at any one time.
- ❖ *Block size* is a multiple of *sector size* (which is fixed).

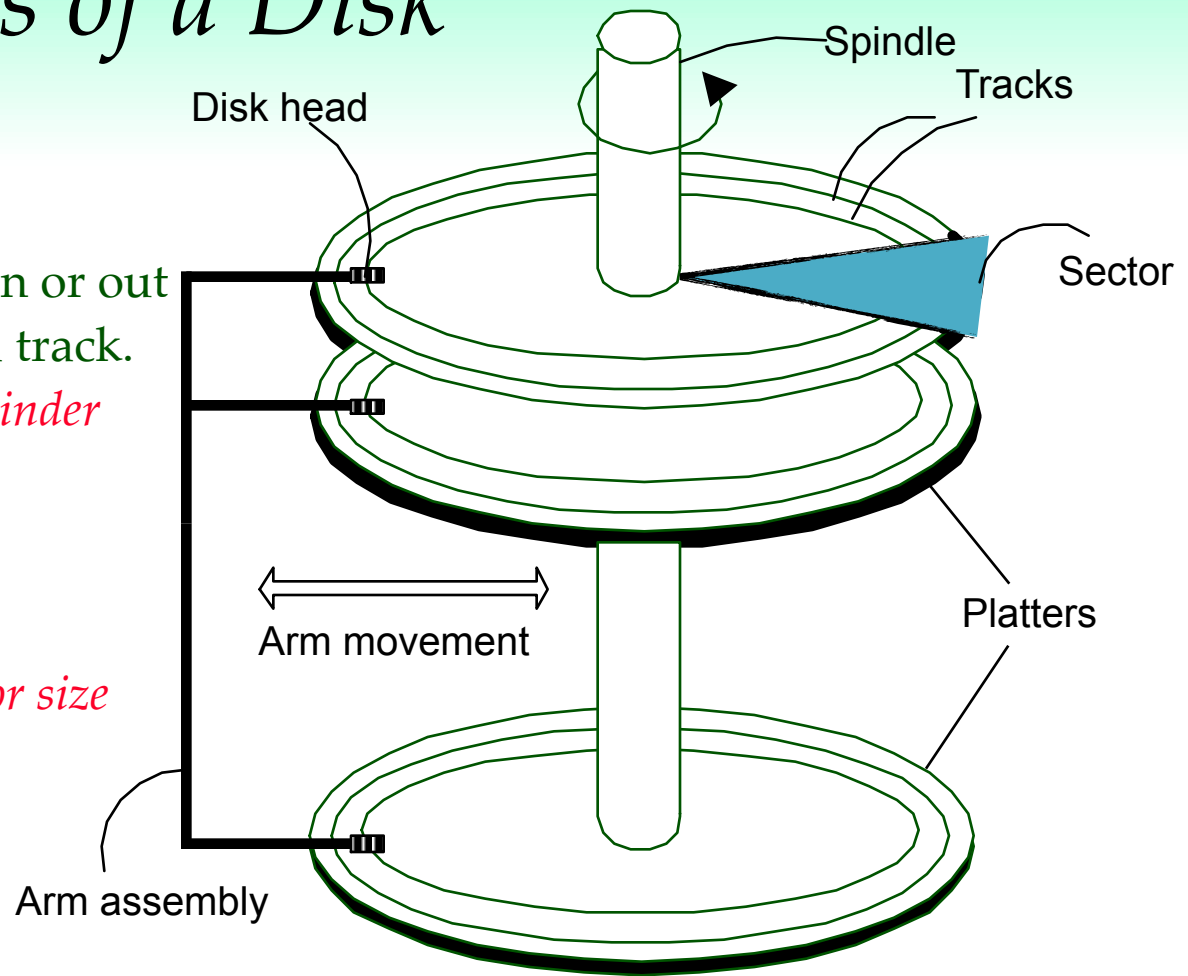

# *Accessing a Disk Page*

- ❖ Time to access (read / write) a disk block:
  - *seek time* (moving arms to position disk head on track)
  - *rotational delay* (waiting for block to rotate under head)
  - *transfer time* (actually moving data to / from disk surface)
- ❖ Seek time and rotational delay dominate.
  - Seek time varies from about 1 to 20msec
  - Rotational delay varies from 0 to 10msec
  - Transfer rate is about 1msec per 4KB page
- ❖ Key to lower I/O cost: **reduce seek / rotation delays!**  
Hardware vs. software solutions?

# Arranging Pages on Disk

- ❖ *'Next'* block concept:
  - blocks on same track, followed by
  - blocks on same cylinder, followed by
  - blocks on adjacent cylinder
- ❖ Blocks in a file should be arranged sequentially on disk (by *'next'*), to minimize seek and rotational delay.
- ❖ For a **sequential scan**, *pre-fetching* several pages at a time is a big win!


# *Disk Space Management*

- ❖ Lowest layer of DBMS software manages space on disk.
- ❖ Higher levels call upon this layer to:
  - allocate / de-allocate a page
  - read / write a page
- ❖ Request for a *sequence* of pages must be satisfied by allocating the pages sequentially on disk! Higher levels don't need to know how this is done, or how free space is managed.



# Buffer Management in a DBMS

Page Requests from Higher Levels

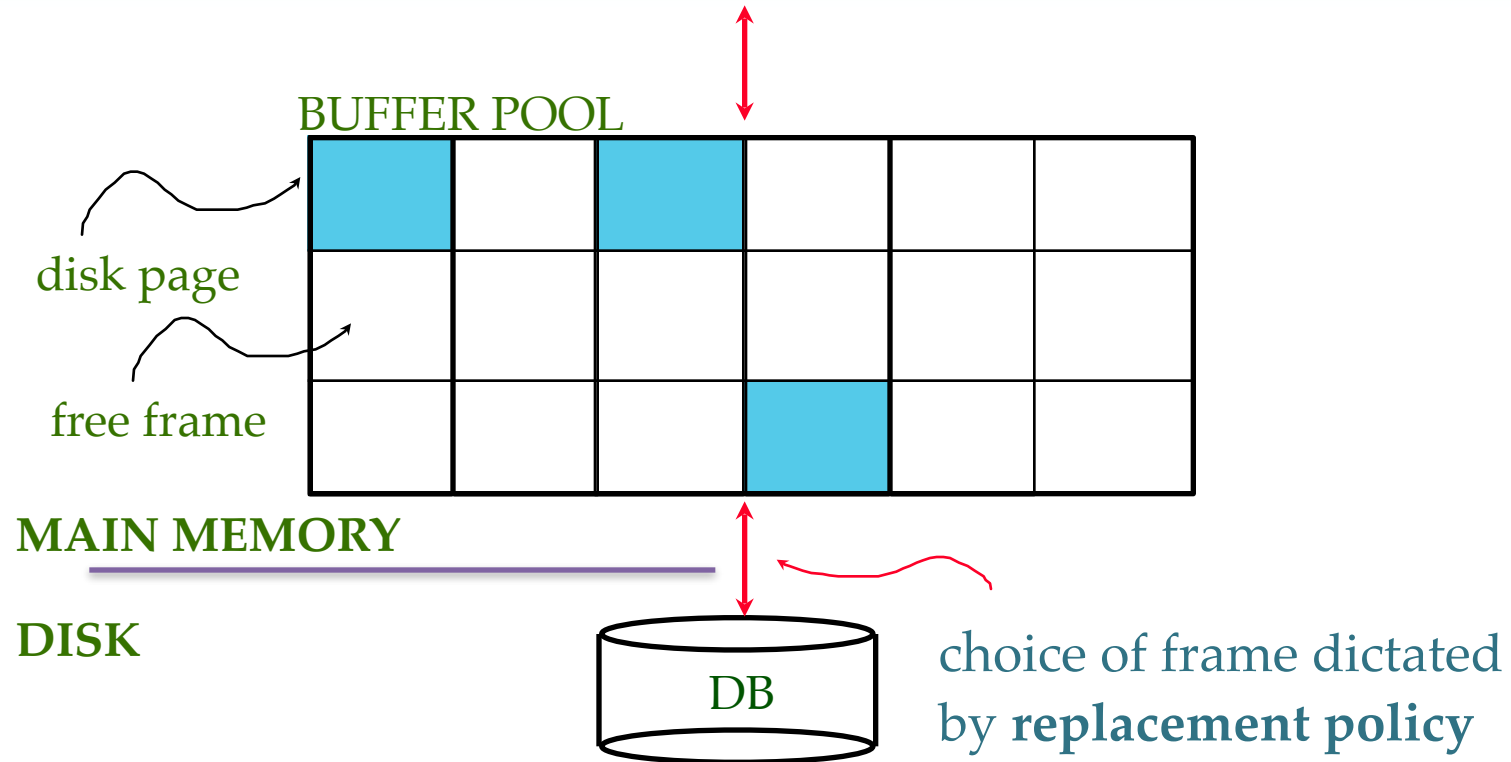


- ❖ *Data must be in RAM for DBMS to operate on it!*
- ❖ *Table of  $\langle \text{frame\#}, \text{pageid} \rangle$  pairs is maintained.*

# When a Page is Requested ...

- ❖ If requested page is not in pool:
  - Choose a frame for *replacement*
  - If frame is dirty, write it to disk
  - Read requested page into chosen frame
- ❖ *Pin* the page and return its address.

BUFFER POOL

Disk Page				
	free frame			
			Dirty Page	



*If requests can be predicted (e.g., sequential scans)  
pages can be pre-fetched several pages at a time!*

# More on Buffer Management

- ❖ Requestor of page must unpin it, and indicate whether page has been modified:
  - *dirty* bit is used for this.
- ❖ Page in pool may be requested many times,
  - a *pin count* is used. A page is a candidate for replacement iff *pin count* = 0.
- ❖ CC & recovery may entail additional I/O when a frame is chosen for replacement. (*Write-Ahead Log* protocol; more later.)

**BUFFER POOL**

Disk Page				
	free frame			
			Dirty Page	

# Buffer Replacement Policy

- ❖ Frame is chosen for replacement by a *replacement policy*:
  - Least-recently-used (LRU), Clock, MRU etc.
- ❖ Policy can have big impact on # of I/O's; depends on the *access pattern*.
- ❖ Sequential flooding: Nasty situation caused by LRU + repeated sequential scans.
  - # buffer frames < # pages in file means each page request causes an I/O. MRU much better in this situation (but not in all situations, of course).

**BUFFER POOL**


Disk Page				
	free frame			
			Dirty Page	

# *DBMS vs. OS File System*

OS does disk space & buffer management: why not let OS manage these tasks?

- ❖ Differences in OS support: portability issues
- ❖ Some limitations, e.g., files can't span disks.
- ❖ Buffer management in DBMS requires ability to:
  - **pin a page** in buffer pool, **force a page** to disk (important for implementing CC & recovery),
  - adjust *replacement policy*, and **pre-fetch pages** based on access patterns in typical DB operations.


# Record Formats: Fixed Length

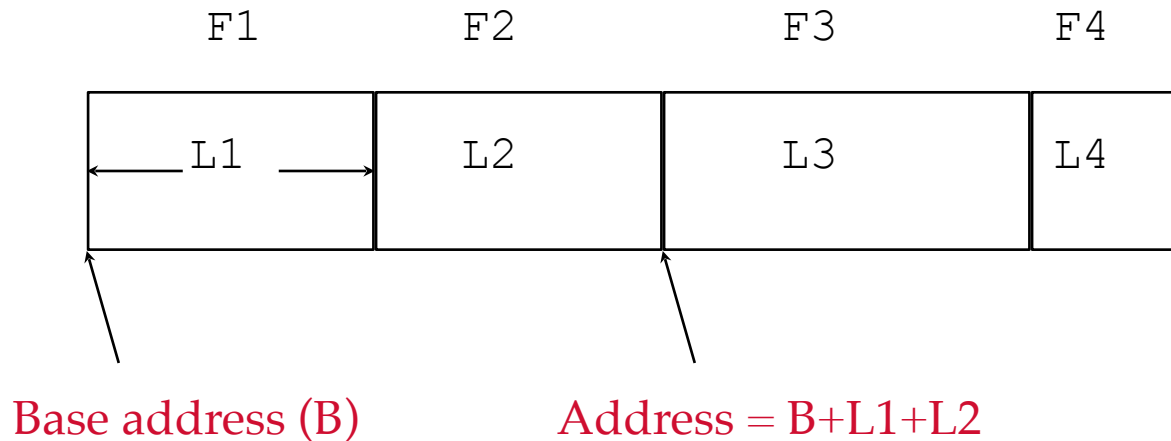

- ❖ Information about field types same for all records in a file; stored in *system catalogs*.
- ❖ Finding *i*'th field does not require scan of record.


# Record Formats: Variable Length

❖ Two alternative formats (# fields is fixed):

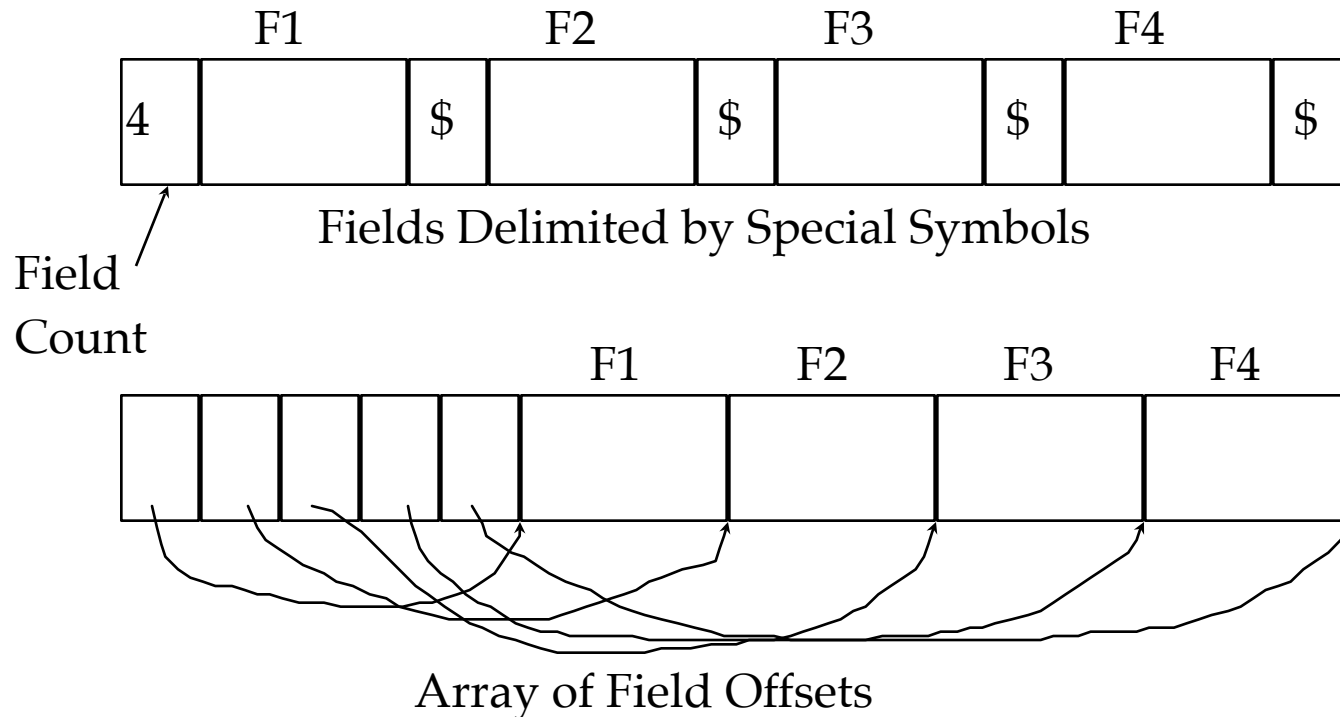

Second offers direct access to  $i$ 'th field, efficient storage of *nulls* (special *don't know* value); small directory overhead.


# Page Formats: Fixed Length Records

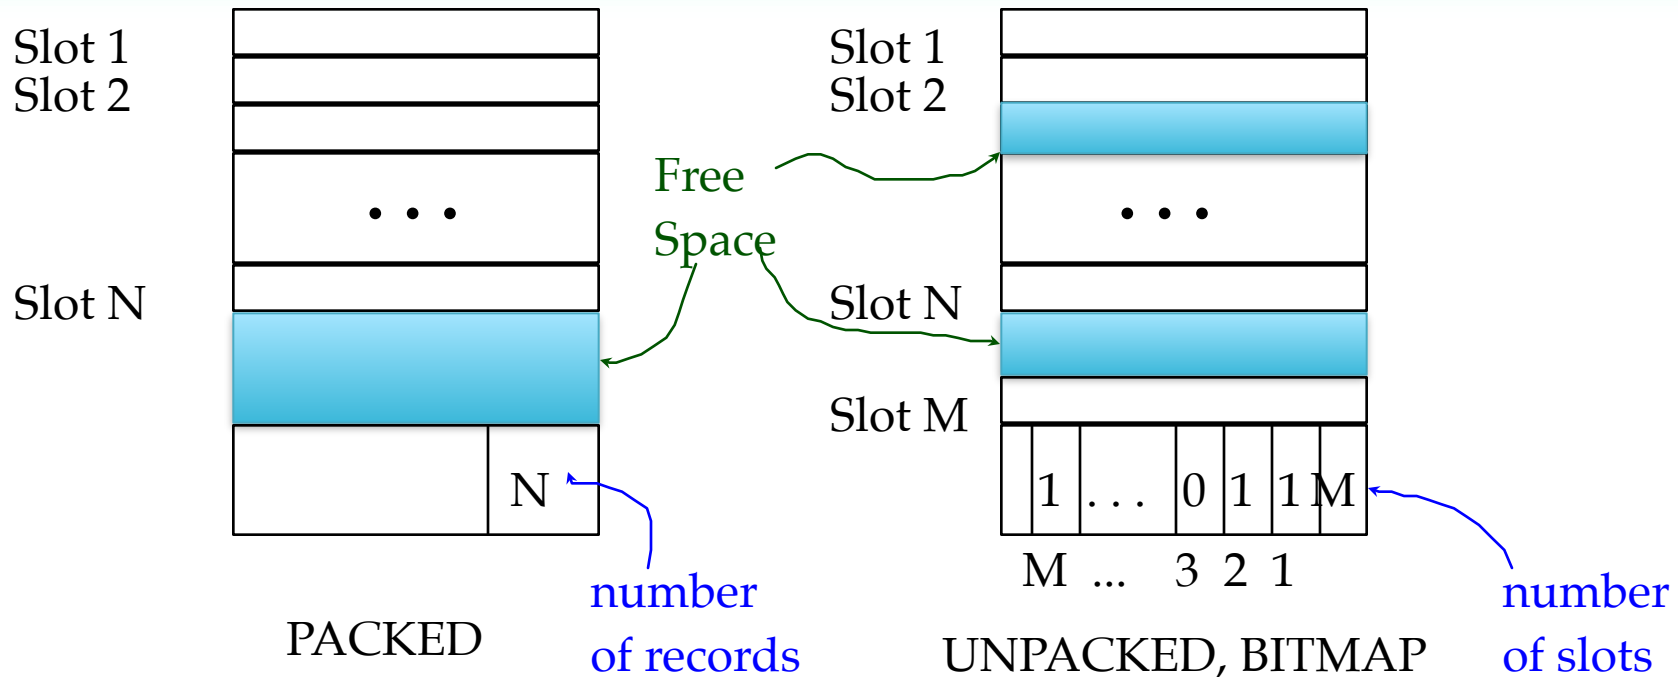

Record id = <page id, slot #>. In first alternative, moving records for free space management changes rid; may not be acceptable.



# Page Formats: Variable Length Records

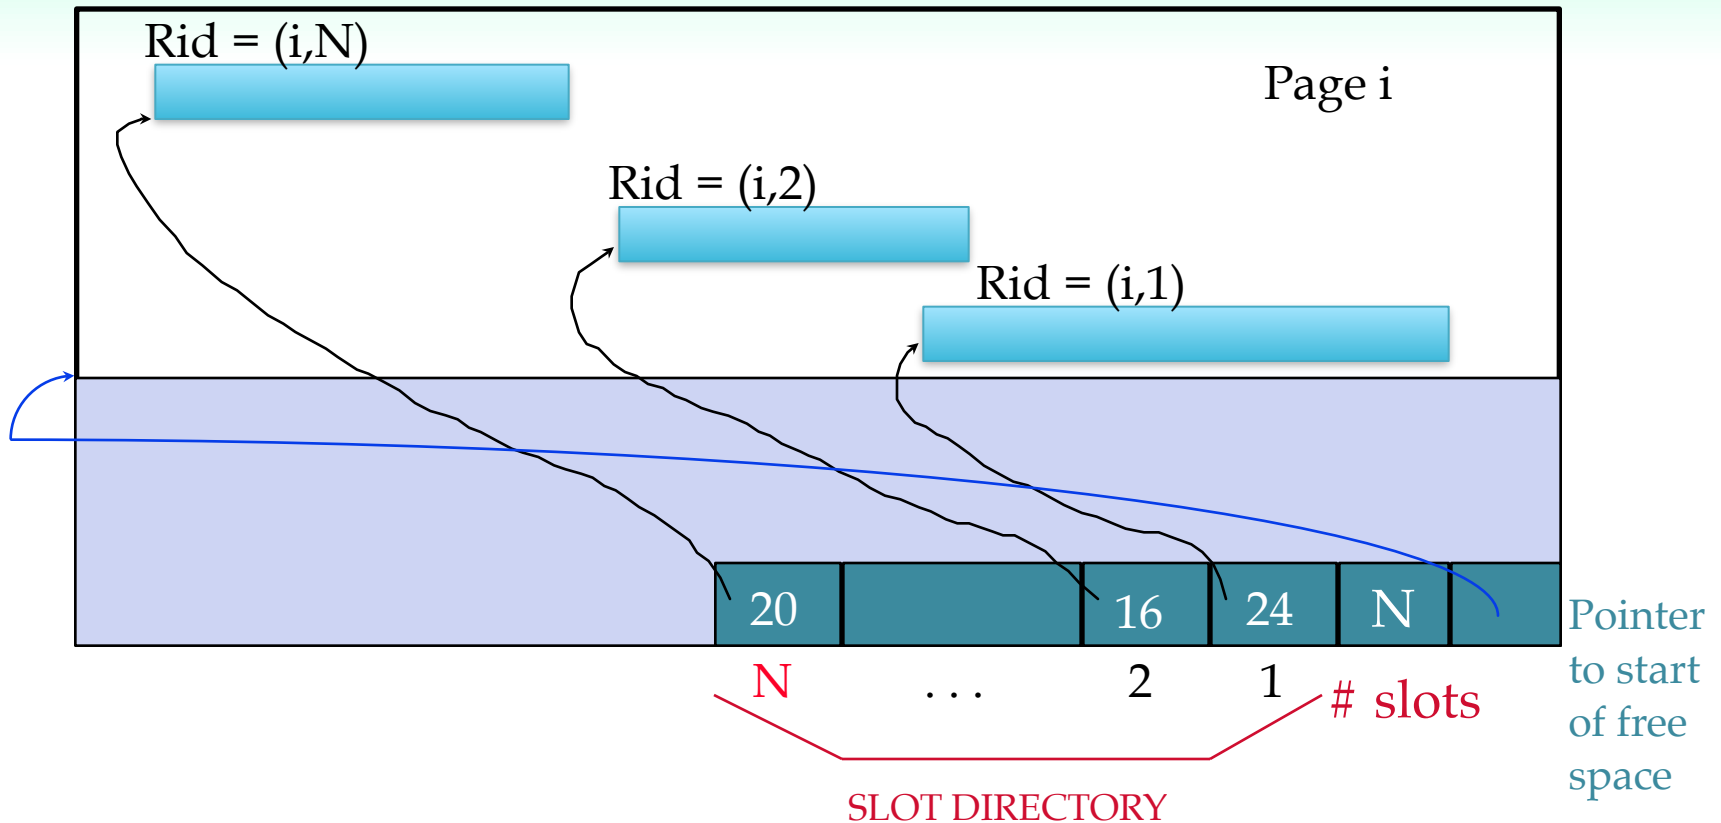

*Can move records on page without changing rid; so, attractive for fixed-length records too.*


# *Files of Records*

- ❖ Page or block is OK when doing I/O, but higher levels of DBMS operate on *records*, and *files of records*.
- ❖ FILE: A collection of pages, each containing a collection of records. Must support:
  - insert/delete/modify record
  - read a particular record (specified using *record id*)
  - scan all records (possibly with some conditions on the records to be retrieved)

# *Unordered (Heap) Files*


- ❖ Simplest file structure contains records in no particular order.
- ❖ As file grows and shrinks, disk pages are allocated and de-allocated.
- ❖ To support record level operations, we must:
  - keep track of the *pages* in a file
  - keep track of *free space* on pages
  - keep track of the *records* on a page
- ❖ There are many alternatives for keeping track of this.

# *Heap File Implemented as a List*

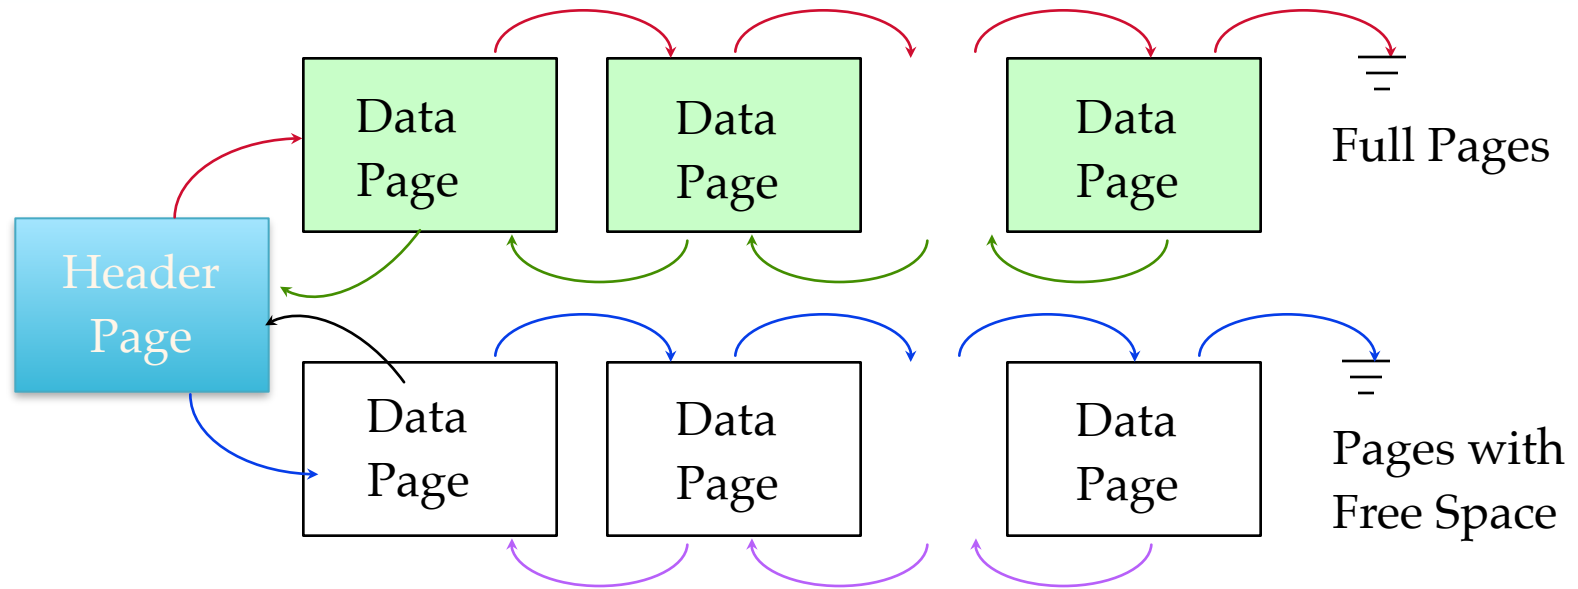

- ❖ The header page id and Heap file name must be stored someplace.
- ❖ Each page contains 2 `pointers' plus data.

# Heap File Using a Page Directory

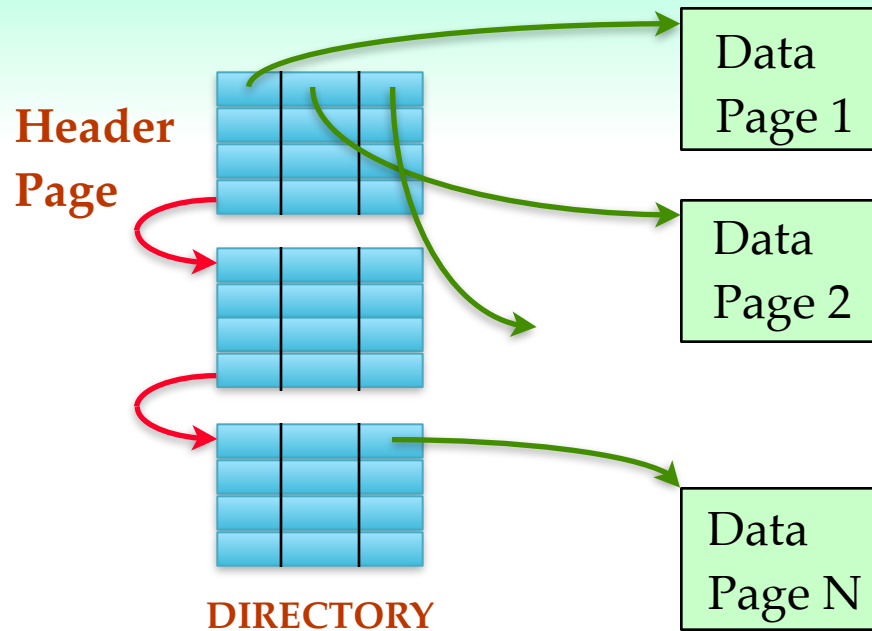

- ❖ The entry for a page can include the number of free bytes on the page.
- ❖ The directory is a collection of pages; linked list implementation is just one alternative.
  - *Much smaller than linked list of all HF pages!*

# *System Catalogs*

- ❖ For each index:
  - structure (e.g., B+ tree) and search key fields
- ❖ For each relation:
  - name, file name, file structure (e.g., Heap file)
  - attribute name and type, for each attribute
  - index name, for each index
  - integrity constraints
- ❖ For each view:
  - view name and definition
- ❖ Plus statistics, authorization, buffer pool size, etc.

*Catalogs are themselves stored as relations!*

*Attr\_Cat(attr\_name, rel\_name, type, position)*

attr_name	rel_name	type	position
attr_name	Attribute_Cat	string	1
rel_name	Attribute_Cat	string	2
type	Attribute_Cat	string	3
position	Attribute_Cat	integer	4
sid	Students	string	1
name	Students	string	2
login	Students	string	3
age	Students	integer	4
gpa	Students	real	5
fid	Faculty	string	1
fname	Faculty	string	2
sal	Faculty	real	3

# Summary

- ❖ Disks provide cheap, non-volatile storage.
  - Random access, but cost depends on location of page on disk; important to arrange data sequentially to minimize *seek* and *rotation* delays.
- ❖ Buffer manager brings pages into RAM.
  - Page stays in RAM until released by requestor.
  - Written to disk when frame chosen for replacement (which is sometime after requestor releases the page).
  - Choice of frame to replace based on *replacement policy*.
  - Tries to *pre-fetch* several pages at a time.



# *Summary (Contd.)*

- ❖ DBMS vs. OS File Support
  - DBMS needs features not found in many OS's, e.g., forcing a page to disk, controlling the order of page writes to disk, files spanning disks, ability to control pre-fetching and page replacement policy based on predictable access patterns, etc.
- ❖ Variable length record format with field offset directory offers support for direct access to i'th field and null values.
- ❖ Slotted page format supports variable length records and allows records to move on page.

# Summary (Contd.)

- ❖ File layer keeps track of pages in a file, and supports abstraction of a collection of records.
  - Pages with free space identified using linked list or directory structure (similar to how pages in file are kept track of).
- ❖ Indexes support efficient retrieval of records based on the values in some fields.
- ❖ Catalog relations store information about relations, indexes and views. (*Information that is common to all records in a given collection.*)