

Top 72 SQL Interview Questions and Answers of 2022

By Naveen 9.7 K Views 44 min read Updated on September 7, 2022

Go through these top Structured Query Language (SQL) interview questions for developers to learn SQL programming thoroughly. SQL is one of the most widely used languages. Almost all bigwigs of the tech industry, such as Uber, Netflix, Airbnb, etc., use SQL. This blog lists all the top SQL interview questions. Learn and ace your SQL interview right away!

Become a Certified Professional

Categories	
Automation	3
Big Data	12
Business Intelligence	21
Cloud Computing	20
Cyber Security	2
Data Science	11
Database	6
Digital Marketing	2
Mobile Development	3
No-SQL	5
Programming	16
Project Management	5
Salesforce	3
Testing	4
Website Development	7

SQL Interview Questions and...



stions

stem ([RDBMS](#)) is the most common database used across organizations, making SQL de you through various SQL questions from concepts such as MS SQL Server, MySQL - interview questions for freshers and experienced professionals. It is a one-stop

resource through which you can avail maximum benefits and prepare for job interviews easily. Check out the top SQL interview questions asked by recruiters today:

[Q1. Define database](#)

[Q2. What is DBMS and RDBMS? Explain the difference between them.](#)

[Q3. What is SQL?](#)

[Q4. What is normalization and its types?](#)

[Q5. What is denormalization?](#)

[Q6. What are Joins in SQL?](#)

[Q7. Explain the types of SQL Joins](#)

[Q8. What are the subsets of SQL?](#)

[Q9. What are the applications of SQL?](#)

[Q10. What is a DEFAULT constraint?](#)

This blog on SQL interview questions and answers can be divided into three parts:

[1. Basic SQL Interview Questions](#)

[2. Intermediate SQL Interview Questions](#)

[3. Advanced SQL Interview Questions](#)

Watch this video on SQL Interview Questions and Answers:

Basic SQL Interview Questions

1. Define database.

A [database](#) is an organized collection of structured data that can be stored, easily accessed, managed, and retrieved digitally from a remote or local computer system. Databases can be complex and vast and are built with a fixed design and modeling approach. While smaller databases can be stored on a file system, large ones are hosted on computer clusters or cloud storage.

2. What is DBMS and RDBMS? Explain the difference between them.

A database management system or [DBMS](#) is system software that can create, retrieve, update, and manage a database. It ensures the consistency of data and sees to it that it is organized and easily accessible by acting as an interface between the database and its end-users or application software. DBMS can be classified into four types:

- **Hierarchical Database:** It has a treelike structure with the data being stored in a hierarchical format. The parent in a database can have multiple children, but a child can have only a single parent.
- **Network Database:** This type of database is presented as a graph that can have many-to-many relationships allowing children to have multiple children.
- **Relational Database:** It is the most widely used and easy-to-use database. It is represented as a table and the values in the columns and rows are related to each other.
- **Object-oriented Database:** The data values and operations are stored as objects in this type of database, and these objects have multiple relationships among them.

RDBMS stores data in the form of a collection of [tables](#). The relations are defined between the common fields of these

 [MySQL](#), [Oracle](#), and [Amazon Redshift](#) are all based on RDBMS.

SQL Interview Questions and...



BMS

RDBMS

Access	Data elements need to be accessed separately	Multiple data elements can be accessed at the same time
Relationship Between Data	No relationship between data	Data in tables is related to each other
Normalization	It is not present	It is present
Distributed Database	It does not support distributed database	It supports distributed database
Data Storage Format	Data is stored in either a navigational or hierarchical form	Data is stored in a tabular structure with headers being the column names and the rows containing corresponding values
Amount of Data	It deals with a small quantity of data	It deals with a larger amount of data
Data Redundancy	It is prevalent	Keys and indexes do not allow data redundancy
Number of Users	It supports a single user	It supports multiple users
Data Fetching	It is slower for large amounts of data	It is speedy due to the relational approach
Data Security	Low-security levels when it comes to data manipulation	Multiple levels of data security exist
Software and Hardware Requirements	Low	High
Examples	XML, Window Registry, etc.	MySQL, SQL Server, Oracle, Microsoft Access, PostgreSQL, etc.

3. What is SQL?

[SQL](#) stands for Structured Query Language. It is the standard language for RDBMS and is useful in handling organized data that has entities or variables with relations between them. SQL is used for communicating with databases.

According to ANSI, SQL is used for maintaining RDBMS and for performing different operations of data manipulation on different [types of data](#) by using the [features of SQL](#). Basically, it is a database language that is used for the creation and deletion of databases. It can also be used, among other things, to fetch and modify the rows of a table.

4. What is normalization and its types?

Normalization is used in reducing data redundancy and dependency by organizing fields and tables in databases. It involves constructing tables and setting up relationships between those tables according to certain rules. The redundancy and inconsistent dependency can be removed using these rules to make normalization more flexible.

The different forms of normalization are:

[SQL Interview Questions and...](#)



First Normal Form (1NF): If every attribute in a relation is single-valued, then it is in the first normal form. If it contains a composite attribute, then it is in violation of the first normal form.

Second Normal Form (2NF): Said to be in the second normal form if it has met the conditions for the first normal form and there is no partial dependency, i.e., it does not have a non-prime attribute that relies on any proper subset of a primary key. Often, the solution to this problem is specifying a single-column primary key.

Third Normal Form (3NF): Said to be in the third normal form when it meets the conditions for the second normal form and there is no transitive dependency between the non-prime attributes, i.e., all the non-prime attributes are fully dependent on the primary key.

decided only by the candidate keys of the relation and not by other non-prime attributes.

- **Boyce-Codd Normal Form:** A relation is in the Boyce-Codd normal form or BCNF if it meets the conditions of the third normal form, and for every functional dependency, the left-hand side is a super key. A relation is in BCNF if and only if X is a super key for every nontrivial functional dependency in form $X \rightarrow Y$.

5. What is denormalization?

Denormalization is the opposite of normalization; redundant data is added to speed up complex queries that have multiple tables that need to be joined. Optimization of the read performance of a database is attempted by adding or grouping redundant copies of data.


6. What are Joins in SQL?

[Join in SQL](#) is used to combine rows from two or more tables based on a related column between them. There are various types of Joins that can be used to retrieve data, and it depends on the relationship between tables.

There are four types of Joins:

- Inner Join
- Left Join
- Right Join
- Full Join

7. Explain the types of SQL joins.

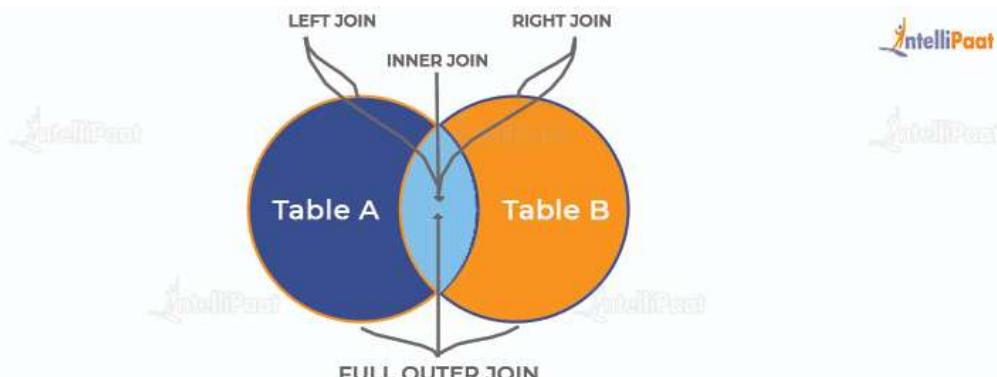

There are four different types of SQL Joins:

- **(Inner) Join:** It is used to retrieve the records that have matching values in both the tables that are involved in the join. [Inner Join](#) is mostly used to join queries.

```
SELECT *
FROM Table_A
JOIN Table_B;
SELECT *
FROM Table_A
INNER JOIN Table_B;
```

[Left Join](#) is to retrieve all the records or rows from the left and the matched ones from the

SQL Interview Questions and...



- **Right (Outer) Join:** Use of [Right_join](#) is to retrieve all the records or rows from the right and the matched ones from the left.

```
SELECT *
FROM Table_A A
RIGHT JOIN Table_B B
ON A.col = B.col;
```

- **Full (Outer) Join:** The use of [Full_join](#) is to retrieve the records that have a match either in the left table or the right table.

```
SELECT *
FROM Table_A A
FULL JOIN Table_B B
ON A.col = B.col;
```

Get 100% Hike!

Master Most in Demand Skills Now !

8. What are the subsets of SQL?

[SQL queries](#) are divided into four main categories:

- **Data Definition Language (DDL)**

DDL queries are made up of SQL commands that can be used to define the structure of the database and modify it.

- **CREATE**: Creates databases, tables, schema, etc.
- **DROP**: Drops tables and other database objects
- **DROP COLUMN**: Drops a column from any table structure
- **ALTER**: Alters the definition of database objects
- **TRUNCATE**: Removes tables, views, procedures, and other database objects
- **ADD COLUMN**: Adds any column to the table schema

- **Data Manipulation Language (DML)**

These SQL queries are used to manipulate data in a database.

- **SELECT INTO**: Selects data from one table and inserts it into another
- **INSERT**: Inserts data or records into a table
- **UPDATE**: Updates the value of any record in the database
- **DELETE**: Deletes records from a table



[SQL Interview Questions and...](#)



Access rights and permission control of the database.

↳ database objects
↳ drop from database objects

Q&A

Learn how professionals like you got upto 100% hike!

- o **COMMIT:** Commits an irreversible transaction, i.e., the previous image of the database prior to the transaction cannot be retrieved
- o **ROLLBACK:** Reverts the steps in a transaction in case of an error
- o **SAVEPOINT:** Sets a savepoint in the transaction to which rollback can be executed
- o **SET TRANSACTION:** Sets the characteristics of the transaction

9. What are the applications of SQL?

The major applications of SQL include:

- Writing data integration scripts
- Setting and running analytical queries
- Retrieving subsets of information within a database for analytics applications and transaction processing
- Adding, updating, and deleting rows and columns of data in a database

10. What is a DEFAULT constraint?

Constraints in SQL are used to specify some sort of rules for processing data and limiting the type of data that can go into a table. Now, let us understand what is a default constraint.

A default constraint is used to define a default value for a column so that it is added to all new records if no other value is specified. For example, if we assign a default constraint for the E_salary column in the following table and set the default value to 85000, then all the entries of this column will have the default value of 85000, unless no other value has been assigned during the insertion.

Now, let us go through how to set a default constraint. We will start by creating a new table and adding a default constraint to one of its columns.

Code:

```
create table stu1(s_id int, s_name varchar(20), s_marks int default 50)
select *stu1
```

Output:

Now, we will insert the records.

SQL Interview Questions and...



```
values(1,'Sam')
values(2,'Bob')
values(3,'Matt')
```

Output:

Also, learn from our blog on [MySQL Interview Questions and Answers](#) to crack any Interview.

11. What is a UNIQUE constraint?

Unique constraints ensure that all the values in a column are different. For example, if we assign a unique constraint to the e_name column in the following table, then every entry in this column should have a unique value.

First, we will create a table.

```
create table stu2(s_id int unique, s_name varchar(20))
```

Now, we will insert the records.

```
insert into stu2 values(1,'Julia')
insert into stu2 values(2,'Matt')
insert into stu2 values(3,'Anne')
```

Output:

A PRIMARY KEY constraint will automatically have a UNIQUE constraint. However, unlike a PRIMARY KEY, multiple UNIQUE constraints are allowed per table.

12. What is meant by table and field in SQL?

An organized data in the form of rows and columns is said to be a table. Simply put, it is a collection of related data in a table format.

Here rows and columns are referred to as tuples and attributes, and the number of columns in a table is referred to as a field. In the record, fields represent the characteristics and attributes and contain specific information about the data.

SQL Interview Questions and...



Identify all table records. It cannot have NULL values and must contain unique values.

:table, and it may have single or multiple fields, making it a composite key.

trating the use of a primary key for the employee table:

```
//  
CREATE TABLE Employee (  
    ID int NOT NULL,  
    Employee_name varchar(255) NOT NULL,  
    Employee_designation varchar(255),  
    Employee_Age int,  
    PRIMARY KEY (ID)  
);
```

14. What is a unique key?

The key that can accept only a null value and cannot accept duplicate values is called a unique key. The role of a unique key is to make sure that all columns and rows are unique.

The syntax for a unique key will be the same as the primary key. So, the query using a unique key for the employee table will be:

```
//  
CREATE TABLE Employee (  
    ID int NOT NULL,  
    Employee_name varchar(255) NOT NULL,  
    Employee_designation varchar(255),  
    Employee_Age int,  
    UNIQUE(ID)  
);
```

15. What is the difference between primary key and unique key?

Both primary and unique keys carry unique values but a primary key cannot have a null value, while a unique key can. In a table, there cannot be more than one primary key, but there can be multiple unique keys.

Career Transition

16. What is a foreign key?

A foreign key is an attribute or a set of attributes that reference the primary key of some other table. Basically, a foreign key is used to link together two tables.

Let us create a foreign key for the following table:

SQL Interview Questions and...



```
CREATE TABLE Orders (
    OrderID int NOT NULL,
    OrderNumber int NOT NULL,
    PersonID int,
    PRIMARY KEY (OrderID),
    FOREIGN KEY (PersonID) REFERENCES Persons(PersonID)
)
```

17. What are the subsets of SQL?

The main subsets of SQL are:

- Data Definition Language (DDL)
- Data Manipulation Language (DML)
- Data Control Language (DCL)
- Transaction Control Language (TCL)

18. Explain the different types of SQL commands.

- **DDL:** DDL is that part of SQL that defines the data structure of the database in the initial stage when the database is about to be created. It is mainly used to create and restructure database objects. Commands in DDL are:
 - Create table
 - Alter table
 - Drop table
- **DML:** DML is used to manipulate already existing data in a database, i.e., it helps users to retrieve and manipulate data. It is used to perform operations such as inserting data into the database through the insert command, updating data with the update command, and deleting data from the database through the delete command.
- **DCL:** DCL is used to control access to the data in the database. DCL commands are normally used to create objects related to user access and to control the distribution of privileges among users. The commands that are used in DCL are Grant and Revoke.
- **TCL:** TCL is used to control the changes made by DML commands. It also authorizes the statements to assemble in conjunction with logical transactions. The commands that are used in TCL are Commit, Rollback, Savepoint, Begin, and Transaction.

Also, Have a look at [SQL Command Cheatsheet](#).

19. What are the usages of SQL?

The following operations can be performed by using SQL database:

- Creating new databases

x

SQL Interview Questions and...



20. What is an index?

Indexes help speed up searching in a database. If there is no index on a column in the [WHERE clause](#), then the SQL Server has to skim through the entire table and check each and every row to find matches, which may result in slow operations in large data.

Indexes are used to find all rows matching with some columns and then to skim through only those subsets of the data to find the matches.

Syntax:

```
CREATE INDEX INDEX_NAME ON TABLE_NAME (COLUMN)
```

21. Explain the types of indexes.

Single-column Indexes: A single-column index is created for only one column of a table.

Syntax:

```
CREATE INDEX index_name  
ON table_name(column_name);
```

Composite-column Indexes: A composite-column index is created for two or more columns of a table.

Syntax:

```
CREATE INDEX index_name  
ON table_name (column1, column2)
```

Unique Indexes: A unique index is used for maintaining the data integrity of a table. A unique index does not allow multiple values to be inserted into the table.

Syntax:

```
CREATE UNIQUE INDEX index  
ON table_name(column_name)
```

Courses you may like

22. What are entities and relationships?

Entities: An entity can be a person, place, thing, or any identifiable object for which data can be stored in a database.

For example, in a company's database, employees, projects, salaries, etc., can be referred to as entities.

Entities can be referred to as a connection between two tables or entities.

The student entity and the department entities are associated with each other.

ew questions. Let us now move on to the next section of intermediate interview

SQL Interview Questions and...



Intermediate SQL Interview Questions

23. What are SQL operators?

SQL Operators are the special keywords or characters that perform specific operations. They are also used in SQL queries. These operators can be used within the WHERE clause of SQL commands. Based on the specified condition, SQL operators filter the data.

The SQL operators can be categorized into the following types:

- Arithmetic Operators: For mathematical operations on numerical data
 - addition (+)
 - subtraction (-)
 - multiplication (*)
 - division (/)
 - remainder/modulus (%)
- Logical Operators: For evaluating the expressions and return results in True or False
 - ALL
 - AND
 - ANY
 - ISNULL
 - EXISTS
 - BETWEEN
 - IN
 - LIKE
 - NOT
 - OR
 - UNIQUE
- Comparison Operators: For comparisons of two values and checking whether they are the same or not
 - equal to (=)
 - not equal to (!= or <>)
 - less than (<),
 - greater than (>)
 - less than or equal to (<=)
 - greater than or equal to (>=)
 - not less than (!<)
 - not greater than (!>)
- Bitwise Operators: For bit manipulations between two expressions of integer type. It first performs conversion of integers into binary bits and then applies operators
 - AND (& symbol)
 - OR (|, ^)
 - NOT (~)
- Compound Operators: For operations on a variable before setting the variable's result to the operation's result

SQL Interview Questions and...



n and pattern matching of strings

- + (String concatenation)
- += (String concatenation assignment)
- % (Wildcard)
- [] (Character(s) matches)
- [^] (Character(s) not to match)
- _ (Wildcard match one character)

24. What do you mean by data integrity?

Data integrity is the assurance of accuracy and consistency of data over its whole life cycle. It is a critical aspect of the design, implementation, and usage of systems that store, process, or retrieve data.

Data integrity also defines integrity constraints for enforcing business rules on data when it is entered into a database or application.

25. What is a data warehouse?

A data warehouse is a large store of accumulated data, from a wide range of sources, within an organization. The data helps drive business decisions.

26. How would you find the second highest salary from the following table?

Code:

```
select * from employee
select max(e_salary) from employee where e_salary not in (select max(e_salary) from employee)
```

Output:

27. Why is the FLOOR function used in SQL Server?

The FLOOR() function helps to find the largest integer value to a given number, which can be an equal or lesser number.

28. State the differences between clustered and non-clustered indexes

- **Clustered Index:** It is used to sort the rows of data by their key values. A clustered index is like the contents of a phone book. We can open the book at "David" (for "David, Thompson") and find information for all Davids right next to each other. It helps a lot in fetching the data based on range-based queries. Also how the data is stored; only one clustered index is possible per table.
- **Non-Clustered Index:** Data is stored at one location and indexes at another location. The index has pointers that point to the data. In a non-clustered index, the data pages are stored in a different place, there can be many

SQL Interview Questions and...



Now, we will see the major differences between clustered and non-clustered indexes:

Parameters	Clustered Index	Non-clustered Index
Used For	Sorting and storing records physically in memory	Creating a logical order for data rows; pointers are used for physical data files
Methods for Storing	Stores data in the leaf nodes of the index	Never stores data in the leaf nodes of the index
Size	Quite large	Comparatively, small
Data Accessing	Fast	Slow
Additional Disk Space	Not required	Required to store indexes separately
Type of Key	By default, the primary key of a table is a clustered index	It can be used with the unique constraint on the table that acts as a composite key
Main Feature	Improves the performance of data retrieval	Should be created on columns used in Joins

29. What do you know about CDC in SQL Server?

CDC refers to change data capture. It captures recent INSERT, DELETE, and UPDATE activity applied to SQL Server tables. It records changes to SQL Server tables in a compatible format.

30. What is the difference between SQL and MySQL?

SQL Interview Questions and...



seen [SQL and MySQL](#).

in a	MySQL
d in a	It is a database management system

It is used for query and operating database system	It allows data handling, storing, and modifying in an organized manner
It is always the same	It keeps updating
It supports only a single storage engine	It supports multiple storage engines
The server is independent	During backup sessions, the server blocks the database

31. State the differences between SQL and PL/SQL

SQL	PL/SQL
It is a database structured query language	It is a programming language for a database that uses SQL
It is an individual query that is used to execute DML and DDL commands	It is a block of codes that are used to write the entire procedure or a function
It is a declarative and data-oriented language	It is a procedural and application-oriented language
It is mainly used for data manipulation	It is used for creating applications
It provides interaction with the database server	It does not provide interaction with the database server
It cannot contain PL/SQL code	It can contain SQL because it is an extension of SQL

32. What is the ACID property in a database?

The full form of ACID is atomicity, consistency, isolation, and durability. ACID properties are used to check the reliability of transactions.

- Atomicity refers to completed or failed transactions, where a transaction refers to a single logical operation on data. This implies that if any aspect of a transaction fails, the whole transaction fails and the database state remains unchanged.
- Consistency means that the data meets all validity guidelines. The transaction never leaves the database without finishing its state.
- Concurrency management is the primary objective of isolation.
- Durability ensures that once a transaction is committed, it will occur regardless of what happens in between such as a power outage, fire, or some other kind of disturbance.

33. What is the need for group functions in SQL?

Group functions operate on a series of rows and return a single result for each group. COUNT(), MAX(), MIN(), SUM(), AVG(), and VARIANCE() are some of the most widely used group functions.

34. What do you understand about a character manipulation function?

Character manipulation functions are used for the manipulation of character data types.

Xnctions are:

se.

SQL Interview Questions and...



Example:

```
SELECT UPPER('demo string') from String;
```

Output:

```
DEMO STRING
```

LOWER: It returns the string in lowercase.

Syntax:

```
LOWER('STRING')
```

Example:

```
SELECT LOWER ('DEMO STRING') from String
```

Output:

```
demo string
```

INITCAP: It converts the first letter of the string to uppercase and retains others in lowercase.

Syntax:

```
Initcap('STRING')
```

Example:

```
SELECT Initcap('DATASET') from String
```

Output:

```
Dataset
```

CONCAT: It is used to concatenate two strings.

Syntax:

```
CONCAT('str1','str2')
```

Example:

```
SELECT CONCAT('Data','Science') from String
```

Output:

```
Data Science
```

LENGTH: It is used to get the length of a string.

Syntax:

SQL Interview Questions and...



rom String

35. What is AUTO_INCREMENT?

AUTO_INCREMENT is used in SQL to automatically generate a unique number whenever a new record is inserted into a table.

Since the primary key is unique for each record, this primary field is added as the AUTO_INCREMENT field so that it is incremented when a new record is inserted.

The AUTO_INCREMENT value starts from 1 and is incremented by 1 whenever a new record is inserted.

Syntax:

```
CREATE TABLE Employee(
    Employee_id int NOT NULL AUTO_INCREMENT,
    Employee_name varchar(255) NOT NULL,
    Employee_designation varchar(255)
    Age int,
    PRIMARY KEY (Employee_id)
)
```

Do check out our Blog on [PL/SQL Interview Questions](#) to crack your SQL Interview.

36. What is the difference between DELETE and TRUNCATE commands?

- **DELETE:** This query is used to delete or remove one or more existing tables.
- **TRUNCATE:** This statement deletes all the data from inside a table.

The difference between DELETE and TRUNCATE commands are as follows:

- TRUNCATE is a DDL command, and DELETE is a DML command.
- With TRUNCATE, we cannot really execute and trigger, while with DELETE, we can accomplish a trigger.
- If a table is referenced by foreign key constraints, then TRUNCATE will not work. So, if we have a foreign key, then we have to use the DELETE command.

The syntax for the DELETE command:

SQL Interview Questions and...



Output:

```
delete from stu where s_name='Bob'
```

Output:

The syntax for the TRUNCATE command:

```
TRUNCATE TABLE  
Table_name;
```

Example:

```
select * from stu1
```

Output:

```
truncate table stu1
```

Output:

This deletes all the records from a table.

37. What is the difference between DROP and TRUNCATE commands?

If a table is dropped, all things associated with that table are dropped as well. This includes the relationships defined on the table with other tables, access privileges, and grants that the table has, as well as the integrity checks and constraints.

To create and use the table again in its original form, all the elements associated with the table need to be redefined.

However, if a table is truncated, there are no such problems as mentioned above. The table retains its original structure.

Q8. What is a trigger in SQL?

SQL Interview Questions and...



natic process that happens when an event occurs in the database server. It helps to ie trigger is activated when the commands, such as insert, update, and delete, are

r function is:

```
CREATE TRIGGER trigger_name
```

39. Where are usernames and passwords stored in SQL Server?

In SQL Server, usernames and passwords are stored in the main database in the sysxlogins table.

40. What are the types of relationships in SQL Server databases?

Relationships are developed by interlinking the column of one table with the column of another table. There are three different types of relationships, which are as follows:

- One-to-one relationship
- Many-to-one relationship
- Many-to-many relationship

41. What are the third-party tools that are used in SQL Server?

The following is the list of third-party tools that are used in SQL Server:

- SQL CHECK
- SQL DOC 2
- SQL Backup 5
- SQL Prompt
- Litespeed 5.0

42. How can you handle expectations in SQL Server?

TRY and CATCH blocks handle exceptions in SQL Server. Put the SQL statement in the TRY block and write the code in the CATCH block to handle expectations. If there is an error in the code in the TRY block, then the control will automatically move to that CATCH block.

43. How many authentication modes are there in SQL Server? And what are they?

Two authentication modes are available in SQL Server. They are:

- Windows Authentication Mode: It allows authentication for Windows but not for SQL Server.
- Mixed Mode: It allows both types of authentication—Windows and SQL Server.

44. What is a function in SQL Server?

A function is an SQL Server database object. It is basically a set of SQL statements that allow input parameters, perform processing, and return results only. A function can only return a single value or table; the ability to insert, update, and delete records in database tables is not available.

45. Mention different types of replication in SQL Server?

In SQL Server, three different types of replications are available:

SQL Interview Questions and...



to find out the SQL Server version?

Identify the version of SQL Server:

```
Select SERVERPROPERTY('productversion')
```

47. What is the COALESCE function?

The COALESCE function takes a set of inputs and returns the first non-null value.

Syntax:

```
COALESCE(val1,val2,val3,.....,nth val)
```

Example:

```
SELECT COALESCE(NULL, 1, 2, 'MYSQL')
```

Output:

```
1
```

48. Can we link SQL Server with others?

SQL Server allows the OLEDB provider, which provides the link, to connect to all databases.

Example: Oracle, I have an OLEDB provider that has a link to connect with an SQL Server group.

49. What is SQL Server Agent?

SQL Server Agent plays an important role in the daily work of SQL Server administrators or DBAs. This is one of the important parts of SQL Server. The aim of the server agent is to easily implement tasks using a scheduler engine that enables the tasks to be performed at scheduled times. SQL Server Agent uses SQL Server to store scheduled management task information.

50. What do you know about magic tables in SQL Server?

A magic table can be defined as a provisional logical table that is developed by an SQL Server for tasks such as insert, delete, or update (DML) operations. The operations recently performed on the rows are automatically stored in magic tables. Magic tables are not physical tables; they are just temporary internal tables.

51. What are some common clauses used with SELECT queries in SQL?

There are many SELECT statement clauses in SQL. Some of the most commonly used clauses with SELECT queries are:

- **FROM**

The FROM clause defines the tables and views from which data can be interpreted. The tables and views listed must exist at the time the question is given.

- **WHERE**

The WHERE clause defines the parameters that are used to limit the contents of the results table. You can test for basic relationships or for relationships between a column and a series of columns using subselects.

- **GROUP BY**

The GROUP BY clause is commonly used for aggregate functions to produce a single outcome row for each set of **X** or expressions.

Using the columns on which the table's result should be sorted.

Its of the GROUP BY clause by using an aggregate function.

following SQL query?

SQL Interview Questions and...



```
SELECT gender, AVG(age) FROM employee WHERE AVG(age)>30 GROUP BY gender
```

When this command is executed, it gives the following error:

```
Msg 147, Level 16, State 1, Line 1
```

Aggregation may not appear in the WHERE clause unless it is in a subquery contained in the HAVING clause or a select list; the column being aggregated is an outer reference.

```
Msg 147, Level 16, State 1, Line 1
```

```
Invalid column name 'gender'.
```

This basically means that whenever we are working with aggregate functions and are using the GROUP BY clause, we cannot use the WHERE clause. Therefore, instead of the WHERE clause, we should use the HAVING clause.

When we are using the HAVING clause, the GROUP BY clause should come first, followed by the HAVING clause.

```
select e_gender, avg(e_age) from employee group by e_gender having avg(e_age)>30
```

Output:

53. What do you know about the stuff() function?

The stuff() function deletes a part of the string and then inserts another part into the string, starting at a specified position.

Syntax:

```
STUFF(String1, Position, Length, String2)
```

Here, String1 is the one that will be overwritten. Position indicates the starting location for overwriting the string. Length is the length of the substitute string, and String2 is the string that will overwrite String1.

Example:

```
select stuff('SQL Tutorial',1,3,'Python')
```

This will change 'SQL Tutorial' to 'Python Tutorial'

Output:

```
Python Tutorial
```

54. What are views? Give an example.

Views are virtual tables used to limit the tables that we want to display. Views are nothing but the result of an SQL query. Since views are not physically present, they take less space to store.

SQL Interview Questions and...



Let us consider an example. In the following employee table, say we want to perform multiple operations on the records with gender "Female". We can create a view-only table for the female employees from the entire employee table.

Now, let us implement it on SQL Server.

This is the employee table:

```
select * from employee
```

Now, we will write the syntax for the view.

Syntax:

```
create view female_employee as select * from employee where e_gender='Female'  
select * from female_employee
```

Output:

55. What are the types of views in SQL?

In SQL, the views are classified into four types. They are:

- Simple View: A view that is based on a single table and does not have a GROUP BY clause or other features.
- Complex View: A view that is built from several tables and includes a GROUP BY clause as well as functions.
- Inline View: A view that is built on a subquery in the FROM clause, which provides a temporary table and simplifies a complicated query.
- Materialized View: A view that saves both the definition and the details. It builds data replicas by physically preserving them.

Advanced SQL Interview Questions

56. What is a stored procedure? Give an example.

A stored procedure is a prepared SQL code that can be saved and reused. In other words, we can consider a stored procedure to be a function consisting of many SQL statements to access the database system. We can consolidate several SQL statements into a stored procedure and execute them whenever and wherever required.

SQL Interview Questions and...



Xmeans of modular programming, i.e., we can create a stored procedure once, store it. This also supports faster execution when compared to executing multiple queries.

```
CREATE PROCEDURE procedure_name  
AS  
Sql_statement  
GO;  
To execute we will use this:  
EXEC procedure_name
```

Example:

```
We are going to create a stored procedure that will help us extract the age of the employees.  
create procedure employee_age  
as  
select e_age from employee  
go  
Now, we will execute it.  
exec employee_age
```

Output:

57. Explain Inner Join with an example.

Inner Join basically gives us those records that have matching values in two tables.

Let us suppose that we have two tables, Table A and Table B. When we apply Inner Join on these two tables, we will get only those records that are common to both Table A and Table B.

Syntax:

```
SELECT columns  
FROM table1  
INNER JOIN table2  
ON table1.column_x=table2.column_y;
```

Example:

```
select * from employee  
select * from department
```

Output:

SQL Interview Questions and...



These tables, where the e_dept column in the employee table is equal to the d_name

```

select employee.e_name, employee.e_dept, department.d_name, department.d_location
from employee inner join department
on
employee.e_dept=department.d_name

```

Output:

After applying Inner Join, we have only those records where the departments match in both tables. As we can see, the matched departments are Support, Analytics, and Sales.

58. State the differences between views and tables.

Views	Tables
A view is a virtual table that is extracted from a database	A table is structured with a set number of columns and a boundless number of rows
A view does not hold data itself	A table contains data and stores it in databases
A view is utilized to query certain information contained in a few distinct tables	A table holds fundamental client information and cases of a characterized object
In a view, we will get frequently queried information	In a table, changing the information in the database changes the information that appears in the view

59. What do you understand about a temporary table? Write a query to create a temporary table

A temporary table helps us store and process intermediate results. Temporary tables are created and can be automatically deleted when they are no longer used. They are very useful in places where temporary data needs to be stored.

Syntax:

```

CREATE TABLE #table_name();
The below query will create a temporary table:
create table #book(b_id int, b_cost int)
Now, we will insert the records.
insert into #book values(1,100)
insert into #book values(2,232)
select * from #book

```

Output:

SQL Interview Questions and...



60. Explain the difference between OLTP and OLAP.

OLTP: It stands for online transaction processing, and we can consider it to be a category of software applications that are efficient for supporting transaction-oriented programs. One of the important attributes of the OLTP system is its potential to keep up the consistency. The OLTP system often follows decentralized planning to keep away from single points of failure. This system is generally designed for a large audience of end users to perform short transactions. The queries involved in such databases are generally simple, need fast response time, and, in comparison, return in only a few records. So, the number of transactions per second acts as an effective measure for those systems.

OLAP: It stands for online analytical processing, and it is a category of software programs that are identified by a comparatively lower frequency of online transactions. For OLAP systems, the efficiency of computing depends highly on the response time. Hence, such systems are generally used for data mining or maintaining aggregated historical data, and they are usually used in multidimensional schemas.

61. What is Hybrid OLAP?

Hybrid OLAP (HOLAP) uses a combination of multidimensional data structures and relational database tables to store multidimensional data. The aggregations for a HOLAP partition are stored by analysis services in a multidimensional structure. The facts are stored in a relational database.

62. What do you understand by Self Join? Explain using an example

[Self Join in SQL](#) is used for joining a table with itself. Here, depending on some conditions, each row of the table is joined with itself and with other rows of the table.

Syntax:

```
SELECT a.column_name, b.column_name  
FROM table a, table b  
WHERE condition
```

Example:

Consider the customer table given below.

Example:

Consider the customer table given below.

ID	Name	Age	Address	Salary
1	Anand	32	Ahmedabad	2,000.00
2	Abhishek	25	Delhi	1,500.00
x		23	Kota	2,000.00
		25	Mumbai	6,500.00
		27	Bhopal	8,500.00
		22	MP	4,500.00

SQL Interview Questions and...



7	Arpit	24	Indore	10,000.00
---	-------	----	--------	-----------

We will now join the table using Self Join:

```
SQL> SELECT a.ID, b.NAME, a.SALARY
  FROM CUSTOMERS a, CUSTOMERS b
 WHERE a.SALARY < b.SALARY;
```

Output:

ID	Name	Salary
2	Anand	1,500.00
2	Abhishek	1,500.00
1	Vishal	2,000.00
2	Vishal	1,500.00
3	Vishal	2,000.00
6	Vishal	4,500.00
1	Sayeedul	2,000.00
2	Sayeedul	1,500.00
3	Sayeedul	2,000.00
4	Sayeedul	6,500.00
6	Sayeedul	4,500.00
1	Amir	2,000.00
2	Amir	1,500.00
3	Amir	2,000.00
1	Arpit	2,000.00
2	Arpit	1,500.00
3	Arpit	2,000.00
4	Arpit	6,500.00
5	Arpit	8,500.00
6	Arpit	4,500.00

x

SQL Interview Questions and...



Difference between Union and Union All operators?

Union operator combines the result set of two or more select statements. For example, the first select statement returns the fish shown in Image A, and the second statement returns the fish shown in Image B. The Union operator combines the two select statements as shown in Image A U B. If there is a record present in both of them in the final result.

Syntax:

```
SELECT column_list FROM table1
```

Union:

```
SELECT column_list FROM table2
```

Now, we will execute it in the SQL Server.

These are the two tables in which we will use the Union operator.

```
select * from student_details1
```

Union:

```
select * from student_details2
```

Output:

The Union All operator gives all the records from both tables including the duplicates.

Let us implement it in the SQL Server.

Syntax:

```
select * from student_details1
```

X

SQL Interview Questions and...



64. What is a cursor? How to use a cursor?

A database cursor is a control that allows you to navigate around a table's rows or documents. It can be referred to as a pointer for a row in a set of rows. Cursors are extremely useful for database traversal operations such as extraction, insertion, and elimination.

- After any variable declaration, DECLARE a cursor. A SELECT statement must always be aligned with the cursor declaration.
- To initialize the result set, OPEN statements must be called before fetching the rows from the result table.
- To grab and switch to the next row in the result set, use the FETCH statement.
- To deactivate the cursor, use the CLOSE expression.
- Finally, use the DEALLOCATE clause to uninstall the cursor description and clear all the resources associated with it.

Here is an example SQL cursor:

```
DECLARE @name VARCHAR(50)

DECLARE db_cursor CURSOR FOR
SELECT name
From myDB.company
WHERE employee_name IN ('Jay', 'Shyam')
OPEN db_cursor
FETCH next
FROM db_cursor
Into @name
Close db_cursor
DEALLOCATE db_cursor
```

65. What is the use of the INTERSECT operator?

The INTERSECT operator helps combine two select statements and returns only those records that are common to both the select statements. So, after we get Table A and Table B over here, and if we apply the INTERSECT operator on these two tables, then we will get only those records that are common to the result of the select statements of these two tables.

Syntax:

SQL Interview Questions and...



or the INTERSECT operator.

```
select * from student_details1  
select * from student_details1
```

Output:

```
select * from student_details1  
intersect  
select * from student_details2
```

Output:

66. How can you copy data from one table into another table?

Here, we have our employee table.

We have to copy this data into another table. For this purpose, we can use the INSERT INTO SELECT operator. Before we go ahead and do that, we will have to create another table that will have the same structure as the above-given table.

Syntax:

```
create table employee_duplicate(  
e_id int,  
e_name varchar(20),  
e_salary int,
```

x

SQL Interview Questions and...



llowing query:

```
insert into employee_duplicate select * from employees
```

Let us take a look at the copied table.

```
select * from employee_duplicate
```

Output:

67. What is the difference between BETWEEN and IN operators in SQL?

The BETWEEN operator is used to represent rows based on a set of values. The values may be numbers, text, or dates. The BETWEEN operator returns the total number of values that exist between two specified ranges.

The IN condition operator is used to search for values within a given range of values. If we have more than one value to choose from, then we use the IN operator.

68. Describe how to delete duplicate rows using a single statement but without any table creation.

Let us create an employee table where the column names are ID, NAME, DEPARTMENT, and EMAIL. Below are the SQL scripts for generating the sample data:

```
CREATE TABLE EMPLOYEE
(
ID INT,
NAME Varchar(100),
DEPARTMENT INT,
EMAIL Varchar(100)
)

INSERT INTO EMPLOYEE VALUES (1,'Tarun',101,'tarun@intellipaat.com')
INSERT INTO EMPLOYEE VALUES (2,'Sabid',102,'sabid@intellipaat.com')
INSERT INTO EMPLOYEE VALUES (3,'Adarsh',103,'adarsh@intellipaat.com')
INSERT INTO EMPLOYEE VALUES (4,'Vaibhav',104,'vaibhav@intellipaat.com')
--These are the duplicate rows:
INSERT INTO EMPLOYEE VALUES (5,'Tarun',101,'tarun@intellipaat.com')
INSERT INTO EMPLOYEE VALUES (6,'Sabid',102,'sabid@intellipaat.com')
```

SQL Interview Questions and...



bove table.

```
EMPLOYEE e2 WHERE e1.name = e2.name AND e1.id > e2.id
```

The SQL query above will delete the rows, where the name fields are duplicated, and it will retain only those unique rows in which the names are unique and the ID fields are the lowest, i.e., the rows with IDs 5 and 6 are deleted, while the rows with IDs 1 and 2 are retained.

69. Can you identify the employee who has the third-highest salary from the given employee table (with salary-related data)?

Consider the following employee table. In the table, Sabid has the third-highest salary (60,000).

Name	Salary
Tarun	70,000
Sabid	60,000
Adarsh	30,000
Vaibhav	80,000

Below is a simple query to find out the employee who has the third-highest salary. The functions RANK, DENSE RANK, and ROW NUMBER are used to obtain the increasing integer value by imposing the ORDER BY clause in the SELECT statement, based on the ordering of the rows. The ORDER BY clause is necessary when RANK, DENSE RANK, or ROW NUMBER functions are used. On the other hand, the PARTITION BY clause is optional.

```
WITH CTE AS
(
    SELECT Name, Salary, RN = ROW_NUMBER() OVER (ORDER BY Salary DESC) FROM EMPLOYEE
)
SELECT Name, Salary FROM CTE WHERE RN =3
```

70. What is the difference between HAVING and WHERE clauses?

The distinction between HAVING and WHERE clauses in SQL is that while the WHERE clause cannot be used with aggregates, the HAVING clause is used with the aggregated data. The WHERE clause works on the data from a row and not with the aggregated data.

Let us consider the employee table below.

Name	Department	Salary
Tarun	Production	50,000
Tarun	Testing	60,000
	Marketing	70,000
	Production	80,000
	Testing	90,000

SQL Interview Questions and...



The following will select the data on a row-by-row basis:

```
SELECT Name, Salary FROM Employee WHERE Salary >=50000
```

Output:

Name	Salary
Tarun	50,000
Tarun	60,000
Sabid	70,000
Adarsh	80,000
Vaibhav	90,000

The HAVING clause, on the other hand, operates on the aggregated results.

```
SELECT Department, SUM(Salary) AS total FROM Employee GROUP BY Department
```

Output:

Department	Total
Marketing	70,000
Production	130,000
Testing	150,000

Now, let us see the output when we apply HAVING to the above query.

```
SELECT Department, SUM(Salary) AS total FROM Employee GROUP BY Department HAVING SUM(Salary)>70000
```

Output:

Department	Total
Production	130,000
Testing	150,000

71. Explain database white box testing and black box testing.

The white box testing method mainly deals with the internal structure of a particular database, where users hide specification details. The white box testing method involves the following:

- As the coding error can be detected by testing the white box, it can eliminate internal errors.

➤ database, it selects the default table values.

➤ integrity rule.

➤ of database functions, triggers, views, and SQL queries.

➤y involves interface testing, followed by database integration. The black box testing

SQL Interview Questions and...



- Verification of incoming data
- Verification of outgoing data from the other query functions

72. How can you create empty tables with the same structure as another table?

This can be achieved by fetching the records of one table into a new table using the INTO operator while fixing a WHERE clause to be false for all records. In this way, SQL prepares the new table with a duplicate structure to accept the fetched records. However, there are no records that will get fetched due to the WHERE clause in action. Therefore, nothing is inserted into the new table, thus creating an empty table.

```
SELECT * INTO Students_copy
FROM Students WHERE 1 = 2;
```

[Next](#)

Course Schedule

Name	Date	
SQL Training	2022-09-24 2022-09-25 (Sat-Sun) Weekend batch	View Details
SQL Training	2022-10-01 2022-10-02 (Sat-Sun) Weekend batch	View Details
SQL Training	2022-10-08 2022-10-09 (Sat-Sun) Weekend batch	View Details

28 thoughts on “Top 72 SQL Interview Questions and Answers of 2022”

Thanks for sharing top SQL interview questions.

[DECEMBER 20, 2015 AT 2:15 PM](#)

[Reply](#)

Aman says:

These questions are really amazing, to preapre for an interview..Thanks

[DECEMBER 20, 2015 AT 5:51 PM](#)

[Reply](#)

Mukesh Saini

says:

Very good question

[DECEMBER 23, 2015 AT 6:08 PM](#)

[Reply](#)

x

SQL Interview Questions and...



very much helpful... please upload more questions related to [MARCH 22, 2016 AT 1:15 AM](#)

Garg says:

Excellent questions/answers for beginner to advanced level SQL development covered.nice work and thanks for sharing.

[APRIL 11, 2016 AT 1:54 AM](#)

Manian says: [Reply](#)

Thanks for sharing SQL Interview Questions and Answers for Developers and Administrators. It's very useful.

[MAY 3, 2016 AT 6:10 PM](#)

Neemita says: [Reply](#)

These are some basic but very essential questions an Sql professional should know. [JUNE 26, 2016 AT 8:51 PM](#)
Thanks for sharing. Indeed it helps to do a self evaluatio.

Pratheesh Babu [Reply](#)
says:

Excellent questions. Some of them do have multiple ways to answer. [SEPTEMBER 20, 2016 AT 12:43 AM](#)
I guess if you know SQL Server you can find many ways to figure things out. I follow best practice, best performance method.
Shaun Goguen What about all the new functionality available with SQL Server 2016? Didn't see any questions on here about those.
says:
Thank you for sharing.

[Reply](#)

great to those things in a very organized way

[OCTOBER 12, 2016 AT 2:17 AM](#)

[Reply](#)

cool says:

Very helpful questions!

[OCTOBER 15, 2016 AT 7:23 AM](#)

[Reply](#)

gezah says:

Very helpful!

[OCTOBER 15, 2016 AT 7:24 AM](#)

[Reply](#)

Anonymous
says:

Thank You for sharing these interview questions.These are really helpful and essential [JULY 25, 2017 AT 11:39 AM](#)
questions for interview.

x

SQL Interview Questions and...



[DECEMBER 17, 2019 AT 1:52 PM](#)

Content is very helpful

[FEBRUARY 20, 2020 AT 2:26 PM](#)

[Reply](#)

Mahesh says:

Thanks for sharing top SQL question and help full to developer

[FEBRUARY 21, 2020 AT 3:39 PM](#)

[Reply](#)

MAHENDER

says:

Thanks for sharing SQL questions and solution.

[MAY 18, 2020 AT 7:22 PM](#)

[Reply](#)

Prity says:

Content is very helpful

[AUGUST 4, 2020 AT 5:49 PM](#)

[Reply](#)

C MANJUNATH

says:

Thanks for sharing

[NOVEMBER 28, 2020 AT 9:10 AM](#)

[Reply](#)

**Mohammed
Wahid** says:

amazing questions and answers, really appreciate the work done here

[JANUARY 25, 2021 AT 4:48 AM](#)

[Reply](#)

Jose Antonio
says:

It was very useful. Thank you so much.

[MARCH 2, 2021 AT 1:46 AM](#)

[Reply](#)

Tichan says:

Thanks for the questions. It is very precise and level of difficulty is sorted. Great job!! [MAY 13, 2021 AT 10:39 PM](#)

[Reply](#)

Pooja N says:



ons. It is very useful information.

[JULY 30, 2021 AT 12:22 PM](#)

Very helpful...please update this with some advanced sql as well..

[JULY 31, 2021 AT 1:05 AM](#)

[Reply](#)

Robin says:

Great information

[SEPTEMBER 6, 2021 AT 7:42 AM](#)

[Reply](#)

Mason says:

Thank you, it s very useful 😊

[DECEMBER 17, 2021 AT 2:32 PM](#)

[Reply](#)

Hülya Özlu says:

nice information. it covered all main concept

[APRIL 25, 2022 AT 3:30 PM](#)

[Reply](#)

Shilpa says:

these Questions and Answer are really helpful

[JUNE 9, 2022 AT 9:56 PM](#)

[Reply](#)

raghavendra
singh says:

Very helpful, thanks for this tutorial.

[JULY 11, 2022 AT 12:25 AM](#)

[Reply](#)

Arpita says:

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment



x

Email *

Find SQL Certification Training in Other Regions

[Bangalore](#) [Chennai](#) [Virginia](#) [Kansas City](#) [Texas](#) [Pune](#) [Hyderabad](#) [Dublin](#) [London](#) [Chicago](#) [San Francisco](#)
[Denver](#) [Seattle](#) [Mumbai](#) [Delhi](#) [Kolkata](#) [Malaysia](#) [San Diego](#) [San Jose](#) [New Jersey](#) [Adelaide](#) [Atlanta](#)
[Boston](#) [Johannesburg](#) [Noida](#) [Phoenix](#) [Orange County](#) [Philippines](#) [Singapore](#) [Sydney](#) [Toronto](#) [Melbourne](#)
[Minneapolis](#) [New York](#) [Perth](#) [Charlotte](#) [Cincinnati](#) [Columbus](#) [Manchester](#) [Detroit](#) [Velachery](#) [Manila](#)
[Maryland](#) [Miami](#) [Michigan](#) [Minnesota](#) [Nashville](#) [New Zeal](#) [South Africa](#) [St Louis](#) [Dallas](#) [Tampa](#) [Los Angeles](#)
[Houston](#) [Brisbane](#) [Calgary](#) [Baltimore](#) [Bay Area](#) [Bellevue](#) [Birmingham](#) [Northern Virginia](#) [Washington](#) [Edinburgh](#)
[USA](#) [Bristol](#)

MEDIA CONTACT US TUTORIALS COMMUNITY INTERVIEW QUESTIONS

© Copyright 2011-2022 intellipaat.com. All Rights Reserved.

x

SQL Interview Questions and...

