




Proxy



Logic

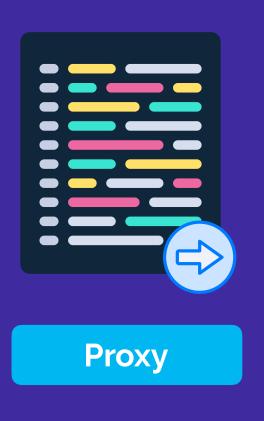



UNSTRUCTURED STORAGE

```
contract Proxy {
address implementation;
function setAddress(address _implementation) {
 implementation = _implementation;
   gas,
   implementation,
   ptr,
```



Proxy

0×580 ...

```
contract Poll {
uint cokeVotes = 0;
uint pepsiVotes = 0;
function voteForCoke() returns(uint) {
  cokeVotes++;
  return cokeVotes;
  pepsiVotes++;
  return pepsiVotes;
```

Poll

0×732 ...