



307307

Part 2 – Introduction to Large Language Models

Preface

- In the previous section, we used Bow and TDIDF to convert documents and words into numerical representations.
- These representations were simple, they had no semantics for words, just on/off switches for existing and non-existing words in a document.
- In this part of the course, we want to convert words into meaningful list of numbers.
- These numbers are called **Word Embeddings**.
- We will use Neural Networks to create these Word Embeddings.

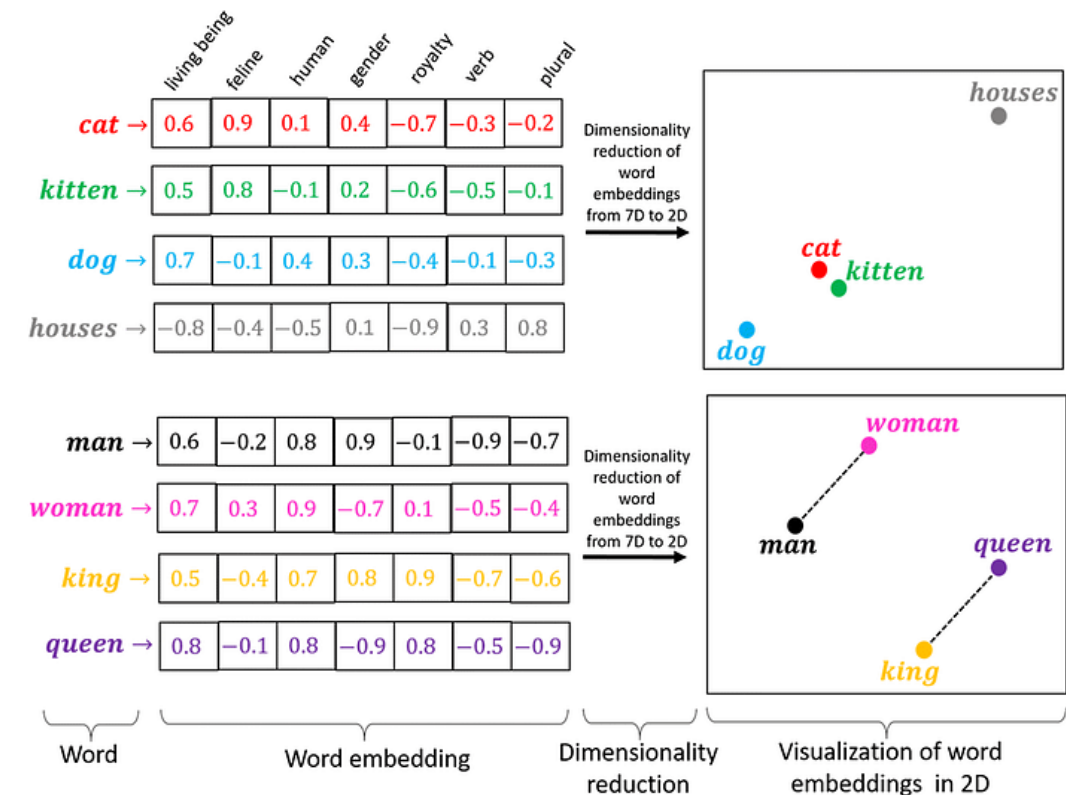

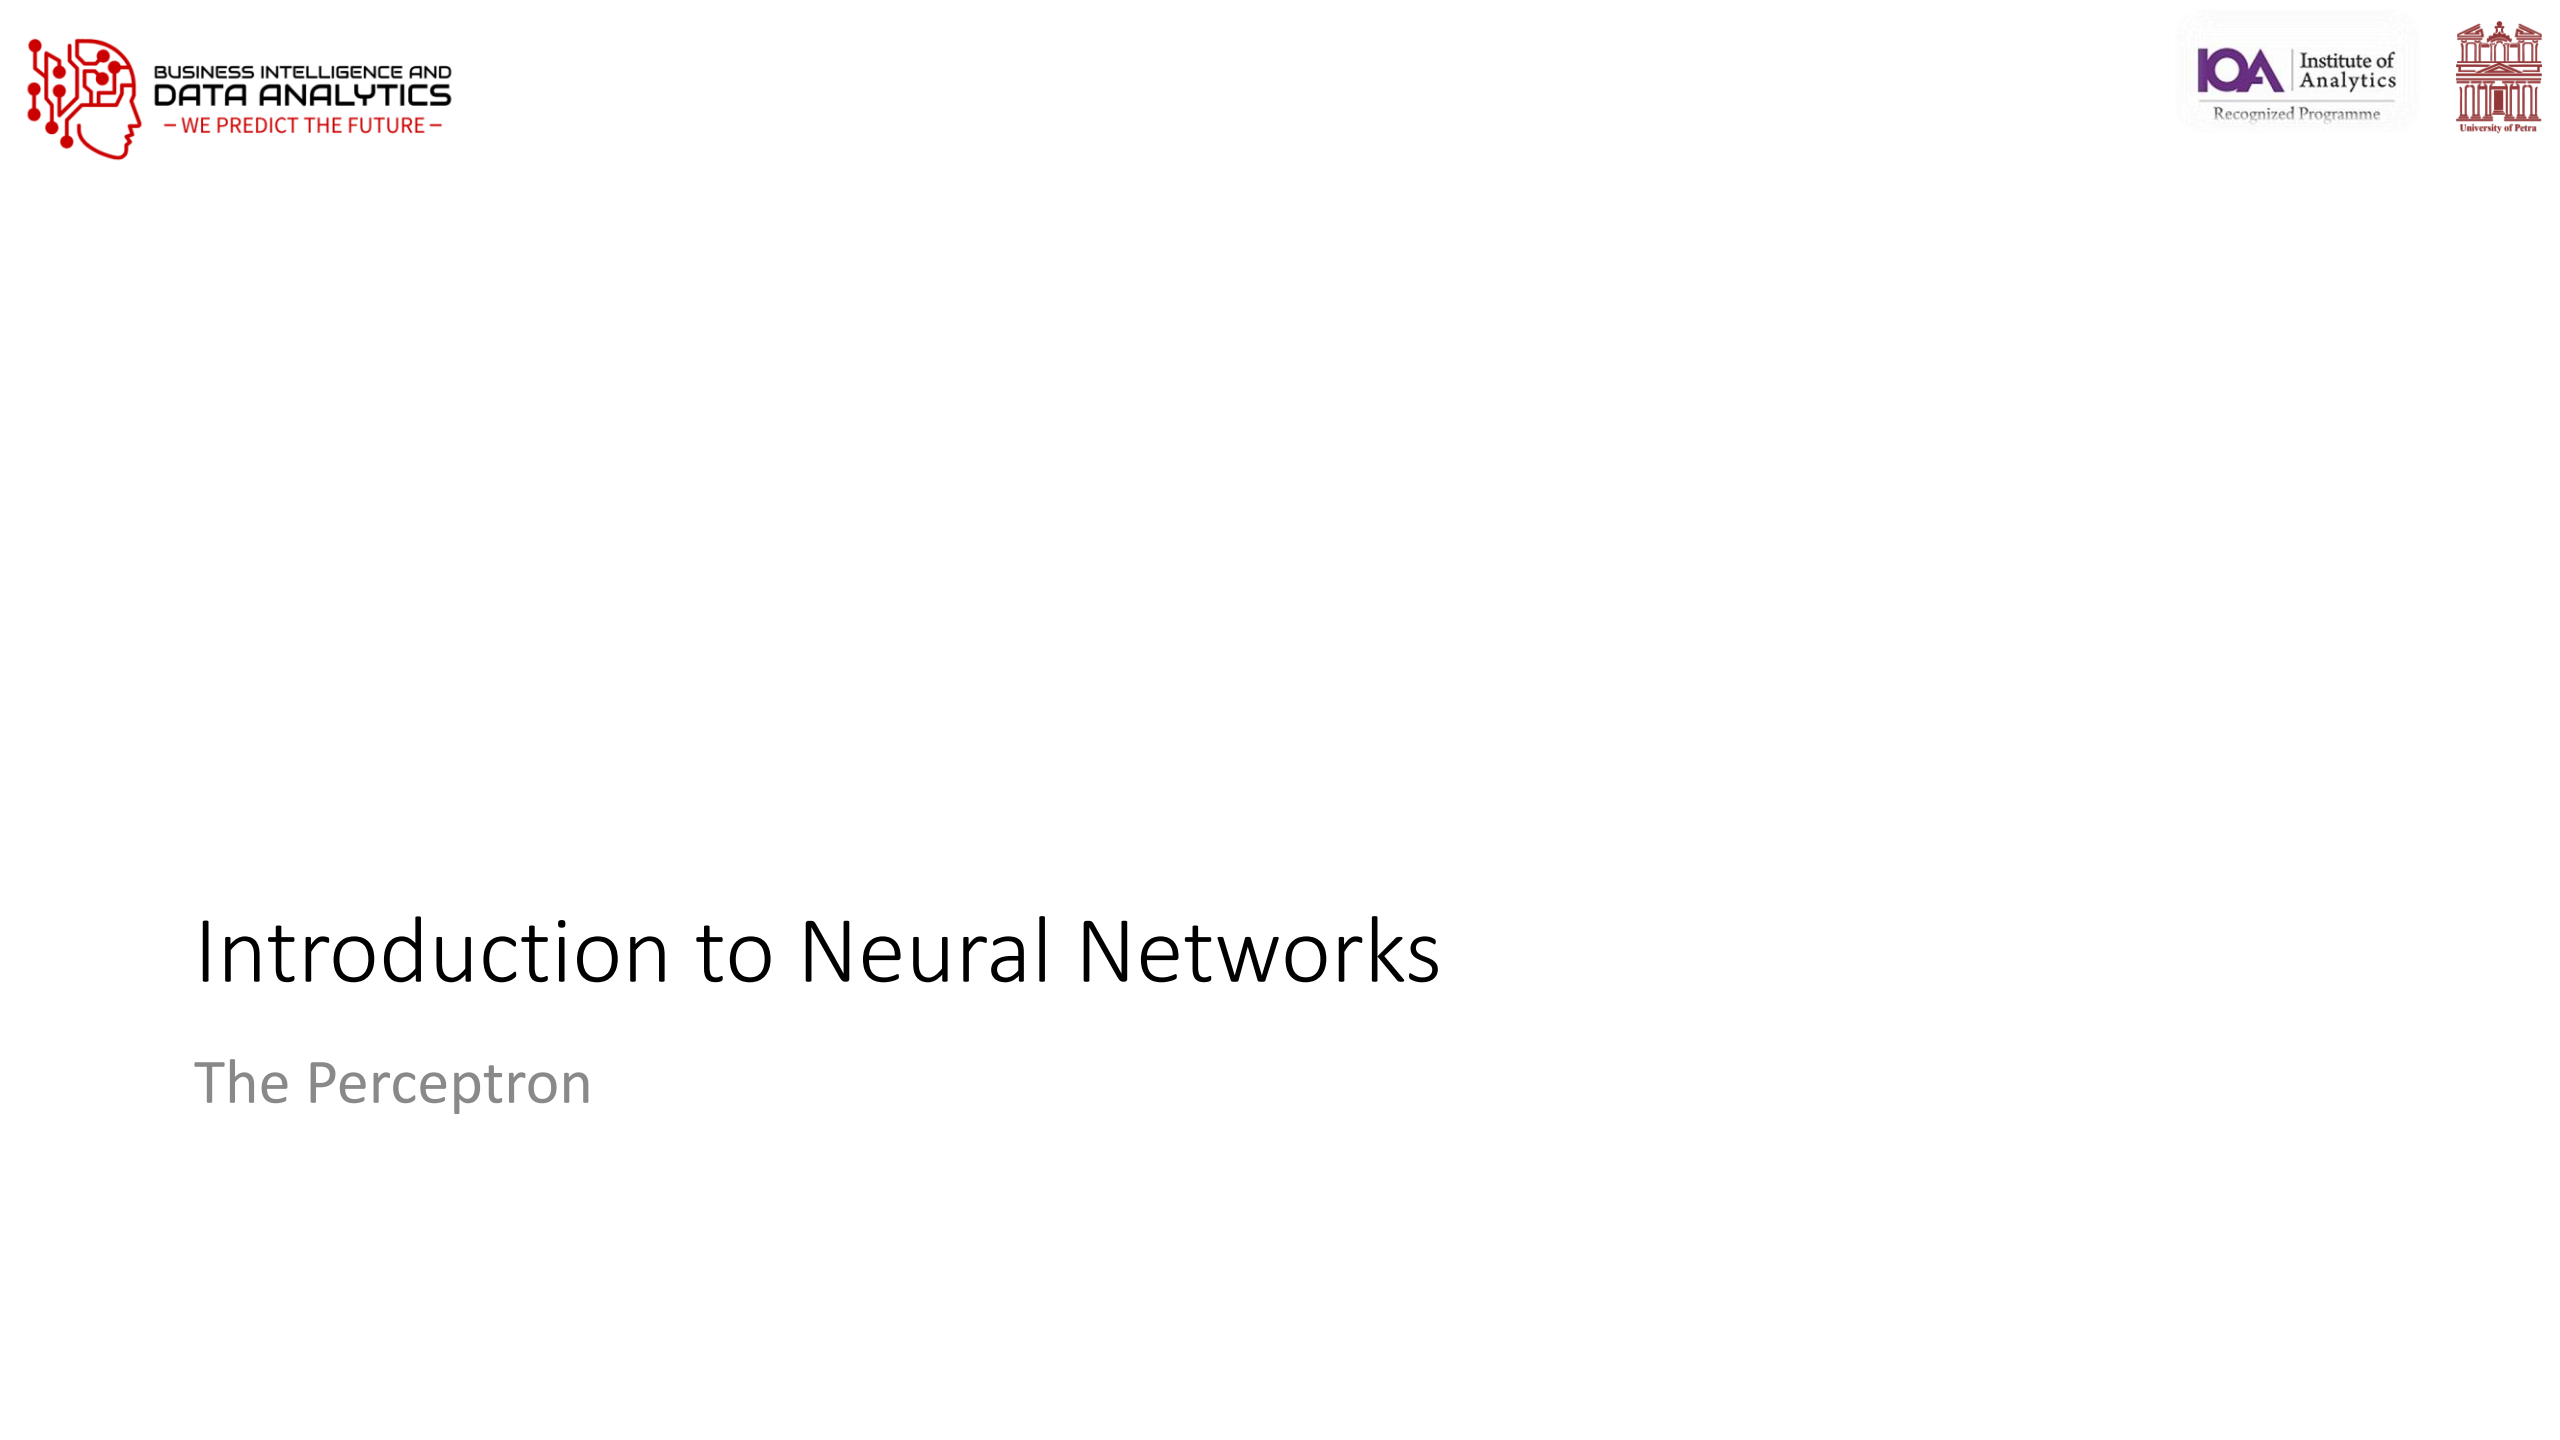

Introduction to Neural Networks

The Perceptron

Outcomes

- Fundamentals of neural networks
- Evolution from single perceptrons to MLPs
- Detailed MLP architecture (input, hidden, and output layers)
- Mathematical representations
- Various activation functions (Sigmoid, ReLU, etc.)
- Backpropagation and training methodologies
- Loss functions and optimization techniques
- Architecture design considerations
- Real-world applications
- Advantages and limitations
- Modern MLP variants and implementations

History of Neural Networks



- In 1943, researchers Warren McCulloch and published their first concept of simplified brain cell.
- This was called McCulloch-Pitts (MCP) neuron.
- They described such a nerve cell as a simple logic gate with binary outputs.
- Multiple signals arrive at the dendrites and are then integrated into the cell body, and, if the accumulated signal exceeds a certain threshold, an output signal is generated that will be passed on by the axon.



Warren Sturgis McCulloch
(1898 – 1969)




Walter Harry Pitts, Jr.
(1923 – 1969)

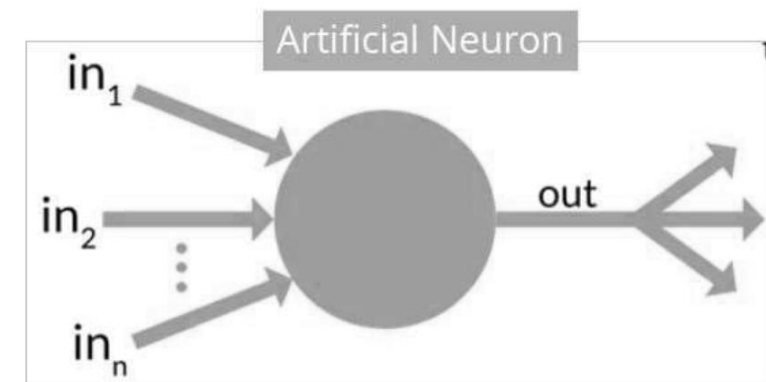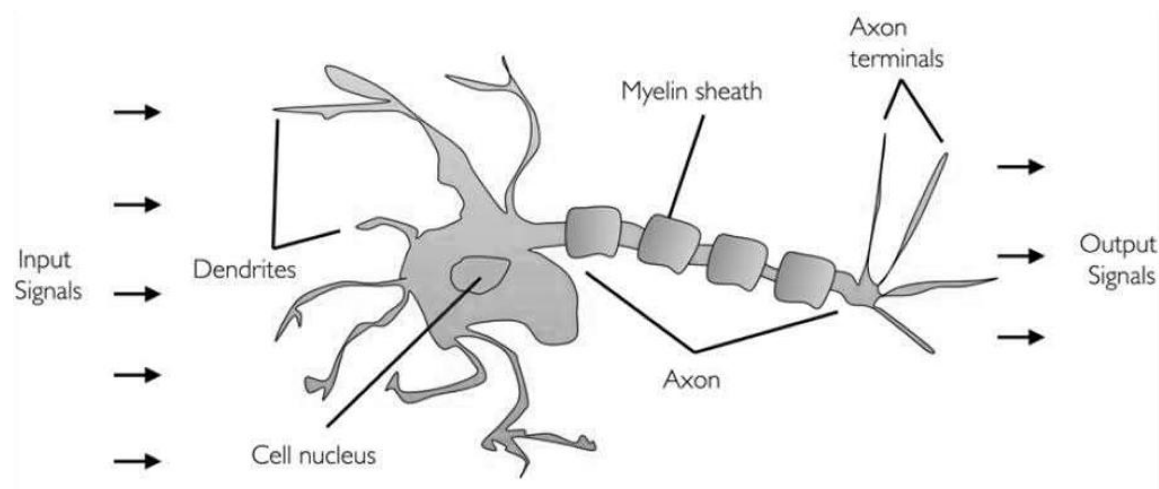


The Perceptron: Building Block of Neural Networks

- In 1953, inspired by McCulloch work, Frank Rosenblatt invented the Perceptron.
- The Perceptron is the simplest form of a neural network
- Binary classifier: separates data into two categories
- Models a single neuron with multiple inputs and one output

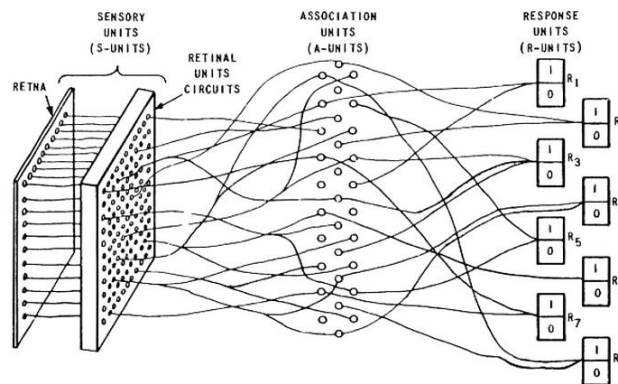


F. Rosenblatt

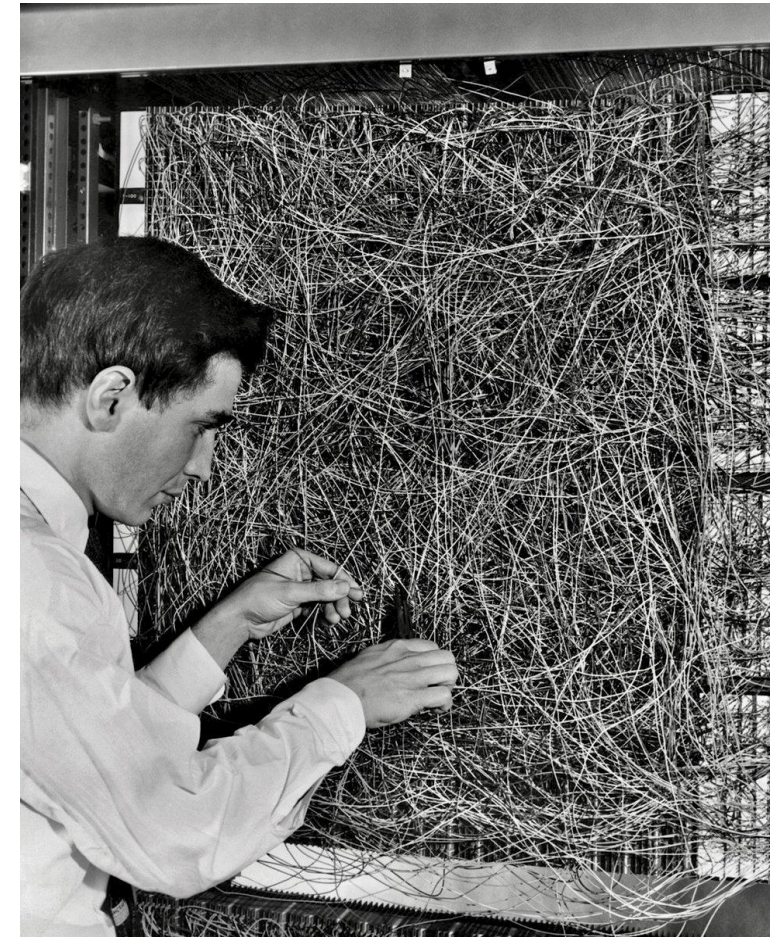

The Perceptron

- Inputs: x_1, x_2, \dots, x_n
- Weights: w_1, w_2, \dots, w_n
- Bias: b
- Activation function: Step function
- Output: 1 if weighted sum $>$ threshold, 0 otherwise

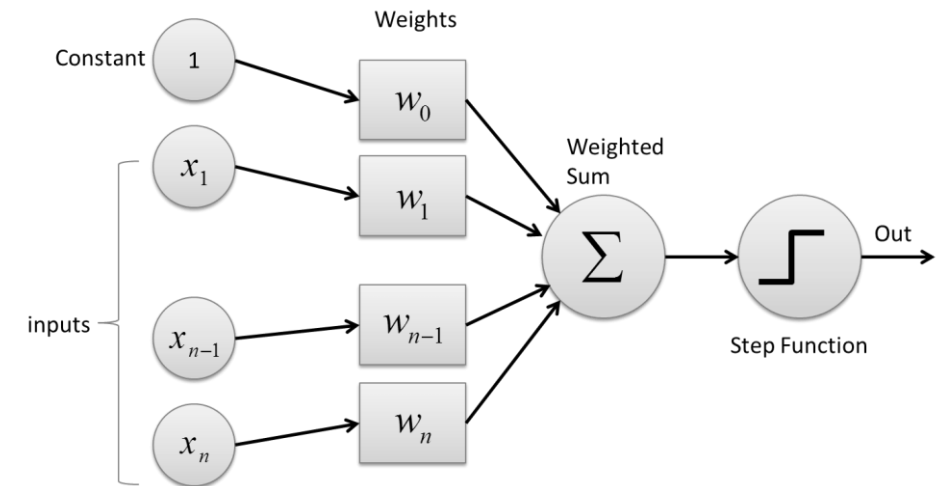


How a Perceptron Works

1. Multiply each input by its corresponding weight
2. Sum all weighted inputs
3. Add the bias term
4. Apply the activation function
5. Output the result


Mathematically:

- $z = w_1x_1 + w_2x_2 + \dots + w_nx_n + b$
- $\text{output} = \text{activation}(z)$

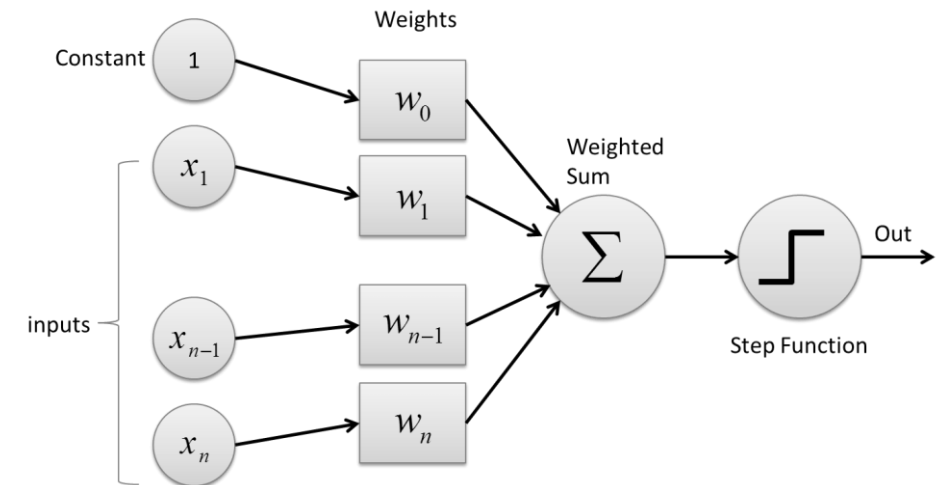

Perceptron Activation Function


- **Step Function:**
 - Output: 1 if $z \geq 0$, 0 if $z < 0$
 - Used in original perceptrons
 - Not differentiable at 0

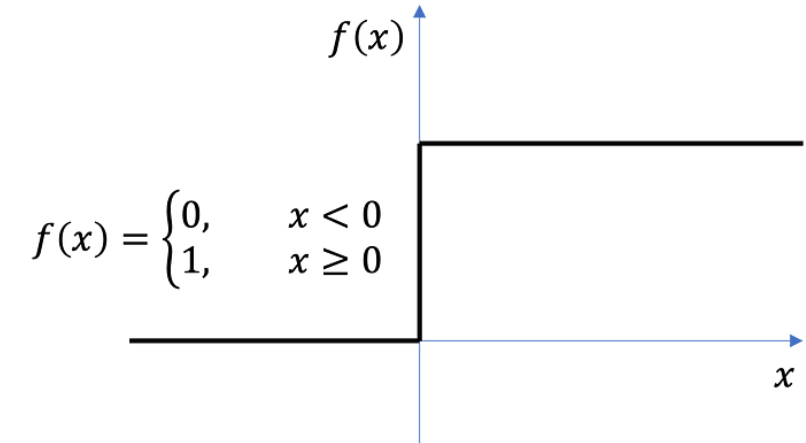

How Perceptron Learn (The Cost Function)

For each training example:

1. Calculate predicted output y_{pred}
2. Calculate error: $\text{error} = y_{\text{true}} - y_{\text{pred}}$
3. Update weights: $w_{\text{new}} = w_{\text{old}} + \text{learning_rate} * \text{error} * x$
4. Update bias: $b_{\text{new}} = b_{\text{old}} + \text{learning_rate} * \text{error}$

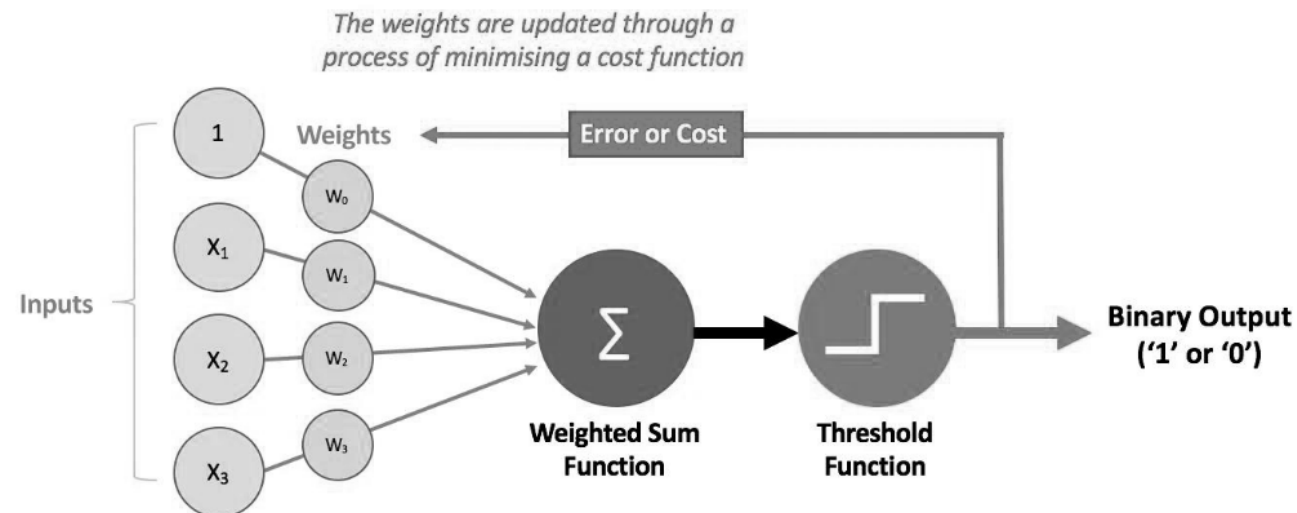

Step-by-Step Hand Calculation for AND Gate

Let's work through the perceptron learning algorithm by hand for the AND gate:

- Training data: $X = [[0,0], [0,1], [1,0], [1,1]]$, $y = [0, 0, 0, 1]$
- Learning rate (η) = 0.1
- Initial weights (randomly assigned): $w_1 = 0.3$, $w_2 = -0.1$
- Initial bias: $b = 0.2$

First Iteration:

Example 1: (0,0) → 0

- Inputs: $x_1 = 0$, $x_2 = 0$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.3(0) + (-0.1)(0) + 0.2 = 0.2$
- Activation: output = 1 (since $z > 0$)
- True output: $y = 0$
- Error: error = $y - \text{output} = 0 - 1 = -1$
- Weight updates:
 - $w_1 = w_1 + \eta * \text{error} * x_1 = 0.3 + 0.1 * (-1) * 0 = 0.3$
 - $w_2 = w_2 + \eta * \text{error} * x_2 = -0.1 + 0.1 * (-1) * 0 = -0.1$
 - $b = b + \eta * \text{error} = 0.2 + 0.1 * (-1) = 0.1$

Step-by-Step Hand Calculation for AND Gate

Example 2: (0,1) → 0

- Inputs: $x_1 = 0$, $x_2 = 1$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.3(0) + (-0.1)(1) + 0.1 = 0$
- Activation: output = 1 (since $z \geq 0$)
- True output: $y = 0$
- Error: error = $y - \text{output} = 0 - 1 = -1$
- Weight updates:
 - $w_1 = w_1 + \eta * \text{error} * x_1 = 0.3 + 0.1 * (-1) * 0 = 0.3$
 - $w_2 = w_2 + \eta * \text{error} * x_2 = -0.1 + 0.1 * (-1) * 1 = -0.2$
 - $b = b + \eta * \text{error} = 0.1 + 0.1 * (-1) = 0$

Example 3: (1,0) → 0

- Inputs: $x_1 = 1$, $x_2 = 0$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.3(1) + (-0.2)(0) + 0 = 0.3$
- Activation: output = 1 (since $z > 0$)
- True output: $y = 0$
- Error: error = $y - \text{output} = 0 - 1 = -1$
- Weight updates:
 - $w_1 = w_1 + \eta * \text{error} * x_1 = 0.3 + 0.1 * (-1) * 1 = 0.2$
 - $w_2 = w_2 + \eta * \text{error} * x_2 = -0.2 + 0.1 * (-1) * 0 = -0.2$
 - $b = b + \eta * \text{error} = 0 + 0.1 * (-1) = -0.1$

Step-by-Step Hand Calculation for AND Gate

Example 4: (1,1) → 1

- Inputs: $x_1 = 1, x_2 = 1$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.2(1) + (-0.2)(1) + (-0.1) = -0.1$
- Activation: output = 0 (since $z < 0$)
- True output: $y = 1$
- Error: error = $y - \text{output} = 1 - 0 = 1$
- Weight updates:
 - $w_1 = w_1 + \eta * \text{error} * x_1 = 0.2 + 0.1 * 1 * 1 = 0.3$
 - $w_2 = w_2 + \eta * \text{error} * x_2 = -0.2 + 0.1 * 1 * 1 = -0.1$
 - $b = b + \eta * \text{error} = -0.1 + 0.1 * 1 = 0$

End of Iteration 1:

- Updated weights: $w_1 = 0.3, w_2 = -0.1$
- Updated bias: $b = 0$

Second Iteration

Example 1: (0,0) → 0

- Inputs: $x_1 = 0, x_2 = 0$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.3(0) + (-0.1)(0) + 0 = 0$
- Activation: output = 1 (since $z \geq 0$)
- True output: $y = 0$
- Error: error = $y - \text{output} = 0 - 1 = -1$
- Weight updates:
 - $w_1 = w_1 + \eta * \text{error} * x_1 = 0.3 + 0.1 * (-1) * 0 = 0.3$
 - $w_2 = w_2 + \eta * \text{error} * x_2 = -0.1 + 0.1 * (-1) * 0 = -0.1$
 - $b = b + \eta * \text{error} = 0 + 0.1 * (-1) = -0.1$

Example 2: (0,1) → 0

- Inputs: $x_1 = 0, x_2 = 1$
- Weighted sum: $z = w_1x_1 + w_2x_2 + b = 0.3(0) + (-0.1)(1) + (-0.1) = -0.2$
- Activation: output = 0 (since $z < 0$)
- True output: $y = 0$
- Error: error = $y - \text{output} = 0 - 0 = 0$
- Weight updates (no change as error = 0):
 - $w_1 = 0.3$
 - $w_2 = -0.1$
 - $b = -0.1$
- **After several iterations**, the perceptron will converge to weights that correctly classify all AND gate examples.

Python Implementation Perceptron from Scratch

```
from sklearn.linear_model import Perceptron
import numpy as np

# Training data for AND gate
X = np.array([[0, 0], [0, 1], [1, 0], [1, 1]])
y = np.array([0, 0, 0, 1])

# Initialize and train Perceptron
model = Perceptron(max_iter=100, eta0=0.1, random_state=42)
model.fit(X, y)

# Results
print("Weights:", model.coef_)
print("Bias:", model.intercept_)
print("Predictions:", model.predict(X))

Weights: [[0.2 0.2]]
Bias: [-0.2]
Predictions: [0 0 0 1]
```

The code shows a scikit-learn Perceptron implementation for the AND gate problem.

The code:

- 1.Imports NumPy, scikit-learn's Perceptron, and matplotlib
- 2.Sets up the training data for the AND gate
- 3.Initializes a Perceptron with 100 max iterations and a random seed of 42
- 4.Trains the perceptron on the AND gate data
- 5.Prints the learned weights, bias, and predictions

The output shows:

- **Weights: [[0.2 0.2]]** - The perceptron learned to assign a weight of 0.2 to both inputs
- **Bias: [-0.2]** - The bias is -0.2
- **Predictions: [0 0 0 1]** - The perceptron correctly classified all four examples of the AND gate

With these weights and bias, the decision function is: $0.2 \times (\text{input1}) + 0.2 \times (\text{input2}) - 0.2$

For the four input combinations:

- [0,0]: $0.2 \times 0 + 0.2 \times 0 - 0.2 = -0.2 < 0 \rightarrow \text{output } 0$
- [0,1]: $0.2 \times 0 + 0.2 \times 1 - 0.2 = 0 \rightarrow \text{output } 0$
- [1,0]: $0.2 \times 1 + 0.2 \times 0 - 0.2 = 0 \rightarrow \text{output } 0$
- [1,1]: $0.2 \times 1 + 0.2 \times 1 - 0.2 = 0.2 > 0 \rightarrow \text{output } 1$


This perceptron implements the AND gate logic.

The decision boundary is the line $2x_1 + 2x_2 - 0.2 = 0$, which separates the point (1,1) from the other three points.

Decision Boundary




- The perceptron learns a decision boundary: $w_1x_1 + w_2x_2 + b = 0$
- Points above the line are classified as 1
- Points below the line are classified as 0
- For AND gate, only the point (1,1) should be above the line

x_1	x_2	y
0	0	0
0	1	0
1	0	0
1	1	1

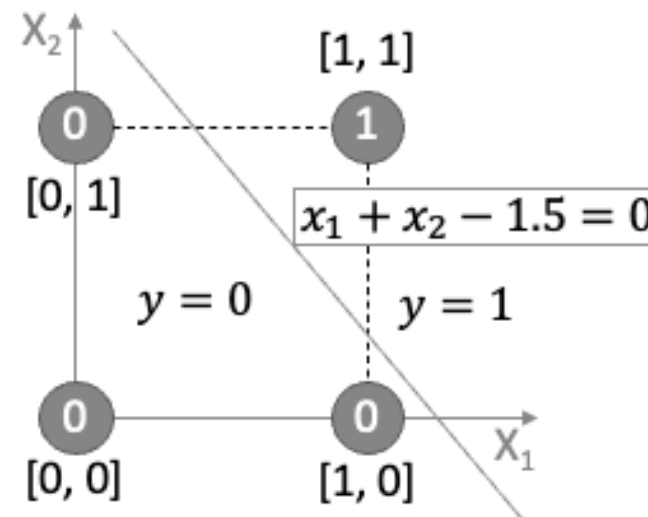

Limitations of Simple Perceptron

- Can only learn linearly separable patterns
- Cannot solve XOR problem (need multiple layers)
- No probabilistic output
- Simple update rule isn't suitable for complex problems

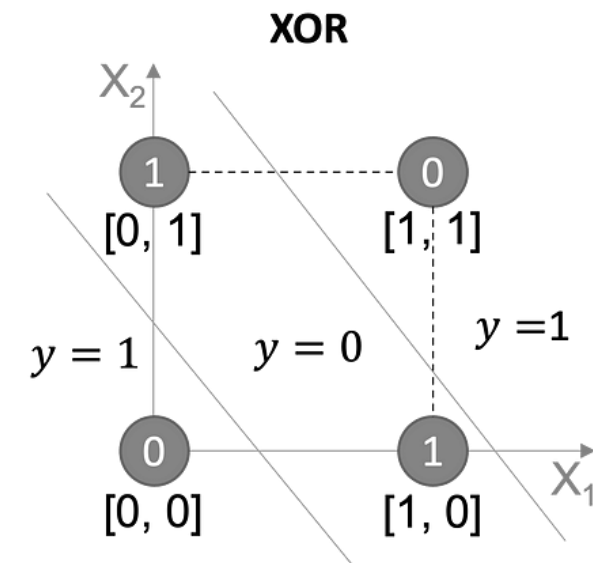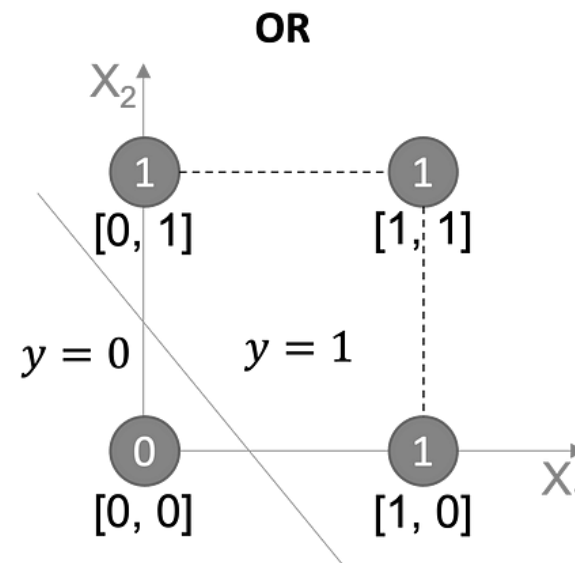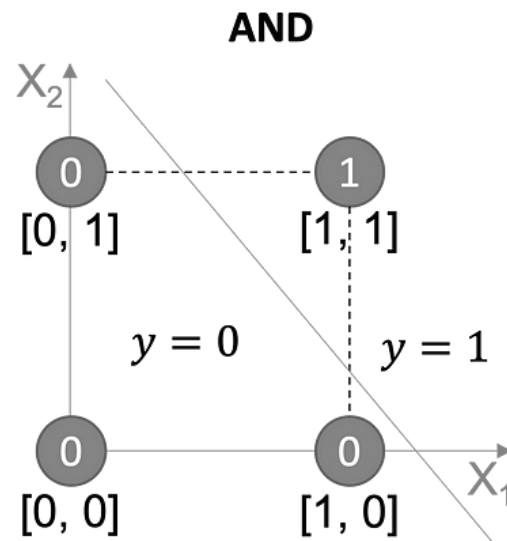

Introduction to Neural Networks

Multi-Layer Neural Network

The Multi-Layer Perceptron (MLP)

Limitations of the Perceptron

While useful for linearly separable problems, the single perceptron cannot solve complex problems like XOR classification, as demonstrated by Minsky and Papert in their 1969 book "Perceptrons."

The Multi-Layer Perceptron

The Multi-Layer Perceptron addresses the limitations of the single perceptron by introducing:

- Multiple layers of neurons
- Non-linear activation functions
- More sophisticated learning algorithms



Structure of an MLP

Definition: An MLP is a class of feedforward artificial neural network that consists of at least three layers of nodes: **input**, **hidden**, and **output** layers.

Key Feature: Each neuron in one layer is connected to every neuron in the next layer (fully connected).

1. Input Layer


- Receives the raw input features
- One neuron per input feature
- No computation occurs here; inputs are simply passed forward

2. Hidden Layer(s)

- One or more layers between input and output
- Each neuron in a hidden layer:
 - Receives inputs from all neurons in the previous layer
 - Computes a weighted sum
 - Applies a non-linear activation function
 - Passes the result to the next layer

3. Output Layer

- Produces the final prediction or classification
- Structure depends on the task:
 - Regression: Often a single neuron with linear activation
 - Binary classification: One neuron with sigmoid activation
 - Multi-class classification: Multiple neurons (one per class) with softmax activation

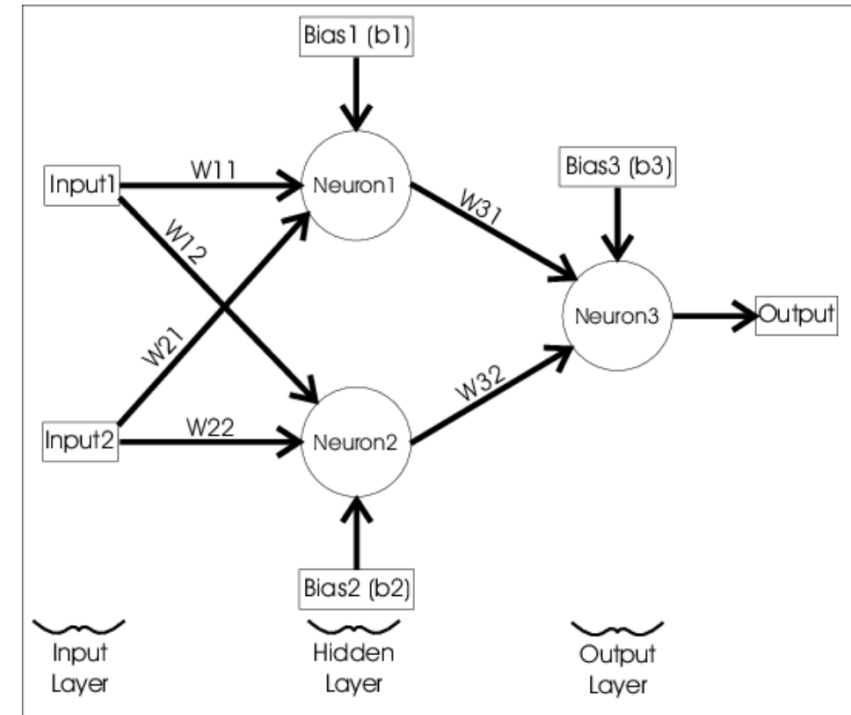


The Neural Network Model to solve the XOR Logic (from: <https://stopsmokingaids.me/>)

How Neural Networks Learn

Training Process:

1. Feed data into the network.
 2. Compute the output using weights.
 3. Compare the output with the correct answer (loss calculation).
 4. Adjust weights using **backpropagation & gradient descent** to improve accuracy.
- **Loss Function:** MSE for regression, Cross-Entropy for classification.
 - **Optimization:** Backpropagation + Gradient Descent (or Adam).

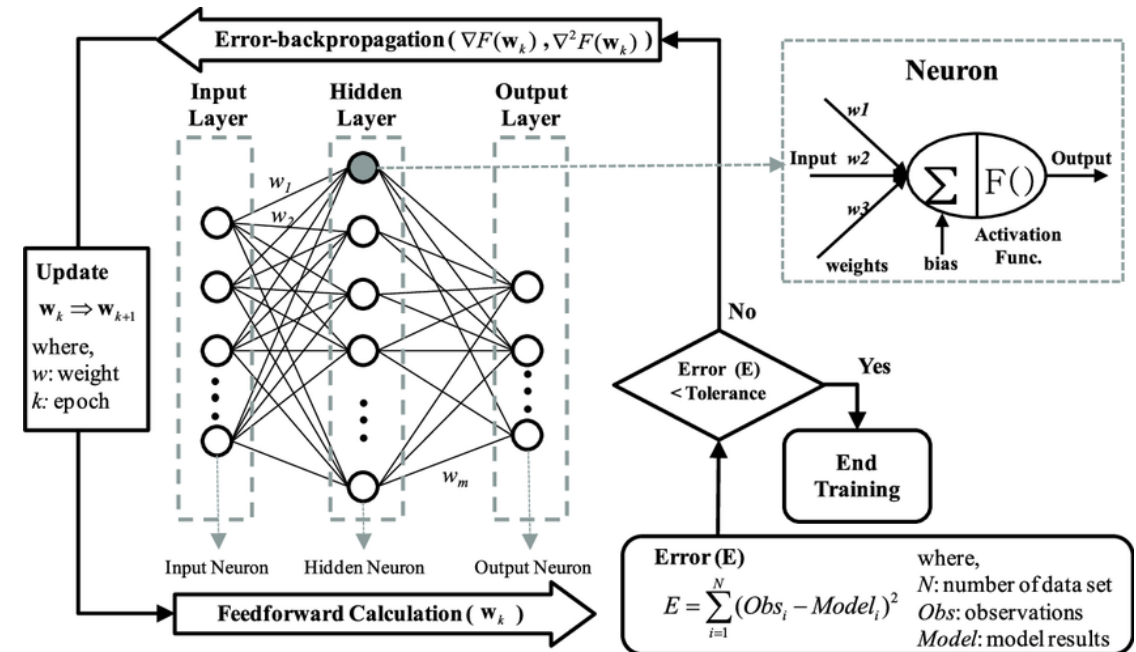


Activation Functions other than Step Function

- Neural Networks use activation functions other than the simple step function in the Perceptron.
- Activation Function helps the neural network use important information while suppressing irrelevant data points (i.e., allows local “gating” of information).


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$

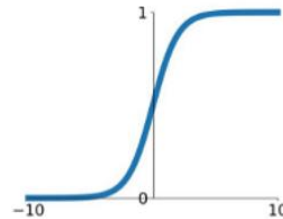


tanh

$$\tanh(x)$$

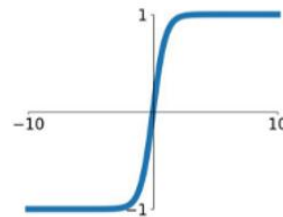


ReLU

$$\max(0, x)$$

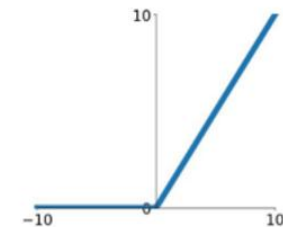

Leaky ReLU

$$\max(0.1x, x)$$

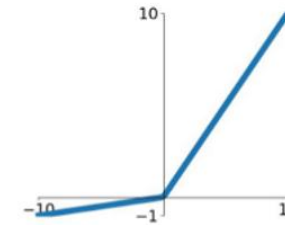


Maxout

$$\max(w_1^T x + b_1, w_2^T x + b_2)$$

ELU

$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$

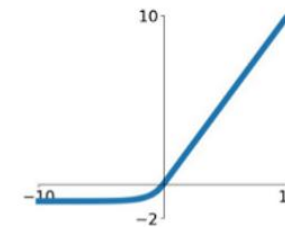

Multi-Layer Perceptron

```
from sklearn.neural_network import MLPClassifier
import numpy as np

# XOR input and output
X = np.array([[0, 0], [0, 1], [1, 0], [1, 1]])
y = np.array([0, 1, 1, 0])

# Define MLP with 1 hidden layer of 2 neurons (minimal config for XOR)
mlp = MLPClassifier(hidden_layer_sizes=(2,), activation='tanh', solver='adam', learning_rate_init=0.01,
                    max_iter=10000, random_state=42)

# Train the model
mlp.fit(X, y)

# Make predictions
predictions = mlp.predict(X)

print("Predictions:\n", predictions)


print("\nWeights (input to hidden):\n", mlp.coefs_[0])
print("\nBias hidden:\n", mlp.intercepts_[0])
print("\nWeights (hidden to output):\n", mlp.coefs_[1])
print("\nBias output:\n", mlp.intercepts_[1])
```

```
Weights (input to hidden):
[[ 2.7144501  3.27401218]
 [-2.73418453 -3.17014048]]


Weights (hidden to output):
[[-4.37775211]
 [ 4.46553876]]
```

```
Bias hidden:
[ 1.21994174 -1.63451199]

Bias output:
[3.61855675]
```

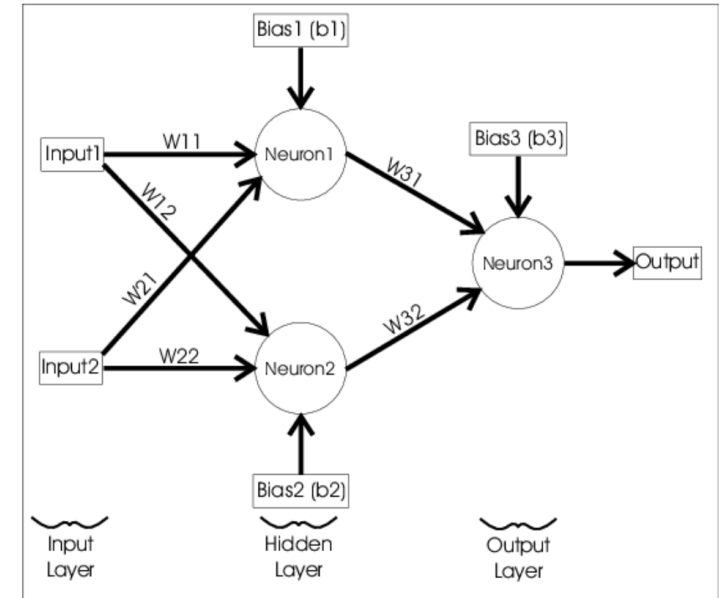

The Neural Network Model to solve the XOR Logic (from: <https://stopsmokingaids.me/>)

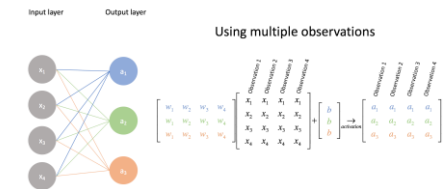

Introduction to Word Embeddings

How Did We Represent Words Pre-2013

- Traditional models like Bag-of-Words (BoW) or TF-IDF, treat words as independent, ignoring semantic similarity.
- **One-hot encoding:** Sparse, binary vectors (dimension = vocabulary size)
- Example: "king" and "queen" are as unrelated as "king" and "banana" in BoW.

Word	Dimension 1 (cat)	Dimension 2 (dog)	Dimension 3 (fish)	Dimension 4 (bird)
cat	1	0	0	0
dog	0	1	0	0
fish	0	0	1	0
bird	0	0	0	1

The Evolution of Word Representations

- **Problem:** How do we represent meaning mathematically?
- **Solution:** Distributional hypothesis - "You shall know a word by the company it keeps" (J.R. Firth, 1957)
- J.R. Firth **did not** provide a detailed technical implementation like an algorithm or computational method. His statement was more of a **linguistic philosophy** or a **theoretical principle**, not a specific engineering method.
- And much later, it inspired the **distributional hypothesis** in computational linguistics, especially by scholars like Zellig Harris and later computational models (Word2Vec, etc.)



...government debt problems turning into **banking** crises as happened in 2009...
...saying that Europe needs unified **banking** regulation to replace the hodgepodge...
...India has just given its **banking** system a shot in the arm...

These **context words** will represent **banking**

Word2Vec (Tomas Mikolov et al., 2013)

- Developed by Tomas Mikolov and team at Google.

Key Innovation

- Transformed NLP by creating dense vector representations through prediction-based models

Two Architectures



- **Continuous Bag of Words (CBOW):**
 - Predicts target word from context words
 - Faster training, better for frequent words
- **Skip-gram:**
 - Predicts context words from target word
 - Better for rare words, captures more semantic information

Characteristics

- Uses **shallow neural networks** and trains on local context windows.
- Typically, 100-300 dimensions (vs. vocabulary size)
- Linear relationships: king - man + woman \approx queen
- Efficient training through negative sampling
- **Limitations: Fixed vectors, one vector per word regardless of context**



CBow and Skip-Gram Models

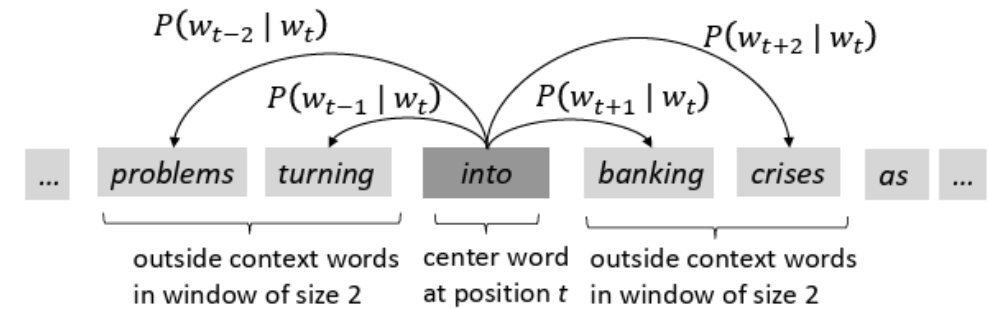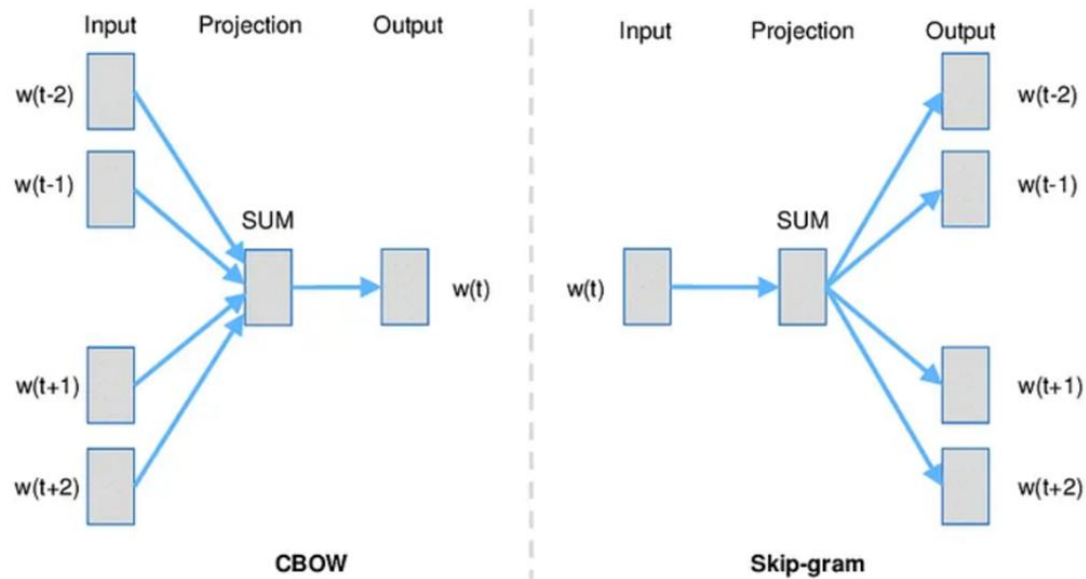


For each position $t=1, \dots, T$, predict context words within a window of fixed size m , given center word w_t .

Skip-gram Architecture (Word2Vec)

This diagram illustrates how Word2Vec's **Skip-gram model** works:

- **Input:** A one-hot encoded vector for the center word (word i).
- **Embedding Matrix:** Multiplies the input vector to produce a **dense embedding** (N -dimensional vector) — this becomes the **vector representation of the input word**.
- **Context Matrix:** The dense vector is then multiplied with another matrix to predict surrounding context words via softmax output.
- **Output:** A probability distribution over the vocabulary, aiming to maximize the likelihood of actual context words.
- This training process helps learn **meaningful word vectors** based on how words appear in context.

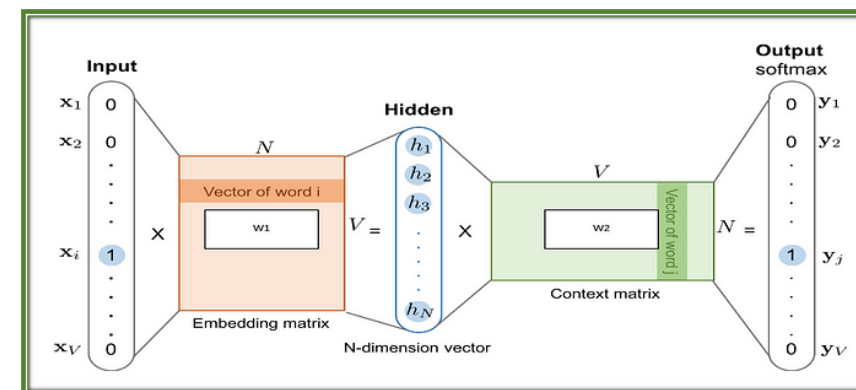

<https://python.plainenglish.io/understanding-word-embeddings-tf-idf-word2vec-glove-fasttext-996a59c1a8d3>

The Result of the Training Process - Similar Words -> Similar Vectors

- Visual example of how embedding changes before and after training. `sports` and `exercise` have similar embedding value post training because they are closely related




Vector Spaces and Word Embeddings

What is a Vector Space?

- A mathematical space where each word is represented as a point (or vector) in multi-dimensional space.
- Words are encoded as dense numerical vectors instead of one-hot or sparse representations (**Word Embeddings**) e.g., "king" \rightarrow [0.21, 0.72, ..., ..., 0.35]
- Word Embeddings captures **semantic** and **syntactic** relationships about/between words.
- Each dimension potentially captures semantic meaning.
- These vectors are learned from text by models like Word2Vec or GloVe.

Word	Dimension 1 (political)	Dimension 2 (dangerous)
shark	0.05	0.22
animal	0.03	0.25
dangerous	0.07	0.32
political	0.31	0.04
dictatorship	0.28	0.15

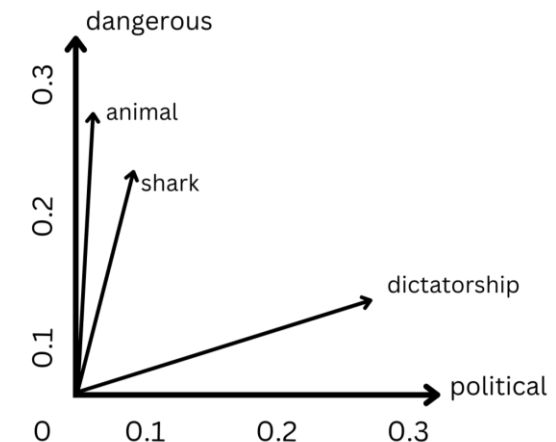



Vector Spaces and Word Embeddings

Why Use a Vector Space?

- Makes it possible to compare, visualize, and manipulate meanings of words using math.
- Enables operations like:
 - **Similarity:** "king" is close to "queen"
 - **Analogy:** "king" - "man" + "woman" \approx "queen"

Properties of Vector Space

- Semantic relationships are preserved (e.g., "shark" is closer to "dangerous" than "political").
- Similar meanings \rightarrow closer vectors.
- Dissimilar meanings \rightarrow vectors farther apart.

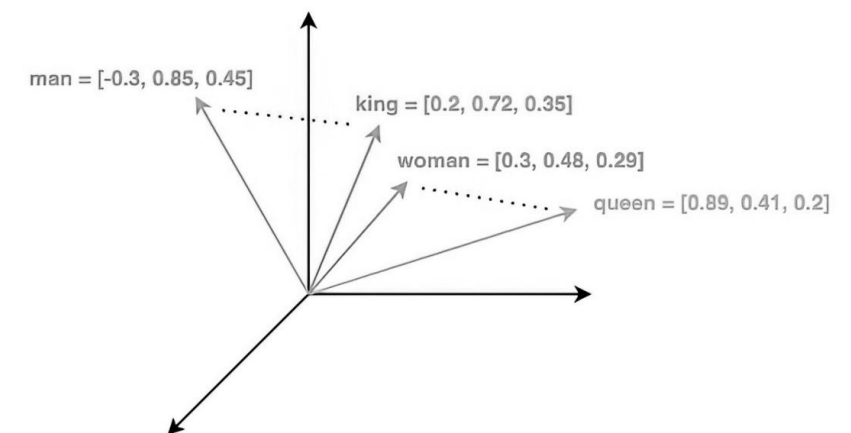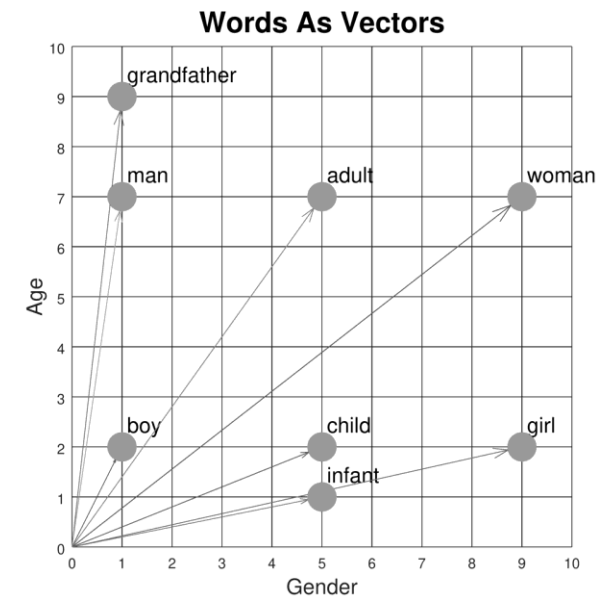

Glove (Pennington, Socher, Manning 2014)

- Developed by Stanford NLP Group (Pennington, Socher, Manning)

- Key Innovation**


Bridges the gap between count-based methods and prediction-based methods by using global co-occurrence statistics to learn word vectors

- Approach**


- Builds a word-word co-occurrence matrix over a large corpus
- Learns embeddings by factorizing the matrix using a weighted least squares objective

Characteristics

- Captures global statistical information while maintaining useful properties of local context
- Produces dense word vectors (typically 100–300 dimensions)
- Linear relationships in vector space are preserved: king - man + woman \approx queen
- Trained on massive corpora (Wikipedia, Common Crawl)
- Limitations: Ignores context variability—still one vector per word regardless of usage**

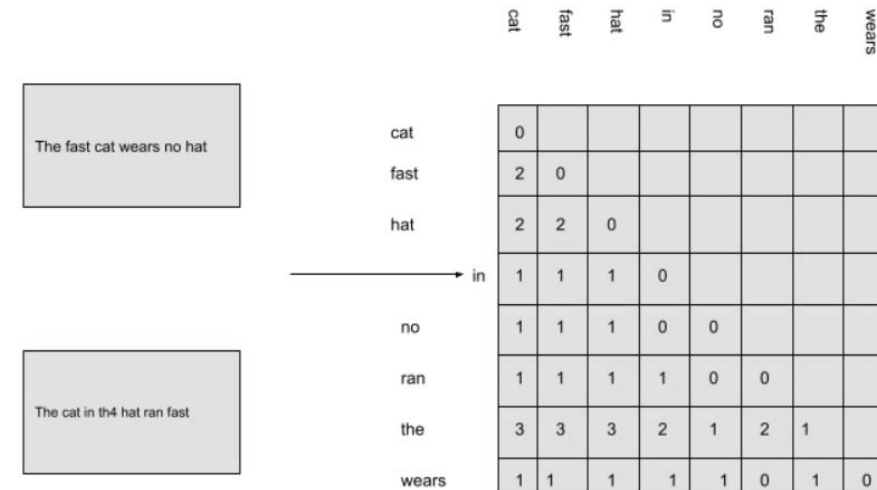

	cat	fast	hat	in	no	ran	the	wears
cat	0							
fast	2	0						
hat	2	2	0					
in	1	1	1	0				
no	1	1	1	0	0			
ran	1	1	1	1	0	0		
the	3	3	3	2	1	2	1	
wears	1	1	1	1	1	0	1	0

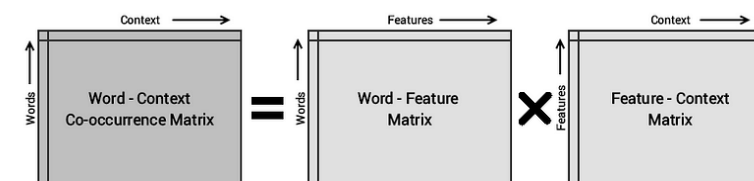

Measuring Similarity Between Word Vectors

Why Compare Word Vectors?

- Word embeddings map words into a vector space.
- **Words with similar meanings** are placed **close together** in that space.
- To quantify this "closeness," we use **vector similarity**.

Cosine Similarity


Most common metric used to compare word vectors:

$$\text{cosine_similarity}(\vec{A}, \vec{B}) = \frac{\vec{A} \cdot \vec{B}}{\|\vec{A}\| \|\vec{B}\|}$$

- Measures the **angle** between two vectors (not their magnitude).
- Ranges from **-1 to 1**:
 - 1 → Same direction (very similar)
 - 0 → Orthogonal (unrelated)
 - -1 → Opposite directions (very different)

Intuition

- Vectors for "king" and "queen" will have high cosine similarity.
- Vectors for "apple" and "keyboard" will have low similarity.

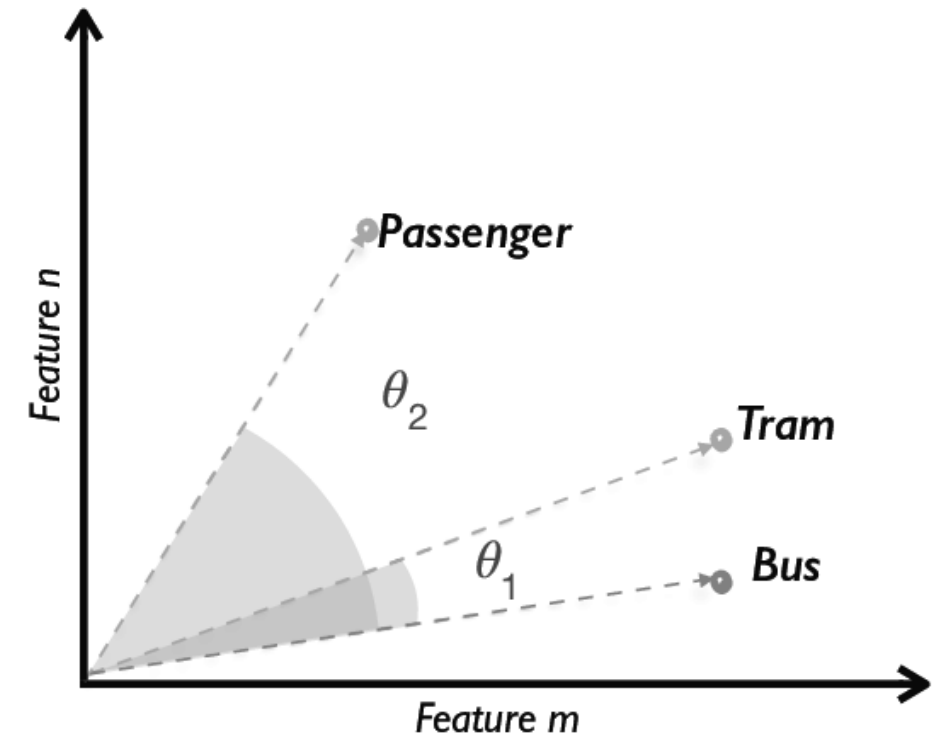

Experimenting with Fake Embeddings

```
import numpy as np

from sklearn.metrics.pairwise import cosine_similarity

# Fake word vectors (3D for simplicity)
word_vectors = {
    "king": np.array([0.8, 0.65, 0.1]),
    "queen": np.array([0.78, 0.66, 0.12]),
    "man": np.array([0.9, 0.1, 0.1]),
    "woman": np.array([0.88, 0.12, 0.12]),
    "apple": np.array([0.1, 0.8, 0.9]),
}

def similarity(w1, w2):
    return cosine_similarity([word_vectors[w1]], [word_vectors[w2]])[0][0]

print("Similarity(king, queen):", similarity("king", "queen"))
print("Similarity(man, woman):", similarity("man", "woman"))
print("Similarity(king, apple):", similarity("king", "apple"))
```

Learn Embeddings From Scratch

```
from gensim.models import Word2Vec

# Sample corpus
sentences = [['data', 'science', 'is', 'fun'],
              ['machine', 'learning', 'is', 'powerful'],
              ['data', 'and', 'learning', 'are', 'related']]

# Train the model
model = Word2Vec(sentences, vector_size=50, window=2, min_count=1, workers=2)

# Access the embedding for a word
print("Vector for 'data':\n", model.wv['data'])

# Find similar words
print("Words similar to 'data':", model.wv.most_similar('data'))
```

Vector for 'data':

```
[-0.01723938  0.00733148  0.01037977  0.01148388  0.01493384 -0.01233535
 0.00221123  0.01209456 -0.0056801  -0.01234705 -0.00082045 -0.0167379
-0.01120002  0.01420908  0.00670508  0.01445134  0.01360049  0.01506148
-0.00757831 -0.00112361  0.00469675 -0.00903806  0.01677746 -0.01971633
 0.01352928  0.00582883 -0.00986566  0.00879638 -0.00347915  0.01342277
 0.0199297  -0.00872489 -0.00119868 -0.01139127  0.00770164  0.00557325
 0.01378215  0.01220219  0.01907699  0.01854683  0.01579614 -0.01397901
-0.01831173 -0.00071151 -0.00619968  0.01578863  0.01187715 -0.00309133
 0.00302193  0.00358008]
```

Words similar to 'data': [('are', 0.16563551127910614), ('fun', 0.13940520584583282), ('learning', 0.1267007291316986), ('powerful', 0.08872982114553452), ('is', 0.011071977205574512), ('and', -0.027849990874528885),

Use Pre-Trained Embeddings

Gensim

- Gensim is a powerful open-source Python library designed specifically for unsupervised topic modeling and natural language processing tasks, with a strong focus on working with large corpora.
- It excels in handling word embeddings and semantic similarity, offering efficient implementations of models like Word2Vec, FastText, and Doc2Vec.
- Gensim is known for its memory-efficient, streaming-based approach, which allows it to process text data without loading everything into memory.
- This makes it especially useful for working with real-world, large-scale text data.

```
import gensim.downloader as api
from gensim.models import Word2Vec

# Load pre-trained Word2Vec model
word2vec_model = api.load("word2vec-google-news-300")

# Find similar words
similar_words = word2vec_model.most_similar('computer', topn=5)
print("Words similar to 'computer':", similar_words)

# Word analogies
result = word2vec_model.most_similar(positive=['woman', 'king'],
                                     negative=['man'], topn=1)
print("king - man + woman =", result)

# Train your own Word2Vec model
sentences = [["cat", "say", "meow"], ["dog", "say", "woof"]]
model = Word2Vec(sentences, vector_size=100, window=5, min_count=1,
                 workers=4)

# Get vector for a word
cat_vector = model.wv['cat']
print("Vector for 'cat':", cat_vector[:5]) # Show first 5 dimensions
```

Word Embeddings Example using Spacy Library

spaCy

- spaCy is a fast and robust natural language processing library for Python that provides industrial-strength tools for text preprocessing and linguistic analysis.
 - It comes with pre-trained models for multiple languages and supports features like tokenization, part-of-speech tagging, named entity recognition, dependency parsing, and sentence segmentation.
 - spaCy is designed for performance and ease of use in production environments and integrates well with deep learning libraries.
 - While it's not primarily focused on word embeddings, it includes pre-trained word vectors and supports similarity comparisons out of the box.
- `pip install spacy`
 - `python -m spacy download en_core_web_md`

```
import spacy
nlp = spacy.load("en_core_web_md")

word1 = nlp("king")
word2 = nlp("queen")
print("Similarity:", word1.similarity(word2))
```

Applications of Word Embeddings in NLP

1. Semantic Similarity

Measure how similar two words, phrases, or documents are by comparing their vector representations.
Example: Identifying that "doctor" and "physician" are closely related.

2. Text Classification

Used as input features for tasks like spam detection, sentiment analysis, and topic classification.
Embeddings provide rich, dense input for machine learning models.

3. Named Entity Recognition (NER)

Help identify proper nouns and classify them into categories like person, location, or organization.
Embedding-based models improve contextual understanding of named entities.

4. Machine Translation

Map words from one language to another by aligning embeddings in multilingual space.
Improves translation accuracy by leveraging semantic proximity.

5. Question Answering & Chatbots

Used to understand queries and match them with appropriate answers or responses.
Enable bots to interpret intent and context more accurately.



- **6. Information Retrieval**

Enhance search engines by retrieving results based on semantic meaning, not just keyword matches.
Example: Searching for "heart attack" returns documents containing "cardiac arrest."

Introduction to Deep Neural Networks

Introduction to Deep Learning

- Neural Networks have revolutionized artificial intelligence by enabling machines to learn from data in ways that mimic human neural processes.
- Deep neural networks (DNNs) are Neural Networks that are composed of multiple processing layers that can learn representations of data with **multiple levels of abstraction**.
- The power of deep learning comes from its ability to **automatically discover intricate patterns** in raw data through the learning process, without requiring human engineers to manually specify all the knowledge needed by the computer system.

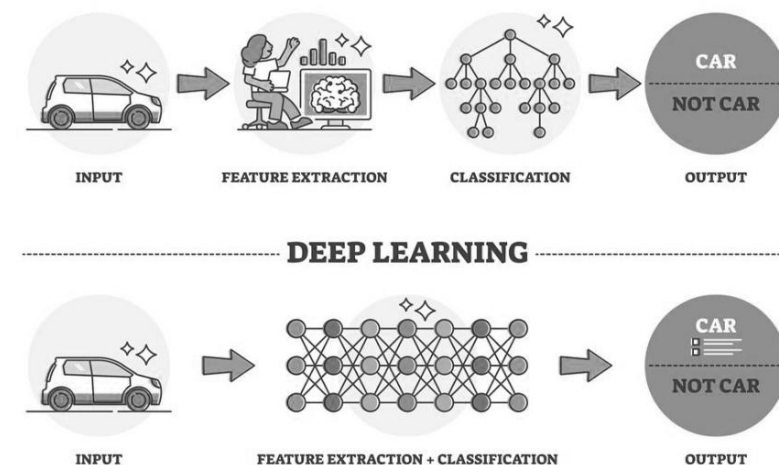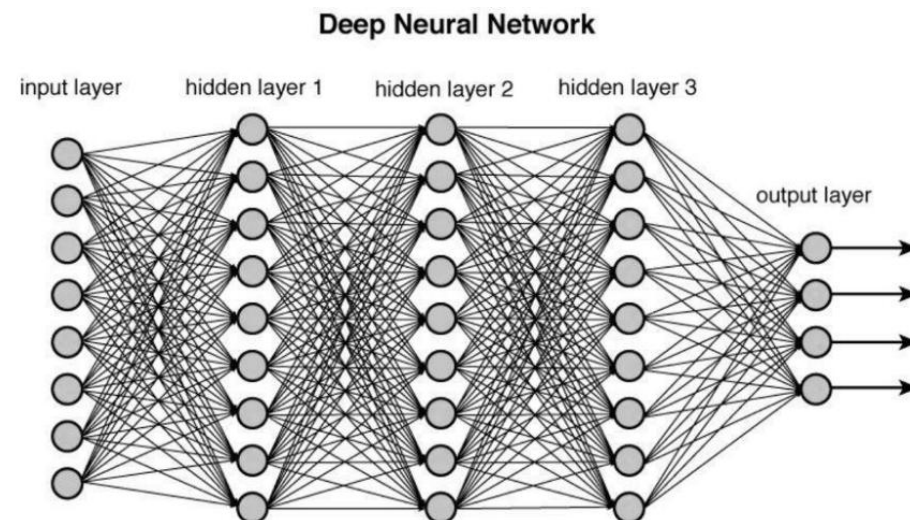

Introduction to Deep Learning


Fundamentals of Neural Networks

At their core, neural networks consist of:

1. **Neurons:** Mathematical functions that take inputs, apply weights, add a bias, and produce an output
2. **Layers:** Collections of neurons that process information in stages
3. **Activation Functions:** Non-linear functions that introduce complexity into the network
4. **Weights and Biases:** Parameters that are adjusted during training

The basic workflow involves:

- Forward propagation: Data flows through the network
- Loss calculation: The network's prediction is compared to the actual value
- Backpropagation: Errors are propagated backward to update weights
- Optimization: Weights are adjusted to minimize errors

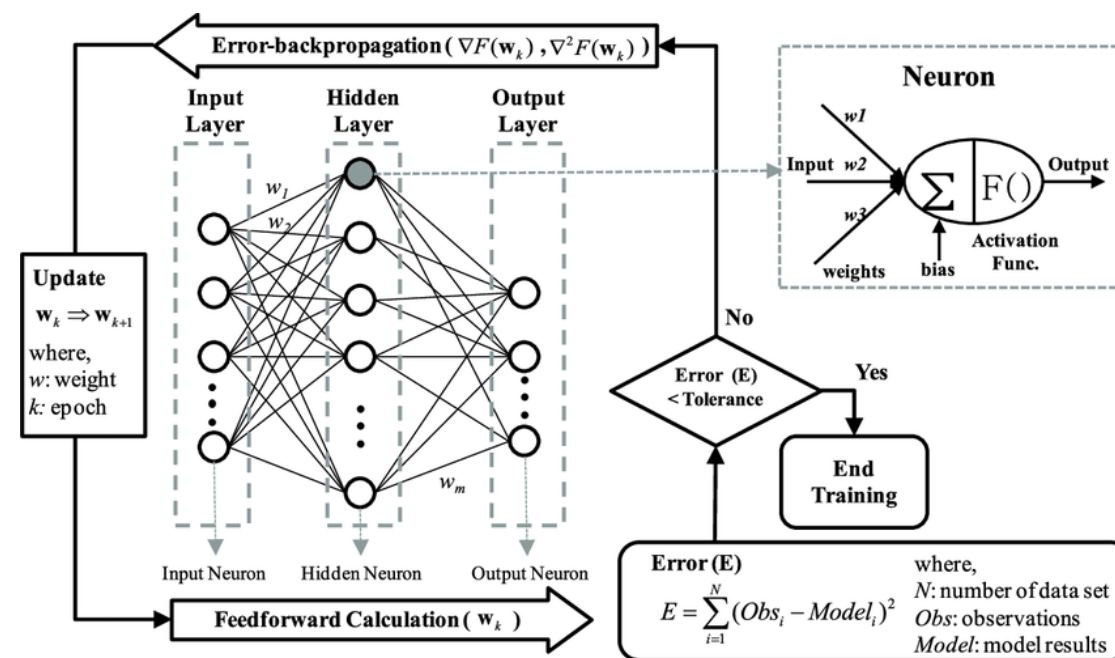

Convolutional Neural Networks

CNNs revolutionized **image processing** by introducing **specialized layers** that mimic how the visual cortex processes information.

Key components include:


1. **Convolutional Layers:** Apply filters that scan across the input data to detect patterns
2. **Pooling Layers:** Reduce dimensions while preserving important features
3. **Fully Connected Layers:** Connect every neuron to every neuron in adjacent layers

Instead of each neuron connecting to every pixel in an image (which would be computationally expensive), CNNs use:

- **Local connectivity:** Neurons connect only to nearby pixels
- **Parameter sharing:** The same filter is applied across the entire image

Business applications include:

- Product image recognition
- Visual quality control in manufacturing
- Document processing
- Customer behavior analysis in retail

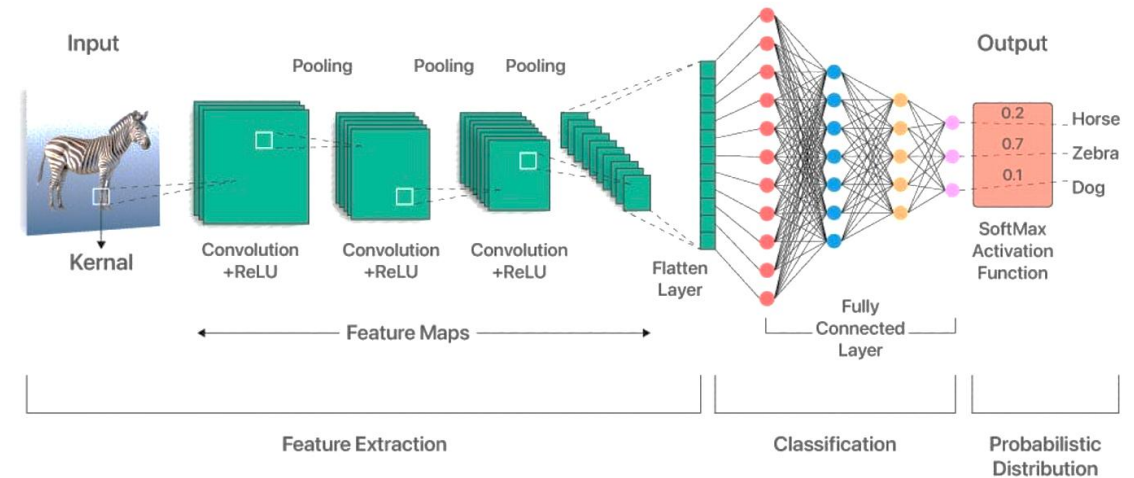

3 ₀	3 ₁	2 ₂	1	0
0 ₂	0 ₂	1 ₀	3	1
3 ₀	1 ₁	2 ₂	2	3
2	0	0	2	2
2	0	0	0	1

12.0	12.0	17.0
10.0	17.0	19.0
9.0	6.0	14.0

Recurrent Neural Networks (RNNs)

Unlike traditional neural networks, RNNs process sequences by maintaining a form of memory of previous inputs.

Key characteristics:



- **Time-dependent processing:** Output depends on both current and previous inputs
- **Shared parameters:** The same weights are applied at each time step
- **Memory:** Internal state acts as a form of short-term memory


However, basic RNNs struggle with long-term dependencies due to:

- **Vanishing gradient problem:** The influence of early inputs fades over time
- **Exploding gradient problem:** Gradients grow uncontrollably during training

Business applications include:

- Language Modeling & Text Generation – Predicting the next word in a sequence (e.g., autocomplete, chatbots).
- Machine Translation – Translating text from one language to another.
- Speech Recognition – Converting spoken language into written text.
- Stock Price Prediction – Predicting future stock or financial data.
- Weather Forecasting – Modeling temporal patterns in weather data.
- Patient Monitoring – Analyzing sequences of medical data (e.g., ECG signals).
- Music Generation – Creating sequences of musical notes.
- Fraud Detection – Detecting unusual sequences in financial transactions.
- Network Intrusion Detection – Monitoring patterns of activity over time.

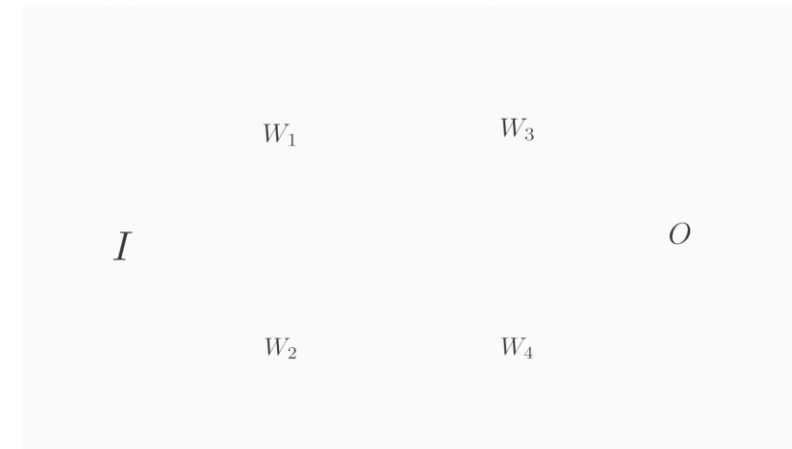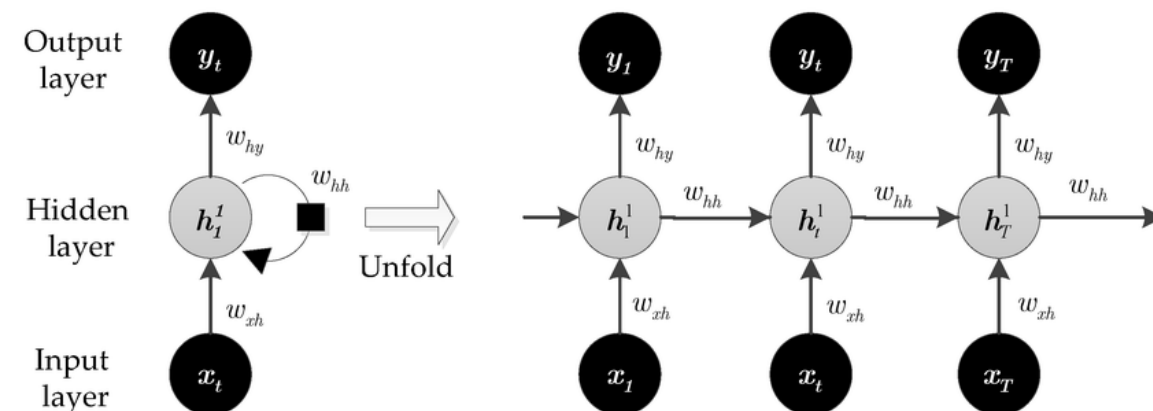

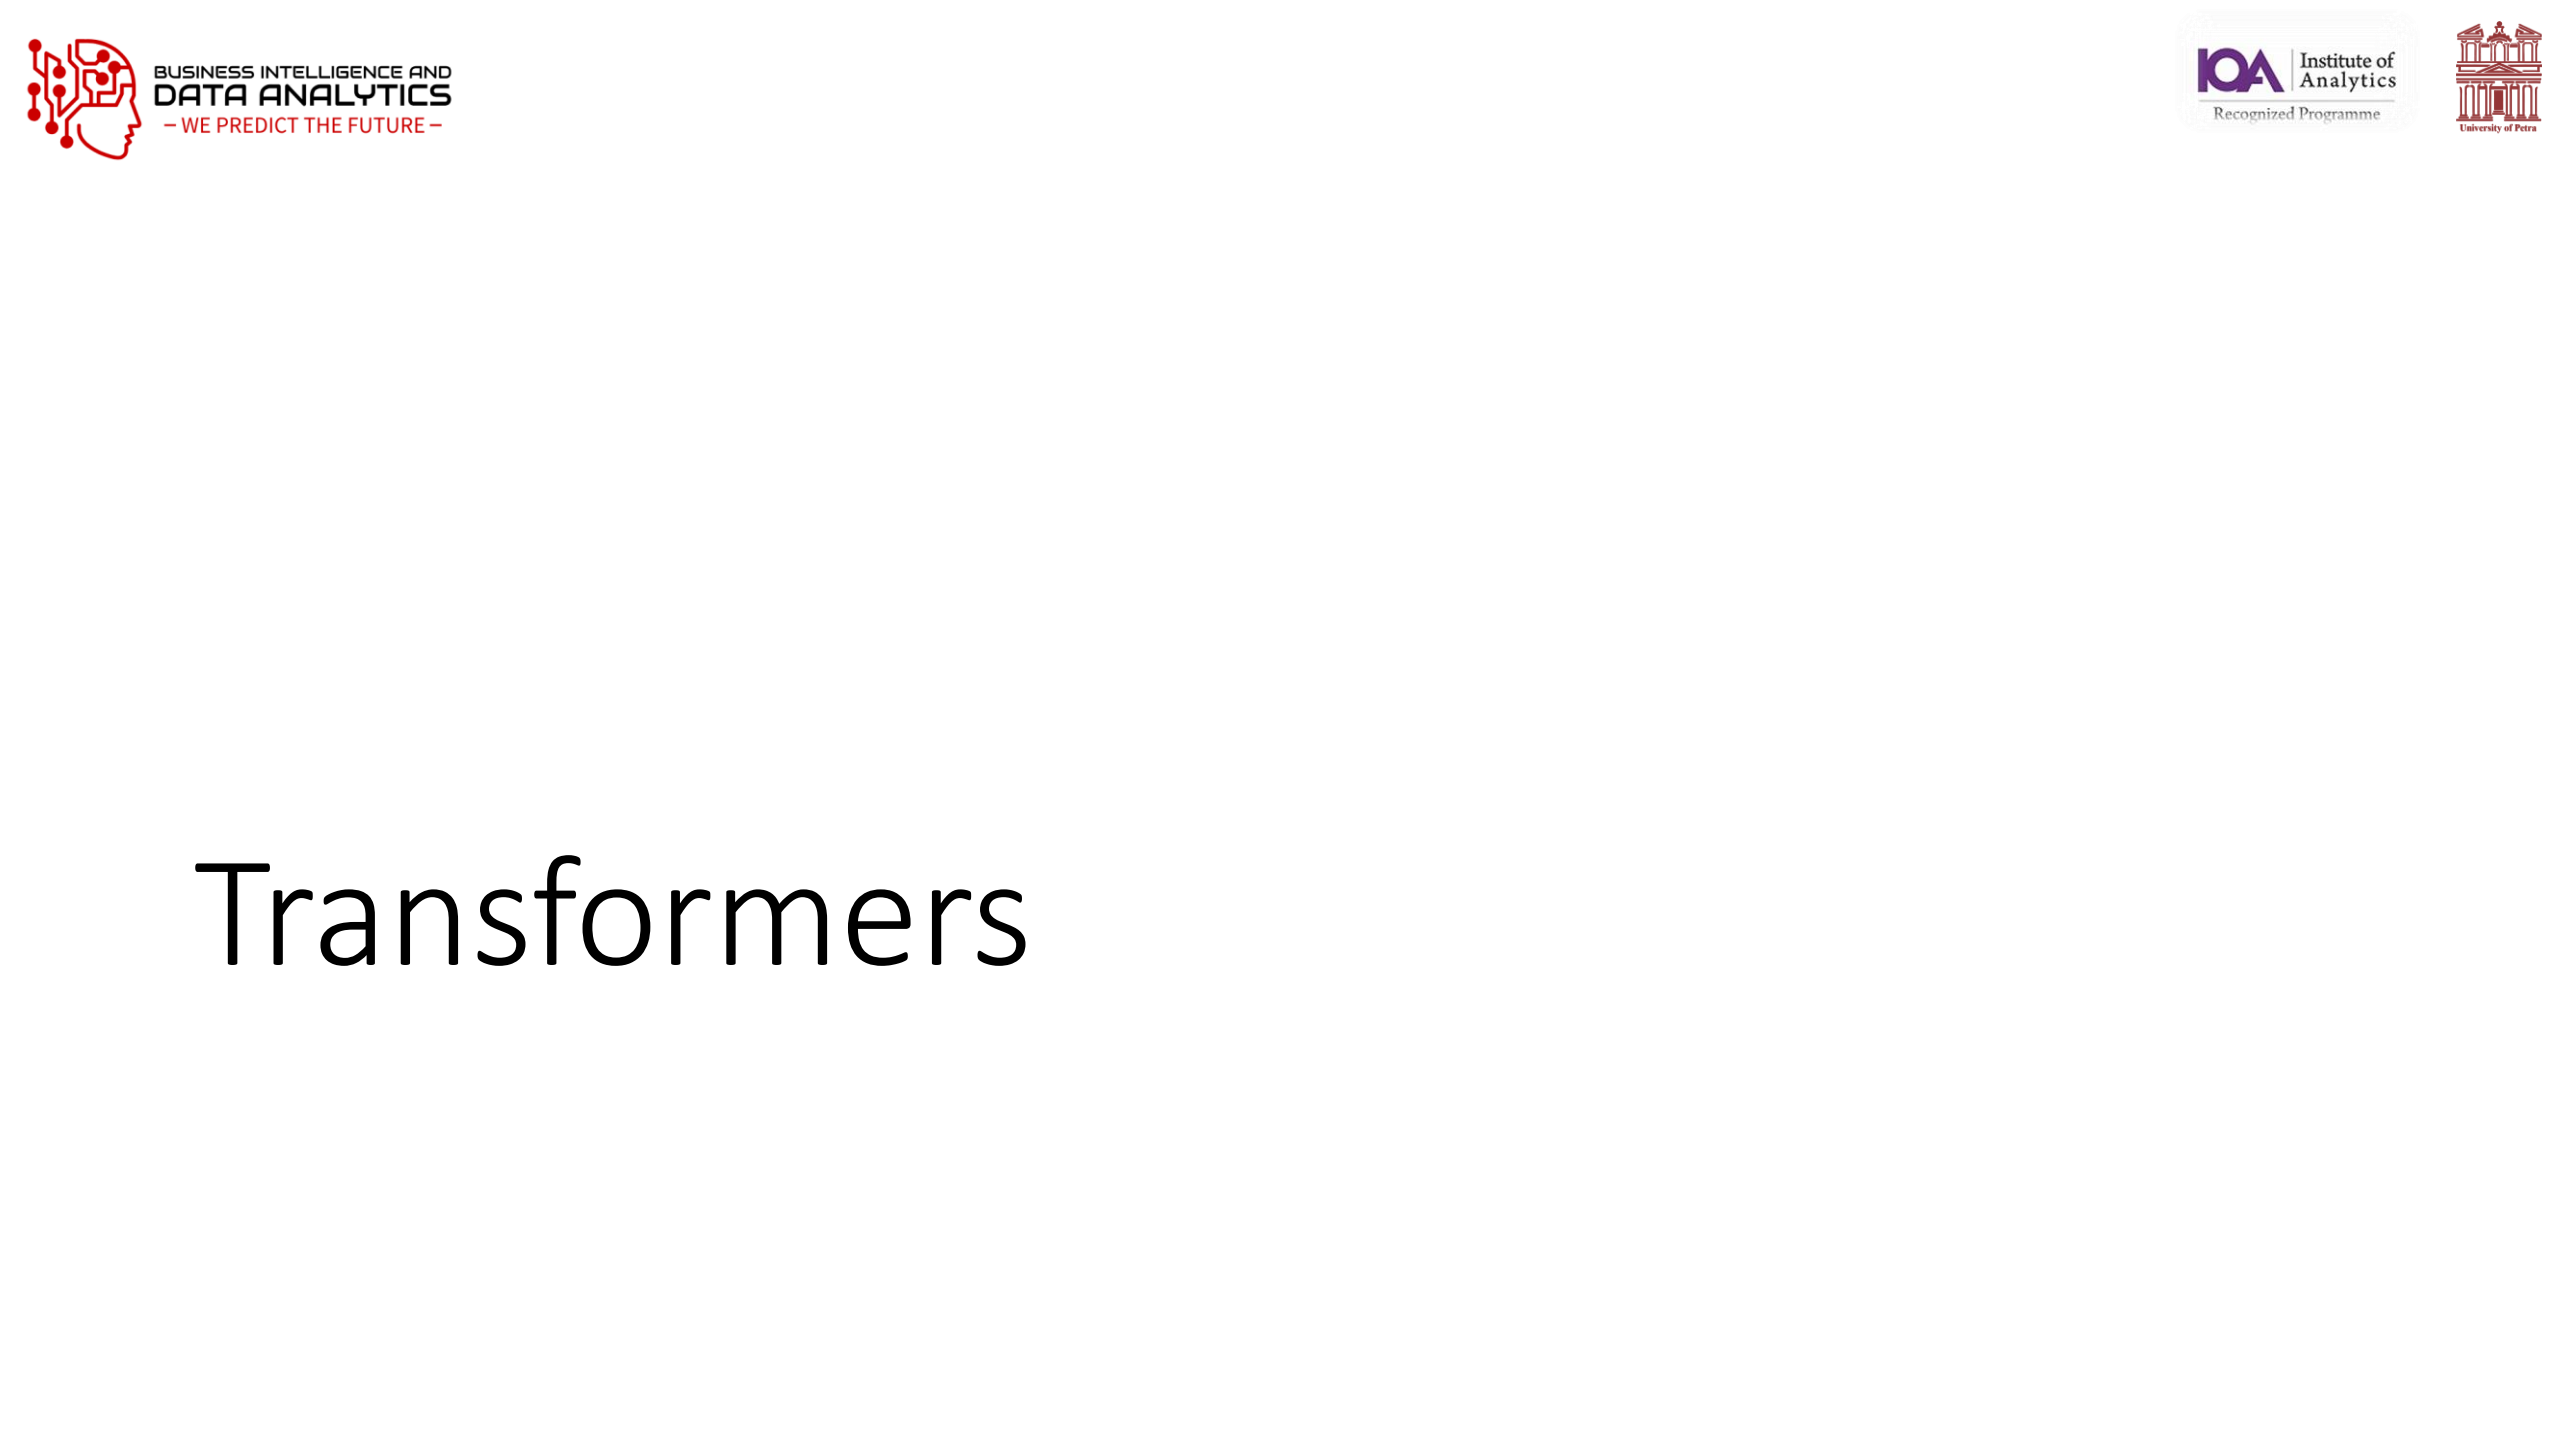

Transformers

Transformers – Architecture and Principles

What is a Transformer?


- A deep learning model based entirely on **self-attention**, with no recurrence or convolutions
- Introduced in the paper “*Attention Is All You Need*” (Vaswani et al., 2017)

Transformer Components:

1. **Embeddings**: Convert tokens to vector representations
2. **Positional Encoding**: Adds position information
3. **Multi-Head Attention**: Processes relationships from multiple perspectives
4. **Feed-Forward Networks**: Process each position independently
5. **Layer Normalization**: Stabilizes training
6. **Residual Connections**: Helps with gradient flow

Architecture Variations:

- **Encoder-only** (BERT): Good for understanding (classification, NER)
- **Decoder-only** (GPT): Good for generation
- **Encoder-decoder** (T5): Good for transformation tasks (translation, summarization)

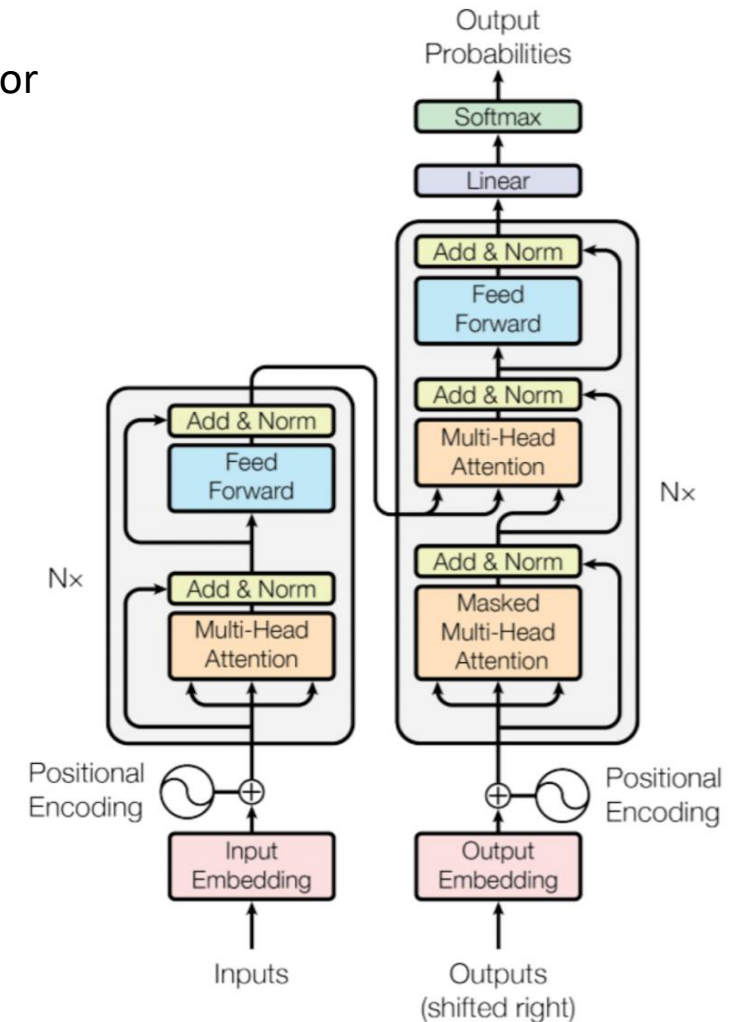

Transformer Processing Flow

Task: Translate the English sentence:

"Your cat is a lovely cat" → "Ton chat est un chat adorable"

We'll walk through the **encoder-decoder Transformer architecture** used in machine translation.

Input Preparation

English sentence (source):

"The cat is sleeping"

- Tokenization: Break the sentence into tokens: ["<s>", "Your", "cat", "is", "a", "lovely", "cat", "</s>"]
- Embedding: Convert each token into a vector using a learned embedding matrix.
- Positional Encoding: Add position-based information to each token embedding to represent word order.
- Without this, the self-attention mechanism would treat the sentence as a bag of words.

Embedding	Index ID	Vocabulary
[0.03 0.12 0.98]	1134	a
[0.04 0.08 0.32]	665	in
[0.45 0.01 0.03]	398	I
[0.93 0.54 0.58]	23	joint
[0.37 0.72 0.08]	76	student
[0.53 0.42 0.77]	56	Wednesday
[0.09 0.71 0.03]	9235	,
[0.22 0.95 0.37]	889	and
[0.07 0.13 0.48]	65	May
[0.15 0.46 0.63]	456	called
[0.45 0.01 0.04]	298	am
...

Original sentence	YOUR	CAT	IS	A	LOVELY	CAT
Embedding (vector of size 512)	952.207 5450.840 1853.448 1.658 2671.529	171.411 3276.350 9192.819 3633.421 8390.473	621.659 1304.051 0.565 7679.805 4506.025	776.562 5567.288 58.942 2716.194 5119.949	6422.693 6315.080 9356.778 2141.081 735.147	171.411 3276.350 9192.819 3633.421 8390.473
Position Embedding (vector of size 512). Only computed once and reused for every sentence during training and inference.	+	+	+	+	+	+
	...	1664.068 8080.133 2620.399 9386.405 3120.159	1281.458 7902.890 912.970 3821.102 1659.217 7018.620
Encoder Input (vector of size 512)	-	-	-	-	-	-
	...	1835.479 11356.483 11813.218 13019.826 11510.632	1452.869 11179.24 10105.789 5292.638 15409.093


d

Encoder

The encoder processes the full input sequence in parallel through a stack of layers.

Each encoder layer includes:


- **Multi-head Self-Attention:**
Each word learns which other words to focus on.
Example: The second occurrence of "cat" may attend to the first "cat" to recognize repetition or coreference.
- **Add & Norm:**
A residual connection followed by layer normalization.
- **Feedforward Network:**
A two-layer neural network processes each position independently.
- **Add & Norm:**
Another residual connection and normalization.
- This stack is repeated several times (e.g., 6 layers), producing a set of **contextualized vectors**, one for each token.

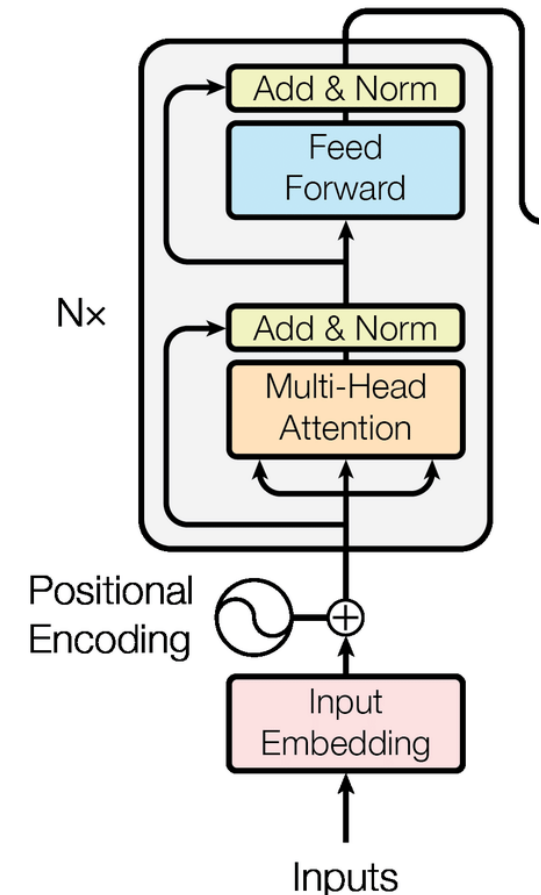

The Attention Mechanism


- 1. Create Q, K, V matrices:** Each word embedding is multiplied by three learned weight matrices (W_Q , W_K , W_V) to create Query, Key, and Value representations:
 - $Q = X \cdot W_Q$
 - $K = X \cdot W_K$
 - $V = X \cdot W_V$
- 2. Compute attention scores:** Each query vector is dot-producted with all key vectors to get raw attention scores:
 - $\text{Scores} = Q \cdot K^T$
- 3. Scale the scores:** Divide by $\sqrt{d_k}$ (where d_k is the dimension of the key vectors) to prevent the values from getting too large:
 - $\text{Scaled scores} = (Q \cdot K^T) / \sqrt{d_k}$
- 4. Apply softmax:** Convert the scaled scores to probabilities:
 - $\text{Attention weights} = \text{softmax}(\text{Scaled scores})$
- 5. Compute weighted values:** Multiply the attention weights by the value vectors:
 - $\text{Output} = \text{Attention weights} \cdot V$

So the formula is: $\text{Attention}(Q, K, V) = \text{softmax}((Q \cdot K^T) / \sqrt{d_k}) \cdot V$

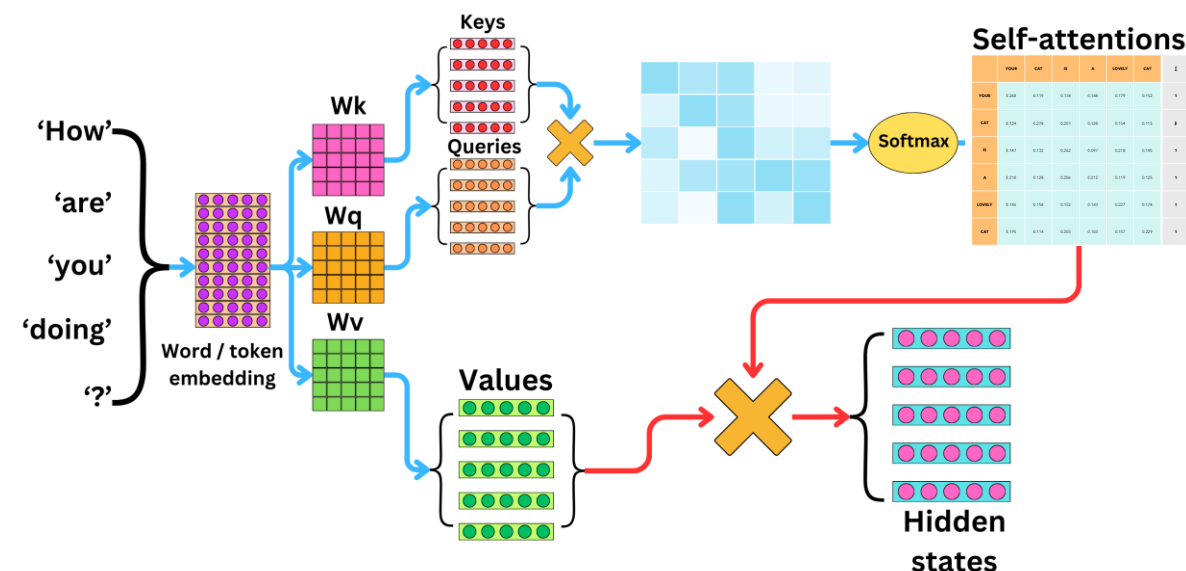

Vector Dot Product as Similarity Measure

$$\mathbf{v}_1 \cdot \mathbf{v}_2 = x_1x_2 + y_1y_2$$

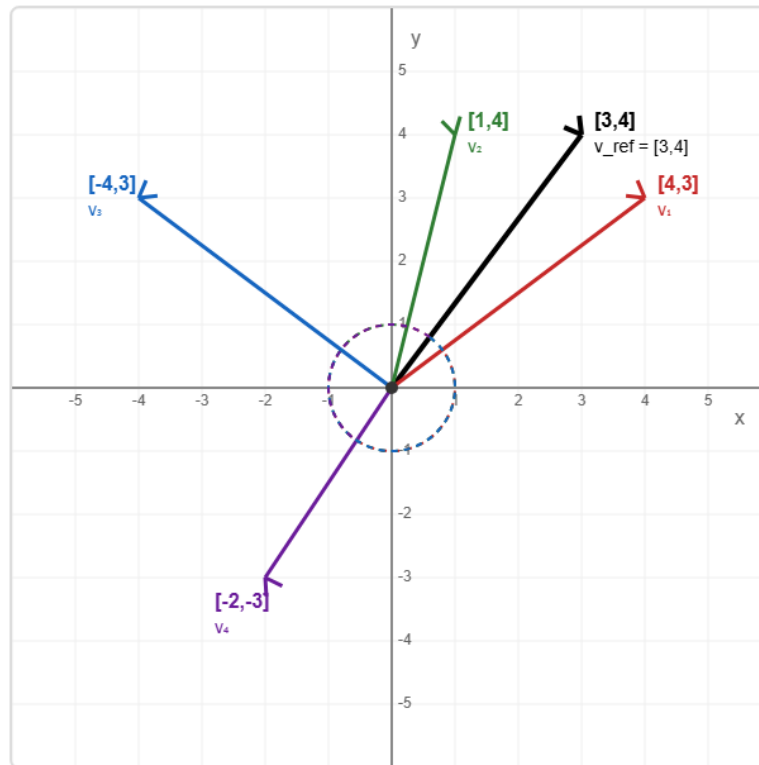

1. Very Similar (High Positive)

Red Vector $\mathbf{v}_1 = [4, 3]$

$$\mathbf{v}_1 \cdot \mathbf{v}_{\text{ref}} = (4 \times 3) + (3 \times 4) = 24$$

Almost same direction as reference

2. Similar (Positive)

Green Vector $\mathbf{v}_2 = [1, 4]$

$$\mathbf{v}_2 \cdot \mathbf{v}_{\text{ref}} = (1 \times 3) + (4 \times 4) = 19$$

Generally same direction

3. Neutral (Zero)

Blue Vector $\mathbf{v}_3 = [-4, 3]$

$$\mathbf{v}_3 \cdot \mathbf{v}_{\text{ref}} = (-4 \times 3) + (3 \times 4) = 0$$

Perpendicular (90° angle)

4. Dissimilar (Negative)

Purple Vector $\mathbf{v}_4 = [-2, -3]$

$$\mathbf{v}_4 \cdot \mathbf{v}_{\text{ref}} = (-2 \times 3) + (-3 \times 4) = -18$$

Opposite direction


Key Innovation: Self-Attention Mechanism

- Self-attention allows each word to compute its embedding by gathering information from all other words in the sequence.
- The "attention weights" determine how much each word should focus on other words.
- Words that are semantically related tend to have higher attention scores between them.
- This mechanism helps capture long-range dependencies and relationships regardless of word distance.
- Multiple attention heads in parallel (Multi-head Attention) allow the model to focus on different aspects of relationships.

	YOUR	CAT	IS	A	LOVELY	CAT	Σ
YOUR	0.268	0.119	0.134	0.148	0.179	0.152	1
CAT	0.124	0.278	0.201	0.128	0.154	0.115	1
IS	0.147	0.132	0.262	0.097	0.218	0.145	1
A	0.210	0.128	0.206	0.212	0.119	0.125	1
LOVELY	0.146	0.158	0.152	0.143	0.227	0.174	1
CAT	0.195	0.114	0.203	0.103	0.157	0.229	1

Multiple Attention Heads

- Multiple attention heads in parallel (Multi-head Attention) allow the model to focus on different aspects of relationships.

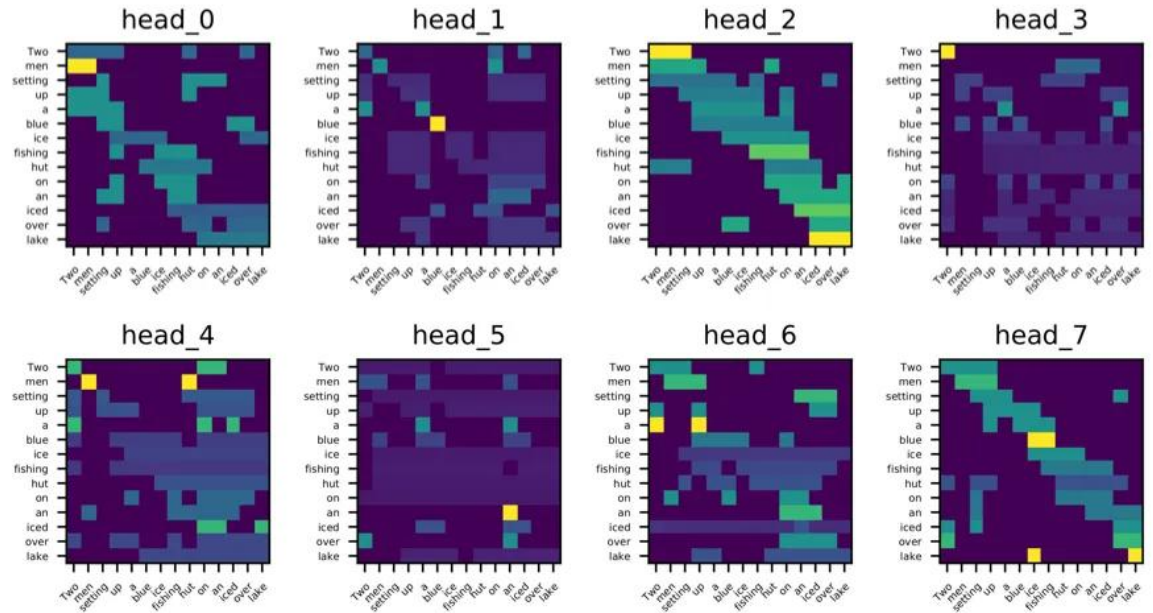

Decoder Input Preparation

The Transformer decoder generates output sequences by attending to two sources:

- Previously generated tokens via masked self-attention
- The encoder's output, which provides context from the input sequence.

This enables fluent and contextually accurate generation.

Example – Target Sentence (French):

"Ton chat est un chat adorable"

Training Phase:


- The decoder begins with a special start-of-sequence token <s>
- At each time step, it receives the actual previous target words.
- Example: Step 1: <s>, Step 2: <s> Ton, Step 3: <s> Ton chat, etc.

Inference Phase:

- Starts with <s> and generates one word at a time.
- Each new word is used as input for the next step.
- Example: <s> → Ton → chat → est → ...

Summary:

By combining attention to past outputs and the encoded input, the decoder generates coherent, context-aware text—essential for tasks like translation and summarization.

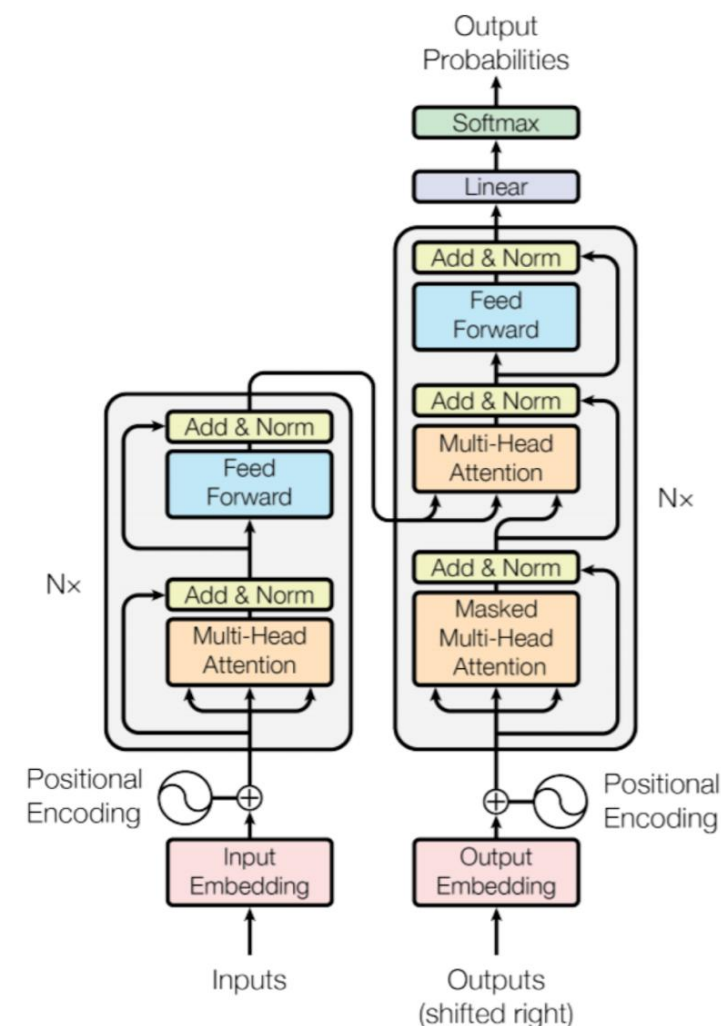

Decoder

Each decoder layer includes:

1. Masked Multi-head Self-Attention:

Looks at the previously generated French words. Future words are masked to prevent cheating.

Scaled Scores Look-Ahead Mask Masked Scores

0.7	0.1	0.1	0.1
0.1	0.6	0.2	0.1
0.1	0.3	0.6	0.1
0.1	0.3	0.3	0.3

+

0	-inf	-inf	-inf
0	0	-inf	-inf
0	0	0	-inf
0	0	0	0

=

0.7	-inf	-inf	-inf
0.1	0.6	-inf	-inf
0.1	0.3	0.6	-inf
0.1	0.3	0.3	0.3

2. Encoder-Decoder Attention:

Each decoder token can attend to all encoder outputs.

Example: The decoder token "chat" may attend to the English "cat" to align the translation.

3. Feedforward Network:

Processes each token vector separately.


- Each sub-layer includes residual connections and layer normalization.

Output Generation

- The decoder outputs a vector at each time step.
- A linear layer followed by softmax turns this vector into a probability distribution over the French vocabulary.
- The model selects the most probable next word ("Ton", then "chat", then "est", etc.).
- This continues until an end-of-sentence token `</s>` is generated or a length limit is reached.

Which word in our vocabulary
is associated with this index?

Get the index of the cell
with the highest value
(argmax)

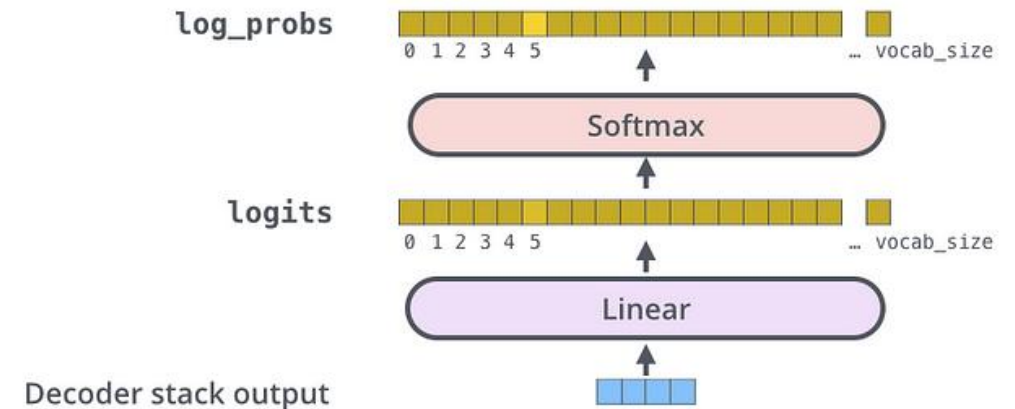

References

- <https://jalammar.github.io/illustrated-transformer/>
- <https://tamoghnasaha-22.medium.com/transformers-illustrated-5c9205a6c70f>

Contextual Word Embeddings

Contextual Word Embeddings (BERT and GPT)

Key Innovation

Unlike static embeddings (Word2Vec, GloVe), contextual models generate **different vectors for the same word** depending on its context.

Approach

Uses deep, pre-trained neural networks (often transformer-based)
Embeddings are derived from entire sentences, capturing syntax and semantics dynamically

Examples

- **BERT (2018)**: Transformer-based neural networks trained with masked language modeling and next sentence prediction
- **GPT (2018)**: Transformer-based unidirectional language model focused on generation.

Characteristics

- Embeddings are **context-sensitive** (e.g., “bank” in “river bank” vs. “savings bank”)
- Each word is embedded based on its role in the sentence.
- Embeddings vary for the same word depending on its position and meaning.
- Significantly improve performance on downstream NLP tasks.

BERT – Overview and Architecture

What is BERT?

- A **pre-trained language model** based on the **Transformer encoder**
- Developed by Google in 2018
- Reads text **bidirectionally**, enabling deep contextual understanding

Key Ideas

- Uses only the **encoder** stack of the Transformer
- Pre-trained on large text corpora, then fine-tuned on specific tasks

Pretraining Objectives

- **Masked Language Modeling (MLM)**: Predict randomly masked words in a sentence
- **Next Sentence Prediction (NSP)**: Predict if one sentence follows another

Applications

- Sentiment Analysis
- Question Answering
- Named Entity Recognition
- Text Classification
- Semantic Search

GPT – Overview and Architecture

What is GPT?

- A family of **Transformer-based language models** developed by OpenAI
- Uses only the **decoder stack** of the original Transformer architecture
- Trained with **causal (autoregressive) language modeling** to predict the next token

Training Objective

- Predict the next token in a sequence

GPT Variants

- **GPT-1**: Introduced the pretrain-then-finetune paradigm
- **GPT-2**: Scaled up model size, trained on web-scale data
- **GPT-3**: 175B parameters, enabled in-context learning
- **GPT-4**: Multimodal, stronger reasoning and generalization

Applications

- Text generation (e.g., chat, storytelling, code)
- Summarization
- Translation
- Question answering
- Semantic search and reasoning tasks

BERT vs. GPT

- BERT: Bidirectional, great for **understanding**
- GPT: Autoregressive, great for **generation**

More About BERT


What is BERT?

- **Bidirectional Encoder Representations from Transformers**
- Developed by Google AI Language in 2018
- Pre-trained language model that revolutionized NLP
- Based on Transformer architecture (Attention mechanism)

Key Advantages

- Contextual embeddings: Word meanings change based on context
- Captures long-range dependencies
- Pre-trained on massive datasets → Transfer learning
- State-of-the-art performance on 11 NLP tasks when released

Architecture Overview

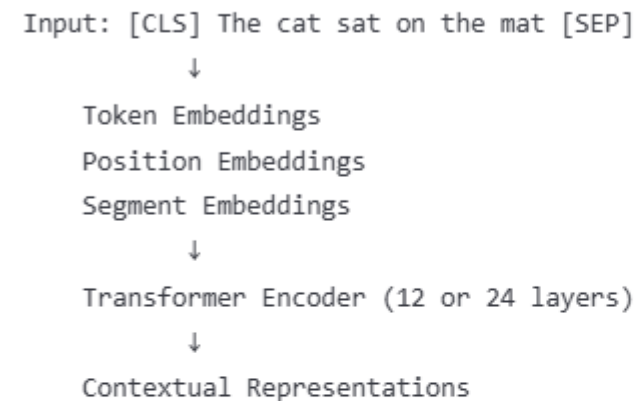

Key Components

- **[CLS]**: Classification token (sentence-level tasks)
- **[SEP]**: Separator token (between sentences)
- **Multi-head attention**: Allows model to focus on different positions
- **Feed-forward networks**: Process attention outputs

BERT Pre-training

Two Pre-training Tasks

1. Masked Language Model (MLM)

- Randomly mask 15% of tokens
- Predict masked tokens using context
- Example: "The [MASK] is very cute" → "cat"

2. Next Sentence Prediction (NSP)

- Given two sentences, predict if B follows A
- Helps understand sentence relationships
- Example:
 - A: "It is raining heavily."
 - B: "I need an umbrella." → True

BERT Variants

Common BERT Models

Model	Parameters	Layers	Hidden Size	Attention Heads
BERT-Base	110M	12	768	12
BERT-Large	340M	24	1024	16
DistilBERT	66M	6	768	12
RoBERTa	355M	24	1024	16
ALBERT	12M-235M	12-24	768-4096	12-64

Specialized Variants

- **BioBERT**: Biomedical text
- **SciBERT**: Scientific text
- **FinBERT**: Financial text
- **ClinicalBERT**: Clinical notes

Brief Introduction to Hugging Face 🤗

The Problem They Solved

Before Hugging Face (2018)

- Models locked in research papers
- Complex implementations
- Different APIs for each model
- Difficult to compare/use models
- Limited accessibility

After Hugging Face

- Unified API for all models
- Easy model sharing
- Standardized interfaces
- Community-driven development
- Democratized AI access

2016: Founded as a Chatbot Company

- Started with conversational AI
- Built tools for developers
- Recognized broader need

2018: The Pivot

- Released transformers library
- Open-sourced BERT implementation
- Explosive community growth

Today: The GitHub of AI

- 350,000+ models
- 50,000+ datasets
- Millions of users
- Industry standard

The Hugging Face Ecosystem

Core Components

1. Transformers Library

```
from transformers import pipeline
# One line to use any model
classifier = pipeline("sentiment-analysis")
result = classifier("I love Hugging Face!")
```

2. Model Hub

- Centralized model repository
- Version control for models
- Model cards (documentation)
- Direct integration with code

3. Dataset Library

```
from datasets import load_dataset
dataset = load_dataset("imdb")
# Automatic downloading, caching, processing
```

4. Tokenizers

- Fast tokenization (Rust-based)
- Supports all tokenization schemes
- Handles special tokens
- Production-ready speed

5. Spaces

- Host ML demos for free
- Gradio/Streamlit integration
- Share with one click
- GPU support available

Why This Matters

Impact on AI Development

1. Accessibility

- PhD not required ✓
- Free models and tools ✓
- Great documentation ✓
- Active community ✓

2. Reproducibility

- Standardized implementations
- Version control
- Model cards with metrics
- Easy sharing

3. Innovation Speed

- Build on others' work
- Rapid prototyping
- Easy experimentation
- Quick deployment

4. Democratization

- Small teams can compete
- Global collaboration
- Open science
- Reduced barriers

Model Hub Deep Dive

Understanding Model Cards

Every model on Hugging Face has:

- **Model Card:** Documentation about the model
- **Files:** Model weights, config, tokenizer
- **Metrics:** Performance benchmarks
- **License:** Usage restrictions
- **Tags:** Task type, language, framework

`organization/model-name`

Examples:

- `bert-base-uncased` (by Hugging Face)
- `google/flan-t5-base` (by Google)
- `microsoft/DialogPT-medium` (by Microsoft)
- `openai/whisper-large` (by OpenAI)

From Concept to Code - The Pipeline Abstraction

- **Traditional Approach**

1. *Load tokenizer*
 2. *Preprocess text*
 3. *Load model*
 4. *Run inference*
 5. *Post-process results*
- ... 50+ lines of code

Hugging face Approach

```
from transformers import pipeline  
classifier = pipeline("task-name")  
result = classifier("your text")  
# 2 lines!
```

Under the Hood

1. Automatic model selection
2. Tokenization handled
3. Inference optimization
4. Result formatting
5. Device management

Other Hugging face Pipelines

The Hugging Face `transformers` library supports a wide range of **pipelines**, each designed for a specific **natural language processing (NLP)** or **vision** task — so you can use powerful models without deep setup.

Pipeline Name	Task Description
"sentiment-analysis"	Classify sentiment (positive/negative)
"text-classification"	General text classification (multi-label or multi-class)
"zero-shot-classification"	Classify into labels without training on them
"text-generation"	Generate text (e.g., GPT models)
"text2text-generation"	Text-to-text tasks (e.g., summarization, translation)
"translation"	Translate between languages
"summarization"	Generate a summary of input text
"question-answering"	Extract answer from context
"fill-mask"	Predict missing word in a sentence (BERT-style)
"ner" (Named Entity Recognition)	Extract entities (like names, places, etc.)
"conversational"	Chatbot-style conversation
"sentence-similarity"	Measure similarity between two sentences
"token-classification"	Classify each token (used for NER, POS tagging, etc.)
"feature-extraction"	Extract embeddings/features from a model
"table-question-answering"	QA over structured data (tables)

► Sentiment Analysis

```
python
pipeline("sentiment-analysis")("I love this!")
```

► Summarization

```
python
pipeline("summarization")("Long article text goes here...")
```

► Translation

```
python
pipeline("translation_en_to_fr")("This is amazing.")
```

► Question Answering

```
python
qa = pipeline("question-answering")
qa({
    "question": "Where do pandas live?",
    "context": "Pandas are native to China and prefer bamboo forests."
})
```

To list all available pipelines in code:

```
python
from transformers.pipelines import SUPPORTED_TASKS
print(SUPPORTED_TASKS.keys())
```

Example: Print out BERT Embeddings

```
from transformers import BertTokenizer, BertModel
import torch

# Load pretrained BERT
tokenizer = BertTokenizer.from_pretrained('bert-base-uncased')
model = BertModel.from_pretrained('bert-base-uncased')

# Sentence
sentence = "He went to the bank to deposit money."

# Tokenize
inputs = tokenizer(sentence, return_tensors='pt')

# Get outputs
with torch.no_grad(): # No training, just inference
    outputs = model(**inputs)

# Get the hidden states (embeddings)
embeddings = outputs.last_hidden_state # Shape: (batch_size, sequence_length,

# (hidden_size)
print(embeddings.shape) # Example output: torch.Size([1, 11, 768])
```

Example: Question Answering using BERT

QA Task Overview

- **Input:** Context paragraph + Question
- **Output:** Answer span from the context
- BERT identifies start and end positions of answer

QA Pipeline Components

1. **Tokenization:** Convert text to tokens
2. **Encoding:** Create input embeddings
3. **Model Inference:** Get start/end logits
4. **Post-processing:** Extract answer text

```
# Import required libraries
from transformers import AutoTokenizer, AutoModelForQuestionAnswering
from transformers import pipeline
import torch

# Using pipeline (High-level API)
qa_pipeline = pipeline( "question-answering",
                        model="bert-large-uncased-whole-word-masking-finetuned-squad",
                        tokenizer="bert-large-uncased-whole-word-masking-finetuned-squad" )

# Example usage
context = """ BERT is a method of pre-training language representations,
meaning that it trains a general-purpose language understanding
model on a large text corpus (like Wikipedia),
and then uses that model for downstream NLP tasks like question answering. """

question = "What is BERT?"
result = qa_pipeline(question=question, context=context)
print(f"Answer: {result['answer']}")
print(f"Confidence: {result['score']:.4f}")
```

Model Choice Explanation

- bert-large-uncased-whole-word-masking-finetuned-squad
 - Based on BERT-Large architecture
 - Uncased: converts text to lowercase
 - Whole word masking: improved pre-training
 - Fine-tuned on SQuAD dataset (Stanford Question Answering Dataset)

Introduction to Large Language Models

Generative AI

- Generative AI, also known as GenAI, refers to a type of artificial intelligence that uses machine learning algorithms to generate new, synthetic data, such as images, videos, music, text, and more.
- Unlike traditional AI, which focuses on analyzing and processing existing data, generative AI models create novel data samples that resemble existing data.
- Some common applications of generative AI include:
 - Text generation: Creating realistic text, such as articles, stories, or chatbot responses, for use in applications like content generation, language translation, and conversational interfaces.
 - Image and video generation: Generating realistic images, videos, or 3D models for use in various industries, such as entertainment, advertising, and architecture.
 - Music and audio generation: Generating music, sound effects, or voice synthesis for use in music production, audiobooks, or voice assistants.
 - Data augmentation: Generating new data samples to augment existing datasets, which can help improve the performance of machine learning models.
 - Art and design: Creating new artistic styles, designs, or patterns for use in various creative fields.

Introduction to LLMs

- Large Language Models (LLMs) are AI models trained on massive amounts of text data to generate human-like text, answer questions, and assist in various applications.
- Some of the most advanced LLMs today come from leading AI research labs, each with unique architectures, capabilities, and use cases.
- This lecture covers the major LLMs, their features, differences, and code examples to interact with them.

Well Known Models:

Company	Model(s)	Key Features
OpenAI	GPT-4, GPT-4-turbo, GPT-3.5	Strong reasoning, multimodal (text & image in GPT-4), API for developers
Anthropic	Claude 1, 2, 3	Focus on safety, long-context handling, efficient responses
Google	Gemini 1, Gemini 1.5	Strong in reasoning, image understanding, Google search integration
Cohere	Command R+, Command R	Enterprise-focused, retrieval-augmented generation (RAG)
Meta	LLaMA 2, LLaMA 3 (upcoming)	Open-source, efficient models for researchers
Perplexity	Perplexity AI	AI-powered search engine, real-time web browsing

What is OpenAI?

- OpenAI is an artificial intelligence research and deployment company.
- Founded in December 2015 by Elon Musk, Sam Altman, Greg Brockman, Ilya Sutskever, John Schulman, and Wojciech Zaremba.
- The organization's mission is to ensure that artificial general intelligence (AGI) benefits all of humanity.
- Initially a non-profit, it transitioned in 2019 to a "capped-profit" model through the creation of OpenAI LP to attract capital while maintaining mission alignment.

Timeline of Key Models

Model	Release Year	Parameters	Training Data	Key Capabilities	Notes
GPT	2018	~117 million	Books, websites, Wikipedia, Common Crawl	Basic text generation and completion	First Generative Pretrained Transformer; proof of concept
GPT-2	2019	1.5 billion	8 million documents from the internet	Coherent paragraphs, summaries, text generation	Withheld initially due to concerns about misuse
GPT-3	2020	175 billion	~570GB filtered text (Common Crawl + curated data)	Question answering, translation, text generation, code assist	Major leap in coherence and contextual understanding
Codex	2021	Built on GPT-3	Text + 100M+ GitHub code repositories	Code generation, code completion, natural language → code	Powers GitHub Copilot
ChatGPT	2022	GPT-3.5 fine-tuned	GPT-3.5 + Human Feedback	Conversational AI, tutoring, brainstorming, creative writing	Optimized for dialogue using RLHF
GPT-4	2023	Estimated 1+ trillion*	Diverse multimodal data (text, image, web)	Multilingual, logic reasoning, coding, image input (limited)	Parameters not publicly confirmed
GPT-4o	2024	Unknown (GPT-4 variant)	Text, images, audio	Real-time interaction with vision, voice, and text capabilities	"o" stands for "omni"; supports seamless multimodal input/output

OpenAI and Microsoft Partnership

- Microsoft is a key partner and investor in OpenAI.
- Azure cloud services are used to deploy OpenAI models.
- OpenAI tools are integrated into Microsoft products like Word, Excel, and GitHub Copilot.
- Microsoft has exclusive licenses to integrate GPT models in enterprise settings.

How OpenAI Models Work

- OpenAI's models are based on the Transformer architecture, introduced by Vaswani et al. in 2017.
- These models are trained on massive datasets containing text, code, and other data from the internet.
- The models learn to predict the next word or token in a sequence (autoregressive training).
- Some models, like ChatGPT, use Reinforcement Learning from Human Feedback (RLHF) to improve response quality.
- GPT-4o is multimodal: it can accept and generate text, images, and audio.

Core OpenAI Technologies and Products

- **GPT (Generative Pretrained Transformer):** Language model that generates human-like text.
- **ChatGPT:** AI chatbot used for conversation, education, and productivity.
- **DALL\ue0b7E:** Text-to-image model that generates pictures from textual descriptions.
- **Codex:** Powers AI programming assistants like GitHub Copilot.
- **Whisper:** Open-source automatic speech recognition system.

Ethical Considerations and Safety Measures

- OpenAI aims to make AI systems that are safe and aligned with human values.
- Safety teams work on reducing harmful outputs and biases.
- Content moderation tools are integrated in public-facing applications.
- OpenAI supports responsible use and restricts applications related to misinformation, surveillance, or violence.

OpenAI Compared to Other AI Labs

- **DeepMind (Google):** Focuses on scientific discovery and AGI through models like AlphaGo and AlphaFold.
- **Anthropic:** Founded by former OpenAI researchers; emphasizes alignment and safety.
- **Meta AI (Facebook):** Focuses on open research in large language models and computer vision.
- OpenAI uniquely balances research, product development, and commercial deployment.

Applications Across Industries

- **Education:** AI tutoring, essay writing support, language learning.
- **Business:** Report generation, customer support automation, data analysis.
- **Healthcare:** Administrative assistance, medical information summarization.
- **Software Development:** Coding help through Copilot and Codex.
- **Creative Work:** Art generation, script writing, music composition.

Concerns and Challenges

- **Bias:** Models may reflect societal biases present in training data.
- **Privacy:** Risk of sensitive data being used in model training or output.
- **Misinformation:** Ability to generate plausible but false content.
- **Job Displacement:** Automation of cognitive tasks may affect employment.
- OpenAI acknowledges these concerns and actively works on mitigation strategies.

Future of OpenAI


- Continued improvement in model capabilities and safety.
- Focus on user customization (e.g., custom GPTs).
- Expansion of real-time multimodal interaction (text, voice, vision).
- Engagement with policymakers and public institutions to guide ethical AI development.
- OpenAI's long-term goal is to achieve safe, beneficial artificial general intelligence (AGI).

Conclusion and Discussion Points

- OpenAI is a leader in AI research and product development.
- It has transformed industries and raised important ethical questions.
- It remains committed to making AGI safe and beneficial.
- **Questions for Discussion:**
 - Should access to powerful AI models be open or restricted?
 - How should governments regulate AI?
 - What are the roles of education and ethics in the age of AI?

groq Playground

groqcloud

Playground API Keys Dashboard Documentation ⚡ Upgrade  Personal

Playground Chat Studio Llama 4 Scout 17B 16E ↕ 📄 </> View code

SYSTEM Enter system message (Optional)

Welcome to the Playground

- You can start by typing a message
- Click submit to get a response
- Use the <> icon to view the code

USER User Message... 📄 Submit Ctrl + ↵

PARAMETERS 📄

Temperature 1

Max Completion Tokens 1024

Stream ☒

JSON Mode ☐

Advanced ^

Moderation: llamaguard ☐

Top P 1

Seed

Stop Sequence

<https://console.groq.com/playground>

Create API Key – groq.com


Playground

API Keys

Dashboard

Documentation



⚡ Upgrade

 Personal

API Keys

Create API Key

Manage your API keys. Remember to keep your API keys safe to prevent unauthorized access.

NAME	SECRET KEY	CREATED	LAST USED	USAGE (24HRS)	
initial_testing	gsk_...h1Xg	26/02/2025	29/04/2025	12 API Calls	<div><div></div><div></div></div>

Access Cloud Based LLMs (groq.com)

```
import os
from groq import Groq

# Load the Groq API key from an environment variable
api_key = os.environ.get("GROQ_API_KEY")

if not api_key:
    print("Please set the GROQ_API_KEY environment variable.")
    exit()

# Initialize the Groq client
client = Groq(api_key=api_key)

# Define a sample prompt
prompt = "What is the capital of France?"

# Create a chat completion
completion = client.chat.completions.create(
    model="compound-beta",
    messages=[
        {"role": "user", "content": prompt},
    ],
    max_tokens=2048,
    stop=None,
)

# Print the response
print(completion.choices[0].message.content)
```

1. Import necessary libraries:

- `import os`: You import Python's `os` module, which provides functions to interact with the operating system (like accessing environment variables).
- `from groq import Groq`: You import the `Groq` client, which is used to communicate with Groq's API to call language models.

2. Load the API key:

- `api_key = os.environ.get("GROQ_API_KEY")`: This attempts to read the environment variable named `GROQ_API_KEY` that should contain your API key.
- If the key is not found (`if not api_key:`), the script prints a message asking the user to set it and exits immediately (`exit()`).

3. Initialize the Groq client:

- `client = Groq(api_key=api_key)`: A new instance of the Groq client is created, authenticated using the loaded API key.

4. Prepare a prompt:

- `prompt = "What is the capital of France?"`: You define the user's question as a simple string, intended to be sent to the language model.

5. Call the language model:

- `client.chat.completions.create(...)`: This sends a chat-style API call to the Groq server:
 - `model="compound-beta"` specifies the model to use.
 - `messages=[{"role": "user", "content": prompt}]` creates a conversation history containing only one user message: your question.
 - `max_tokens=2048` defines the maximum length of the model's reply (up to 2048 tokens).
 - `stop=None` means no special stopping sequence is set; the model will stop when it reaches the end or the token limit.


6. Print the response:

- `print(completion.choices[0].message.content)`: After getting the model's reply, you access the first choice's content and print it to the console.

Retrieval Augmented Generation (RAG)


In this process:

- The **Query** is the user input.
- The **Retriever** searches the knowledge base and brings back relevant documents.
- The **Generator** combines the retrieved information and generates the final response.

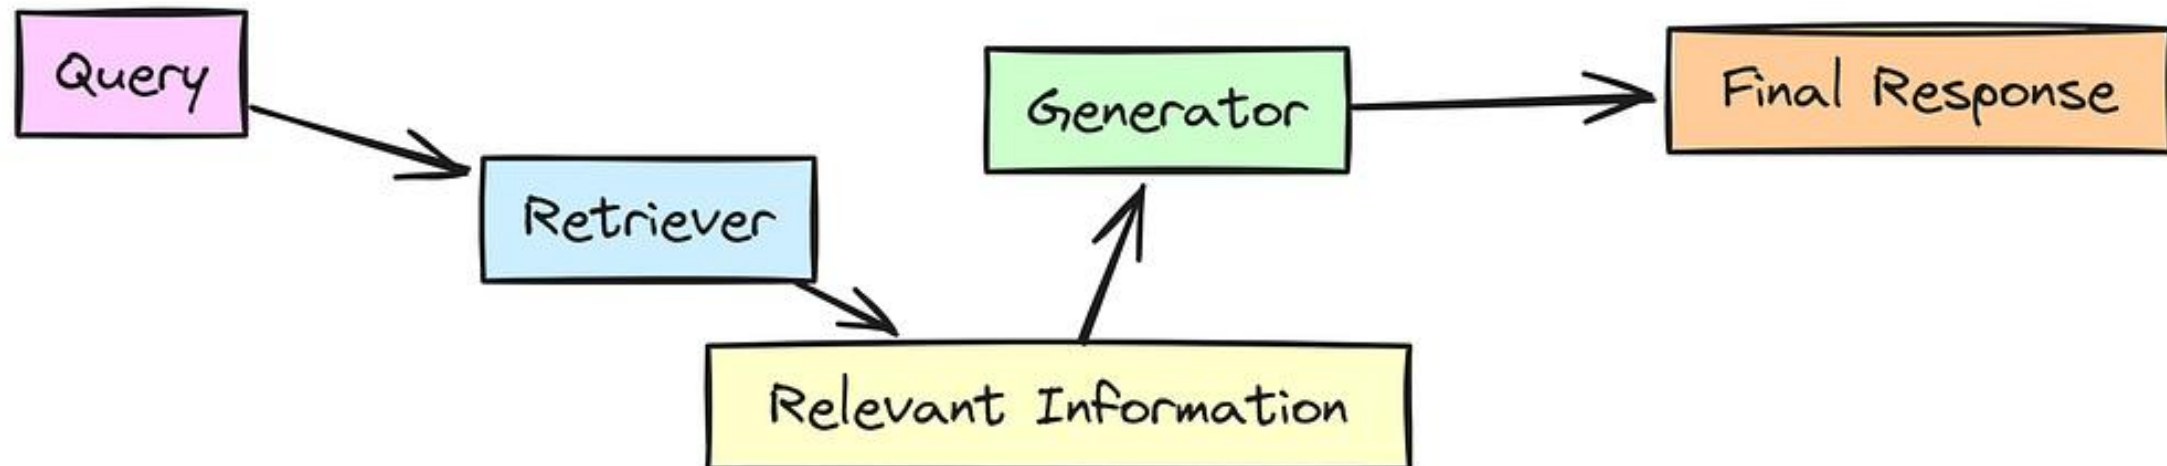

Next

- Introduce deep neural networks e.g. cnn, rnn, lstm or go directly to BERT (next)
- Attention Role in the process and its Mechanism
- Transformer Architecture, Attention is all you need
- Mohammad Zarrar post about BERT on linkedin
- Basic Topics:
 - LLM Terminology and Playground (temperature, top, context window...etc)
 - Tokenizer Playground
 - Prompt Engineering
- Calling APIS
- RAG Case
- Agentic Case
- Local LLM i.e. Ollama
- N8n

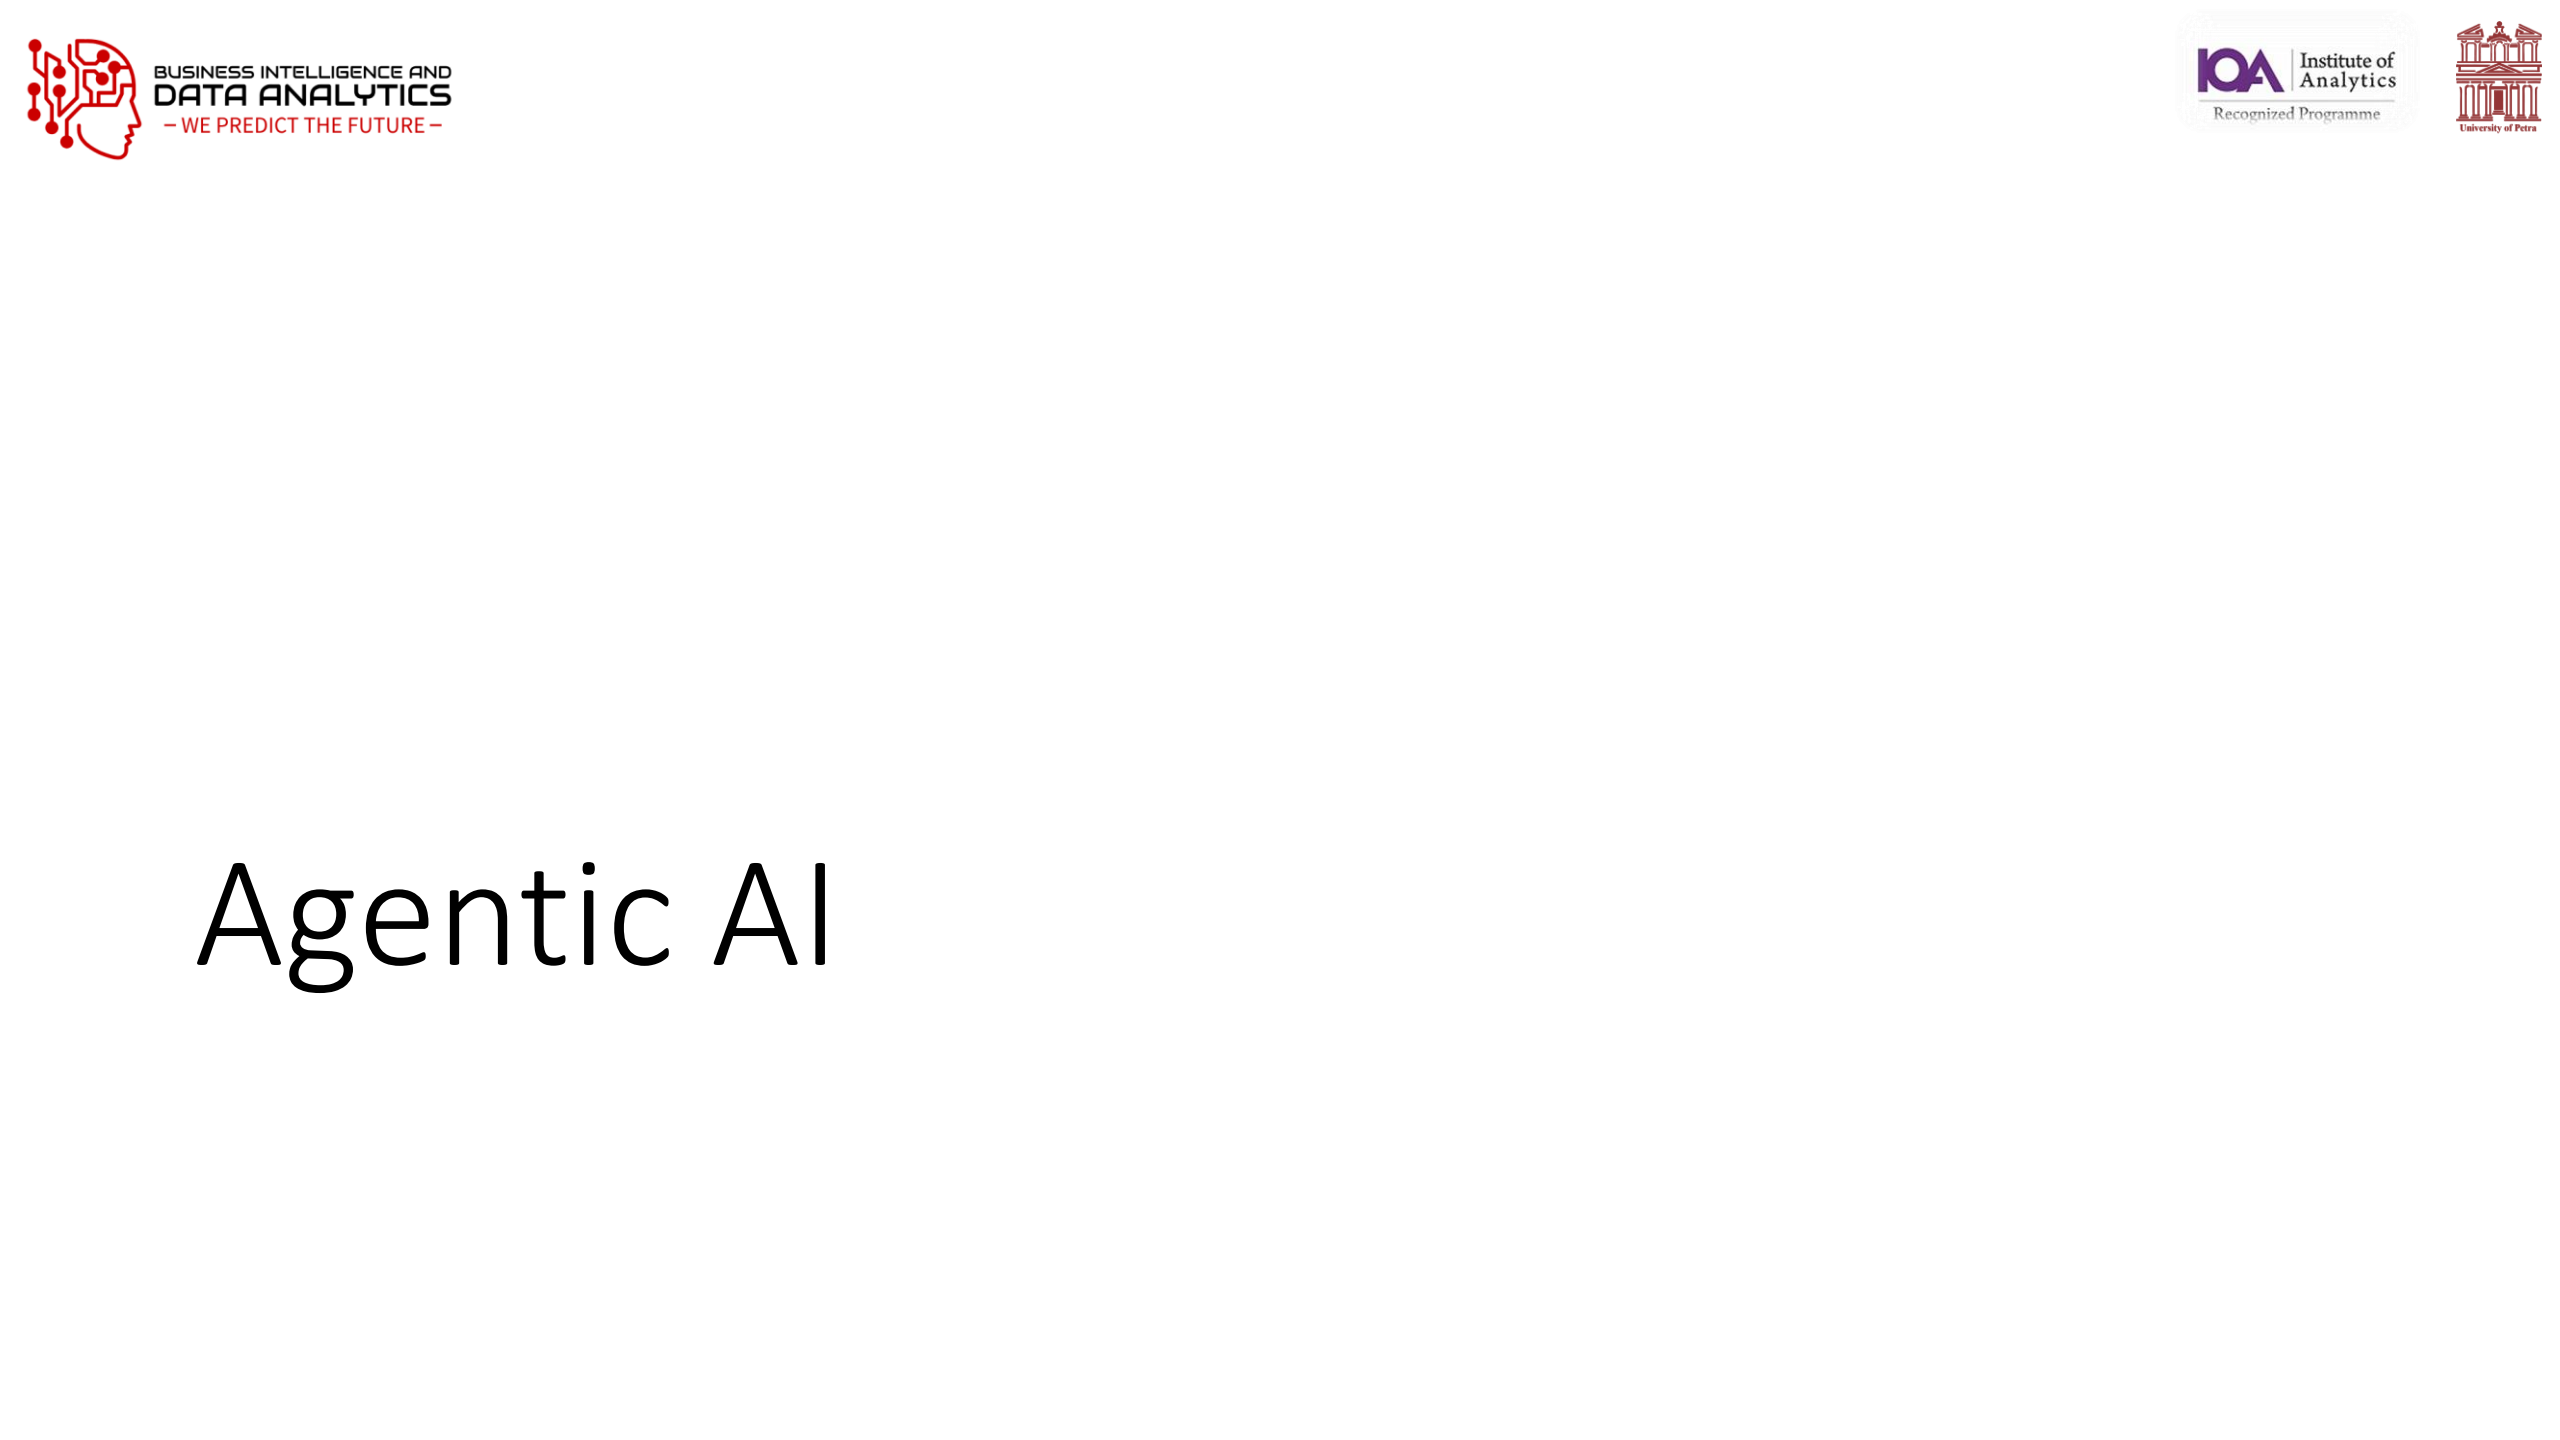

Agentic AI

References

- Mathematics for Machine Learning / Dr. Naveed R. Butt @ GIKI