User Guide for Light Version of BooksStock.API

1. After extracting files from zip archive, run BookStore.API.exe

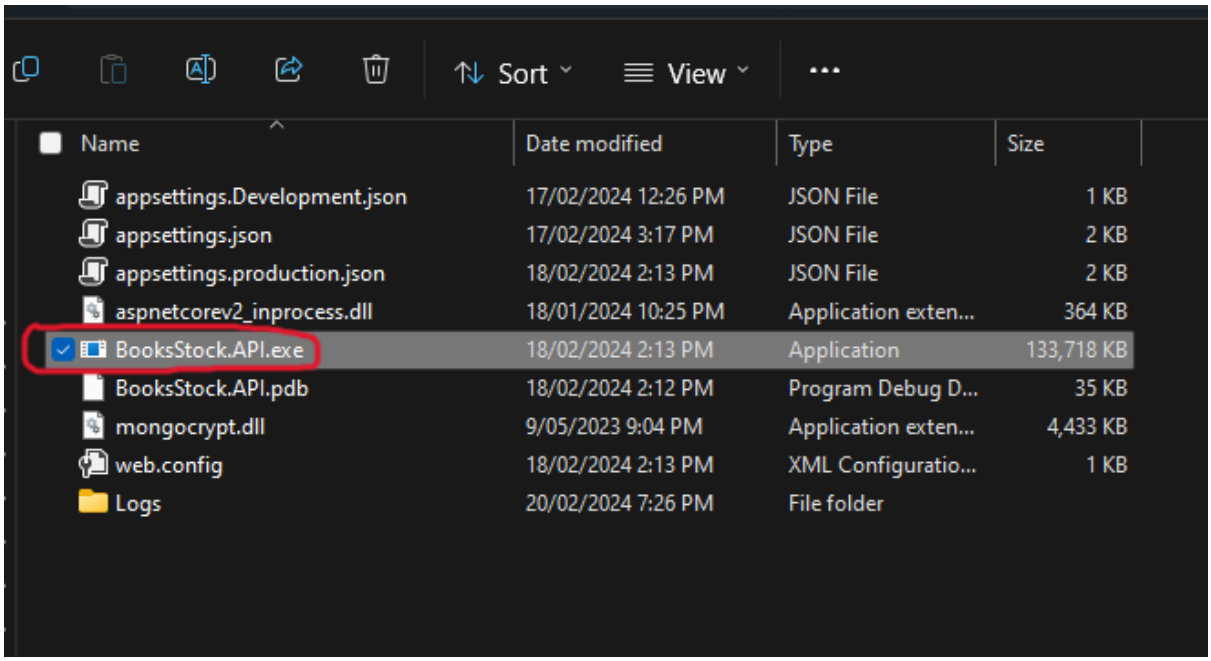

2. Open any internet browser and enter address: http://localhost:5000/swagger/index.html

ATTENTION: localhost supports only http.

3. Press arrow icon in righthand side:

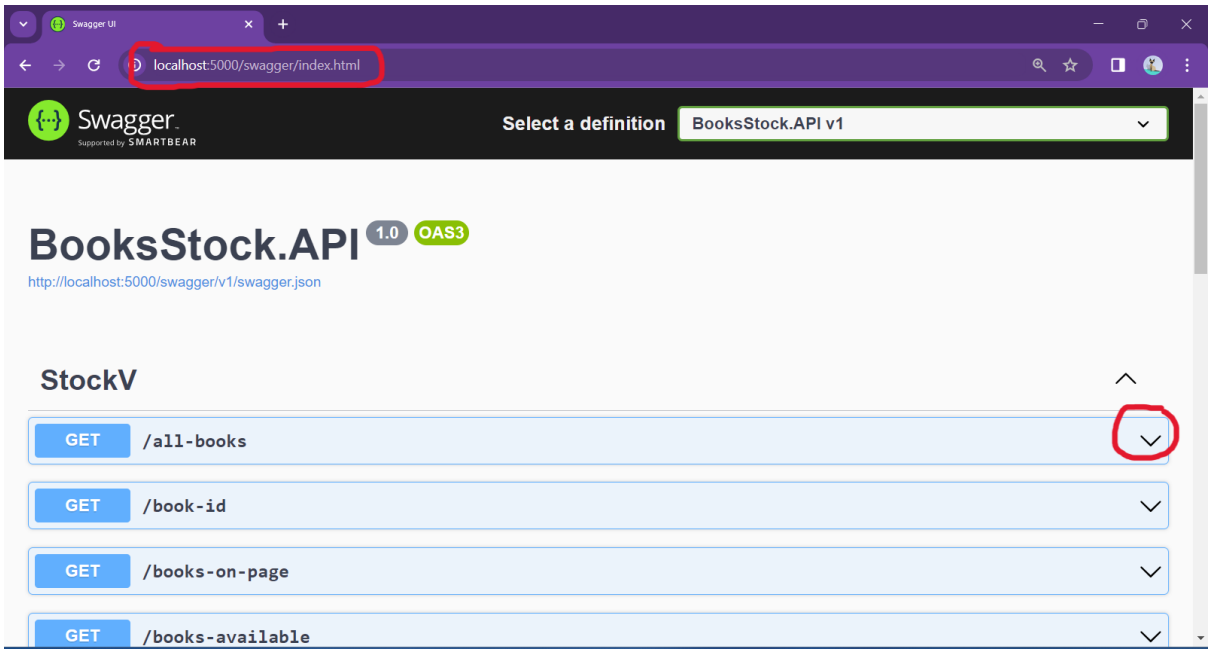

4. Press button “Try it out” in right hand side:

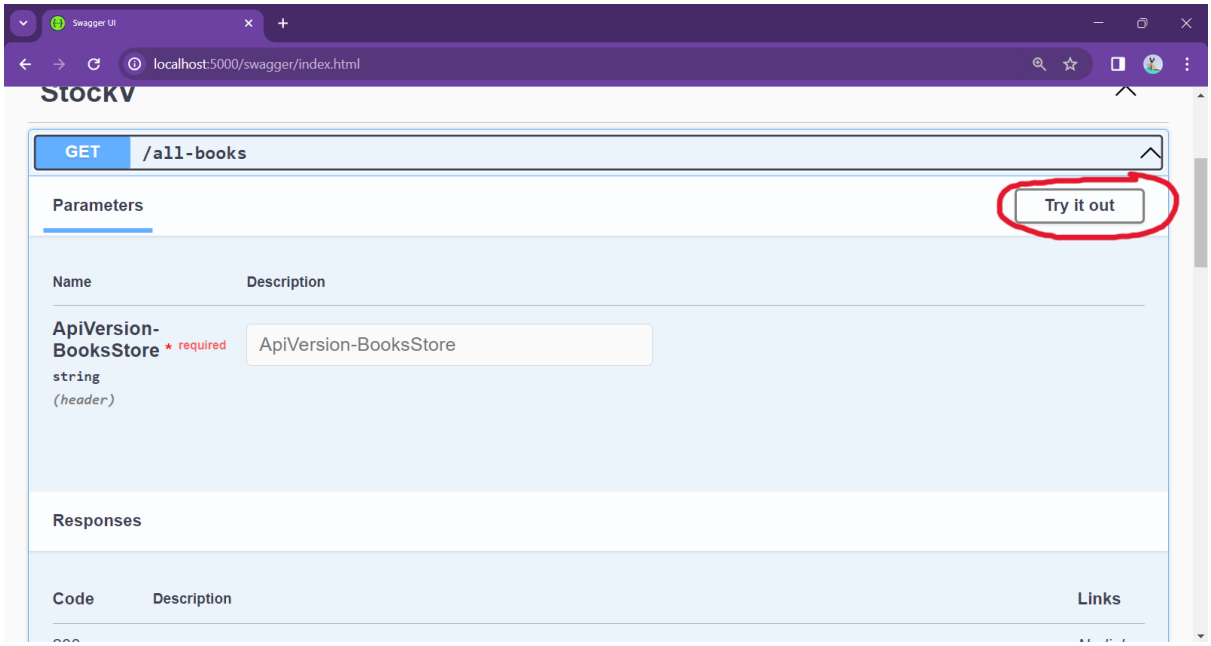

5. In ApiVersion-BooksStore enter 1 or 2, to use API version 1 – enter “1” supports all methods (GET, POST, DELETE and PUT), and retrieves all data from database, or to use API version 2 – enter “2” (supports only some GET methods), and retrieves only available from database:

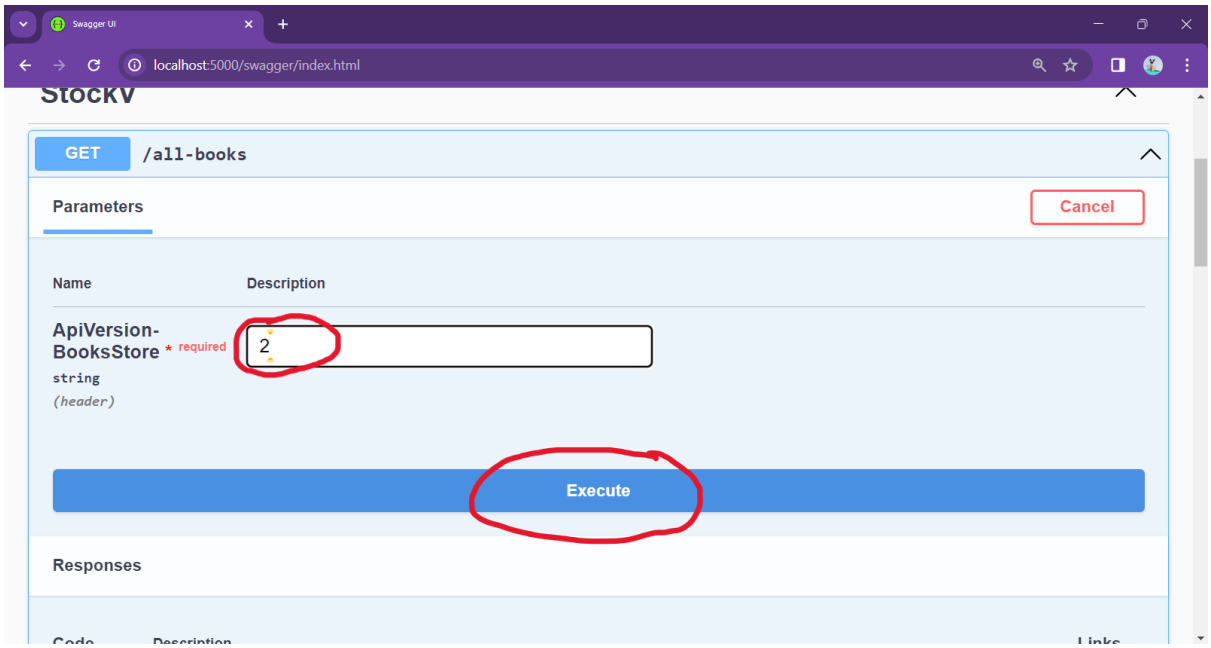

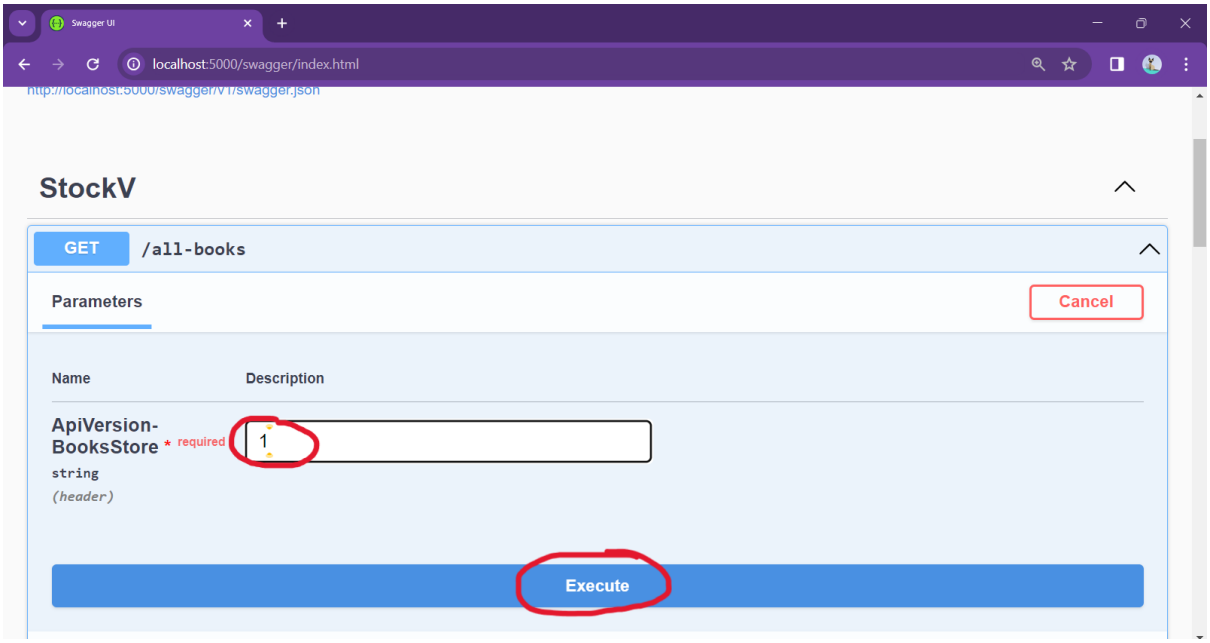

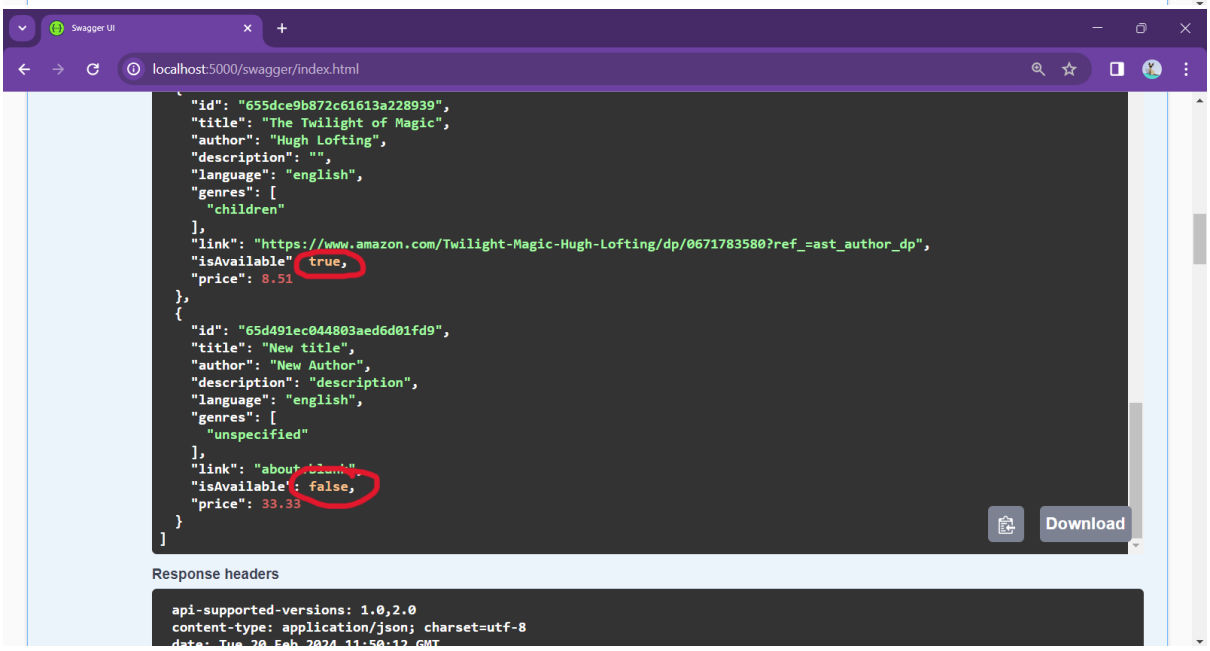

Methods:	Supports:	Description
GET/all-books	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database. For **ApiVersion-BooksStore : 2** retrieves only were parameter “isAvailable” : true
GET/book-id	ApiVersion-BooksStore : 1	Gets book by “id”
GET/books-on-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database, with requested page and requested quantity per page (divides all data from database into pages) and sorts the data in ascending or descending order.

		For **ApiVersion-BooksStore : 2** retrieves only were parameter "isAvailable" : true
GET/books-available	ApiVersion-BooksStore : 1	Retrieves all data from database with requested available - "isAvailable": true or false
POST/book-add	ApiVersion-BooksStore : 1	Add new book/data in database. Requires entering all data, except the Id, Id generated automatically.
PUT/book-update	ApiVersion-BooksStore : 1	Update/Change existing book/data in database, by Id. Myst be entered Id, IsAvailable. Rest data that was not entered would be kept the current. ATTENTION if need to add new genre, but keep the currents, then all genres that needs to be kept must be entered, otherwise they would be deleted or should not enter any new.
DELETE/book-delete	ApiVersion-BooksStore : 1	Delete existing book/data from database. Requires existing Id.