User Guide for Secure Version of BooksStock.API

BooksStock.API supports API-Version : 1 and 2.

API version 1 (“ApiVersion-BooksStore” : ”1”), supports all methods (**GET**, **POST**, **DELETE** and **PUT**.

API version 2 (“ApiVersion-BooksStore” : ”2”), supports only some **GET** methods and retrieves only available from database.

To use only 2 Version please go to heading: “Retrieve data from Database”, if you would like to use 1 Version of API or both, then must complete Authorization and should start from heading: “Authorization”.

To look short description of all API methods, please go to: “Short Description of all methods”.

Authorization:

1. After extracting files from zip archive, run BookStore.API.exe

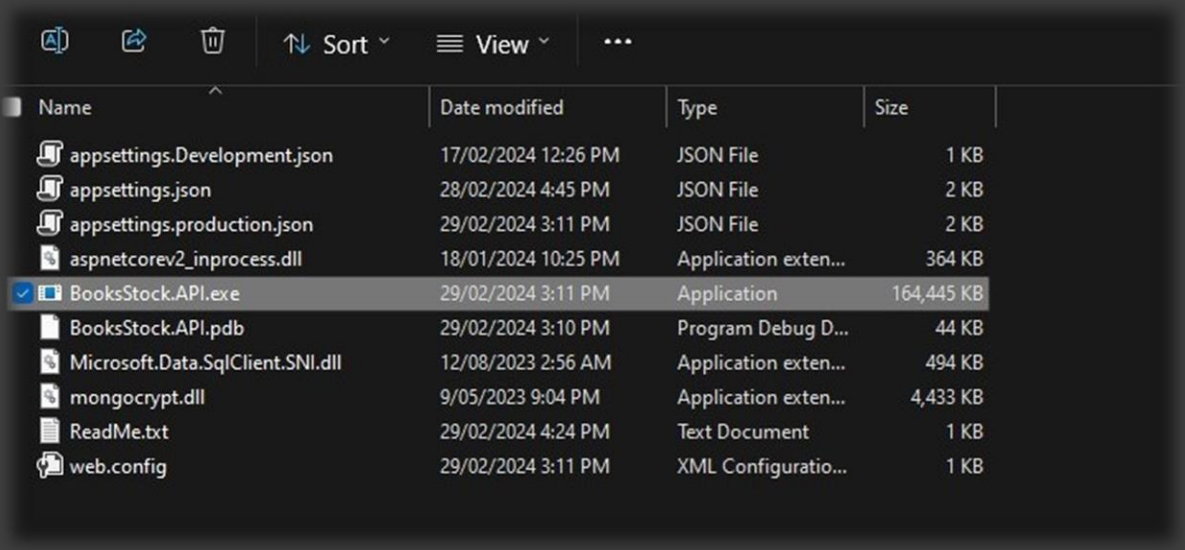

Name	Date modified	Type	Size
appsettings.Development.json	17/02/2024 12:26 PM	JSON File	1 KB
appsettings.json	28/02/2024 4:45 PM	JSON File	2 KB
appsettings.production.json	29/02/2024 3:11 PM	JSON File	2 KB
aspnetcorev2_inprocess.dll	18/01/2024 10:25 PM	Application exten...	364 KB
BooksStock.API.exe	29/02/2024 3:11 PM	Application	164,445 KB
BooksStock.API.pdb	29/02/2024 3:10 PM	Program Debug D...	44 KB
Microsoft.Data.SqlClient.SNI.dll	12/08/2023 2:56 AM	Application exten...	494 KB
mongocrypt.dll	9/05/2023 9:04 PM	Application exten...	4,433 KB
ReadMe.txt	29/02/2024 4:24 PM	Text Document	1 KB
web.config	29/02/2024 3:11 PM	XML Configuratio...	1 KB

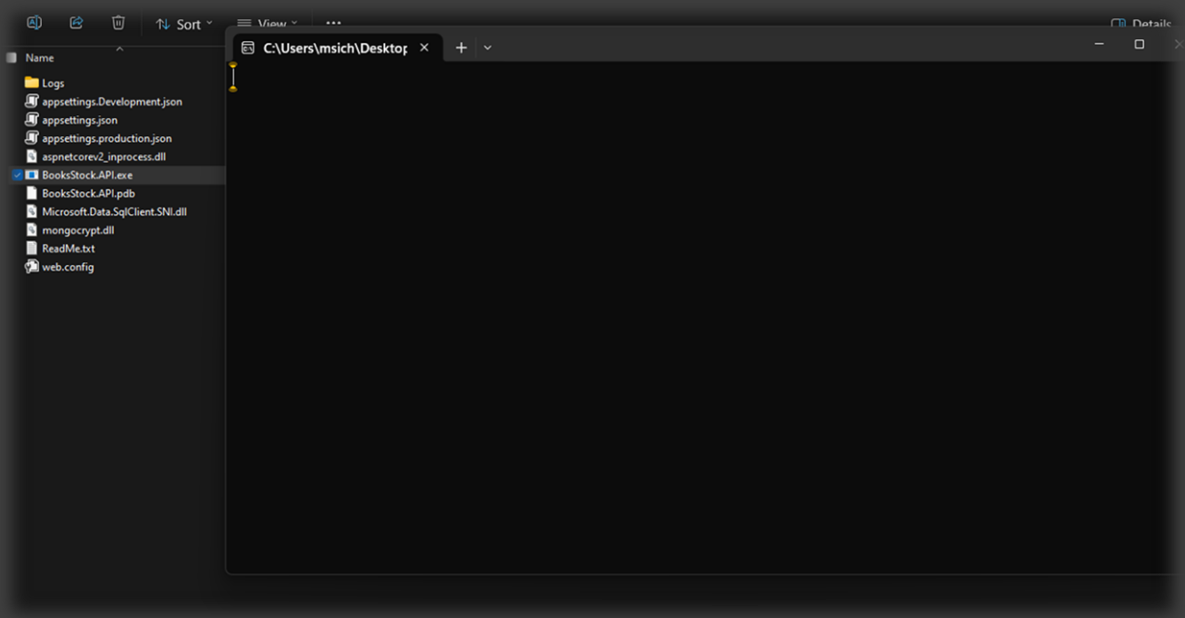

2. Open any internet browser and enter address:
   http://localhost:5000/swagger/index.html

The web-address could be found in ReadMe.txt file at project folder.

ATTENTION: localhost supports only http.

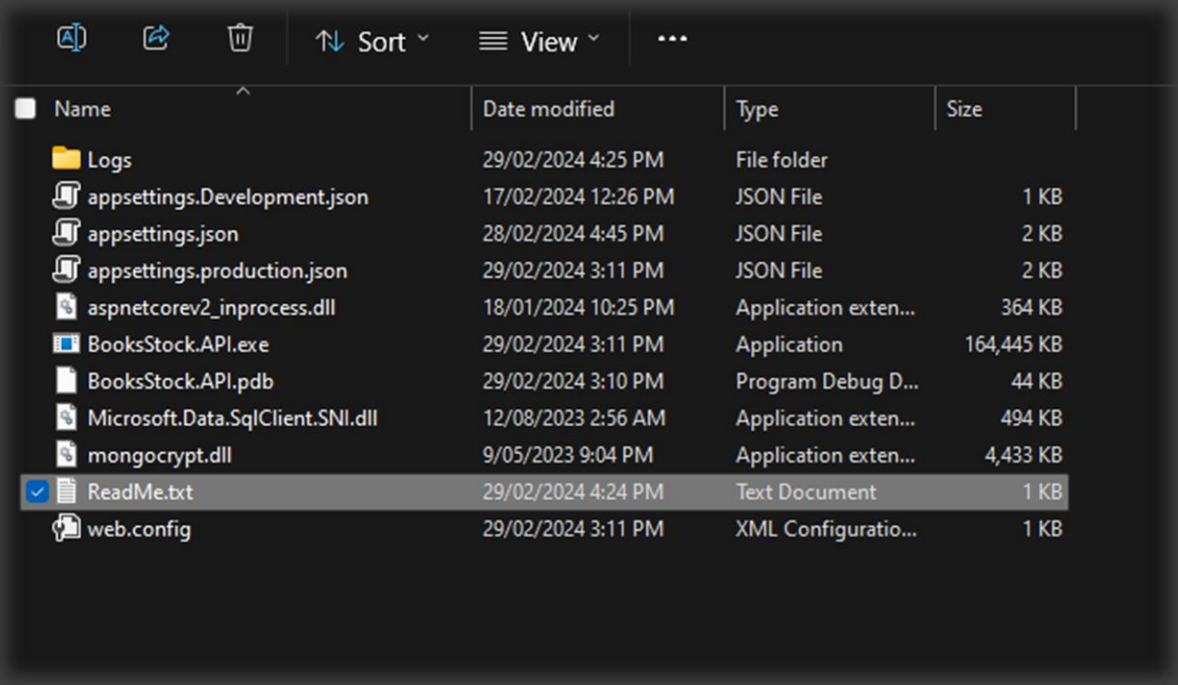

Name	Date modified	Type	Size
Logs	29/02/2024 4:25 PM	File folder	
appsettings.Development.json	17/02/2024 12:26 PM	JSON File	1 KB
appsettings.json	28/02/2024 4:45 PM	JSON File	2 KB
appsettings.production.json	29/02/2024 3:11 PM	JSON File	2 KB
aspnetcorev2_inprocess.dll	18/01/2024 10:25 PM	Application exten...	364 KB
BooksStock.API.exe	29/02/2024 3:11 PM	Application	164,445 KB
BooksStock.API.pdb	29/02/2024 3:10 PM	Program Debug D...	44 KB
Microsoft.Data.SqlClient.SNI.dll	12/08/2023 2:56 AM	Application exten...	494 KB
mongocrypt.dll	9/05/2023 9:04 PM	Application exten...	4,433 KB
ReadMe.txt	29/02/2024 4:24 PM	Text Document	1 KB
web.config	29/02/2024 3:11 PM	XML Configuratio...	1 KB

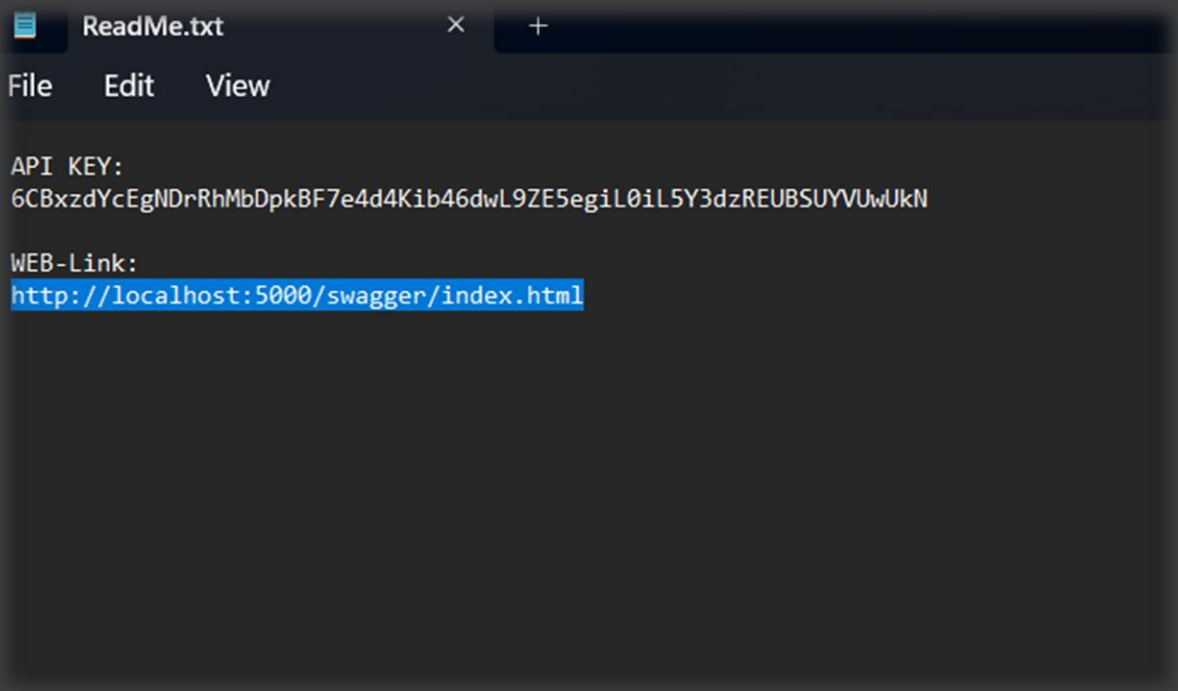

```
API KEY:
6CBxzdYcEgNDrRhMbDpkBF7e4d4Kib46dwL9ZE5egiL0iL5Y3dzREUBSUYVUwUkN

WEB-Link:
http://localhost:5000/swagger/index.html
```

3. Press button: “Authorize” on the left side of screen.

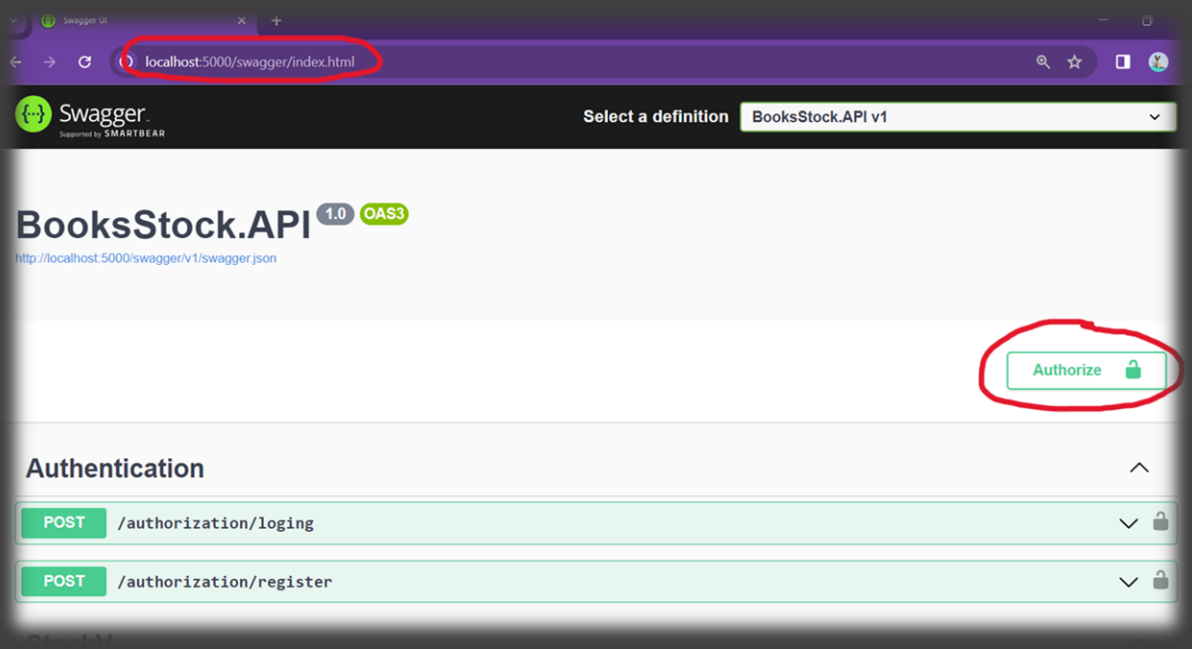

4. Copy the API-key from ReadMe.txt file or from here:
   6CBxzdYcEgNDrRhMbDpkBF7e4d4Kib46dwL9ZE5egiL0iL5Y3dzREUBSUYVUwUkN

And enter it in the opened form in section “ApiKey(apiKey)” as “Value:” and press button: “Authorize”, and then close this form.

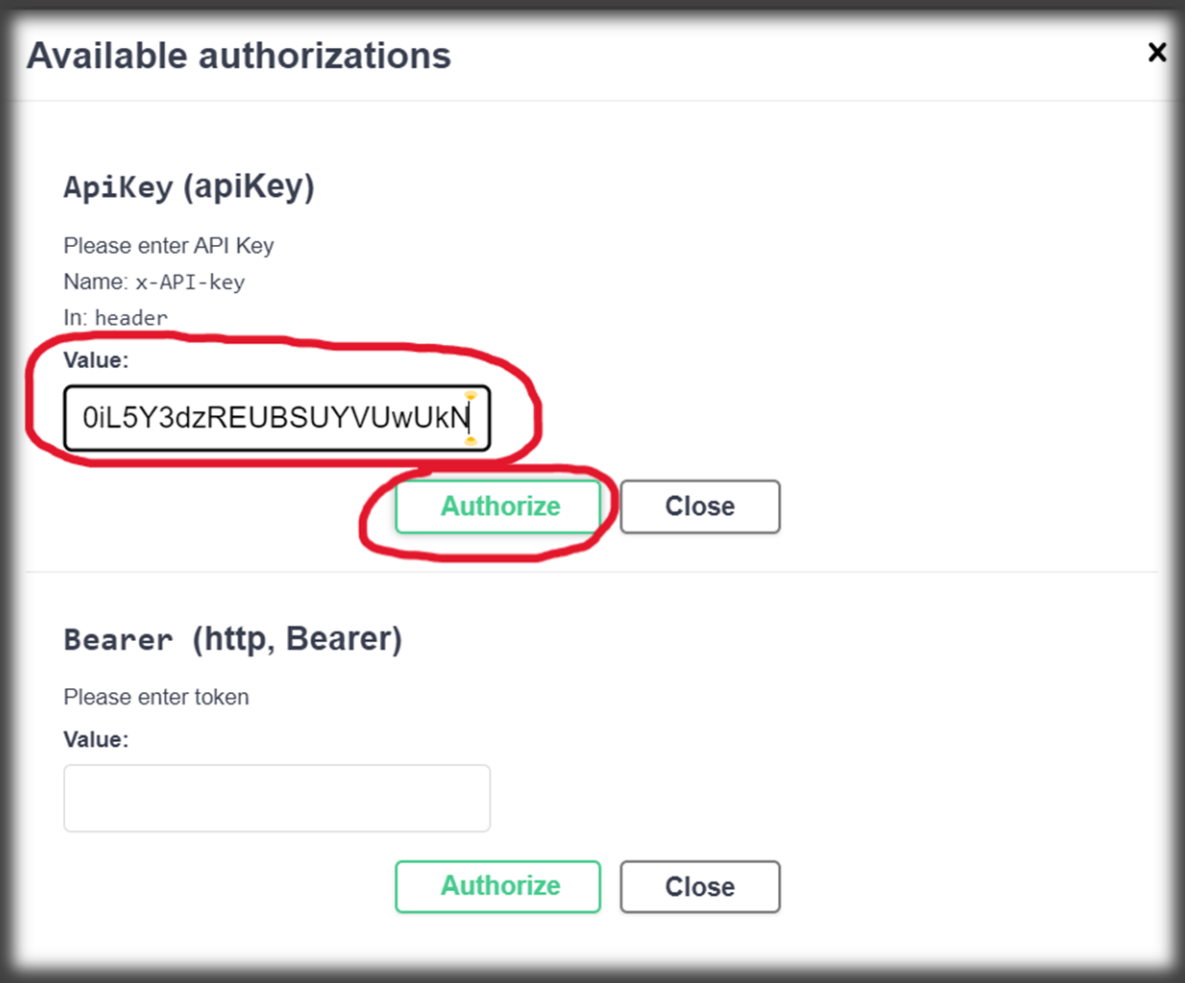

5. Press: POST/authorization/loging

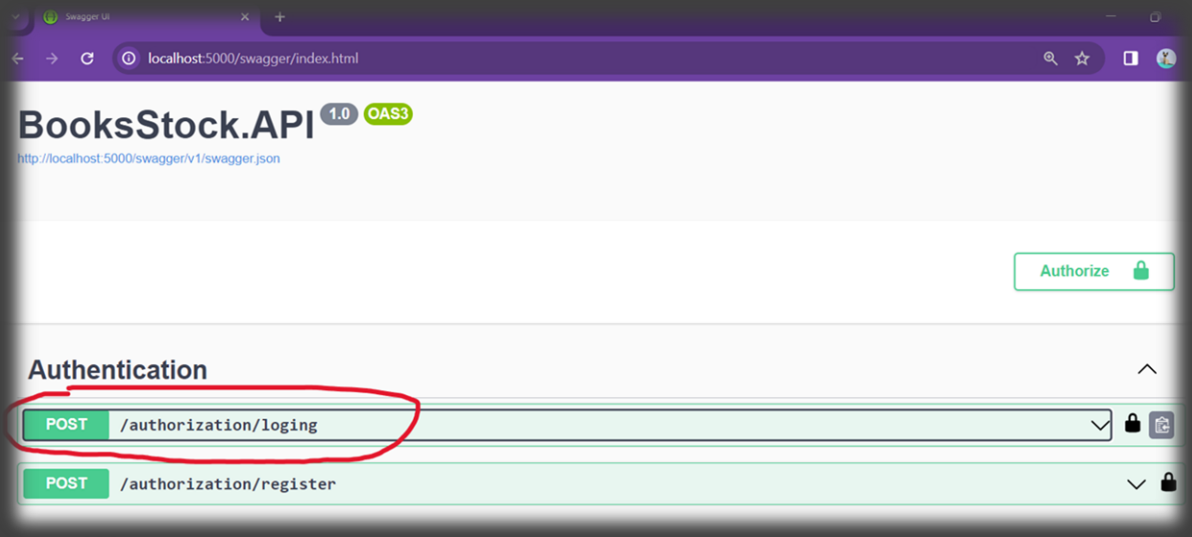

6. Press button “Try it out” in right hand side:

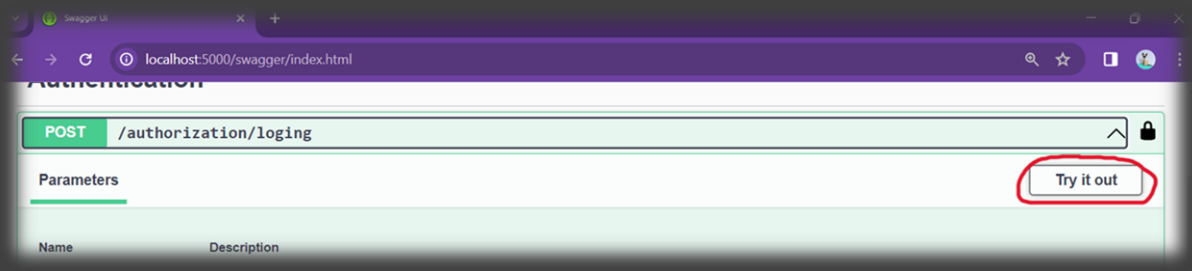

7. Enter “1” for “ApiVersion-BooksStore”. For Authentication available only 1st API Version.

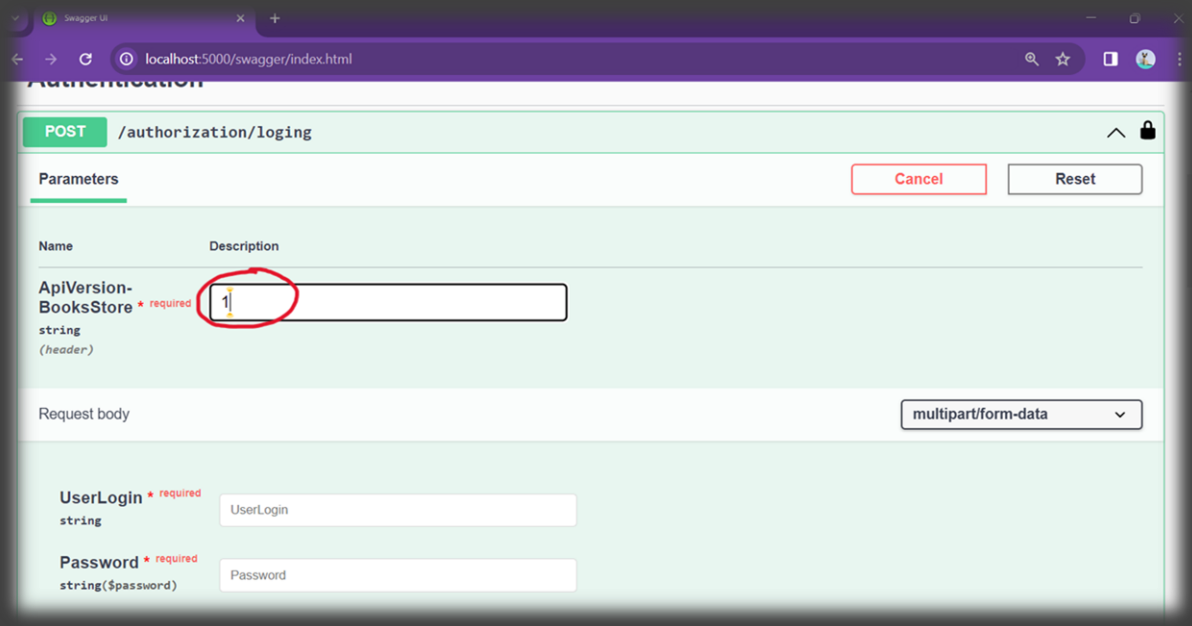

8. For logging enter can be used default admin account or you can create your own in administration account in section “**POST**/authorization/register”.

zero

Capital ‘P’

Default admin logging data:

“UserLogin” : “admin”

“Password” : “P@ssw0rd”

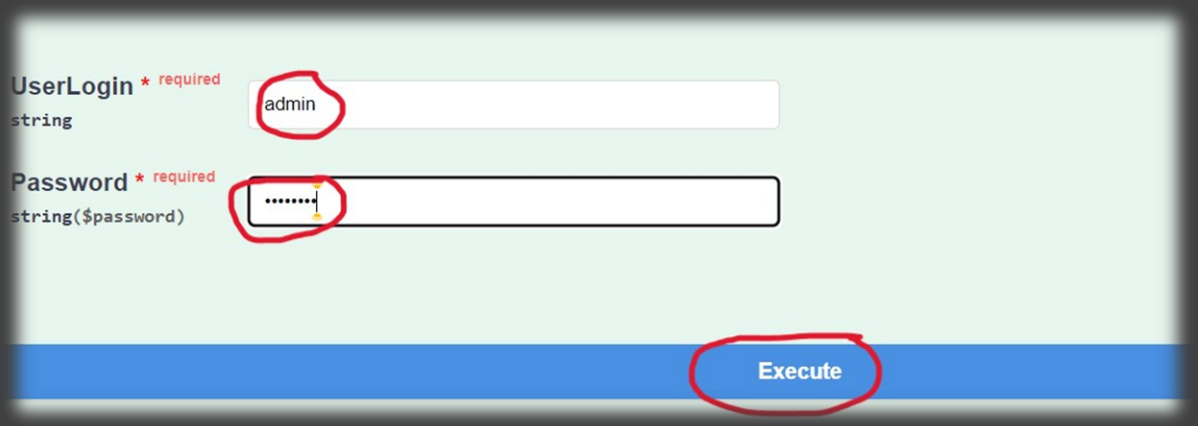

9. If Loging is successful then you should receive token, that needs to be copied. It is valid for 1 hour, after 1 hour needs to do Loging again.

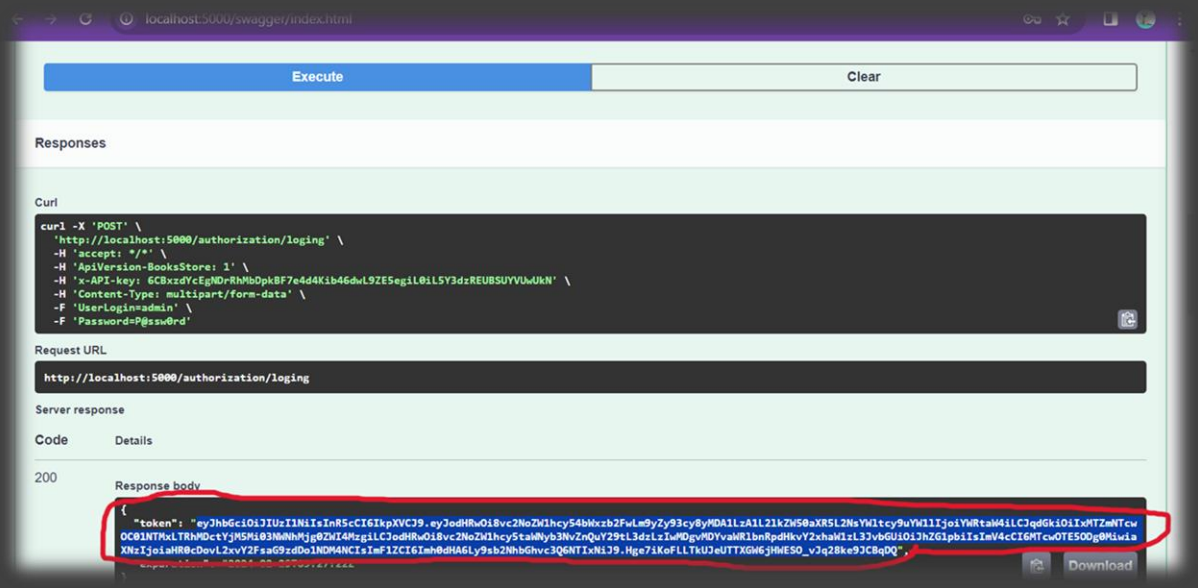

10. Press button: “Authorize” on the left side of screen to go to authorization form. And enter received token into “Bearer(http, Bearer” section and press button “Authorize”.

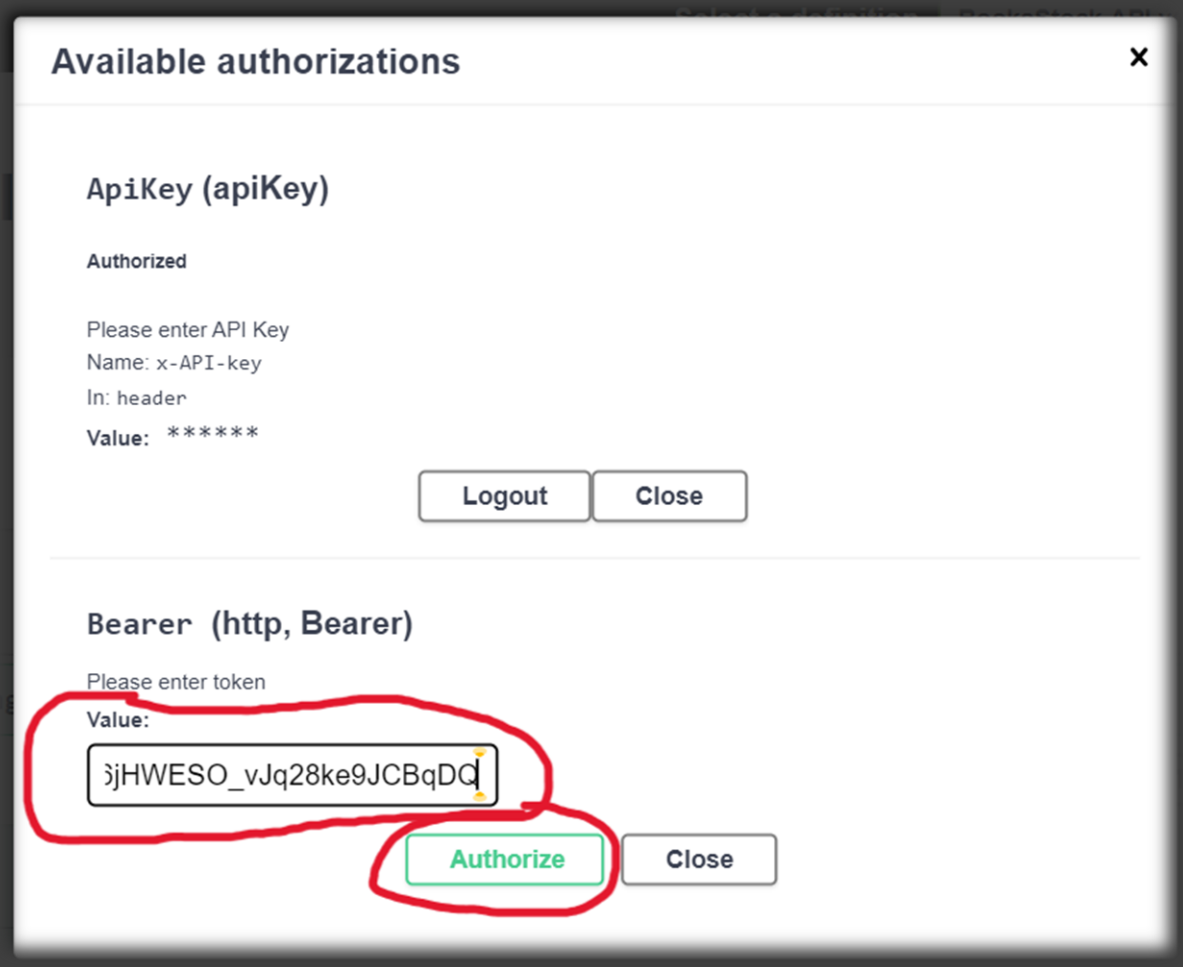

Now you should be able to use both API-Versions.

Retrieve data from Database:

1. After successful Authorization please go to section "**StockV**" and to get all data from database press: "**GET**/all-books".

2. Press button "Try it out" in right hand side:

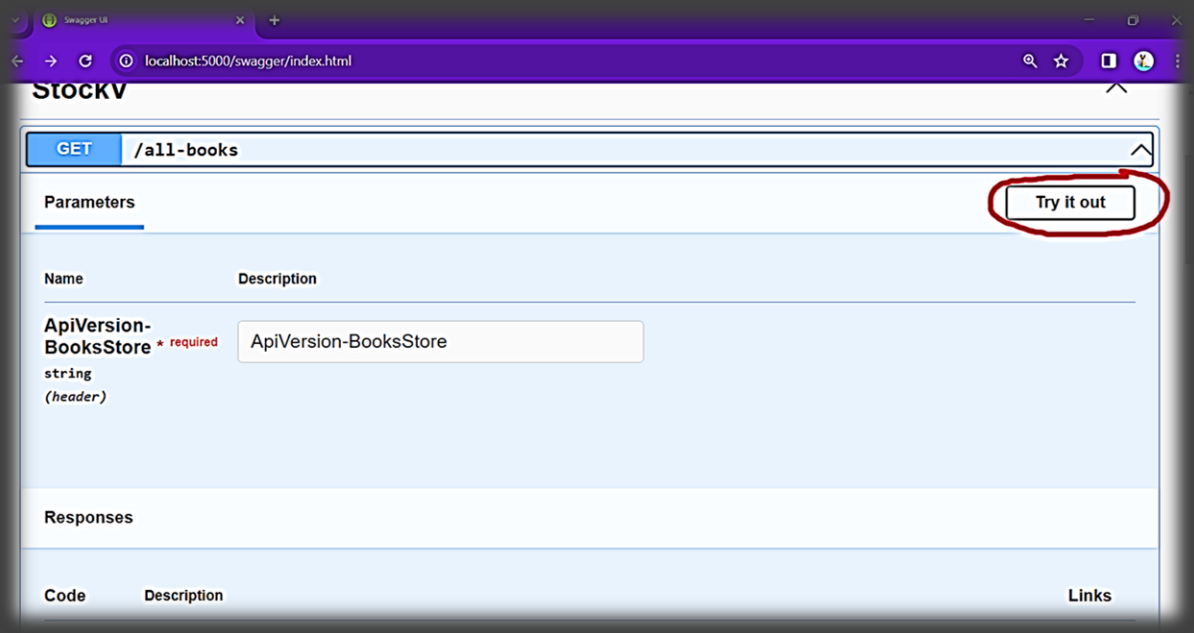

3. In "ApiVersion-BooksStore" enter 1 or 2, to use API version 1 – enter "1" supports all methods (GET, POST, DELETE and PUT), and retrieves all data from database, or to use API version 2 – enter "2" (supports only some GET methods), and retrieves only available from database:

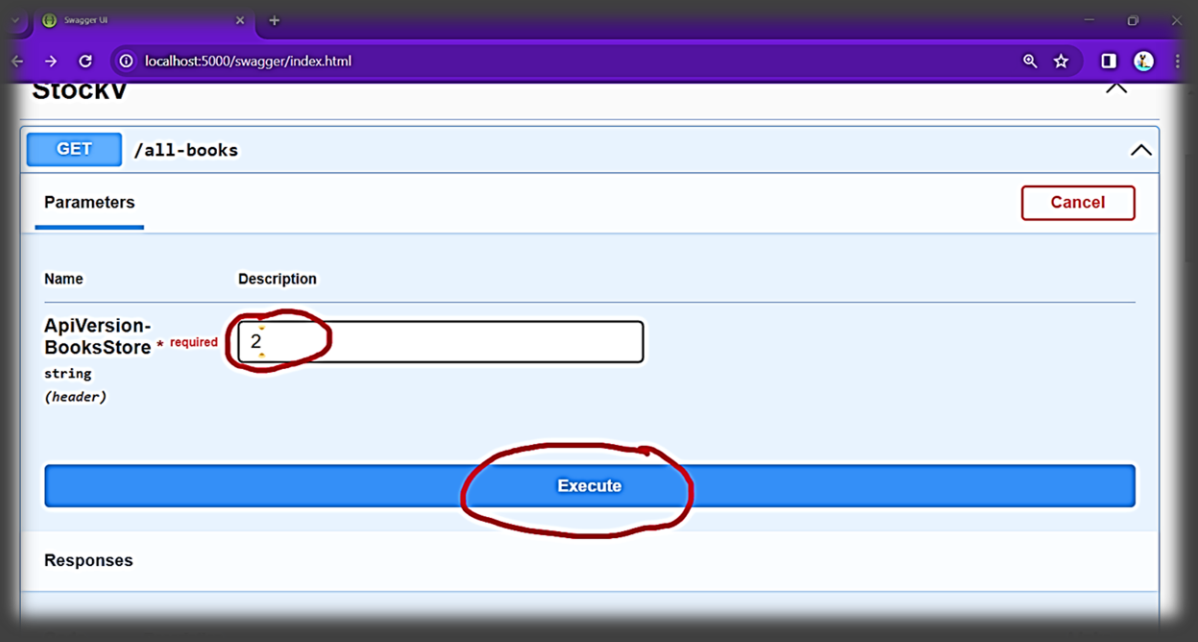
localhost:5000/swagger/index.html
StockV
GET
/all-books
Parameters
Cancel
Name
Description
ApiVersion-BooksStore * required
string
(header)
2
Execute
Responses

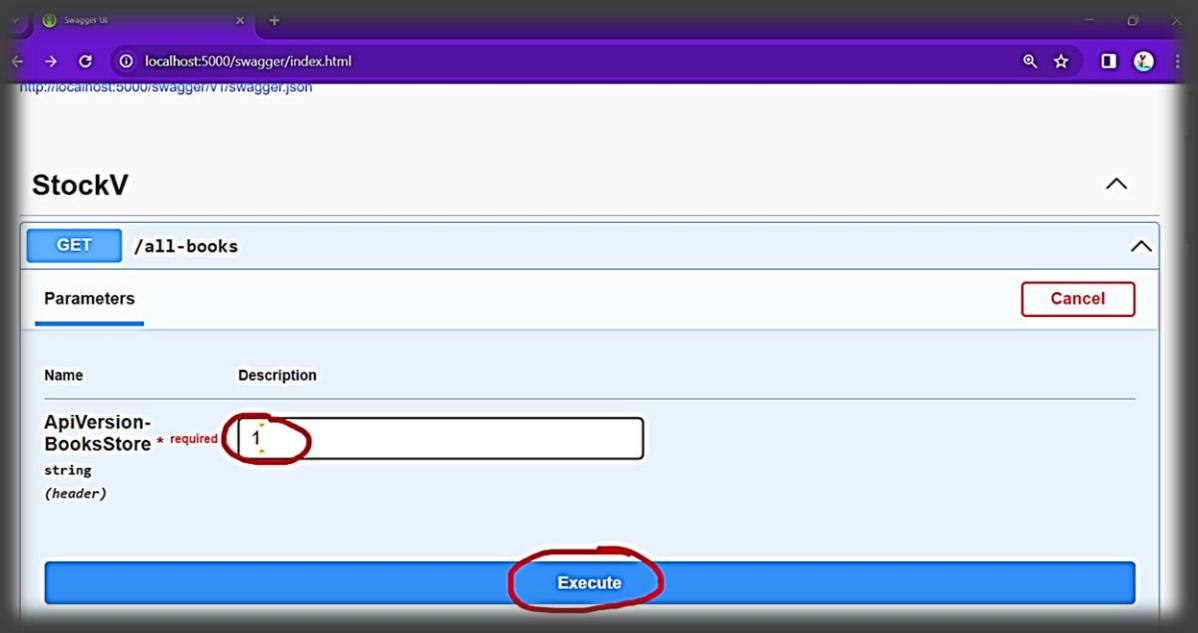
localhost:5000/swagger/index.html
http://localhost:5000/swagger/v1/swagger.json
StockV
GET
/all-books
Parameters
Cancel
Name
Description
ApiVersion-BooksStore * required
string
(header)
1
Execute

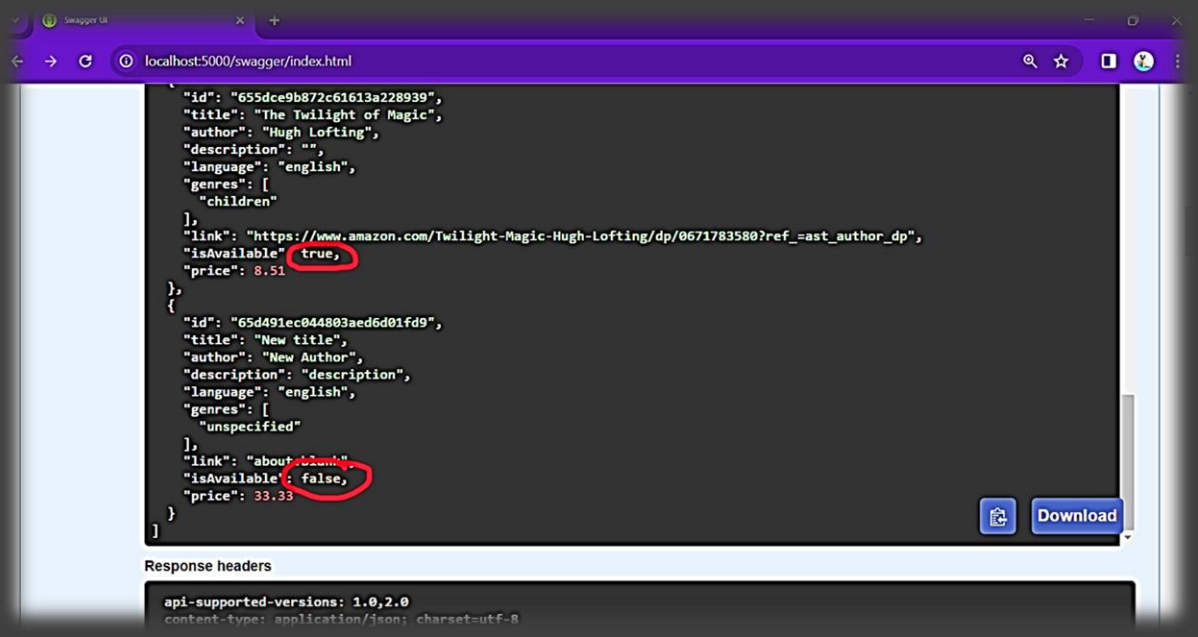
localhost:5000/swagger/index.html
"id": "655dce9b872c61613a228939",
"title": "The Twilight of Magic",
"author": "Hugh Lofting",
"description": "",
"language": "english",
"genres": [
"children"
],
"link": "https://www.amazon.com/Twilight-Magic-Hugh-Lofting/dp/0671783580?ref_=ast_author_dp",
"isAvailable": true,
"price": 8.51
},
{
"id": "65d491ec044803aed6d01fd9",
"title": "New title",
"author": "New Author",
"description": "description",
"language": "english",
"genres": [
"unspecified"
],
"link": "about:blank",
"isAvailable": false,
"price": 33.33
}
]
Download
Response headers
api-supported-versions: 1.0,2.0
content-type: application/json; charset=utf-8

Short description of all methods:

Authentication		
Methods:	**Supports:**	**Description**
POST/ authorization/loging	ApiVersion-BooksStore : 1	Singing in existing administration account and provides token. Default account: UserName: admin Password: P@ssw0rd
POST/authorization/register	ApiVersion-BooksStore : 1	Registering new administration account, require unique username, unique email, and password

StockV		
Methods:	**Supports:**	**Description**
GET/all-books	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database. For **ApiVersion-BooksStore : 2** retrieves only were parameter "isAvailable" : true
GET/book-id	ApiVersion-BooksStore : 1	Gets book by "id"
GET/books-on-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database, with requested page and requested quantity per page (divides all data from database into pages) and sorts the data in ascending or descending order. For **ApiVersion-BooksStore : 2** retrieves only were parameter "isAvailable" : true
GET/books-available	ApiVersion-BooksStore : 1	Retrieves all data from database with requested available - "isAvailable": true or false
GET/books-available-page	ApiVersion-BooksStore : 1	Retrieves all data from database with requested page, quantity of books per page and available - "isAvailable": true or false
GET/genres	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets the list of all genres in database. For ApiVersion-BookStore: 2 only genres where at least one book "isAvailable" : true
GET/books-equals-condition	ApiVersion-BooksStore : 1	Gets all books where at least one property equals to the entered

	ApiVersion-BooksStore : 2	term, For ApiVersion-BookStore: 2, only books “isAvailable” : true
GET/books-equals-condition-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/books-contains-condition	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets all books where at least one property contains to the entered term, For ApiVersion-BookStore: 2, only books “isAvailable” : true
GET/books-contains-condition-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/books-filtered	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets all books where data in each property contains entered data for each property. For ApiVersion-BookStore: 2, only books “isAvailable” : true.
GET/books-filtered -page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/all-books-count	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Returns quantity of all books in database. For ApiVersion-BookStore: 2, only counts books “isAvailable” : true.
GET/all-available-count	ApiVersion-BooksStore : 1	Returns quantity of all books in database, where parameter available - “isAvailable” : as requested.
GET/books-genre-count	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Returns quantity of books under requested genre. For ApiVersion-BookStore: 2, only counts books “isAvailable” : true.
POST/book-add	ApiVersion-BooksStore : 1	Add new book/data in database. Requires entering all data, except the Id, Id generated automatically.
PUT/book-update	ApiVersion-BooksStore : 1	Update/Change existing book/data in database, by Id. Myst be entered Id, IsAvailable. Rest data that was not entered would be kept the current. ATTENTION if need to add new genre, but keep the currents, then all genres that needs to be kept must be entered, otherwise

		they would be deleted or should not enter any new.
DELETE/book-delete	ApiVersion-BooksStore : 1	Delete existing book/data from database. Requires existing Id.