User Guide for Light Version of BooksStock.API

1. After extracting files from zip archive, run BookStore.API.exe

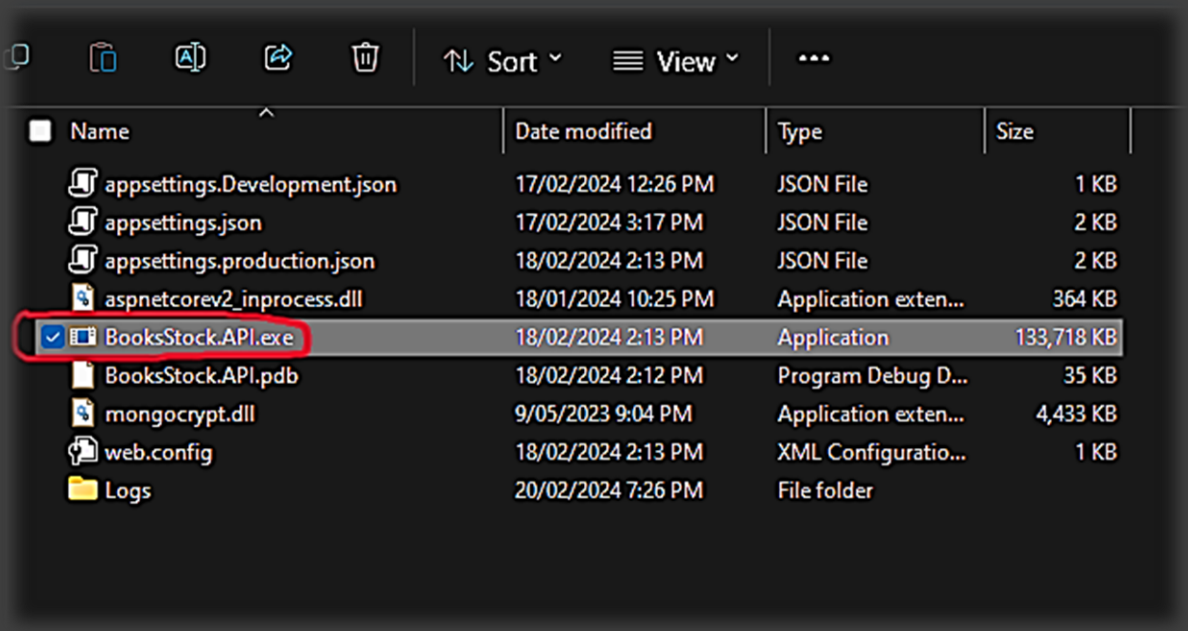

2. Open any internet browser and enter address: http://localhost:5000/swagger/index.html

ATTENTION: localhost supports only http.

3. Press arrow icon in righthand side:

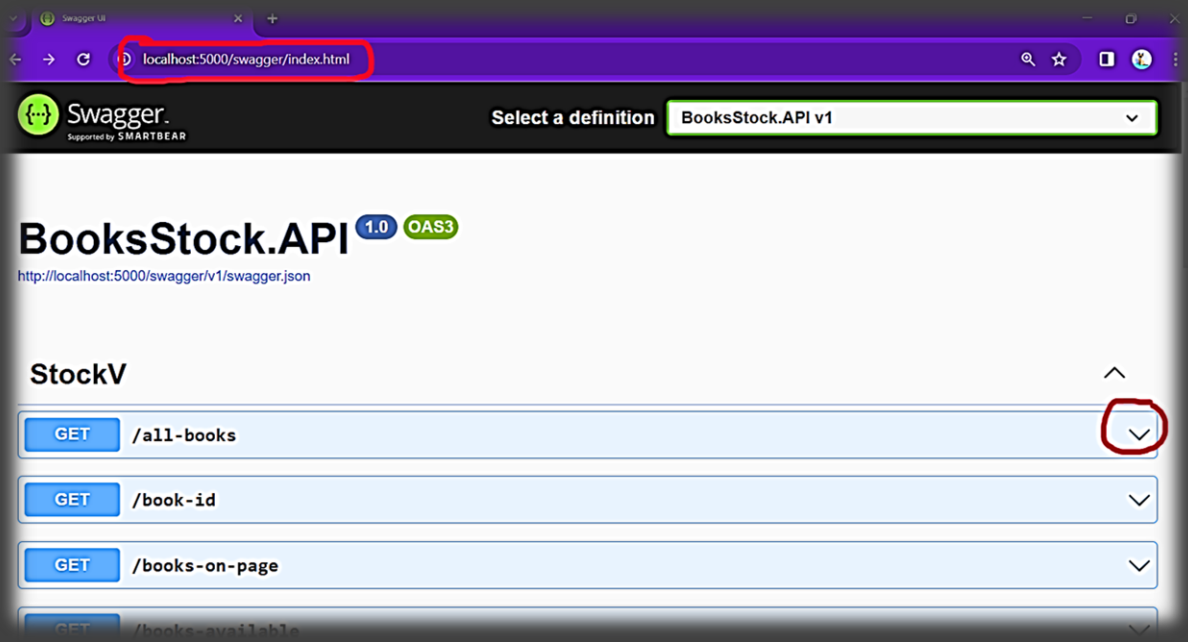

4. Press button “Try it out” in right hand side:

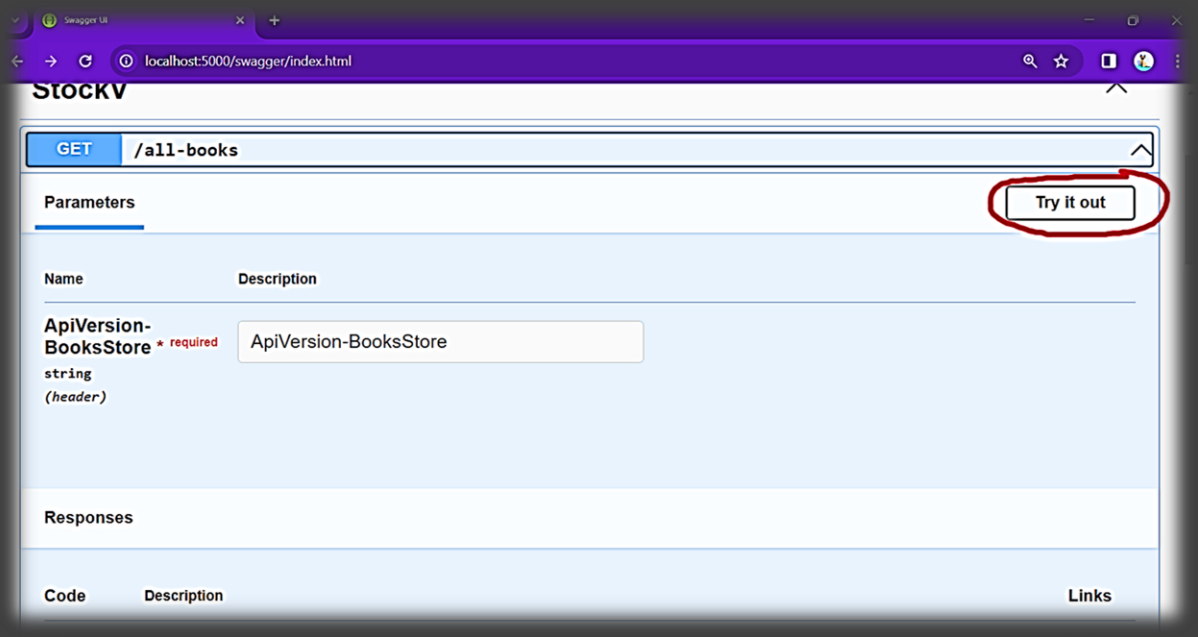

5. In ApiVersion-BooksStore enter 1 or 2, to use API version 1 – enter “1” supports all methods (GET, POST, DELETE and PUT), and retrieves all data from database, or to use API version 2 – enter “2” (supports only some GET methods), and retrieves only available from database:

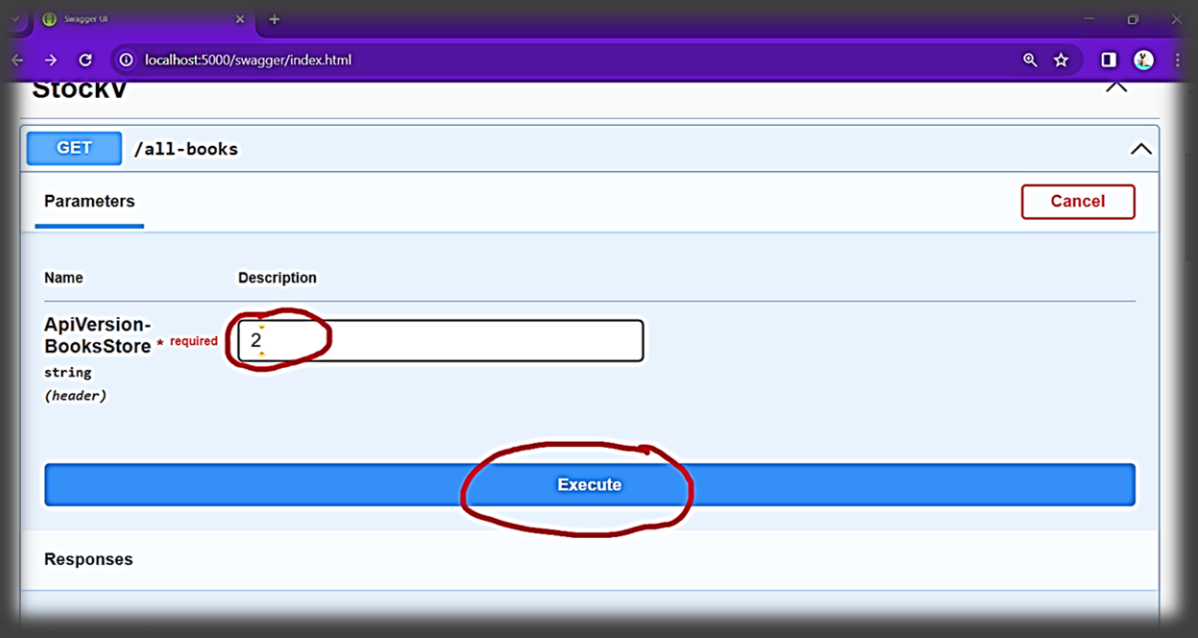

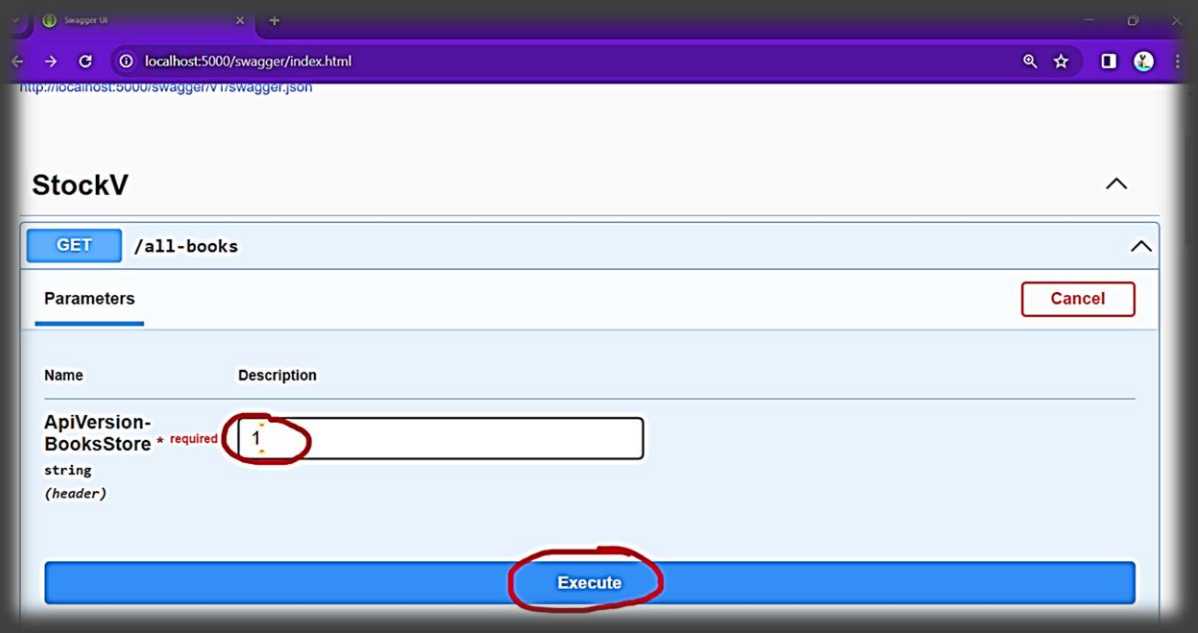

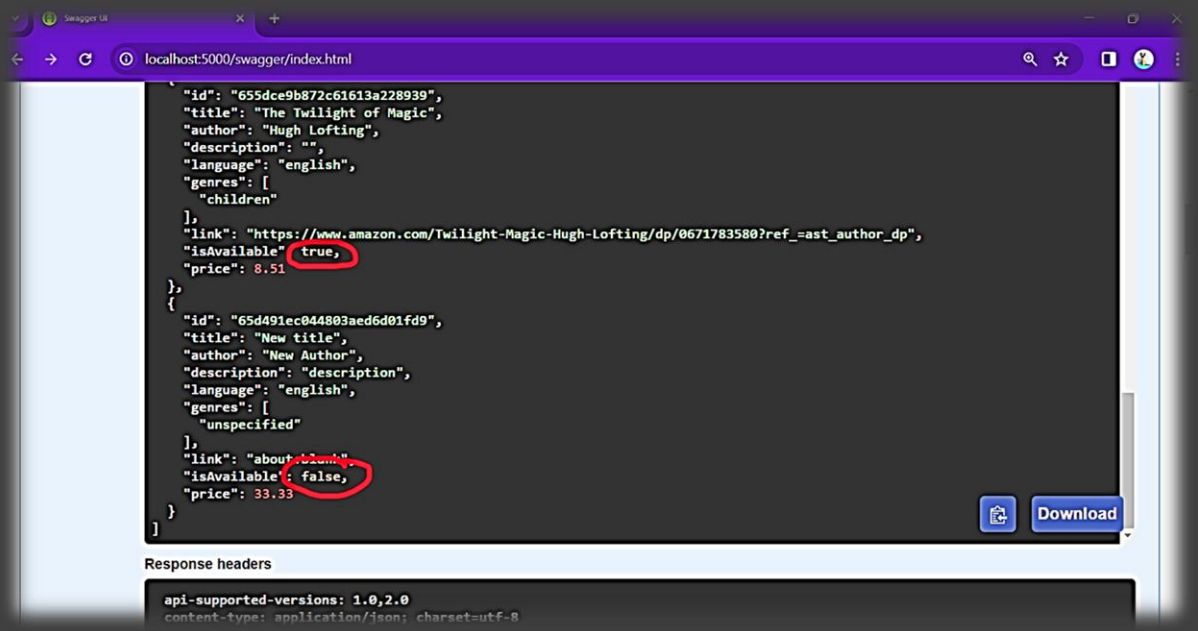

Short description of all methods:

Methods:	Supports:	Description
GET/all-books	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database. For **ApiVersion-BooksStore : 2** retrieves only were parameter “isAvailable” : true
GET/book-id	ApiVersion-BooksStore : 1	Gets book by “id”
GET/books-on-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Retrieves all data from database, with requested page and requested quantity per page (divides all data from database into pages) and sorts

		the data in ascending or descending order. For **ApiVersion-BooksStore : 2** retrieves only were parameter "isAvailable" : true
GET/books-available	ApiVersion-BooksStore : 1	Retrieves all data from database with requested available - "isAvailable": true or false
GET/books-available-page	ApiVersion-BooksStore : 1	Retrieves all data from database with requested page, quantity of books per page and available - "isAvailable": true or false
GET/genres	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets the list of all genres in database. For ApiVersion-BookStore: 2 only genres where at least one book "isAvailable" : true
GET/books-equals-condition	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets all books where at least one property equals to the entered term, For ApiVersion-BookStore: 2, only books "isAvailable" : true
GET/books-equals-condition-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/books-contains-condition	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets all books where at least one property contains to the entered term, For ApiVersion-BookStore: 2, only books "isAvailable" : true
GET/books-contains-condition-page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/books-filtered	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Gets all books where data in each property contains entered data for each property. For ApiVersion-BookStore: 2, only books "isAvailable" : true.
GET/books-filtered -page	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Same as previous, just divides content into pages, with requested quantity per page.
GET/all-books-count	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Returns quantity of all books in database. For ApiVersion-BookStore: 2, only counts books "isAvailable" : true.
GET/all-available-count	ApiVersion-BooksStore : 1	Returns quantity of all books in database, where parameter

		available - “isAvailable” : as requested.
GET/books-genre-count	ApiVersion-BooksStore : 1 ApiVersion-BooksStore : 2	Returns quantity of books under requested genre. For ApiVersion-BookStore: 2, only counts books “isAvailable” : true.
POST/book-add	ApiVersion-BooksStore : 1	Add new book/data in database. Requires entering all data, except the Id, Id generated automatically.
PUT/book-update	ApiVersion-BooksStore : 1	Update/Change existing book/data in database, by Id. Myst be entered Id, IsAvailable. Rest data that was not entered would be kept the current. ATTENTION if need to add new genre, but keep the currents, then all genres that needs to be kept must be entered, otherwise they would be deleted or should not enter any new.
DELETE/book-delete	ApiVersion-BooksStore : 1	Delete existing book/data from database. Requires existing Id.