

Sample 7-4

幾何学処理

有理数比の解像度変換

画像処理特論

村松 正吾

動作確認: MATLAB R2023a

Geometric image processing

Resizing w/ rational factor

Advanced Topics in Image Processing

Shogo MURAMATSU

Verified: MATLAB R2023a

準備

(Preparation)

```
close all
```

補間率の設定

(Setting of upsampling factor)

- : 補間率 (upsampling factor)

```
% Upsampling factor  
uFactor = 5;
```

間引き率の設定

(Setting of downsampling factor)

- : 間引き率 (downsampling factor)

```
% Downsampling factor  
dFactor = 3;
```

フィルタの設定

(Setting of filter)

平均フィルタのインパルス応答 (Impulse response of averaging filter)

- : インパルス応答 (Impulse response)

```
% Impulse response of averaging filter  
h = ones(1,dFactor)/dFactor;
```

線形補間フィルタのインパルス応答 (Impulse response of linear interpolation filter)

ただし、非因果性に注意. (Note that the incausal property.)

- : インパルス応答 (Impulse response)

```
% Impulse response of interpolation filter  
f = 1-abs(-(uFactor-1):(uFactor-1))/uFactor;
```


縦続フィルタのインパルス応答 (Impulse response of the cascade filter)

```
% Impulse response of the combination  
g = conv(h,f);
```


フィルタ特性の表示

(Display of filter characteristics)

```
% Impulse response  
figure(1)  
impz(g)  
ax = gca;  
ax.XLim = [-1 length(g)];  
ax.YLim = [-0.2 1];
```

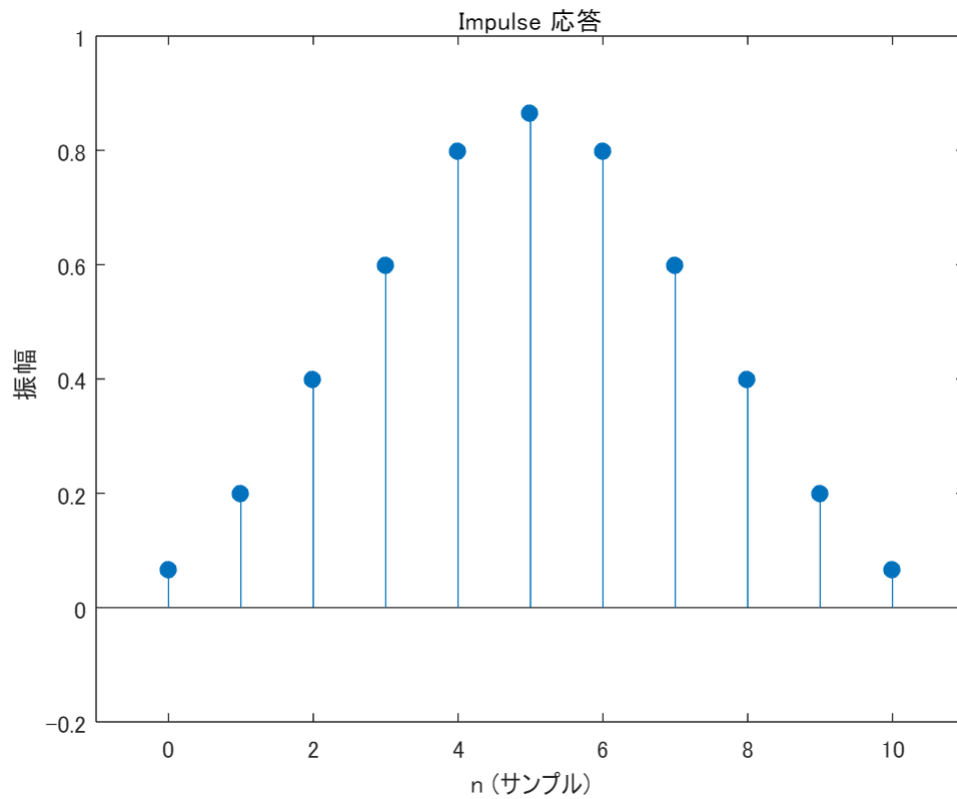

```
% Frequency response
figure(2)
freqz(g)
ax = gca;
hold on
line([0 min(1/uFactor,1/dFactor) min(1/uFactor,1/dFactor)], [20*log10(uFactor)
20*log10(uFactor) ax.YLim(1)],...
    'LineStyle',':', 'LineWidth',2, 'Color','red');
hold off
```

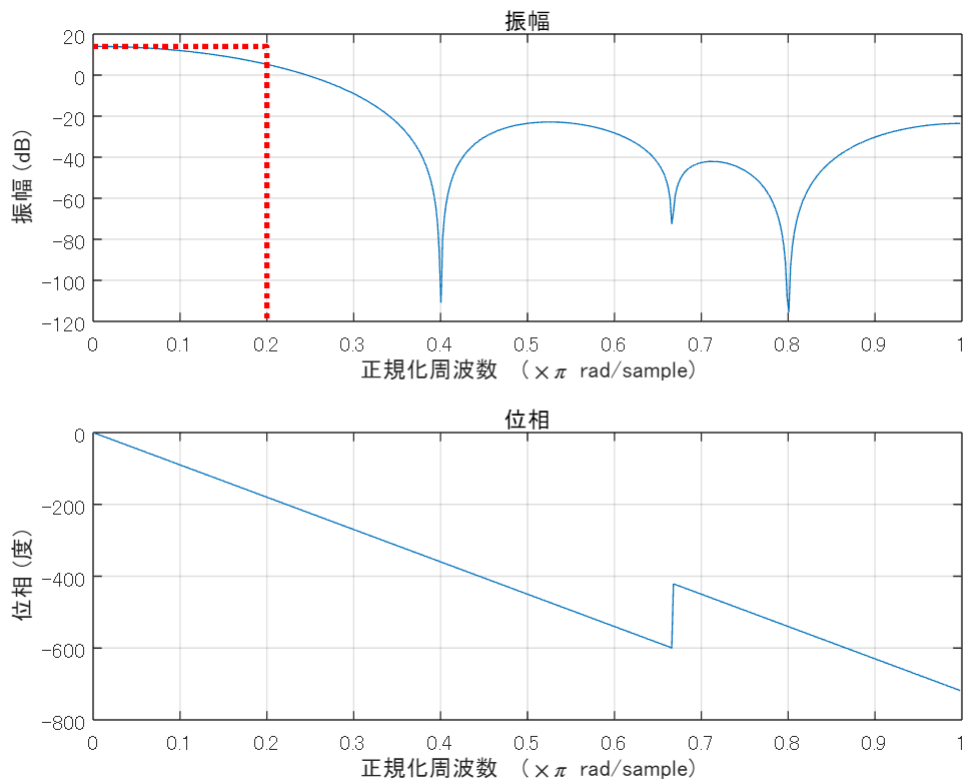

画像への適用

(Application to images)

ただし, (where)

ただし, 非因果性に注意. (Note that the incausal property.)

- : インパルス応答 (Impulse response)

```
% Reading an image
u = imread('cameraman.tif');

% Generating the bilinear interpolation filter
[n1,n2] = ndgrid(-uFactor+1:uFactor-1);
f = (1-abs(n1)/uFactor).*(1-abs(n2)/uFactor);


% Generating the average filter
h = fspecial('average',dFactor);
```

```

% Combination of h and f
g = conv2(f,h);
[n1,n2] = ndgrid(-uFactor-floor(dFactor/2)+1:uFactor+floor(dFactor/2)-1);

% Impulse response
figure(3)
stem3(n2,n1,g,'filled')
axis ij
ax = gca;
ax.XLim = ax.XLim + [-1 1];
ax.YLim = ax.YLim + [-1 1];


```

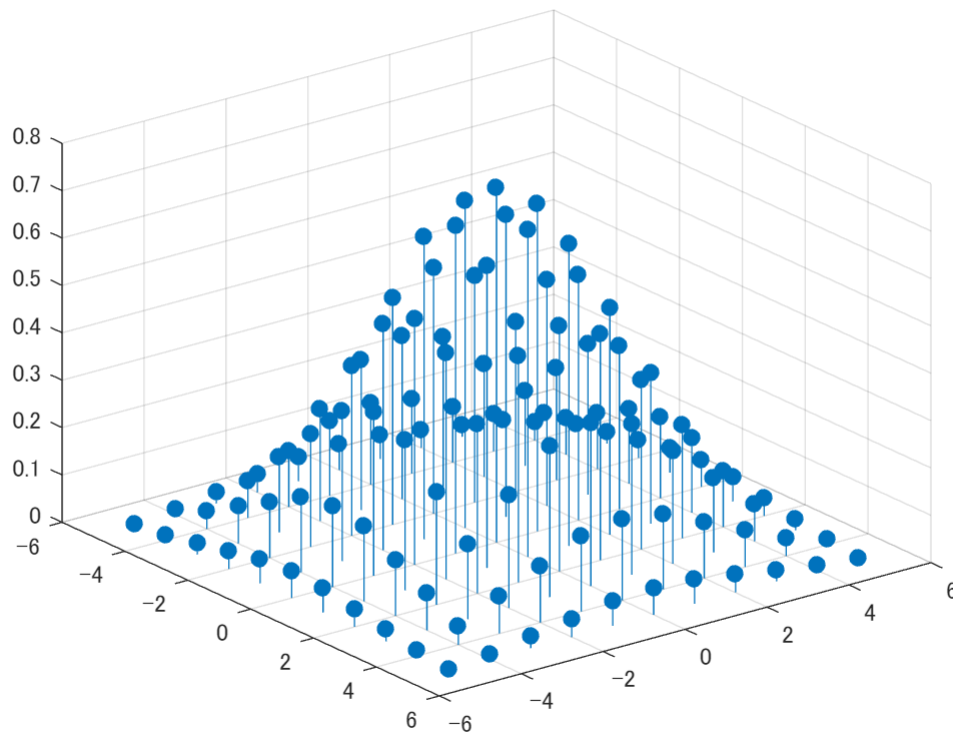

```

% Frequency response
figure(4)
freqz2(g)
axis ij

```

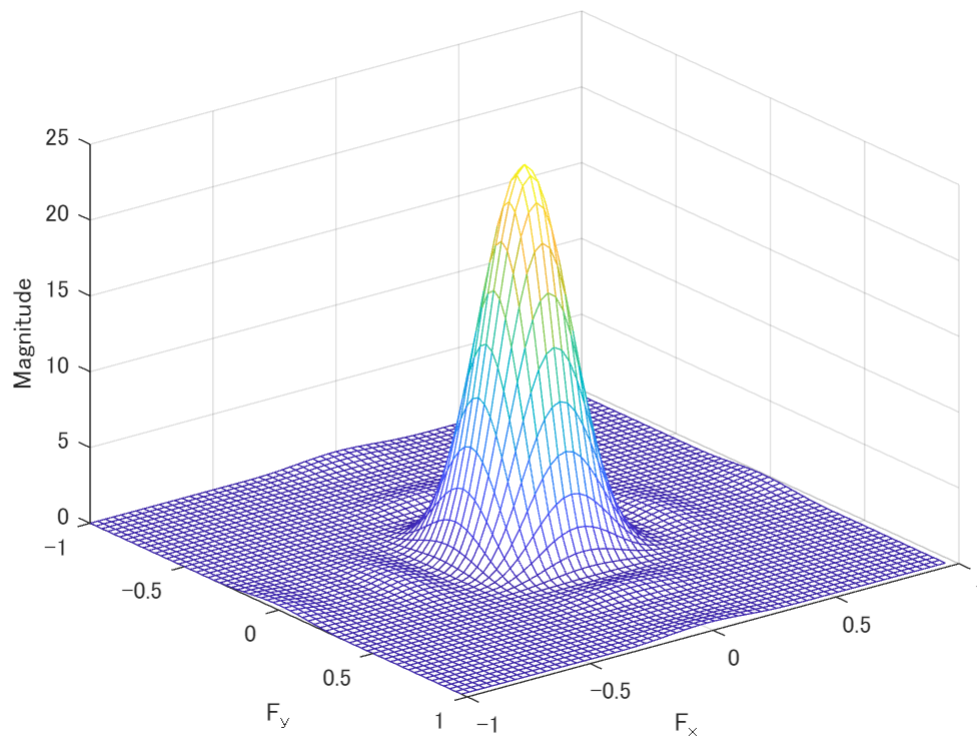

```
% Bivariate upsampling function
```

```
upsample2 = @(x,n) ...
    shiftdim(upsample(...
    shiftdim(upsample(x,...
    n(1)),1),...
    n(2)),1);
```

```
% Bivariate downsampling function
```

```
downsample2 = @(x,n) ...
    shiftdim(downsampling(...
    shiftdim(downsampling(x,...
    n(1)),1),...
    n(2)),1);
```

```
% Interpolation with upsampling and filtering
```

```
x = padarray(u,[1 1],'replicate','both');
w = imfilter(upsample2(x,uFactor*[1 1]),g,'conv');
s = ceil(uFactor/2);
y = w(s+1:s+uFactor*size(u,1),s+1:s+uFactor*size(u,2));
v = downsample2(y,dFactor*[1 1]);
```

画像表示

(Display image)

原画像 (Original)

```
figure(5)
imshow(u)
title('Original')
```



結果画像 (Result)

```
% Display result
figure(6)
imshow(v)
title('Result')
```



```
% Imresize
figure(7)
z = imresize(u,uFactor/dFactor);
imshow(z)
title('Imresize')
```

Imresize



© Copyright, Shogo MURAMATSU, All rights reserved.