Sample 10-4

冗長変換

 ℓ_2 -ノルム最小化

画像処理特論

村松 正吾

動作確認: MATLAB R2023a

Redundant transforms

 ℓ_2 -norm minimization

Advanced Topics in Image Processing

Shogo MURAMATSU

Verified: MATLAB R2023a

準備

(Preparation)

```
close all
```

非線形近似の設定

(Settings of non-linear approximation)

```
% # of Coefs.
K = 32;
```

入力信号の生成

(Generation of input sequence)

```
% # of input samples
nSamples = 128;

% Random process in AR(1) model
rng('default');
w = 0.1*randn(nSamples,1);
w(floor(end/2)) = 1;
u = filter(1,[1 -0.95],w);
```

合成辞書

(Synthesis dictionary)

```
% Synthesis filters
```

```
f0 = [ 1 1 ]/2;
f1 = [ -1 1 ]/2;

% (Circular) convolution matrix
nF = max(length(f0),length(f1));
X = [zeros(nF-1,nSamples-nF+1) eye(nF-1); eye(nSamples)]; % Circular extension
matrix
C = [zeros(nSamples,nF-1) eye(nSamples) zeros(nSamples,nF-1)]; % Clipping matrix

% Atoms in (circular) convolution matrix
d0 = C*convmtx(f0.',nSamples+nF-1)*X;
d1 = C*convmtx(f1.',nSamples+1)*X;
```

辞書 (Dictionary) D

```
% Dictionary D (Global matrix representation of synthesis filter bank)
D = zeros(nSamples,2*nSamples);
D(:,1:2:end) = d0;
D(:,2:2:end) = d1;
disp(D)
```

0.5000	-0.5000	0	0	0	0	0	0	0	0	0
0.5000	0.5000	0.5000	-0.5000	0	0	0	0	0	0	0
0	0	0.5000	0.5000	0.5000	-0.5000	0	0	0	0	0
0	0	0	0	0.5000	0.5000	0.5000	-0.5000	0	0	0
0	0	0	0	0	0	0.5000	0.5000	0.5000	-0.5000	0
0	0	0	0	0	0	0	0	0.5000	0.5000	0.5000
0	0	0	0	0	0	0	0	0	0	0.5000
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0

ℓ_2 -ノルム最小化による非線形近似

(Non-linear approximation with ℓ_2 -norm minimization)

$$\hat{\mathbf{s}} = \arg\min_{\mathbf{s} \in \mathbb{R}^L} \|\mathbf{s}\|_2^2 \text{ s.t. } \mathbf{v} = \mathbf{D}\mathbf{s}$$

ムーア・ペンローズの一般逆行列で解く。

```
\mathbf{T} = \mathbf{D}^T (\mathbf{D} \mathbf{D}^T)^{-1}
```

分析処理 (Analysis process)

```
% Analysis process
s = pinv(D)*u;
```

係数選択 (Coefficient selection)

```
s = s(:);
[~,ix] = sort(abs(s),'descend');
s(ix(K+1:end)) = 0;
```

近似結果 (Approximatiom result)

```
v = D*s;
```


近似誤差 (Residual)

```
r = u - v;
```

グラフ描画

(Graph plot)

```
figure(1)
% Input
subplot(3,1,1)
stem(0:nSamples-1,u,'filled')
axis([0 nSamples -1.5 1.5])
xlabel('n')
ylabel('u[n]')
title('1 2-norm minimization')
% NLA
subplot(3,1,2)
stem(0:nSamples-1,v,'filled')
axis([0 nSamples -1.5 1.5])
xlabel('n')
ylabel('~u[n]')
% Residual
subplot(3,1,3)
stem(0:nSamples-1,r,'filled')
axis([0 nSamples -1.5 1.5])
xlabel('n')
ylabel('r[n]')
```

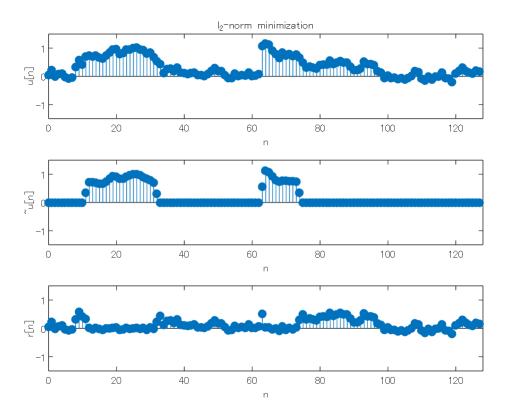

MSE 評価 (MSE evaluation)

mse = 0.051818

© Copyright, Shogo MURAMATSU, All rights reserved.