

Weak solution of the merged mathematical equations of the polluted atmosphere

March 7, 2018

Abstract

Considered as a geophysical fluid, the polluted atmosphere shares the shallow domain characteristics with other natural large-scale fluids such as seas and oceans. This means that its domain is excessively greater horizontally than in the vertical dimension, leading to the classic hydrostatic approximation of the Navier-Stokes equations. The authors of the [Azérad and Guillén, 2001] article have proved a convergence theorem for this model with respect to the ocean, without considering pollution effects. In this present work we provide a generalization of their result translated to the atmosphere, extending the fluid velocity equations with an additional convection-diffusion equation representing pollutants in the atmosphere.

Keywords: Navier-Stokes equations, shallow domains, pollution evolution equation, hydrostatic approximation, compactness, weak solutions.

Contents

1	Introduction	4
1.1	Notations	4
2	The equations describing the polluted atmosphere	4
3	Main theorem	8
4	Weak formulation	9
4.1	Weak formulation of the hydrostatic system	9
4.2	Weak formulation of the anisotropic system	10
5	Proof of the main theorem	10
5.1	Energy inequality	10
5.2	A priori estimates and weak convergence	12
5.3	Passing to the limit	12
5.3.1	Linear terms	12
5.3.2	Nonlinear term	13
6	A generalized model	15
6.1	Weak formulation	16
6.1.1	Anisotropic system	16
6.1.2	Hydrostatic system	17
6.2	Energy inequality	17
6.3	Passing to the limit	17
7	Convection dominated coastal model	18
7.1	Anisotropic system	18
7.2	Hydrostatic system	18
7.3	Energy inequality	19
8	Future work, concluding remarks	19
9	Todo	20
A	The existence of weak solution of the hydrostatic system of the polluted atmosphere	21
B	The regularity of the source term	25

1 Introduction

We investigate the convergence of the weak solutions for the merged motion-pollution atmosphere model. At this point the functions we work with are $\mathbf{v} = (\mathbf{v}_H, v_3)$, and C , representing velocity and concentration, respectively (we are not considering other variables such as water vapor quantity or temperature).

We underline the fact that this work is for the case of **inland** scenario.

Even though the [Az  rad and Guill  n, 2001] article works with the equations of the ocean, this work is the extension of that article in the sense that we transfer and exploit its main result for the case of the atmosphere, and for this reason it is the main reference article for this work.

1.1 Notations

- a) ϵ = the aspect ratio which goes to zero
- b) ν = viscosity
- c) Ω_ϵ, Ω = the original and the rescaled, ϵ -independent domain, respectively
- d) g = represents the force due to gravity, which also includes the centrifugal effect
- e) $\mathbf{w}$ represents the earth rotation angular speed, $l(y)$ = latitude
- f) $\alpha = 2f \sin(l(x_2))$, $\beta = 2f \cos(l(x_2))$
- g) $(\cdot, \cdot)$ = the scalar product in $L^2(\Omega)^d$ or the duality $L^p(\Omega)$, $L^{p'}(\Omega)$
- h) $\langle \cdot, \cdot \rangle_\Gamma$ = the scalar product or duality on the boundary curve Γ ($H^{-1/2}(\Gamma)$, $H^{1/2}(\Gamma)$)
- i) $b(\mathbf{u}_H) = \alpha(-u_2, u_1)$

2 The equations describing the polluted atmosphere

The first step is to choose a coordinate system, set the domain we start with and an appropriate set of equations describing both atmosphere motions and the effect of pollution. The set of equations, the choice of the locally acceptable Cartesian coordinate system we are using for the velocity terms are similar to those suggested by our reference article. We ignore large scale effects such as the curvature of the Earth. For describing the effect of pollution we use a continuity equation written in Cartesian coordinates for the concentration.

We fix the local Cartesian coordinate system to be adjusted to the downwind direction, i.e. z is the vertical direction, while x is the downwind, and y is the crosswind direction. It is a legitimate thing to do if we are considering a time interval which is not too long in the sense that it is reasonable to assume that

we have a permanent, relatively stable main wind direction. It is true that this is a certain restriction on the model, but as we will see later, exploiting this choice will help us simplify the model a bit.

Let us consider the following domain to begin with. This domain is a local slice of the atmosphere filled with homogeneous air that we assume to be incompressible, and a pollutant of concentration C .

$$\Omega_\epsilon = \{(x, y, z) \in \mathbb{R}^3; (x, y) \in \omega, 0 < z < \epsilon h(x, y)\}, \quad (1)$$

where ω is a Lipschitz-domain in $\mathbb{R}^2$, and h is a nonnegative Lipschitzian application.

The equations describing the air velocity in the atmosphere are the incompressible Navier-Stokes equations:

$$\partial_t \mathbf{v} + (\mathbf{v} \cdot \nabla) \mathbf{v} - \Delta_\nu \mathbf{v} + \nabla q + 2\mathbf{w} \times \mathbf{v} = \mathbf{g} \text{ in } \Omega_\epsilon \times (0, T) \quad (2)$$

$$\nabla \cdot \mathbf{v} = 0 \text{ in } \Omega_\epsilon \times (0, T) \quad (3)$$

Contaminants emitted into the atmosphere are transported by the wind, mixed and dispersed by turbulent behavior, and deposited onto the ground by gravity. The dispersion of pollutants is commonly modeled by a continuity equation, and this is what we will use to describe the pollution phenomena as well.

$$\partial_t C + \mathbf{v} \cdot \nabla C = K_x \frac{\partial^2 C}{\partial x^2} + K_y \frac{\partial^2 C}{\partial y^2} + K_z \frac{\partial^2 C}{\partial z^2} + S \quad (4)$$

In this equation S represents a source term, from now on we will assume that S is as regular as needed.

As usual in asymptotic analysis, we perform a vertical scaling to make the domain independent of ϵ .

$$\begin{aligned} x &= x_1, y = x_2, z = \epsilon x_3 \\ v_1 &= u_1^\epsilon, v_2 = u_2^\epsilon, v_3 = \epsilon u_3^\epsilon, p = p^\epsilon \\ \nu_x &= \nu_1, \nu_y = \nu_2, \nu_z = \epsilon^2 \nu_3 \\ K_z &= \epsilon^2 K_3 \end{aligned}$$

So we have the following new domain

$$\Omega = \{(x_1, x_2, x_3) \in \mathbb{R}^3; (x_1, x_2) \in \omega, 0 < x_3 < h(x_1, x_2)\}.$$

As a second step of the rescaling process, here we also exploit the fact that we chose the coordinate system in a way so that the x axis matches the downwind direction. In this case we use an additional scaling equation, which is different in nature from the previous ones in the sense that it is not derived from the shallowness of the domain but rather suggested by the fact that in the downwind

direction it is natural to assume that the diffusion is negligible compared to downwind transport, i.e.

$$|u_1 \partial_{x_1} C| \gg \left| K_x \frac{\partial^2 C}{\partial x_1^2} \right| \quad (5)$$

which leads us to using

$$K_x = \epsilon K_1.$$

Putting this condition and the previously described rescaling terms together to the original equations, we arrive to the merged anisotropic equations of the polluted atmosphere above inland surface.

$$\partial_t u_1^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_1^\epsilon - \Delta_\nu u_1^\epsilon - \alpha u_2^\epsilon + \epsilon \beta u_3^\epsilon + \partial_1 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (6)$$

$$\partial_t u_2^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_2^\epsilon - \Delta_\nu u_2^\epsilon + \alpha u_1^\epsilon + \partial_2 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (7)$$

$$\epsilon^2 \{ \partial_t u_3^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon - \Delta_\nu u_3^\epsilon \} - \epsilon \beta u_1^\epsilon + \partial_3 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (8)$$

$$\nabla \cdot \mathbf{u}^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (9)$$

$$\partial_t C^\epsilon + \mathbf{u}^\epsilon \cdot \nabla C^\epsilon = \epsilon K_1 \frac{\partial^2 C^\epsilon}{\partial x_1^2} + K_2 \frac{\partial^2 C^\epsilon}{\partial x_2^2} + K_3 \frac{\partial^2 C^\epsilon}{\partial x_3^2} + S \text{ in } \Omega \times (0, T) \quad (10)$$

$$\mathbf{u}^\epsilon = 0 \text{ on } \Gamma \times (0, T) \quad (11)$$



$$\mathbf{u}^\epsilon(\cdot, t=0) = \mathbf{u}_0, C^\epsilon(\cdot, t=0) = C_0^\epsilon \text{ in } \Omega \quad (12)$$

To make the above set of equations complete, we need to decide on the boundary conditions for the pollution term.

It is vital to choose boundary conditions for the pollution concentration that are physically as accurate as possible and at the same time not unnecessarily complicated. As we can see in many other articles and as we will see later in this one, in the case of LAMs (limited area models) finding the right boundary conditions can be a nontrivial task.

The boundary division of the $\partial\Omega$: the upper boundary of the Ω domain is denoted by Γ_U , the lateral boundary is Γ_L , and the lower boundary of the domain is Γ_G . As we mentioned before, the case we are investigating is that of inland domains Ω , i.e. the case of landscapes and cities with no significant nearby water surface. This is very important since the boundary conditions for both wind velocity and pollution concentration in the air are different depending whether we are above solid ground or water surface. The boundary conditions we choose to use in the inland scenario are the following, shown in a cross-section.

An explanation of the boundary conditions:

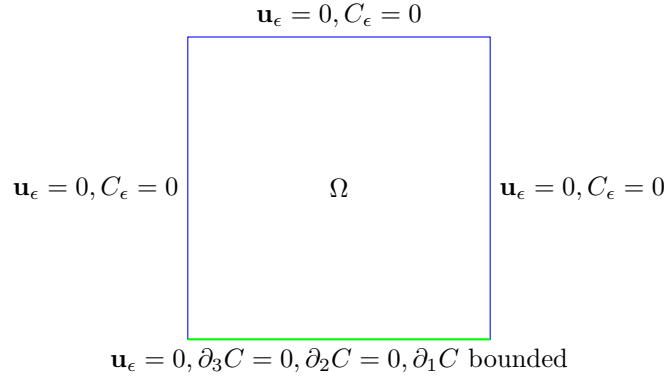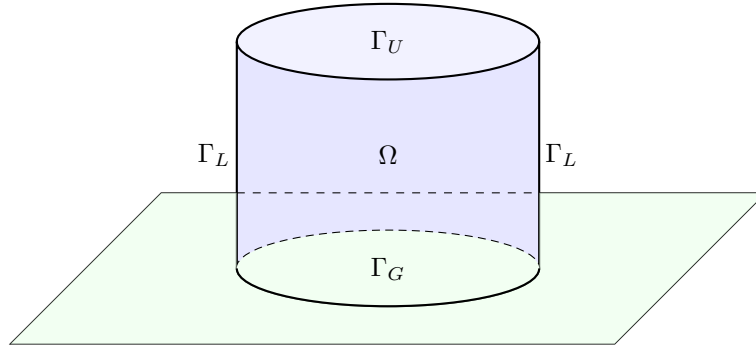

- The upper boundary of the domain we are considering is chosen to be at the isobar representing the planetary boundary layer ([Arya, 2001]), on this $p = p_0$ pressure level the upper boundary of the local domain is denoted by Γ_U . On Γ_U we use $\mathbf{u}_H = 0, u_3 = 0, C(x, y, z) = 0$ boundary conditions.
- On Γ_L we use the same boundary conditions as on the upper level, i.e. we have $\mathbf{u}_H = 0, u_3 = 0, C(x, y, z) = 0$.

Remark. *If we wanted to use $C(x, y, z) = c$ with some c constant value, we could make a change of variables distracting that background flow and arrive back to the same mathematical problem with C being zero.*

- In this model we neglect topological variations, and the $z = 0$ plane represents the lower boundary. On the ground level we have $u_H = 0, u_3 = 0$ boundary conditions for the air velocity. This is the mathematical way of expressing no-slip boundary conditions for the horizontal wind speed and the impervious nature of the ground with respect to the wind. As for the concentration, the way we can choose ground level boundary conditions is the following. Firstly, we assume that the pollution is not absorbed by the ground, so we use $\partial_3 C = 0$ on Γ_G (see also for example

[Yeh and Huang, 1975]). For the horizontal partial derivatives of the pollution, we can separate downwind and crosswind direction boundary conditions. In the crosswind direction we use $\partial_2 C = 0$ while in the downwind (stronger) direction our assumption is more relaxed, we only assume that $\partial_1 C$ is finite in the boundary norm, i.e. in $L^2 L^2(0, T; \Gamma_G)$.

Note that we have a domain where the lower and upper boundaries represent a physically existent layer (i.e. the ground and the planetary boundary layer), but outside the lateral boundary the physical world continues without influence and without any particular external condition. On boundaries of such nature we have to apply OBCs (open boundary conditions), which is not a trivial task, see for example [Wang et al., 2014]. We need to avoid any spurious reflection or constraint which is unnatural, but at the same time we want the model to remain mathematically manageable.

If we assume $\mathbf{u}^\epsilon = O(1)$, then neglecting the ϵ^2 and ϵ in the anisotropic equations, we formally arrive to the hydrostatic Navier-Stokes equations combined with pollution.

$$\partial_t u_1 + \mathbf{u} \cdot \nabla u_1 - \Delta_\nu u_1 - \alpha u_2 + \partial_1 p = 0 \text{ in } \Omega \times (0, T) \quad (13)$$

$$\partial_t u_2 + \mathbf{u} \cdot \nabla u_2 - \Delta_\nu u_2 - \alpha u_1 + \partial_2 p = 0 \text{ in } \Omega \times (0, T) \quad (14)$$

$$\partial_3 p = 0 \text{ in } \Omega \times (0, T) \quad (15)$$

$$\nabla \cdot \mathbf{u} = 0 \text{ in } \Omega \times (0, T) \quad (16)$$

$$\partial_t C + \mathbf{u} \cdot \nabla C = K_2 \frac{\partial^2 C}{\partial x_2^2} + K_3 \frac{\partial^2 C}{\partial x_3^2} + S \text{ in } \Omega \times (0, T) \quad (17)$$

$$u_1 = u_2 = u_3 n_3 = 0 \text{ on } \Gamma \times (0, T) \quad (18)$$

$$u_i(\cdot, t = 0) = u_{0i}, C(\cdot, t = 0) = C_0 \text{ in } \Omega, i = 1, 2 \quad (19)$$

3 Main theorem

- The article of [Azérad and Guillén, 2001] proved a convergence theorem for weak solutions of the equations describing the ocean without pollution. We can use a modified version of this, translated to the polluted inland atmosphere domain.

Theorem 1. *Let $\mathbf{u}_0 \in L^2(\Omega)^3$, with $\nabla \cdot \mathbf{u}_0 = 0$, $\mathbf{u}_0 \cdot \mathbf{n} = 0$ on $\partial\Omega$; there exists a weak solution $\mathbf{u}$ of the hydrostatic Navier-Stokes equations as the aspect ratio ϵ tends to 0.*

- The task we want to do is to extend this result in the sense that it becomes valid to the merged set of $(\mathbf{u}, C)$ equations as well.

Theorem 2. *Let $\mathbf{u}_0 \in L^2(\Omega)^3$, with $\nabla \cdot \mathbf{u}_0 = 0$, $\mathbf{u}_0 \cdot \mathbf{n} = 0$ on $\partial\Omega$; and let $C(0) \in L^2(\Omega)$, $C(0) = 0$ on $\partial\Omega$, there exists a weak solution $(\mathbf{u}, C)$ of the hydrostatic Navier-Stokes equations as the aspect ratio ϵ tends to 0.*

4 Weak formulation

We need to calculate the weak formulation of the merged equations in both the anisotropic and hydrostatic case. Since this inland atmosphere model has slightly different boundary conditions even in the velocity equations than the model of the ocean, we will see that the weak formulation of our system has minor differences from the ocean scenario.

4.1 Weak formulation of the hydrostatic system

For the weak formulation we will use the modified version of the spaces defined in the original article.

$$H_\Gamma^1(\Omega) = \{v \in H^1(\Omega); v = 0 \text{ on } \partial\Omega = \Gamma\}$$

$$\mathbf{V} = \{\mathbf{v} \in H_\Gamma^1(\Omega) \times H_\Gamma^1(\Omega) \times H_0^1(\Omega); \nabla \cdot \mathbf{v} = 0 \text{ in } \Omega\}$$

$$H(\partial_3, \Omega) = \{v \in L^2(\Omega); \partial_3 v \in L^2(\Omega)\}$$

$$H_0(\partial_3, \Omega) = \{v \in H(\partial_3, \Omega); v n_3 = 0 \text{ on } \partial\Omega\}$$

$$\mathbf{W} = \{\mathbf{u} \in H_\Gamma^1(\Omega) \times H_\Gamma^1(\Omega) \times H_0(\partial_3, \Omega); \nabla \cdot \mathbf{u} = 0 \text{ in } \Omega\}$$

Find $(\mathbf{u}, C)$ such that $\mathbf{u} = (\mathbf{u}_H, u_3) \in L^2(0, T; \mathbf{W})$ with $\mathbf{u}_H \in L^\infty(0, T; L^2(\Omega)^2)$, and C with $\partial_2 C, \partial_3 C \in L_t^2 L_x^2$, $C \in L^\infty L^2$ and $C(0) \in L_x^2$, such that

$$\begin{aligned} & \int_0^T -(\mathbf{u}_H, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H, (\mathbf{u} \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H), \mathbf{v}_H) dt \\ & + \int_0^T -(C, \partial_t \tilde{C}) - (\mathbf{u} C, \nabla \tilde{C}) + K_2(\partial_2 C, \partial_2 \tilde{C}) + K_3(\partial_3 C, \partial_3 \tilde{C}) dt = \\ & = -(\mathbf{u}_{0H}, \mathbf{v}_H(0)) - (C(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt \end{aligned} \quad (20)$$

for all $(\mathbf{v}, \tilde{C})$ with $\mathbf{v} = (\mathbf{v}_H, v_3) \in H^1(0, T; \mathbf{W})$, with $v_H(T) = 0$ and $\partial_3 \mathbf{v}_H \in L^\infty(0, T; L^3(\Omega)^2)$ and $\tilde{C}$ with $\tilde{C} \in L^2(0, T, H^1)$, $\tilde{C} \in H^1(0, T, L^2)$, $\tilde{C}(T) = 0$.

4.2 Weak formulation of the anisotropic system

Find $\mathbf{u}^\epsilon = (\mathbf{u}_H, u_3^\epsilon) \in L^2(0, t; \mathbf{V}) \cap L^\infty(0, T; L^2(\Omega)^3)$ and C with $C \in L^\infty L^2$, $C \in L^2(0, T; H^1)$, $C(0) \in L_x^2$ such that

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H^\epsilon, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H^\epsilon, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H^\epsilon, (\mathbf{u}^\epsilon \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H^\epsilon), \mathbf{v}_H) dt \\
& + \epsilon \beta \left[\int_0^T (u_3^\epsilon, v_1) - (u_1^\epsilon, v_3) \right] dt \\
& + \epsilon^2 \left[\int_0^T -(u_3^\epsilon, \partial_t v_3) + (\mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon, v_3) + (\nabla_\nu u_3^\epsilon, \nabla_\nu v_3) dt \right] \\
& + \int_0^T -(C^\epsilon, \partial_t \tilde{C}^\epsilon) - (\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon) + \\
& \epsilon K_1 (\partial_1 C^\epsilon, \partial_1 \tilde{C}^\epsilon) - \epsilon K_1 [(\partial_1 C^\epsilon) \tilde{C}]_{\Gamma_G} + K_2 (\partial_2 C^\epsilon, \partial_2 \tilde{C}^\epsilon) + K_3 (\partial_3 C^\epsilon, \partial_3 \tilde{C}^\epsilon) dt = \\
& = -(\mathbf{u}_{0H}^\epsilon, \mathbf{v}_H^\epsilon(0)) - \epsilon^2 (u_{03}^\epsilon, v_3^\epsilon(0)) - (C^\epsilon(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{21}$$

for all $\mathbf{v} = (\mathbf{v}_H, v_3) \in H^1(0, T; \mathbf{V})$ with $\mathbf{v}(T) = 0$ and $\tilde{C}$ such that $\tilde{C} \in H^1(0, T, H^1)$ and $\tilde{C}(T) = 0$.

To pass to the limit in the terms that do not include pollution in the anisotropic equation has already been worked out in the original article. What we need to work on is how to legitimately pass to the limit with the terms including the new function C^ϵ . To do this our first key tool will be the energy inequality. Once we have a priori estimates for the functions in the linear terms, we can pass to the limit with those without particular problems; the challenging part will be to prove convergence for the $(\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon)$ term, here we will need a stronger result than just the weak convergence of the present functions in the product.

5 Proof of the main theorem

5.1 Energy inequality

Calculating the energy inequality for the merged system we arrive to

$$\begin{aligned}
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{ \|\nabla_\nu \mathbf{u}_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2 \} d\tau + \\
& \int_0^t \{ \epsilon K_1 \|\partial_1 C^\epsilon\|_{L^2}^2 + K_2 \|\partial_2 C^\epsilon\|_{L^2}^2 + K_3 \|\partial_3 C^\epsilon\|_{L^2}^2 \} d\tau \leq \\
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C^\epsilon) d\tau + \int_0^t \epsilon K_1 \langle \partial_1 C^\epsilon, C^\epsilon \rangle_{\Gamma_G} d\tau
\end{aligned} \tag{22}$$

In order to use the energy inequality to extract a priori estimates, we need to know that the right hand side of the inequality is bounded. Since the S source term is assumed to be as smooth as we need it to be, the only term we need to work further is $\int_0^t \epsilon K_1 \langle \partial_1 C^\epsilon, C^\epsilon \rangle_{\Gamma_G} d\tau$.

We can estimate this term in the following way.

$$\begin{aligned} \int_0^t \epsilon K_1 \langle \partial_1 C^\epsilon, C^\epsilon \rangle_{\Gamma_G} d\tau &\leq K_1 \int_0^t \sqrt{\epsilon} \|\partial_1 C^\epsilon\|_{L^2(\Gamma_G)} \sqrt{\epsilon} \|C^\epsilon\|_{L^2(\Gamma_G)} \leq \\ \frac{1}{\delta} K_1 \frac{\epsilon}{2} \int_0^t \|\partial_1 C^\epsilon\|_{L^2(\Gamma_G)}^2 + \delta K_1 \int_0^t \frac{\epsilon}{2} \|C^\epsilon\|_{L^2(\Gamma_G)}^2 &\leq \\ B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \|C^\epsilon\|_{W^{1,2}(\Omega)}^2, \end{aligned} \quad (23)$$

where c_T is the constant provided by the trace theorem, and $B.T.$ denotes the boundary term which is bounded because of the a priori assumptions made on boundary conditions. Now we can carry on with the estimate by using the $W^{1,2}$ norm definition, exploit the fact that we are on a bounded domain and then applying the Sobolev inequality (for $n = 3, p = 2, p^* = 6$, denoting its constant by c_S), so we have

$$\begin{aligned} \int_0^t \epsilon K_1 \langle \partial_1 C^\epsilon, C^\epsilon \rangle_{\Gamma_G} d\tau &\leq \\ B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ \|C^\epsilon\|_{L^2(\Omega)}^2 + \|\nabla C^\epsilon\|_{L^2(\Omega)}^2 \} d\tau &\leq \\ B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ \|C^\epsilon\|_{L^6(\Omega)}^2 + \|\nabla C^\epsilon\|_{L^2(\Omega)}^2 \} d\tau &\leq \\ B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ c_S \|\nabla C^\epsilon\|_{L^2(\Omega)}^2 + \|\nabla C^\epsilon\|_{L^2(\Omega)}^2 \} d\tau = \\ B.T. + \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1) \int_0^t \|\nabla C^\epsilon\|_{L^2(\Omega)}^2 d\tau \end{aligned} \quad (24)$$

Which means that the energy inequality takes the form of

$$\begin{aligned} \frac{1}{2} (\|\mathbf{u}_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{ \|\nabla_\nu \mathbf{u}_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2 \} d\tau + \\ \int_0^t \{ (\epsilon K_1 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_1 C^\epsilon\|_{L^2}^2 + (K_2 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_2 C^\epsilon\|_{L^2}^2 + \\ + (K_3 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_3 C^\epsilon\|_{L^2}^2 \} d\tau \leq \\ \frac{1}{2} (\|\mathbf{u}_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C^\epsilon) d\tau + \frac{1}{\delta} K_1 \frac{\epsilon}{2} \int_0^t \|\partial_1 C^\epsilon\|_{L^2(\Gamma_G)}^2 d\tau \end{aligned} \quad (25)$$

The right hand side of the energy inequality is now apparently bounded, and it is easy to see that the coefficients of the pollution terms are positive, since the δ constant of the generalized Young inequality can be freely chosen in a way such that the requirements $\epsilon K_1(1 - \delta \frac{1}{2} c_T(c_S + 1)) > 0$, $(K_2 - \delta \frac{\epsilon}{2} K_1 c_T(c_S + 1)) > 0$, $(K_3 - \delta \frac{\epsilon}{2} K_1 c_T(c_S + 1)) > 0$ are all satisfied.

5.2 A priori estimates and weak convergence

Now we can extract a priori estimates from the final form of the energy inequality. We have

- $L_t^\infty L_x^2$ boundedness for $u_1^\epsilon, u_2^\epsilon, \epsilon u_3^\epsilon$,
- $L_t^2 H_x^1$ boundedness for $u_1^\epsilon, u_2^\epsilon, \epsilon u_3^\epsilon$,
- $L_t^\infty L_x^2$ boundedness for C^ϵ ,
- $L_t^2 L_x^2$ boundedness for $\sqrt{\epsilon} \partial_1 C^\epsilon, \partial_2 C^\epsilon, \partial_3 C^\epsilon$.

Because of the boundedness we have weak convergence, i.e. there are subsequences still denoted by the same way, for which we have $C^\epsilon \rightharpoonup C$ in $L_t^\infty L_x^2$, $\partial_2 C^\epsilon \rightharpoonup \partial_2 C$ and $\partial_3 C^\epsilon \rightharpoonup \partial_3 C$ in $L_t^2 L_x^2$, and $\sqrt{\epsilon} \partial_1 C^\epsilon \rightharpoonup e$ for some limit element e in $L_t^2 L_x^2$.

5.3 Passing to the limit

Passing to the limit is done without problems for the terms that do not include the pollution function, since that had been worked out before. In the linear terms the weak convergence guaranteed by the a priori estimates will be sufficient. In the nonlinear term we need an additional result that provides a weak convergence of the product of functions for which we only have weak convergence separately.

5.3.1 Linear terms

For the linear terms we can directly apply the weak convergence results of the previous section.

- The convergence of the $(C^\epsilon, \frac{\partial \tilde{C}}{\partial t})$ term is easy to see, since we have $C^\epsilon \rightharpoonup C$ in $L_t^\infty L_x^2$.
- For the next term we have $\epsilon K_1 \int_0^T (\partial_1 C^\epsilon, \partial_1 \tilde{C}) = \sqrt{\epsilon} K_1 \int_0^T (\sqrt{\epsilon} \partial_1 C^\epsilon, \partial_1 \tilde{C})$, which goes to 0 as $\epsilon \rightarrow 0$ because of the Cauchy-Schwartz inequality, since we have $\sqrt{\epsilon} \partial_1 C^\epsilon$ bounded in $L_t^2 L_x^2$, and $\tilde{C}$ is a test function.
- As we have seen before, we have $\partial_2 C^\epsilon \rightharpoonup \partial_2 C$ in $L_t^2 L_x^2$, which by definition provides that

$$\int_0^T (\partial_2 C^\epsilon, f) dt \rightarrow \int_0^T (\partial_2 C, f) dt \quad \forall f \in L_t^2 L_x^2.$$

(iv) Analogously,

$$\int_0^T (\partial_3 C^\epsilon, f) dt \rightarrow \int_0^T (\partial_3 C, f) dt \quad \forall f \in L_t^2 L_x^2.$$

(v) The $\epsilon K_1 \int_0^T [(\partial_1 C^\epsilon) \tilde{C}]_{\Gamma_G} dt$ line integral vanishes as $\epsilon \rightarrow 0$ since by the Cauchy-Schwartz equation we can estimate the integral by two bounded terms ($\partial_1 C^\epsilon$ was assumed to be finite in norm on the lower boundary).

5.3.2 Nonlinear term

We need some sort of compactness theorem to handle $(\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C})$.

Remark. As a matter of fact, we actually have three terms here, namely $(u_i^\epsilon C^\epsilon, \partial_i \tilde{C})$ for $i = 1, 2, 3$, and for the values 1, 2 of i the weak convergence of the $u_i^\epsilon C^\epsilon$ product is given by the fact that, as it is proved in the reference article, we actually have strong convergence for the horizontal velocities, and because of the a priori estimate from the energy bound we know we have weak convergence for the C^ϵ term. But this argument does not really solve the challenge caused by nonlinearity because it does not hold for u_3 , so we still need an additional compactness theorem as mentioned before.

In this case the Aubin-Lions lemma can not be applied since it would require for C^ϵ to be in a compactly embedded space such as $L^2 H^1$, which is not the case here because we only know boundedness results for $\sqrt{\epsilon} \partial_1 C$, but not for $\partial_1 C$.

We will show that the following lemma from [Lions, 1996] is applicable in our case.

Lemma 1. Let g_n, h_n converge weakly to g, h respectively in $L^{p_1}(0, T; L^{p_2}(\Omega))$, $L^{q_1}(0, T; L^{q_2}(\Omega))$ where $1 \leq p_1, p_2 \leq +\infty$,

$$\frac{1}{p_1} + \frac{1}{q_1} = \frac{1}{p_2} + \frac{1}{q_2} = 1.$$

We assume in addition that

- $\frac{\partial g_n}{\partial t}$ is bounded in $L^1(0, T; W^{-m, 1}(\Omega))$ for some $m \geq 0$ independent of n .
- $\|h^n - h^n(\cdot + \xi, t)\|_{L^{q_1}(0, T; L^{q_2}(\Omega))} \rightarrow 0$ as $|\xi| \rightarrow 0$, uniformly in n .

Then, $g^n h^n$ converges to gh (in the sense of distributions on $\Omega \times (0, T)$).

What we will show in the following is that for the functions u_i^ϵ and C^ϵ the assumptions of Lemma 1 are satisfied, which means that $u_i^\epsilon C^\epsilon \rightharpoonup u_i C$ holds.

Lemma 2. We have $u_i^\epsilon C^\epsilon \rightharpoonup u_i C$.

Proof. We have seen from the a priori estimates that $C^\epsilon \rightharpoonup C$ in $L_t^\infty L_x^2$, and we know from the reference article that $u_i^\epsilon \rightharpoonup u_i$ in $L_t^2 L_x^2$.

Let us choose $q_1 = q_2 = p_1 = p_2 = 2$. This is fine since we are on a finite domain, so $C^\epsilon \in L^\infty L^2$ implies $C^\epsilon \in L^2 L^2$.

- **Bound for the time derivative.**

$$\frac{\partial C^\epsilon}{\partial t} = -u^\epsilon \nabla C^\epsilon + \underbrace{\sqrt{\epsilon} K_1 \partial_1 \underbrace{\partial_1 \sqrt{\epsilon} C^\epsilon}_{L^2}}_{W^{-1,2}} + \underbrace{K_2 \partial_2 \underbrace{\partial_2 C^\epsilon}_{L^2}}_{W^{-1,2}} + \underbrace{K_3 \partial_3 \underbrace{\partial_3 C^\epsilon}_{L^2}}_{W^{-1,2}} - S$$

Since the S source term was assumed to be regular, we see that the second part of the right hand side is in $W^{-1,2}$. On the other hand, the first part is in $W^{-1,1}$, because we have

$$u^\epsilon \nabla C^\epsilon = \underbrace{\nabla \cdot \underbrace{(u^\epsilon C^\epsilon)_{L^1}}_{W^{-1,1}}}_{W^{-1,1}} - \underbrace{\nabla \cdot (u^\epsilon)}_0 C.$$

Eventually we have $\frac{\partial C}{\partial t} \in L^1 W^{-1,1}$.

- **Equicontinuity.** We need to show that $\|u_i^n - u_i^n(\cdot + \xi, t)\|_{L^2 L^2} \rightarrow 0$ as $\xi \rightarrow 0$. Since in the time domain the condition naturally holds, we will focus on the space part of the proof.

First we show that for a function f in the function space C_0^∞ the condition holds.

$$\begin{aligned} \|f(x + \xi) - f(x)\|_{L^2} &= \left(\int_{\Omega} |f(x + \xi) - f(x)|^2 dx \right)^{1/2} \leq \\ &\left(\int_{\Omega} \sup_x |f(x + \xi) - f(x)|^2 dx \right)^{1/2} = \|f(x + \xi) - f(x)\|_{L^\infty} \cdot |\Omega|^{1/2}. \end{aligned}$$

So we have

$$\lim_{\xi \rightarrow 0} \|f(x + \xi) - f(x)\|_{L^2} \leq |\Omega|^{1/2} \cdot \lim_{\xi \rightarrow 0} \left(\sup_x |f(x + \xi) - f(x)| \right) = 0,$$

since $f \in C_0^\infty$.

As a second step we show that the condition holds for any function $f \in L^2$. Here we exploit the fact that C_0^∞ is dense in the L^p function space. By definition this means that $\exists \varphi_n \in C_0^\infty(\Omega)$ such that $\varphi_n \rightarrow f$ in $L^p(\Omega)$. With this we have

$$\begin{aligned} \|f(x + \xi) - f(x)\|_{L^2} &= \\ \|f(x + \xi) - \varphi_n(x + \xi) + \varphi_n(x + \xi) - \varphi_n(x) + \varphi_n(x) - f(x)\|_{L^2} &\leq \\ \|f(x + \xi) - \varphi_n(x + \xi)\|_{L^2} + \|\varphi_n(x + \xi) - \varphi_n(x)\|_{L^2} + \|\varphi_n(x) - f(x)\|_{L^2} \end{aligned}$$


The first and third term goes to 0 as $\xi \rightarrow 0$, since $\varphi_n \rightarrow f$ in $L^p(\Omega)$. On the other hand in the first part of the proof we have shown exactly that the second term goes to 0. Which proves that $\|u_i^n - u_i^n(\cdot + \xi, t)\|_{L^2 L^2} \rightarrow 0$ as $\xi \rightarrow 0$. Eventually this means that we can apply the lemma with $h^n = u_i^\epsilon, g^n = C^\epsilon$, which proves the statement of the lemma.

□

6 A generalized model

We now will present a generalization of the previous model by applying the following modifications.

- Drop the assumption about the coordinate system being fixed onto the main wind direction, i.e. drop the ϵ from K_x , —it comes from a specifically chosen coordinate system.
- Adapt the model for coastal conditions.

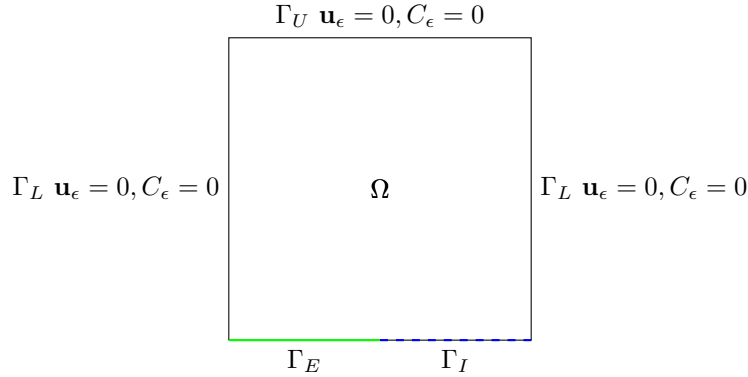

On the ground layer we naturally separate the boundary into two different parts in this model, $\Gamma_G = \Gamma_E \cup \Gamma_I$; Γ_E denoting the part of the boundary above the ground, and Γ_I denoting the section that is interacting with the sea. The separation is a sort of expansion or generalization of the ground boundary since while above ground parts it is reasonable to use no-slip conditions, above the ocean it is natural to assume that the wind has an interaction with the waves, there is no such rigidness as in the ground case. For this cause we will include θ , which represents the wind traction on the ocean surface. Analogously, we need to make similar changes for the pollution concentration as well, above sea territory it is not natural to use $\partial_3 C = 0$, since the particles can now sink under the boundary level.

On Γ_E we have the same boundary conditions as in the inland case, $\mathbf{u}^\epsilon = 0, \partial_3 C^\epsilon = 0, \partial_2 C^\epsilon = 0, \partial_1 C^\epsilon$ bounded. On Γ_I on the other hand we have

$\nu_3 \partial_3 \mathbf{u}_H^\epsilon = \theta_H, u_3 = 0$ with assuming a finite wind energy, i.e. the functions θ being in $L^2(0, T; H^{-1/2}(\Gamma_I))$. For the pollution concentration we use the same approach and assume that the functions $\partial_1 C^\epsilon, \partial_2 C^\epsilon, \partial_3 C^\epsilon$ are equal to some sufficiently regular, ϵ -independent functions defined on the respective boundaries. More accurately, we assume that we have a $C_{\Gamma_G}^\epsilon = \sigma$ sediment function on the lower boundary, where $\sigma \in L^2(0, T; H^1(\Gamma_G))$. If the partial derivatives of σ are denoted by $\sigma_1, \sigma_2, \sigma_3$, we have $\partial_1 C^\epsilon = \sigma_1$ on Γ_G , and $\partial_2 C^\epsilon = \sigma_2, \partial_3 C^\epsilon = \sigma_3$ on Γ_I . (Of course σ has to be a function such that we have σ_2 and σ_3 equal to zero on the Γ_E part).

We will discuss in more details the parts that are different from the inland case.

6.1 Weak formulation

The weak formulation of the coastal generalized systems will be different from the original inland version in that *a)* it will contain a boundary term for the wind because of the air - ocean interface, *b)* it will contain boundary terms for $\partial_2 C, \partial_3 C$, which had been assumed to be zero before on the ground, and finally *c)* here the $\partial_1 C$ terms are present that were absent in the previous version because of the ϵ used in K_x . For enhanced straightforwardness we have underlined the terms which are new or different in this version.

6.1.1 Anisotropic system

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H^\epsilon, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H^\epsilon, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H^\epsilon, (\mathbf{u}^\epsilon \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H^\epsilon), \mathbf{v}_H) dt \\
& + \epsilon \beta \left[\int_0^T (u_3^\epsilon, v_1) - (u_1^\epsilon, v_3) \right] dt \\
& + \epsilon^2 \left[\int_0^T -(u_3^\epsilon, \partial_t v_3) + (\mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon, v_3) + (\nabla_\nu u_3^\epsilon, \nabla_\nu v_3) dt \right] \\
& + \int_0^T -(C^\epsilon, \partial_t \tilde{C}^\epsilon) - (\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon) + \underline{K_1}(\partial_1 C^\epsilon, \partial_1 \tilde{C}^\epsilon) - \underline{K_1} \langle \sigma_1, \tilde{C} \rangle_{\Gamma_G} + \\
& \underline{K_2}(\partial_2 C^\epsilon, \partial_2 \tilde{C}^\epsilon) - \underline{K_2} \langle \sigma_2, \tilde{C} \rangle_{\Gamma_I} + \underline{K_3}(\partial_3 C^\epsilon, \partial_3 \tilde{C}^\epsilon) - \underline{K_3} \langle \sigma_3, \tilde{C} \rangle_{\Gamma_I} dt = \\
& = -(\mathbf{u}_{0H}^\epsilon, \mathbf{v}_H^\epsilon(0)) - \underline{\int_0^T \langle \theta_H, \mathbf{v}_H \rangle_{\Gamma_I}} - \epsilon^2(u_{03}^\epsilon, v_3^\epsilon(0)) - (C^\epsilon(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{26}$$

6.1.2 Hydrostatic system

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H, (\mathbf{u} \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H), \mathbf{v}_H) dt \\
& + \int_0^T -(C, \partial_t \tilde{C}) - (\mathbf{u} C, \nabla \tilde{C}) + \underline{K_1(\partial_1 C, \partial_1 \tilde{C}) - K_1 \langle \sigma_1, \tilde{C} \rangle_{\Gamma_G}} + \\
& K_2(\partial_2 C, \partial_2 \tilde{C}) - \underline{K_2 \langle \sigma_2, \tilde{C} \rangle_{\Gamma_I}} + K_3(\partial_3 C, \partial_3 \tilde{C}) - \underline{K_3 \langle \sigma_3, \tilde{C} \rangle_{\Gamma_I}} dt = \\
& = -(\mathbf{u}_{0H}, \mathbf{v}_H(0)) - \underline{\int_0^T \langle \theta_H, \mathbf{v}_H \rangle_{\Gamma_I}} - (C(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{27}$$

6.2 Energy inequality

The analogous terms that we saw in the weak formulation will be different in the energy inequality as well. The coastal, generalized version of the energy inequality will be the following. The different parts are again noted by underline.

$$\begin{aligned}
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{\|\nabla_\nu \mathbf{u}_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2\} d\tau + \\
& \int_0^t \{\underline{K_1 \|\partial_1 C^\epsilon\|_{L^2}^2} + K_2 \|\partial_2 C^\epsilon\|_{L^2}^2 + K_3 \|\partial_3 C^\epsilon\|_{L^2}^2\} d\tau \leq \\
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C^\epsilon) d\tau - \underline{\int_0^t \langle \theta_H, \mathbf{u}_H \rangle_{\Gamma_I}} \\
& \int_0^t \underline{K_1 \langle \sigma_1, \sigma \rangle_{\Gamma_G}} + \underline{K_2 \langle \sigma_2, \sigma \rangle_{\Gamma_I}} + \underline{K_3 \langle \sigma_3, \sigma \rangle_{\Gamma_I}} d\tau
\end{aligned} \tag{28}$$

Since the σ boundary function is in $L^2 H^1$, we have boundedness on the right hand side. Even though by first look the inequality seems a bit different from the inland one, it practically provides the same estimates and weak convergences. We have

- $L_t^\infty L_x^2$ boundedness for $u_1^\epsilon, u_2^\epsilon, \epsilon u_3^\epsilon$,
- $L_t^2 H_x^1$ boundedness for $u_1^\epsilon, u_2^\epsilon, \epsilon u_3^\epsilon$,
- $L_t^\infty L_x^2$ boundedness for C^ϵ ,
- $L_t^2 L_x^2$ boundedness for $\partial_1 C^\epsilon, \partial_2 C^\epsilon, \partial_3 C^\epsilon$, basically we have $L_t^2 H_x^1$ boundedness for C^ϵ .

6.3 Passing to the limit

As for passing to the limit as $\epsilon \rightarrow 0$ in the coastal version of the anisotropic system seen above, there is no mathematical novelty compared to the inland case.

7 Convection dominated coastal model

Note that the previous version of the energy inequality (seaside scenario) has a sort of stability with respect to reintroducing ϵ as a factor in K_x . By this robustness we mean that if we have ϵK_1 again instead of K_1 in the inequality, it holds the same, and provides the same boundedness results as we saw in the inland case. This means that we can either use this "informationless", fix coordinate system, but we can also go back to using a coordinate system matching the downwind direction and assuming that the flow is convection dominated (i.e. diffusion is negligible).

We can see that the differences are little compared to the coastal model without ϵ -diffusion.

We use a regular σ function on the Γ_G boundary, with $C^\epsilon = \sigma \in H^1(\Gamma_G)$.

Even if we used the inequality introduced in the inland case for estimating the $\partial_1 C^\epsilon$ boundary term, we would end up needing the $\frac{1}{8} K_1 \frac{\epsilon}{2} \int_0^t \|\partial_1 C^\epsilon\|_{L^2(\Gamma_G)}^2$ term to be bounded, which means that even considering that result, we still need H^1 regularity for σ on the lower boundary, and the presence of the ϵ term does not help to relax it.

7.1 Anisotropic system

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H^\epsilon, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H^\epsilon, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H^\epsilon, (\mathbf{u}^\epsilon \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H^\epsilon), \mathbf{v}_H) dt \\
& + \epsilon \beta \left[\int_0^T (u_3^\epsilon, v_1) - (u_1^\epsilon, v_3) \right] dt \\
& + \epsilon^2 \left[\int_0^T -(u_3^\epsilon, \partial_t v_3) + (\mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon, v_3) + (\nabla_\nu u_3^\epsilon, \nabla_\nu v_3) dt \right] \\
& + \int_0^T -(C^\epsilon, \partial_t \tilde{C}^\epsilon) - (\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon) + \epsilon K_1 (\partial_1 C^\epsilon, \partial_1 \tilde{C}^\epsilon) - \epsilon K_1 \langle \sigma_1, \tilde{C} \rangle_{\Gamma_G} + \\
& K_2 (\partial_2 C^\epsilon, \partial_2 \tilde{C}^\epsilon) - K_2 \langle \sigma_2, \tilde{C} \rangle_{\Gamma_I} + K_3 (\partial_3 C^\epsilon, \partial_3 \tilde{C}^\epsilon) - K_3 \langle \sigma_3, \tilde{C} \rangle_{\Gamma_I} dt = \\
& = -(\mathbf{u}_{0H}^\epsilon, \mathbf{v}_H(0)) - \int_0^T \langle \theta_H, \mathbf{v}_H \rangle_{\Gamma_I} - \epsilon^2 (u_{03}^\epsilon, v_3^\epsilon(0)) - (C^\epsilon(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{29}$$

7.2 Hydrostatic system

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H, (\mathbf{u} \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H), \mathbf{v}_H) dt \\
& + \int_0^T -(C, \partial_t \tilde{C}) - (\mathbf{u} C, \nabla \tilde{C}) + \\
& K_2 (\partial_2 C, \partial_2 \tilde{C}) - K_2 \langle \sigma_2, \tilde{C} \rangle_{\Gamma_I} + K_3 (\partial_3 C, \partial_3 \tilde{C}) - K_3 \langle \sigma_3, \tilde{C} \rangle_{\Gamma_I} dt = \\
& = -(\mathbf{u}_{0H}, \mathbf{v}_H(0)) - \int_0^T \langle \theta_H, \mathbf{v}_H \rangle_{\Gamma_I} - (C(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{30}$$

7.3 Energy inequality

$$\begin{aligned}
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{\|\nabla_\nu \mathbf{u}_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2\} d\tau + \\
& \int_0^t \{\epsilon K_1 \|\partial_1 C^\epsilon\|_{L^2}^2 + K_2 \|\partial_2 C^\epsilon\|_{L^2}^2 + K_3 \|\partial_3 C^\epsilon\|_{L^2}^2\} d\tau \leq \\
& \frac{1}{2} (\|\mathbf{u}_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C^\epsilon) d\tau - \int_0^t \langle \theta_H, \mathbf{u}_H \rangle_{\Gamma_I} \\
& \int_0^t \epsilon K_1 \langle \sigma_1, \sigma \rangle_{\Gamma_G} + K_2 \langle \sigma_2, \sigma \rangle_{\Gamma_I} + K_3 \langle \sigma_3, \sigma \rangle_{\Gamma_I} d\tau
\end{aligned} \tag{31}$$

Since σ is in H^1 on Γ_G , the right hand side is bounded, and we derive the same boundedness results as we had in the inland case. Passing to the limit works as before.

8 Future work, concluding remarks

Remark. In the paper of [Temam and Ziane, 2005], on p35 it is suggested that the domain we work on has the form of $p_0 < p < p_1$, because for the thin portion of air between the earth and the isobar $p = p_1$, another specific simplified model would be necessary. So a way to make the model more precise is to cut the domain at an isobar a little bit off the physical ground. This would of course radically change the boundary conditions we use for the functions, because it would take away the advantage of having a wall-like, natural and physical boundary condition for our domain to support it. If we are positively above the ground, $\partial_3 C = 0$ would represent a strange reflective layer.

- We mentioned a small ambiguity regarding where to cut the lower boundary of the domain we are considering. Other authors use the $z = 0$ simplified ground level cut as well, such as [Hosseini, 2013].
- Use more sophisticated ground-level boundary conditions instead of $\partial_3 C = 0$ in the inland case, for example [Monin, 1959].
- We could consider multiple contaminants.
- It is possible and not unreasonable in certain cases to use isotropic diffusivities $K_x = K_y = K_z \neq 0$.
- It is an option to simply take $K_x = 0$, without using ϵ as suggested by [Hosseini, 2013], the advection/convection effect being dominant compared to diffusion. It could also be possible to assume that $K_x = K_z$ due to symmetry in some cases(p16).
- Use the flux C equals const on the laterals. How does that change the weak formulation, the existence, and the EIQ.

- Try to apply the

$$\frac{\partial \Phi}{\partial t} + u \frac{\partial \Phi}{\partial n} = 0$$

radiation condition derived by the wave equation on the lateral boundary, where u is the current in the direction to the normal to the boundary. This is suggested articles such as [Marsaleix et al., 2006] and [Wang et al., 2014].

9 Todo

- (i) Work on the mathematical description on the source term S and give examples.
- (ii) Appendix
- (iii) $\mathbf{u}C$ product to be in L^2 in the hydrostatic weak formulation - spaces.
- (iv) Officially the Trace theorem can be used with $\|u\|_{W^{1,p}(U)}$ if u is in that space, but in the inland case, C^ϵ is not a priori in the H^1 in space, we need to say something here when we pass from the line integral to the main domain.
- (v) Add a section that covers issues regarding how physically meaningful the model is. *(a)* What is our exact concept of what happens to the pollutants inside the domain, i.e. what is the expectation for example after a relatively long time. *(b)* Physical features such as we can not at the same time use ϵ in the inland domain where there is significant friction for the wind and not use ϵ at the ocean surface. *(c)* The aspect ratio going to zero makes sense on the global level, where we have 11 kms versus 40 000 kms. But it seems like we need an extra argument when we say we are dealing with a local model. In a local model the horizontal dimension is no longer as big, compared to the vertical. The point is, in case we are considering for example a city, it is a very local domain with Cartesian coordinates, however we want to incorporate a feature that seems only legitimate when on a global scale.
- (vi) : Think about this: Note that the [Temam and Ziane, 2005] article works with the beta plane approximation, which is appropriate for example for midlatitude regional studies, where the curvature is minimal. If you take this as the idea, and consider a local part of the ocean, you will most likely not have genuine physical lateral boundaries for the ocean water in the model, such as would be a coast for example. But what he uses as a lateral boundary condition is: the salt flux is 0, which represents a wall-like boundary. What would be natural is salt flux = const, but it would of make things mathematically more complicated on the other hand. See, balance: physically meaningful, mathematically manageable.

A The existence of weak solution of the hydrostatic system of the polluted atmosphere

What we have showed is that the weak solutions of the anisotropic system converge to the weak solution of the hydrostatic system of the polluted atmosphere. Without having an existence theorem for the hydrostatic equations, the weak solutions of the anisotropic system could just be converging to the empty set. The reference article for unpolluted fluids states only the convergence part as well, but the existence is implicitly assumed since it is a well-known result.

To complete our work of expanding the original result to the case of a fluid containing a certain pollution concentration, we also need an existence theorem.

The idea is that the polluted atmosphere can be viewed as the air-analogous version of the salty sea water in terms of the equations that represent it. In both cases we have a fluid which can be seen approximately as a homogenous incompressible fluid carrying some other particles in a significant concentration, the basis fluid motion is well described by the incompressible Navier-Stokes equations, and the additional concentration is described by an advection-diffusion equation.

The paper of [Temam and Ziane, 2005] provides an existence result for an arbitrary time interval $[0, t_1]$ for the system describing the salty ocean water with temperature. The structure of the equations themselves describing the system is essentially the same, if we drop the equation describing the temperature, we basically arrive to the same system that describes the polluted atmosphere.

The differences are the following:

- a) Boundary conditions: On every boundary they use a zero flux for the salinity, $\frac{\partial S}{\partial \mathbf{n}_s} = 0$. This coincides with our lower boundary conditions, but on the lateral boundary we use a fix constant.
- b) Spatial weak formulation: In the [Temam and Ziane, 2005] article they use spatial weak formulation.
- c) The K_1 term: In the pollution equation the K_1 term is missing in our version of the concentration equation.
- d) Concentration mean integral: for the salinity they use a mean integral equals zero condition after a shift, which is not a big constriction, since the shift can be reversed. (This is something that we use as well anyway, since we subtracted the background flow when discussing the boundary conditions.)
- e) The K_C term: In order to have coercivity, in the weak formulation for the concentration part we multiply by $K_C \tilde{C}$, not just by $\tilde{C}$.

Remember that the weak formulation that we need an existence theorem for is

$$\begin{aligned}
& \int_0^T -(\mathbf{u}_H, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H, (\mathbf{u} \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H), \mathbf{v}_H) dt \\
& + \int_0^T -(C, \partial_t \tilde{C}) - (\mathbf{u} C, \nabla \tilde{C}) + K_2(\partial_2 C, \partial_2 \tilde{C}) + K_3(\partial_3 C, \partial_3 \tilde{C}) dt = \\
& = -(\mathbf{u}_{0H}, \mathbf{v}_H(0)) - (C(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt
\end{aligned} \tag{32}$$

While the equation the article provides the result for has the form of

$$(\frac{d}{dt} U, \tilde{U})_H + a(U, \tilde{U}) + b(U, U, \tilde{U}) + e(U, \tilde{U}) = l(\tilde{U}),$$

where the definition of the above terms can be found on page 21 in the article of [Temam and Ziane, 2005]. In this version the weak formulation is only performed in space, and the space derivatives are not in every case translated to the text function when it is possible.

What the above equation means for example for the salinity is

$$\begin{aligned}
& \int_{\mathcal{M}} K_S \frac{d}{dt} S \cdot \tilde{S} d\mathcal{M} + K_S \int_{\mathcal{M}} (\mu_s \nabla S \nabla \tilde{S} + \nu_s \frac{\partial S}{\partial z} \frac{\partial \tilde{S}}{\partial z}) d\mathcal{M} + \\
& + K_S \int_{\mathcal{M}} (v \nabla S + w \frac{\partial S}{\partial z}) \tilde{S} d\mathcal{M} = K_S \int_{\mathcal{M}} F_S \tilde{S} d\mathcal{M} + (K_S \mu_s \frac{\partial S}{\partial x} \tilde{S})_{\Gamma_i}.
\end{aligned}$$

Step 1. The first step is to redefine the norms so that they match our system.

$$((U, \tilde{U})) = ((v, \tilde{v}))_1 + K_C((C, \tilde{C}))_2$$

$$((v, \tilde{v}))_1 = \int_{\Omega} \nabla_\nu v \nabla_\nu \tilde{v} d\omega$$

$$((C, \tilde{C}))_2 = \int_{\Omega} K_2 \partial_2 C \partial_2 \tilde{C} + K_3 \partial_3 C \partial_3 \tilde{C} d\omega$$

$$\|U\| = ((U, U))^{1/2}$$

$$(U, \tilde{U})_H = \int_{\Omega} -v \tilde{v} - K_C C \tilde{C} d\omega$$

$$|U|_H = |(U, U)_H|^{1/2}$$

Step 2. With this, now the weak formulation of the polluted atmosphere can be brought to an analogous format as seen above:

$$\int_0^T (U, \frac{d}{dt} \tilde{U})_H dt + \int_0^T a(U, \tilde{U}) + b(U, U, \tilde{U}) + e(U, \tilde{U}) dt =$$

$$= \int_0^T l(\tilde{U})dt + \int_0^T \int_{\Omega} U_0 \tilde{U}(0) d\omega dt$$

with

$$a(U, \tilde{U}) = a_1(U, \tilde{U}) + K_C a_2(U, \tilde{U})$$

$$a_1(U, \tilde{U}) = \int_{\Omega} \nabla_{\nu} v \nabla_{\nu} \tilde{v} d\omega$$

$$a_2(U, \tilde{U}) = \int_{\Omega} K_2 \partial_2 C \partial_2 \tilde{C} + K_3 \partial_3 C \partial_3 \tilde{C} d\omega$$

$$b = b_1 + K_2 b_2$$

$$b_1(U, \tilde{U}, U^{\#}) = - \int_{\Omega} (v \tilde{v} + v \tilde{w}) \nabla v^{\#}$$

$$b_2(U, \tilde{U}, U^{\#}) = - \int_{\Omega} (v \tilde{C} + w \tilde{C}) \nabla C^{\#}$$

$$e(U, \tilde{U}) = \int_{\Omega} b(v) \tilde{v} d\omega$$

$$l(\tilde{U}) = - \int_{\Omega} S \tilde{C} d\omega.$$

Here the term $b(\mathbf{u}_H) = \alpha(-u_2, u_1)$ represents the cross product, and we use the fact that the vertical velocity w can be expressed as $w = w(v)$ because the divergence of the three dimensional velocity is zero.

Step 3. The next step is to check if the properties that yield the foundation of the proof still hold. It is easy to see that a is trilinear continuous, the coercivity of a is also trivial, moreover e is bilinear continuous and $e(U, U) = 0$.

What changes slightly is the proof of the results available on the expression b since the space derivatives in our case are applied on the test function.

- To prove the bound for $U, \tilde{U} \in V, U^{\#} \in V_{(2)}$, in this case we can not use the L_{∞} bound on the third term, since we would eventually arrive to $\|C^{\#}\|_{H^3}$, which means that we can not close the bound that way. We can use

$$\begin{aligned} \int_{\Omega} w \tilde{C} \nabla C^{\#} d\omega &\leq c \|w\|_{L^2} \|\tilde{C}\|_{L^4} \|\nabla C^{\#}\|_{L^4} \leq \\ &\leq c \|U\| \|\tilde{U}\| \|\nabla C^{\#}\|_{H^1} \leq c \|U\| \|\tilde{U}\| \|U^{\#}\|_{V^{(2)}} \end{aligned}$$

- For $U, U^\# \in V, \tilde{U} \in V_{(2)}$ we use

$$\int_{\Omega} w \tilde{C} \nabla C^\# d\omega \leq c \|\tilde{C}\|_{L^\infty} \|w\|_{L^2} \|\nabla C^\#\|_{L^2} \leq c \|U\| \|\tilde{U}\|_{V_{(2)}} \|U^\#\|,$$

exploiting the fact that in $n = 3$ we have $H^2 \subset L^\infty$.

- The proof of $b(U, \tilde{U}, U^\#) = -b(U, U^\#, \tilde{U})$ can be derived similarly as we derived

$$\int_0^T (\mathbf{u} \nabla C, \tilde{C}) dt = - \int_0^T (-\mathbf{u} C, \nabla \tilde{C}) dt,$$

using the integration by parts formula, observing that the boundary terms disappear, and finally using the fact that the divergence of the velocity.

- The establishment of the improvement of the first bound works the same way as in the original article, except that we don't apply the switch provided by the result of the previous point, i.e. we perform the estimate

$$\int_{\Omega} w \tilde{C} \nabla C^\# d\omega \leq \|w\|_{L^2} \|\tilde{C}\|_{L^3} \|\nabla C^\#\|_{L^6},$$

and after this everything follows the same way.

This means that all the basic results and properties of the functions a, b, e still hold in this version.

Step 4. The operator form of the equation.

The change in this part of the proof is that we will need an additional operator Z for the time derivative part. In the original version $\frac{dU}{dt}$ was used as an operator acting on $\tilde{U}$, the result defined to be their inner product. In this version, because we apply the weak formulation in space-time, the time derivation is applied on the test function, so we will need the following operator Z :

$$\langle Z(U), \tilde{U} \rangle = \int_0^T (U, \frac{d\tilde{U}}{dt})_H dt.$$

With this the operator form of the equation is

$$ZU + AU + B(U, U) + EU = l + U_0,$$

where all the other operators are understood in a way that the time integration is included. Since in this version we work with both time-space and only-space (stationary case) weak formulation as well, it is always assumed that we use the one according to the context.

Step 5. The stationary case works as it worked in the original article, since the operator form of the new version is created in a way that ZU and U_0 contains all the time-related part, after dropping it we arrive to the same equation as in the original case.

Step 6. Time-dependent case. Once again we remind ourselves that in this case, since in our version we performed the weak formulation also in time, we can not use notations such as $\frac{d\tilde{U}_k}{dt}$ for the operator that will result in the inner product of the function's time derivative and the test function. Instead, we can use $Z\tilde{U}_k$, which as an operator acting on $\tilde{U}$ yields the inner product of the function and the time derivative of the test function.

Even though the time derivative here is applied on the test function, it does not make sense to write something like $\tilde{U}^n - \tilde{U}^{n-1}$, since $\tilde{U}$ is the test function. But using the time difference for the solution function actually works, and the original article arrives from the same start to a weak formulation where the derivative is applied on the test function.

Basically with the time discretization form of

$$\frac{1}{\Delta t}(U^n - U^{n-1}, \tilde{U})_H + a(U^n, U^n) + b(U^n, U^n, \tilde{U}) + e(U^n, \tilde{U}) = l(\tilde{U}),$$

we arrive to the expression

$$\begin{aligned} - \int_0^T (U, \tilde{U})_H \psi' dt + \int_0^T [a(U, \tilde{U}) + b(U, U, \tilde{U}) + e(U, \tilde{U})] \psi dt = \\ = (U_0, \tilde{U}) \psi(0) + \int_0^T l(\tilde{U}) \psi dt, \end{aligned}$$

where ψ is a function defined on $[0, T]$, used to create the time-dependent version $\tilde{U}\psi$ of the test function. If we rename this product simply to be $\tilde{U}$, the time-dependent test function, we arrive exactly to,

$$\begin{aligned} - \int_0^T (U, \partial_t \tilde{U})_H dt + \int_0^T [a(U, \tilde{U}) + b(U, U, \tilde{U}) + e(U, \tilde{U})] dt = \\ = (U_0, \tilde{U}(0)) + \int_0^T l(\tilde{U}) dt, \end{aligned}$$

which is what we needed.

B The regularity of the source term

The term S represents the sources and sinks of the pollutant in the atmosphere i.e. its emission, removal from the atmosphere by dry and wet deposition, and chemical reactions. So far we always assumed that this source term is simply "regular enough", i.e. is in $L_t^2 L_x^2$ to perform the computations we needed. In this section we introduce functions that represent a pollution source reasonably well.

- a) One approach is to use the Dirac delta to represent a pollutant released instantaneously from an elevated point source of strength Q located at (x^*, y^*, z^*) . In this case the source term is given by $S(x, y, z) = Q\delta(x - x^*)\delta(y - y^*)\delta(z - z^*)$, for example [Goyal and Kumar, 2011] uses the delta distribution to grasp the pollution source (in a steady state model, no time dependence is involved). When trying to describe the 'infinite - zero' nature of a boundary condition or a source, the Dirac delta can be a natural choice, but since it is not a function, by definition it is not in L^2 .
- b) Another option is, as described in [Zhuk et al., 2016], is to use what is called a parametrized nascent delta function, i.e. a smooth function which converges to the delta distribution. Let us consider a gas plume with intensity I originating at emission coordinates $\mathbf{x}^*$ beginning at time t^* . At the beginning we assume zero concentration. An abrupt gas emission is modeled by a source term represented as a product of an approximate delta function $\delta_\kappa(\mathbf{x} - \mathbf{x}^*)$ (centered at $\mathbf{x}^*$ with a constant parameter κ) and a Heaviside function s (switching from 0 to I at time t^* .) In fact, this source term models the continuous emission of the gas at constant rate and fixed location. Basically $s(t; t^*)$ is a function which activates the source, namely $s(t; t^*) := IH(t - t^*)$ where $H(\cdot)$ is the Heaviside step function and $0 \leq t^* \leq T$. We arrive to the complete source term model of the form $s(t; t^*)\delta_\kappa(\mathbf{x} - \mathbf{x}_s)$. The shape of the source is given by the function δ_κ , which can be defined in several different ways using the many different pulses that approximate the delta function (choosing only those however that are physically meaningful in our case, for example its values are nonnegative), e.g.

- i) the Gaussian pulse: $\delta_\kappa(\mathbf{x} - \mathbf{x}_s) = C\kappa^{-1}e^{-\frac{(\mathbf{x} - \mathbf{x}_s)^2}{\kappa^2}}$,
- ii) the unit impulse: $\delta_\kappa(\mathbf{x} - \mathbf{x}_s) = \kappa/2, |(\mathbf{x} - \mathbf{x}_s)| < 1/\kappa$,
- iii) the Lorentzian pulse: $\delta_\kappa(\mathbf{x} - \mathbf{x}_s) = \kappa/(1 + \pi^2\kappa^2(\mathbf{x} - \mathbf{x}_s)^2)$.

The Gaussian and Lorentzian version of the source term is continuous and bounded on Ω , it is actually in L^∞ in space (and in L^2 as a consequence), while it is easy to see that the piecewise constant unit pulse is in L^2 as well. Since the time dependence of this source is described by the Heaviside function, the time norm is also finite.

References

- [Adams and Fournier, 2003] Adams, R. A. and Fournier, J. J. (2003). *Sobolev spaces*, volume 140. Academic press.
- [Ali et al., 1998] Ali, I., Kalla, S., and Khajah, H. (1998). A partial differential equation related to a problem in atmospheric pollution. *Mathematical and computer modelling*, 28(12):1–6.

- [Anderson and Wendt, 1995] Anderson, J. D. and Wendt, J. (1995). *Computational fluid dynamics*, volume 206. Springer.
- [Andria et al., 2000] Andria, G., Lay-Ekuakille, A., and Notarnicola, M. (2000). Mathematical models for atmospheric and industrial pollutant prediction. In *XVI IMEKO World Congress, Vienna, Austria*.
- [Arya, 2001] Arya, P. S. (2001). *Introduction to micrometeorology*, volume 79. Elsevier.
- [Azérad and Guillén, 2001] Azérad, P. and Guillén, F. (2001). Mathematical justification of the hydrostatic approximation in the primitive equations of geophysical fluid dynamics. *SIAM Journal on Mathematical Analysis*, 33(4):847–859.
- [Goyal and Kumar, 2011] Goyal, P. and Kumar, A. (2011). Mathematical modeling of air pollutants: An application to indian urban city. In *Air Quality Models and Applications*. InTech.
- [Hosseini, 2013] Hosseini, B. (2013). Dispersion of pollutants in the atmosphere: a numerical study. Master’s thesis, Simon Fraser University.
- [Kathirgamanathan et al., 2002] Kathirgamanathan, P., McKibbin, R., and McLachlan, R. (2002). Source term estimation of pollution from an instantaneous point source.
- [Lions, 1996] Lions, P.-L. (1996). *Mathematical Topics in Fluid Mechanics: Volume 2: Compressible Models*, volume 2. Oxford University Press on Demand.
- [Marsaleix et al., 2006] Marsaleix, P., Auclair, F., and Estournel, C. (2006). Considerations on open boundary conditions for regional and coastal ocean models. *Journal of Atmospheric and Oceanic Technology*, 23(11):1604–1613.
- [Monin, 1959] Monin, A. (1959). On the boundary condition on the earth surface for diffusing pollution. In *Advances in Geophysics*, volume 6, pages 435–436. Elsevier.
- [Pedlosky, 2013] Pedlosky, J. (2013). *Geophysical fluid dynamics*. Springer Science & Business Media.
- [Prodanova et al., 2008] Prodanova, M., Perez, J. L., Syrakov, D., San Jose, R., Ganev, K., Miloshev, N., and Roglev, S. (2008). Application of mathematical models to simulate an extreme air pollution episode in the bulgarian city of stara zagora. *Applied Mathematical Modelling*, 32(8):1607–1619.
- [Temam and Ziane, 2005] Temam, R. and Ziane, M. (2005). Some mathematical problems in geophysical fluid dynamics. *Handbook of mathematical fluid dynamics*, 3:535–658.

- [Wang et al., 2014] Wang, Q., Zhou, W., Wang, D., and Dong, D. (2014). Ocean model open boundary conditions with volume, heat and salinity conservation constraints. *Advances in Atmospheric Sciences*, 31(1):188–196.
- [Yeh and Huang, 1975] Yeh, G.-T. and Huang, C.-H. (1975). Three-dimensional air pollutant modeling in the lower atmosphere. *Boundary-Layer Meteorology*, 9(4):381–390.
- [Zhuk et al., 2016] Zhuk, S., Tchakian, T. T., Moore, S., Ordóñez-Hurtado, R., and Shorten, R. (2016). On source-term parameter estimation for linear advection-diffusion equations with uncertain coefficients. *SIAM Journal on Scientific Computing*, 38(4):A2334–A2356.