

# Weak solution of the merged mathematical equations of the polluted atmosphere

February 7, 2018

## **Abstract**

Abstract

**Keywords:** Navier-Stokes equations, shallow domains, pollution evolution equation, hydrostatic approximation.

# Contents

|           |                                                                                |           |
|-----------|--------------------------------------------------------------------------------|-----------|
| <b>1</b>  | <b>Introduction</b>                                                            | <b>4</b>  |
| <b>2</b>  | <b>Equations describing the polluted atmosphere</b>                            | <b>4</b>  |
| <b>3</b>  | <b>Rescaling</b>                                                               | <b>4</b>  |
| 3.1       | Rescaling due to shallow domain . . . . .                                      | 4         |
| 3.2       | Rescaling due to special choice of coordinate system . . . . .                 | 5         |
| 3.3       | Rescaled merged equations - Anisotropic Navier-Stokes plus pollution . . . . . | 5         |
| <b>4</b>  | <b>Boundary conditions</b>                                                     | <b>6</b>  |
| <b>5</b>  | <b>Hydrostatic Navier-Stokes plus pollution</b>                                | <b>7</b>  |
| <b>6</b>  | <b>Main theorem</b>                                                            | <b>8</b>  |
| <b>7</b>  | <b>Weak formulation</b>                                                        | <b>8</b>  |
| 7.1       | Weak formulation of the anisotropic system . . . . .                           | 8         |
| 7.2       | Weak formulation of the hydrostatic system . . . . .                           | 9         |
| <b>8</b>  | <b>Energy inequality and a priori estimates</b>                                | <b>9</b>  |
| 8.1       | Energy inequality . . . . .                                                    | 9         |
| 8.2       | A priori estimates and weak convergence . . . . .                              | 10        |
| <b>9</b>  | <b>Passing to the limit</b>                                                    | <b>11</b> |
| 9.1       | Linear terms . . . . .                                                         | 11        |
| 9.2       | Nonlinear term . . . . .                                                       | 11        |
| <b>10</b> | <b>Future work</b>                                                             | <b>12</b> |
| <b>11</b> | <b>TODO</b>                                                                    | <b>13</b> |

# 1 Introduction

We investigate existence of a weak solution for the merged motion-pollution atmosphere model. At this point the functions we work with are  $\mathbf{v} = (\mathbf{v}_H, v_3)$ , and  $C$ , representing velocity and concentration, respectively (we are not considering other variables such as water vapor quantity or temperature).

We underline the fact that this work is for the case of **inland** scenario.

Contaminants emitted into the atmosphere are transported by the wind, turbulent behaviour results in mixing and dispersion, gravity acts to deposit containment on the ground.

## 2 Equations describing the polluted atmosphere

The first step is to choose a coordinate system, set the domain we start with and an appropriate set of equations describing both atmosphere motions and the effect of pollution. The set of equations, the choice of the locally acceptable Cartesian coordinate system we are using for the velocity terms are similar to those suggested by the [Azérad and Guillén, 2001] article, we ignore large scale effects such as the curvature of the Earth. For describing the effect of pollution we use a continuity equation written in Cartesian coordinates for the concentration.

The coordinate system we choose to work with is local, we neglect curvature and work with Cartesian coordinates which is chosen to be adjusted to the downwind direction, ie.  $z$  is the vertical direction, while  $x$  is the downwind,  $y$  is the crosswind direction.

The original domain:

$$\Omega_\epsilon = \tag{1}$$

The equations describing the atmosphere are the incompressible Navier-Stokes:

$$\partial_t \mathbf{v} + (\mathbf{v} \cdot \nabla) \mathbf{v} - \Delta_\nu \mathbf{v} + \nabla q + 2\mathbf{w} \times \mathbf{v} = \mathbf{g} \text{ in } \Omega_\epsilon \times (0, T) \tag{2}$$

$$\nabla \cdot \mathbf{v} = 0 \text{ in } \Omega_\epsilon \times (0, T) \tag{3}$$

dispersion of pollutants is commonly modeled by convection / advection - diffusion equation. The diffusion-reaction equation describing the pollutant chemicals in the air:

$$\partial_t C + \mathbf{v} \cdot \nabla C = K_x \frac{\partial^2 C}{\partial x^2} + K_y \frac{\partial^2 C}{\partial y^2} + K_z \frac{\partial^2 C}{\partial z^2} + S \tag{4}$$

## 3 Rescaling

### 3.1 Rescaling due to shallow domain

$$x = x_1, y = x_2, z = \epsilon x_3$$

$$\begin{aligned}
v_1 &= u_1^\epsilon, v_2 = u_2^\epsilon, v_3 = \epsilon u_3^\epsilon, p = p^\epsilon \\
\nu_x &= \nu_1, \nu_y = \nu_2, \nu_z = \epsilon^2 \nu_3 \\
\tau_i^\epsilon &= \epsilon \theta_i \\
K_z &= \epsilon^2 K_3
\end{aligned}$$

So we have a new domain

$$\Omega =$$

### 3.2 Rescaling due to special choice of coordinate system

Here we exploit the fact that we chose the coordinate system in a way so that the  $x$  axis matches the downwind direction. In this case we use an additional scaling equation, which is different in nature from the previous ones in the sense that it is not derived from the shallowness of the domain but rather suggested by the fact that in the downwind direction it is natural to assume that the diffusion is negligible compared to downwind transport, ie.

$$|v_1 \partial_x C| \gg \left| K_x \frac{\partial^2 C}{\partial x_1^2} \right| \quad (5)$$

which leads us to using

$$K_x = \epsilon K_1$$

Putting this condition and the previously described rescaling terms together to the original equations, we arrive to the merged anisotropic equations of the polluted atmosphere above inland surface.

### 3.3 Rescaled merged equations - Anisotropic Navier-Stokes plus pollution

$$\partial_t u_1^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_1^\epsilon - \Delta_\nu u_1^\epsilon - \alpha u_2^\epsilon + \epsilon \beta u_3^\epsilon + \partial_1 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (6)$$

$$\partial_t u_2^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_2^\epsilon - \Delta_\nu u_2^\epsilon + \alpha u_1^\epsilon + \partial_2 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (7)$$

$$\epsilon^2 \{ \partial_t u_3^\epsilon + \mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon - \Delta_\nu u_3^\epsilon \} - \epsilon \beta u_1^\epsilon + \partial_3 p^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (8)$$

$$\nabla \cdot \mathbf{u}^\epsilon = 0 \text{ in } \Omega \times (0, T) \quad (9)$$


$$\mathbf{u}^\epsilon = 0 \text{ on } \Gamma \times (0, T) \quad (10)$$

$$\mathbf{u}^\epsilon(\cdot, t=0) = \mathbf{u}_0, C^\epsilon(\cdot, t=0) = C_0^\epsilon \text{ in } \Omega \quad (11)$$


$$\partial_t C^\epsilon + \mathbf{u}^\epsilon \cdot \nabla C^\epsilon = \epsilon K_1 \frac{\partial^2 C^\epsilon}{\partial x_1^2} + K_2 \frac{\partial^2 C^\epsilon}{\partial x_2^2} + K_3 \frac{\partial^2 C^\epsilon}{\partial x_3^2} + S \quad (12)$$

## 4 Boundary conditions

It is vital to choose boundary conditions for the pollution concentration that are physically as accurate as possible and at the same time not unnecessarily complicated.

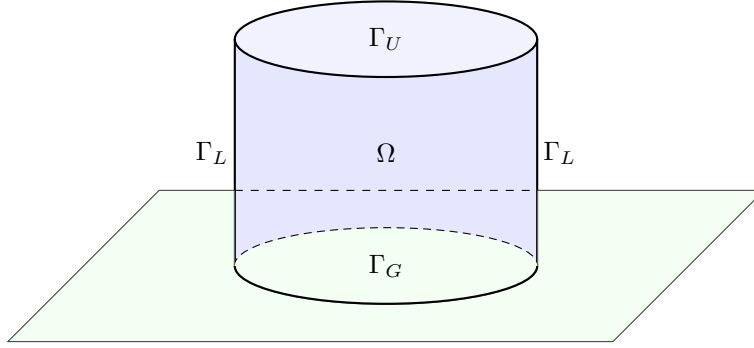

The boundary division of the  $\partial\Omega$ : the upper boundary of the  $\Omega$  domain is denoted by  $\Gamma_U$ , the lateral boundary is  $\Gamma_L$ , and the lower boundary of the domain is  $\Gamma_G$ . As we mentioned before, the case we are investigating is that of inland domains  $\Omega$ , ie the case of landscapes and cities with no significant nearby water surface. This is very important since the boundary conditions for both wind velocity and pollution concentration in the air are different depending whether we are above solid ground or water surface. The boundary conditions we choose to use in the inland scenario are the following, shown in a cross-section.

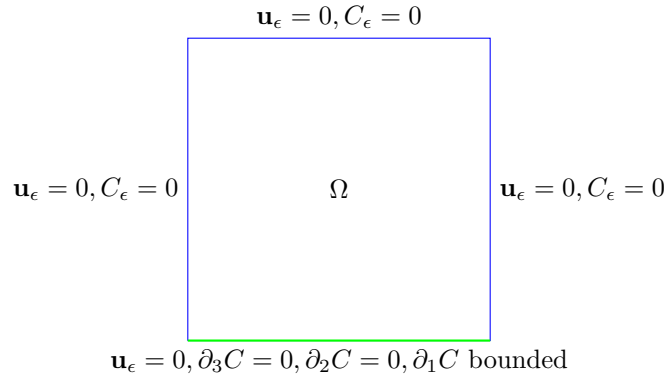

An explanation of the boundary conditions:

- The upper boundary of the domain we are considering is chosen to be at the isobar representing the planetary boundary layer ([Arya, 2001]), on this  $p = p_0$  pressure level the upper boundary of the local domain is

denoted by  $\Gamma_U$ . On  $\Gamma_U$  we use  $\mathbf{u}_H = 0, u_3 = 0, C(x, y, z) = 0$  boundary conditions.

- On both sides the lateral boundary of the rectangle shaped  $\Omega$  domain is given by  $\Gamma_L$ . Here we use the same boundary conditions as on the upper level, ie. we have  $\mathbf{u}_H = 0, u_3 = 0, C(x, y, z) = 0$ .

**Remark.** *If we wanted to use  $C(x, y, z) = c$  with some  $c$  constant value, we could make a change of variables distracting that background flow and arrive back to the same mathematical problem with  $C$  being zero.*

- On the  $z = 0$  ground level we have  $u_H = 0, u_3 = 0$  boundary conditions for the air velocity. This is the mathematical way of expressing no-slip boundary conditions for the horizontal wind speed and the impervious nature of the ground with respect to the wind. As for the concentration, the way we can choose ground level boundary conditions is the following. Firstly, we assume that the pollution is not absorbed by the ground, so we use  $\partial_3 C = 0$  on  $\Gamma_G$  (see also for example [Yeh and Huang, 1975]). For the horizontal partial derivatives of the pollution, we can separate downwind and crosswind direction boundary conditions. In the crosswind direction we use  $\partial_2 C = 0$  while in the downwind (stronger) direction our assumption is more relaxed, we only assume that  $\partial_1 C$  is finite in the boundary norm.

**Remark.** *In the paper of [Temam and Ziane, 2005], on p35 it is suggested that the domain we work on has the form of  $p_0 < p < p_1$ , because for the thin portion of air between the earth and the isobar  $p = p_1$ , another specific simplified model would be necessary. So a way to make the model more precise is to cut the domain at an isobar a little bit off the physical ground. This would of course radically change the boundary conditions we use for the functions, because it would take away the advantage of having a wall-like, natural and physical boundary condition for our domain to support it. If we are positively above the ground,  $\partial_3 C = 0$  would represent a strange reflective layer.*

## 5 Hydrostatic Navier-Stokes plus pollution

$$\partial_t u_1 + \mathbf{u} \cdot \nabla u_1 - \Delta_\nu u_1 - \alpha u_2 + \partial_1 p = 0 \text{ in } \Omega \times (0, T) \quad (13)$$

$$\partial_t u_2 + \mathbf{u} \cdot \nabla u_2 - \Delta_\nu u_2 - \alpha u_1 + \partial_2 p = 0 \text{ in } \Omega \times (0, T) \quad (14)$$

$$\partial_3 p = 0 \text{ in } \Omega \times (0, T) \quad (15)$$

$$\nabla \cdot \mathbf{u} = 0 \text{ in } \Omega \times (0, T) \quad (16)$$

$$u_1 = u_2 = u_3 n_3 = 0 \text{ on } \Gamma \times (0, T) \quad (17)$$

$$u_i(\cdot, t = 0) = u_{0i}, C(\cdot, t = 0) = C_0 \text{ in } \Omega, i = 1, 2 \quad (18)$$

$$\partial_t C + \mathbf{u} \cdot \nabla C = K_2 \frac{\partial^2 C}{\partial x_2^2} + K_3 \frac{\partial^2 C}{\partial x_3^2} + S \quad (19)$$

## 6 Main theorem

- The article of [Azérad and Guillén, 2001] proved an existence theorem for weak solution of the equations describing the atmosphere without pollution.

**Theorem 1.** *Let  $\mathbf{u}_0 \in L^2(\Omega)^3$ , with  $\nabla \cdot \mathbf{u}_0 = 0, \mathbf{u}_0 \cdot \mathbf{n} = 0$  on  $\partial\Omega$ , and  $\theta_1, \theta_2 \in L^2(0, T; H^{\ell-1/2}(\Gamma_s))$ ; there exists a weak solution  $\mathbf{u}$  of the hydrostatic Navier-Stokes equations as the aspect ratio  $\epsilon$  tends to 0.*

- The task we want to do is to extend this result in the sense that it becomes valid to the merged set of equations as well,  $\mathbf{s} = (\mathbf{u}, C)$ .

## 7 Weak formulation

Weak formulation of the merged equations in both the anisotropic and hydrostatic case.

### 7.1 Weak formulation of the anisotropic system

$$\begin{aligned} & \int_0^T -(\mathbf{u}_H^\epsilon, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H^\epsilon, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H^\epsilon, (\mathbf{u}^\epsilon \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H^\epsilon), \mathbf{v}_H) dt \\ & + \epsilon \beta \left[ \int_0^T (u_3^\epsilon, v_1) - (u_1^\epsilon, v_3) \right] dt \\ & + \epsilon^2 \left[ \int_0^T -(u_3^\epsilon, \partial_t v_3) + (\mathbf{u}^\epsilon \cdot \nabla u_3^\epsilon, v_3) + (\nabla_\nu u_3^\epsilon, \nabla_\nu v_3) dt \right] \\ & + \int_0^T -(C^\epsilon, \partial_t \tilde{C}^\epsilon) - (\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon) + \\ & \epsilon K_1 (\partial_1 C^\epsilon, \partial_1 \tilde{C}^\epsilon) - \epsilon K_1 [(\partial_1 C^\epsilon) \tilde{C}^\epsilon]_{\Gamma_G} + K_2 (\partial_2 C^\epsilon, \partial_2 \tilde{C}^\epsilon) + K_3 (\partial_3 C^\epsilon, \partial_3 \tilde{C}^\epsilon) dt = \\ & = -(\mathbf{u}_{0H}^\epsilon, \mathbf{v}_H^\epsilon(0)) - \epsilon^2 (u_{03}^\epsilon, v_3^\epsilon(0)) - (C^\epsilon(0), \tilde{C}^\epsilon(0)) + \int_0^T (S, \tilde{C}^\epsilon) dt \end{aligned} \quad (20)$$

To pass to the limit in the terms that do not include pollution in the anisotropic equation has already been worked out in the [Azérad and Guillén, 2001] article. What we need to work on is how to legitimately pass to the limit with the  $C$  terms. To do this we firstly will use the key tool of the previously mentioned

article, the energy inequality. Once we have a priori estimates for the functions in the linear terms, we can pass to the limit with those without particular problems; the challenging part will be to prove convergence for the  $(\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C}^\epsilon)$  term, here we will need a stronger result than just the weak convergence of the present functions in the product.

## 7.2 Weak formulation of the hydrostatic system

Add specific assumptions on the test functions.

$$\begin{aligned} & \int_0^T -(\mathbf{u}_H, \partial_t \mathbf{v}_H) + (\nabla_\nu \mathbf{u}_H, \nabla_\nu \mathbf{v}_H) - (\mathbf{u}_H, (\mathbf{u} \cdot \nabla) \mathbf{v}_H) + (b(\mathbf{u}_H), \mathbf{v}_H) dt \\ & + \int_0^T -(C, \partial_t \tilde{C}) - (\mathbf{u} C, \nabla \tilde{C}) + K_2(\partial_2 C, \partial_2 \tilde{C}) + K_3(\partial_3 C, \partial_3 \tilde{C}) dt = \\ & = -(\mathbf{u}_{0H}, \mathbf{v}_H(0)) - (C(0), \tilde{C}(0)) + \int_0^T (S, \tilde{C}) dt \end{aligned} \quad (21)$$

## 8 Energy inequality and a priori estimates

### 8.1 Energy inequality

Calculating the energy inequality for the merged system we arrive to

$$\begin{aligned} & \frac{1}{2} (\|\mathbf{u}_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{ \|\nabla_\nu \mathbf{u}_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2 \} d\tau + \\ & \int_0^t \{ \epsilon K_1 \|\partial_1 C^\epsilon\|_{L^2}^2 + K_2 \|\partial_2 C^\epsilon\|_{L^2}^2 + K_3 \|\partial_3 C^\epsilon\|_{L^2}^2 \} d\tau \leq \\ & \frac{1}{2} (\|\mathbf{u}_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C) d\tau + \int_0^t \epsilon K_1 \langle \partial_1 C, C \rangle_{\Gamma_G} d\tau \end{aligned} \quad (22)$$

In order to use the energy inequality to extract a priori estimates, we need to know that the righthand side of the inequality is bounded. Since the  $S$  source term is assumed to be as smooth as we need it to be, the only term we need to work further is  $\int_0^t \epsilon K_1 \langle \partial_1 C, C \rangle_{\Gamma_G} d\tau$ .

We can estimate this term in the following way.

$$\begin{aligned} & \int_0^t \epsilon K_1 \langle \partial_1 C, C \rangle_{\Gamma_G} d\tau \leq K_1 \int_0^t \sqrt{\epsilon} \|\partial_1 C\|_{L^2(\Gamma_G)} \sqrt{\epsilon} \|C\|_{L^2(\Gamma_G)} d\tau \\ & \frac{1}{\delta} K_1 \frac{\epsilon}{2} \int_0^t \|\partial_1 C\|_{L^2(\Gamma_G)}^2 d\tau + \delta K_1 \int_0^t \frac{\epsilon}{2} \|C\|_{L^2(\Gamma_G)}^2 d\tau \leq \\ & B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \|C\|_{W^{1,2}(\Omega)}^2 d\tau, \end{aligned} \quad (23)$$

where  $c_T$  is the constant provided by the trace theorem, and  $B.T.$  denotes the boundary term which is bounded because of the a priori assumptions made on boundary conditions. Now we can carry on with the estimate by using the  $W^{1,2}$  norm definition, exploit the fact that we are on a bounded domain and then applying the Sobolev inequality (for  $n = 3, p = 2, p^* = 6$ , denoting its constant by  $c_S$ ), so we have

$$\begin{aligned}
& \int_0^t \epsilon K_1 \langle \partial_1 C, C \rangle_{\Gamma_G} d\tau \leq \\
& B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ \|C\|_{L^2(\Omega)}^2 + \|\nabla C\|_{L^2(\Omega)}^2 \} d\tau \leq \\
& B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ \|C\|_{L^6(\Omega)}^2 + \|\nabla C\|_{L^2(\Omega)}^2 \} d\tau \leq \quad (24) \\
& B.T. + \delta \frac{\epsilon}{2} K_1 c_T \int_0^t \{ c_S \|\nabla C\|_{L^2(\Omega)}^2 + \|\nabla C\|_{L^2(\Omega)}^2 \} d\tau = \\
& B.T. + \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1) \int_0^t \|\nabla C\|_{L^2(\Omega)}^2 d\tau
\end{aligned}$$

Which means that the energy inequality takes the form of

$$\begin{aligned}
& \frac{1}{2} (\|u_H^\epsilon(t)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(t)\|_{L^2}^2 + \|C^\epsilon(t)\|_{L^2}^2) + \int_0^t \{ \|\nabla_\nu u_H^\epsilon\|_{L^2}^2 + \epsilon^2 \|\nabla_\nu u_3^\epsilon\|_{L^2}^2 \} d\tau + \\
& \int_0^t \{ (\epsilon K_1 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_1 C^\epsilon\|_{L^2}^2 + (K_2 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_2 C^\epsilon\|_{L^2}^2 + \\
& + (K_3 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) \|\partial_3 C^\epsilon\|_{L^2}^2 \} d\tau \leq \\
& \frac{1}{2} (\|u_H^\epsilon(0)\|_{L^2}^2 + \epsilon^2 \|u_3^\epsilon(0)\|_{L^2}^2 + \|C^\epsilon(0)\|_{L^2}^2) + \int_0^t (S, C) d\tau + \frac{1}{\delta} K_1 \frac{\epsilon}{2} \int_0^t \|\partial_1 C\|_{L^2(\Gamma_G)}^2 d\tau \quad (25)
\end{aligned}$$

The right hand side of the energy inequality is now apparently bounded, and it is easy to see that the coefficients of the pollution terms are positive, since the  $\delta$  constant of the generalized Young inequality can be freely chosen in a way such that the requirements  $\epsilon K_1 (1 - \delta \frac{1}{2} c_T (c_S + 1)) > 0$ ,  $(K_2 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) > 0$ ,  $(K_3 - \delta \frac{\epsilon}{2} K_1 c_T (c_S + 1)) > 0$  are all satisfied.

## 8.2 A priori estimates and weak convergence

Now we can extract a priori estimates from the final form of the energy inequality. We have

- $L_t^\infty L_x^2$  boundedness for  $u_1, u_2, \epsilon u_3$ ,
- $L_t^2 H_x^1$  boundedness for  $u_1, u_2, \epsilon u_3$ ,

- $L_t^\infty L_x^2$  boundedness for  $C$ ,
- $L_t^2 L_x^2$  boundedness for  $\sqrt{\epsilon}\partial_1 C, \partial_2 C, \partial_3 C$ .

Because of the boundedness we have weak convergence, ie. there are subsequences still denoted by the same way, for which we have  $C^\epsilon \rightharpoonup C$  in  $L_t^\infty L_x^2$ ,  $\partial_2 C^\epsilon \rightharpoonup \partial_2 C$  and  $\partial_3 C^\epsilon \rightharpoonup \partial_3 C$  in  $L_t^2 L_x^2$ , and  $\sqrt{\epsilon}\partial_1 C^\epsilon \rightharpoonup e$  for some limit element  $e$  in  $L_t^2 L_x^2$ .

## 9 Passing to the limit

Passing to the limit is done without problems for the terms that do not include pollution term, since that has been proved before in the [Azérad and Guillén, 2001] article. In the linear terms the weak convergence guaranteed by the a priori estimates will be enough. In the nonlinear term we need an additional result that provides a weak convergence of the product of functions for which we only had weak convergence separately.

### 9.1 Linear terms

For the linear terms we can apply the boundedness provided by the a priori estimates and arrive to weak convergence.

The line integral term is bounded because the partial is bounded and  $\tilde{C}$  is smooth.

Other linear terms are ok. 22.01.18 7 p9

### 9.2 Nonlinear term

We need some sort of compactness theorem to handle  $(\mathbf{u}^\epsilon C^\epsilon, \nabla \tilde{C})$ .

**Remark.** *As a matter of fact, we actually have three terms here, namely  $(u_i^\epsilon C^\epsilon, \partial_i \tilde{C})$  for  $i = 1, 2, 3$ , and for the values 1, 2 of  $i$  the weak convergence of the  $u_i^\epsilon C^\epsilon$  product is given by the fact that, as it is proved in the reference article, we actually have strong convergence for the horizontal velocities, and because of the a priori estimate from the energy bound we know we have weak convergence for the  $C^\epsilon$  term. But this argument does not really solve the challenge caused by nonlinearity because it does not hold for  $u_3$ , so we still need an additional compactness theorem as mentioned before.*

In this case the Aubin-Lions lemma can not be applied since it would require for  $C^\epsilon$  to be in a compactly embedded space such as  $L^2 H^1$ , which is not the case here because we only know boundedness results for  $\sqrt{\epsilon}\partial_1 C$ , but not for  $\partial_1 C$ .

We will show that the following lemma from [Lions, 1996] is applicable in our case.

**Lemma 1.** *Let  $g_n, h_n$  converge weakly to  $g, h$  respectively in  $L^{p_1}(0, T; L^{p_2}(\Omega))$ ,  $L^{q_1}(0, T; L^{q_2}(\Omega))$  where  $1 \leq p_1, p_2 \leq +\infty$ ,*

$$\frac{1}{p_1} + \frac{1}{q_1} = \frac{1}{p_2} + \frac{1}{q_2} = 1.$$


*We assume in addition that*

- $\frac{\partial g_n}{\partial t}$  is bounded in  $L^1(0, T; W^{-m,1}(\Omega))$  for some  $m \geq 0$  independent of  $n$ .
- $\|h^n - h^n(\cdot + \xi, t)\|_{L^{q_1}(0, T; L^{q_2}(\Omega))} \rightarrow 0$  as  $|\xi| \rightarrow 0$ , uniformly in  $n$ .

*Then,  $g^n h^n$  converges to  $gh$  (in the sense of distributions on  $\Omega \times (0, T)$ ).*

## 10 Future work

- Use more sophisticated ground-level boundary conditions instead of  $\partial_3 C = 0$  in the inland case, for example [Monin, 1959].
- Making the model physically more precise, accurate, and adapted for near seaside conditions are the following.

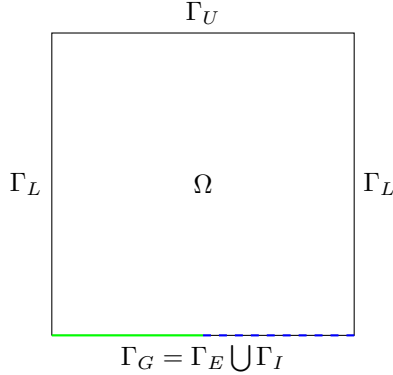

On the ground layer we naturally separate the boundary into two different parts,  $\Gamma_E$  denoting the part of the boundary above the ground, and  $\Gamma_I$  denoting the section that is interacting with the sea. The separation is a sort of expansion or generalization of the ground boundary since while above ground parts it is reasonable to use no-slip conditions, above the ocean it is natural to assume that the wind has an interaction with the waves, there is no such rigidity as in the ground case. For this case we could use  $\nu_3 \frac{\partial \mathbf{u}_H}{\partial x_3} = \theta_H, u_3 = 0$ . For the pollution concentration as well, above sea territory it is not natural to use  $\partial_3 C = 0$ .

## 11 TODO

- 1.) Write down the whole process for the version when we touch the ground and there is no ocean. Specify spaces.
- 2.) When we touch the ground and there is ocean but no eps in the continuity eq
- 3.) Look into the physics books
- 4.) Look into the 2 articles and the idea boundary condition which could be a way for improvement.

## References

- [Ali et al., 1998] Ali, I., Kalla, S., and Khajah, H. (1998). A partial differential equation related to a problem in atmospheric pollution. *Mathematical and computer modelling*, 28(12):1–6.
- [Andria et al., 2000] Andria, G., Lay-Ekuakille, A., and Notarnicola, M. (2000). Mathematical models for atmospheric and industrial pollutant prediction. In *XVI IMEKO World Congress, Vienna, Austria*.
- [Arya, 2001] Arya, P. S. (2001). *Introduction to micrometeorology*, volume 79. Elsevier.
- [Azérad and Guillén, 2001] Azérad, P. and Guillén, F. (2001). Mathematical justification of the hydrostatic approximation in the primitive equations of geophysical fluid dynamics. *SIAM Journal on Mathematical Analysis*, 33(4):847–859.
- [Goyal and Kumar, 2011] Goyal, P. and Kumar, A. (2011). Mathematical modeling of air pollutants: An application to indian urban city. In *Air Quality-Models and Applications*. InTech.
- [Lions, 1996] Lions, P.-L. (1996). *Mathematical Topics in Fluid Mechanics: Volume 2: Compressible Models*, volume 2. Oxford University Press on Demand.
- [Monin, 1959] Monin, A. (1959). On the boundary condition on the earth surface for diffusing pollution. In *Advances in Geophysics*, volume 6, pages 435–436. Elsevier.
- [Prodanova et al., 2008] Prodanova, M., Perez, J. L., Syrakov, D., San Jose, R., Ganev, K., Miloshev, N., and Roglev, S. (2008). Application of mathematical models to simulate an extreme air pollution episode in the bulgarian city of stara zagora. *Applied Mathematical Modelling*, 32(8):1607–1619.
- [Temam and Ziane, 2005] Temam, R. and Ziane, M. (2005). Some mathematical problems in geophysical fluid dynamics. *Handbook of mathematical fluid dynamics*, 3:535–658.

[Yeh and Huang, 1975] Yeh, G.-T. and Huang, C.-H. (1975). Three-dimensional air pollutant modeling in the lower atmosphere. *Boundary-Layer Meteorology*, 9(4):381–390.