

Mouse Interactions

overRect(x, y, width, height)

This function returns True if the mouse is over the rectangle specified. This rectangle does not need to be drawn on the screen. e.g.,

```
drawRect("grey", 100, 200, 200, 100)
if overRect(100, 200, 200, 100):
    drawRect("red", 100, 200, 200, 100)
```



clickOnRect(x, y, width, height)

This function returns True if you click on the rectangle specified. This rectangle does not need to be drawn on the screen. e.g.,

```
count = 0
drawRect("grey", 100, 200, 200, 100)
if clickOnRect(100, 200, 200, 100):
    count = count + 1
    print(count)
```

Combined example. This will act like a button, where you can hover and then press for some effect.

```
drawRect("plum", 300, 400, 120, 60, outline = 3)
if overRect(300, 400, 120, 60):
    drawRect("pink", 300, 400, 120, 60, outline = 3)
if clickOnRect(300, 400, 120, 60):
    page = "game"
drawText("black", "Start", 340, 415)
```

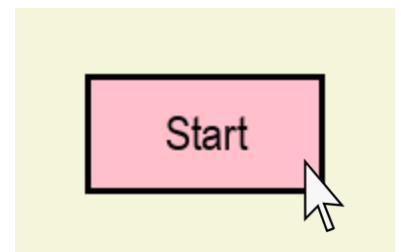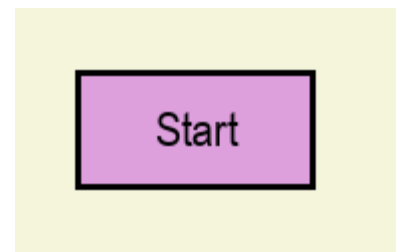

mouseXY()

These functions return the x and y locations of the mouse on the screen. e.g.,

```
print(mouseXY())          # will print mouse like (123, 55)
```

mouseL() / mouseM() / mouseR()

These functions tell you if the left, middle or right buttons are down or not. e.g.,

```
if mouseL():
    print("Left Button down")
```

justClicked(button)

Returns True if a mouse button was pressed during the last frame, False otherwise. This is good for events that only happen once per click, like throwing a basketball or buying something.

button values:

- None: check if any button was pressed
- 0: left button
- 1: middle button
- 2: right button