# Test Run Report




### Test Run Overview

Started 16 Mar 2022, 11:53:39 Ended 16 Mar 2022, 12:11:07

Duration (mm:ss) 17:27.988

### **Test Results Summary**

Passed 0 Failed 6 Skipped 0

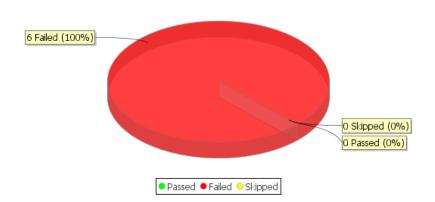

### **Test Case Summary**

plans  PO END to End Execution  API_PO-POAPMATCH-Postpayment.testinstance  API_PO-POAPMATCH-Postpayment.testcase  ASSERTION failed. (result) ProcessingComplete = Validation Failure (target)	<ul><li>failed</li><li>failed</li><li>failed</li><li>failed</li></ul>
Sub-Test Steps failed for iteration 2	
Sub-Test Steps failed for iteration 1	
POtoPOAPMATCHInvamtgreater.testinstance POtoPOAPMATCHInvamtgreater.testcase  TestCase not found for Call. Registry Id: IdentifierImpl{id=5e762c63-0656-4a26-8a25-66df35188869}	<ul><li>failed</li><li>failed</li></ul>
POtoPOAPMATCHInvamtless.testinstance POtoPOAPMATCHInvamtless.testcase  TestCase not found for Call. Registry Id: IdentifierImpl{id=5e762c63-0656-4a26-8a25-66df35188869}	<ul><li>failed</li><li>failed</li></ul>
Purchase Requisition to PostPayment.testinstance Purchase Requisition to PostPayment.testcase  Unknown Page metadata file. Page Name: Payables Batch Header, Namespace Prefix: null	<ul><li>failed</li><li>failed</li></ul>
Unknown Page metadata file. Page Name: Payables Batch Header, Namespace Prefix: null	

• Error doing interaction. Connection Name: QARSF\_Admin, cause: [NoSuchElementException: No elements matched the field locator. Field name: postSession For documentation on this error, please visit: http://seleniumhq.org/exceptions/no\_such\_element.html Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0',

java.version: '1.8.0\_181' Driver info: driver.version: ProvarSeleniumDriver]

org.openqa.selenium.NoSuchElementException: No elements matched the field locator. Field name: postSession

Build info: version: 'unknown', revision: 'unknown', time: 'unknown'	
System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.ver	rsion: '1.8.0_181'
Driver info: driver.version: ProvarSeleniumDriver	
• at com.provar.plugins.forcedotcom.core.ui.ProvarFindByElementLocator.findElement(ProvarFindByElementLocator.java:96)	
• at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)	
at com.sun.proxy.\$Proxy103.getWrappedElement(Unknown Source)	
• at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:50)	
at com.google.common.collect.lterators\$7.transform(lterators.java:750)	
• at com.google.common.collect.TransformedIterator.next(TransformedIterator.java:47)	
• at com.google.common.collect.lterators.addAll(Iterators.java:367)	
• at com.google.common.collect.Lists.newArrayList(Lists.java:165)	
• at com.google.common.collect.Lists.newArrayList(Lists.java:150)	
• at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:571)	
at com.provar.core.testapi.ProvarSeleniumDriver.getAttributes(ProvarSeleniumDriver.java:1192)	
• at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.getWebElementAttributes(SeleniumUiHandler.java:3722)	
• at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performActionInteraction(SeleniumUiHandler.java:4298)	
• at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:2523)	
• at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:5490)	
• at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:2219)	
• at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:5445)	
• at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.perform(SeleniumUiHandler.java:418)	
• at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.delegateToUiHandler(SfConnectionHandler.java:34	6)
• at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.perform(SfConnectionHandler.java:337)	
• at com.provar.core.testexecution.common.java.TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionOperationContextImpl.doConnectionOperationContextImpl.doConnectionOperation(TestExecutionContextImpl.doConnectionContextImpl.doConne	.java:857)
at com.provar.plugins.forcedotcom.core.ui.UiDoAction.execute(UiDoAction.java:130)	
at sun.reflect.GeneratedMethodAccessor85.invoke(Unknown Source)	
<ul> <li>at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</li> </ul>	
at java.lang.reflect.Method.invoke(Method.java:498)	
• at com.provar.core.testexecution.container.java.TestExecutionContainerImpl.invokeTestApi(TestExecutionContainerImpl.java	:754)
• at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestExecutionContainer.doInvokeTestApi(LocalTestApi	ontainerRunner.java:744)
<ul><li>at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.access\$11(LocalTestExecutionContainer.java.LocalTestExecutionContainer.java.LocalTestExecutionContainer.java.localTestExecutionContainer.java</li></ul>	erRunner.java:676)
<ul> <li>at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner</li> <li>\$MessageProcessor.run(LocalTestExecutionContainerRunner.java:1400)</li> </ul>	
One or more Sub-Test Steps failed.	
Sub-Test Steps failed for iteration 1	
RSTK-8669-Inventory Requisition to PO AP Match.testinstance	failed
RSTK-8669-Inventory Requisition to PO AP Match.testcase	failed
• Field not found on the screen. Locator: ProvarFindByElementLocator [by=public org.openqa.selenium.WebElement pageobjects.rstk_lcreq.pOPriceOverride]	
One or more Sub-Test Steps failed.	
Sub-Test Steps failed for iteration 1	
Sub-Test Steps failed for iteration 1	
RSTK-9180-SYDATA-Close PO AP Batch.testinstance	failed
RSTK-9180-SYDATA-Close PO AP Batch.testcase  The workbook path is required	failed

• For documentation on this error, please visit: http://seleniumhq.org/exceptions/no\_such\_element.html

- Sub-Test Steps failed for iteration 1
- Sub-Test Steps failed for iteration 1
- PO END to End Execution
  - API\_PO-POAPMATCH-Postpayment.testinstance

0 11:53:39(00:00.013)

0 11:53:39(00:00.000)

- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\ReadExcelPath.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\POLOADER\Callable\POLoader\_POCreation.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\POLOADER\Callable\SubmittoVendor.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOReceipt.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOAuthorization.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- ⑤ Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOAPMatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATA Detail.testcase
- ① Loading test case. File: D:\provar\PKTEst\Test\Test\Poje\tests\PO\_SYDATA\Callable\SYDATAEditPOAPMatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAClosePOAPBatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Account Payable\Callable\POPaySession.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Account Payable\Callable\PAYTO.testcase

## API\_PO-POAPMATCH-Postpayment.testcase

### Summary

Started 16 Mar 2022, 11:53:39 Ended 16 Mar 2022, 11:56:19

Duration (mm:ss) 02:39.774
Outcome failed

### Output

Salesforce Connect: SFConnection (Test)

0 11:53:39(00:00.169)

① 11:53:48(00:08.900)

- Connecting to Salesforce as QARSF\_Admin
- Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessTolenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- \* Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ▼ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- \* Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

① Successfully connected to Salesforce as QARSF\_Admin

Then

Successium connected to Salestorce as QANSI _Autiliti	
Reading Excel Data	0 11:53:47(00:08.455)
Call ReadExcelPath	0 11:53:48(00:08.724)
ReadExcelPath	0 11:53:48(00:08.725)
Salesforce Connect: SFConnection (Test)	0 11:53:48(00:08.755)
① Connecting to Salesforce as QARSF_Admin	
① Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection	
If: {GetSelectedEnvironment() = "QARSF"}	0 11:53:48(00:08.799)
Then	<b>0</b>
⇔ Set Values: poui	<b>0</b>
Set Values: financial	<b>0</b>
Set Values: posydata1	<b>0</b>
⇔ Set Values: posydata	0
Set Values: poloader	<b>0</b>
Else	0 11:53:48(00:08.864)
If: {GetSelectedEnvironment() = "AutomationOrg"}	0 11:53:48(00:08.879)

Set Values: financial Setting value financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 11:53:48(00:08.934) Set Values: posydata1 Setting value posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx 0 11:53:48(00:08.975) Set Values: posydata Setting value posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 0 11:53:48(00:09.014) Set Values: poloader ① Setting value poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 11:53:48(00:09.192) Set Values: poui Setting value poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: pouipath 0 11:53:48(00:09.270) ① Setting value pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx 0 11:53:48(00:09.403) Set Values: posydatapath1 ① Setting value posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Set Values: finpath 0 11:53:48(00:09.448) ① Setting value finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 11:53:48(00:09.498) Set Values: poloaderpath ① Setting value poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 11:53:48(00:09.561) Set Values: posydatapath ① Setting value posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 1 Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 11:53:49(00:09.626) Read Data for Close PO AP Batch (i) Loading data from Parameter Value Source ... 1: Loading Parameter Value Source row 1: 1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

0 11:53:48(00:08.912)

```
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation_HomeCurr, valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Vendor = PrimitiveValueImpl [ value: a4X5f000000tkbm, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
(i) Loading Parameter Value Source row 2:
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation_ForeignCurr, valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Vendor = PrimitiveValueImpl [ value: a4X5f000000tkbw, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 2 rows from Parameter Value Source.
(i) Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiH8, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 958.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 960.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 2:
1] ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiHN, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 55.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 56.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

    Loading Parameter Value Source row 3:

1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiHD, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
```

```
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 482.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 485.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
Loaded 3 rows from Parameter Value Source.
(i) Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Item = PrimitiveValueImpl [ value: a415f00000IOC4, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 230, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 2:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCJ, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 45.23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 3:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOC9, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 44.23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 4:
1] ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCi, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 303, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 5:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCn, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> UnitPrice = PrimitiveValueImpl [ value: 500, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
```

Loaded 5 rows from Parameter Value Source.

```
1: Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Authorization, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionQTY = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1] ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
       ① ==Column=> Auth = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 Loading Parameter Value Source row 2:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Authorization, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionQTY = PrimitiveValueImpl [ value: 5, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Auth = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       Loaded 2 rows from Parameter Value Source.
       (1) Loading data from Parameter Value Source ...
       (i) Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO AP Match Using Detail, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Hold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       Loaded 1 rows from Parameter Value Source.
       (i) Loading data from Parameter Value Source ...
       Loading Parameter Value Source row 1:
       1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionDetailType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       Loaded 1 rows from Parameter Value Source.
       1 Loading data from Parameter Value Source ...
       1: Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: Close PO AP Batch, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       ① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
       Loaded 1 rows from Parameter Value Source.
                                                                                                                   0 11:53:49(00:10.083)
For Each: {AddPOCreationData}=>POData
  ① Start of iteration 1 of 2.
                                                                                                                   0 11:53:49(00:10 388)
   Iteration 1
                                                                                                                   0 11:53:50(00:11.007)
       Call POLoader_POCreation
                                                                                                                   0 11:53:50(00:11.008)
           POLoader_POCreation
               Salesforce Connect: SFConnection (Test)
                                                                                                                   0 11:53:50(00:11.019)
```

(i) Connecting to Salesforce as QARSF\_Admin

(i) Loading data from Parameter Value Source ...

```
1 Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection
                                                                                               0 11:53:50(00:11.047)
Read Add Both Data
Addition of PO and PO Line
                                                                                               0 11:53:50(00:11.090)
                                                                                               0 11:53:50(00:11.154)
    Add PO Header
                                                                                               0 11:53:50(00:11.193)
       For Each: {List}=>addheader
           i Start of iteration 1 of 1.
            Iteration 1
                                                                                               0 11:53:50(00:11.268)
                Create Object:
                                                                                               0 11:53:50(00:11.269)
               rstk__poloader__c=>addheaderId
                   ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                   Setting fields:
                   i =Field=> rstk__poloader_mode__c = <null>
                   i =Field=> rstk__poloader_vendno__c = a4X5f000000tkbm
                   i =Field=> rstk_poloader_div_c = a8d5f0000004JbG
                   =Field=> rstk__poloader_poagh__c = <null>
                   i =Field=> rstk__poloader_process__c = Ready
                   1 = Field => Name = NP_Automation_HomeCurr
                   PO Loader created successfully. Object Id: a485f000001aKJpAAM, Result Name: addheaderId
                   ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
                   a485f000001aKJpAAM
               SOQL Query: select
               Id,Name,rstk__poloader_pohdr__c,rstk__poloader_process__c
                                                                                               0 11:54:09(00:30.173)
               from rstk__poloader__c where id =
               'a485f000001aKJpAAM'=>poloaderhdrapi
                    1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
                   Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c from rstk_poloader_c where id = 'a485f000001aKJpAAM'
                   ① Query successful. Row Count: 1.
                Set Values: POHDRID
                                                                                               0 11:54:11(00:31.596)
                   (i) Setting value POHDRID to a3w5f000000v35QAAQ
                    Configuration: ValueScope:Test
                   (i) Successfully set POHDRID to a3w5f000000v35QAAQ
           (i) Reached the end of the List.
    Add PO Line
                                                                                               0 11:54:11(00:31.642)
                                                                                               0 11:54:11(00:31.746)
        For Each: {AddLineData}=>poloaderaddline
           (i) Start of iteration 1 of 5.
                                                                                               0 11:54:11(00:31.922)
            Iteration 1
                Create Object: rstk__poloader__c=>addlineId
                                                                                               0 11:54:11(00:31.923)
                   ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                   count: 9
                   (i) Setting fields:
                   i =Field=> rstk__poloader_poitem__c = a415f000000IOC4
                   i =Field=> rstk__poloader_mode__c = Add Line
                   i =Field=> rstk__poloader_unitprice__c = 230
                   i =Field=> rstk__poloader_qtyreq__c = 2
                   ① =Field=> rstk__poloader_pohdr__c = a3w5f000000v35QAAQ
                   i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
                   i =Field=> rstk__poloader_process__c = Ready
                   i =Field=> Name = NP_Automation
                   i =Field=> rstk_poloader_schedrcptdte_c = 2022-03-16
```

```
PO Loader created successfully. Object Id: a485f000001aKJuAAM, Result Name: addlineId
        Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKJuAAM
    SOQL Query: select
    ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKJuAAM'=>addlineapi
        (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKJuAAM'
        (i) Query successful. Row Count: 1.
                                                                                     0 11:54:18(00:38.968)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPvYAAU
        Configuration: ValueScope:Test
        ① Successfully set POLINEID to a445f000000pPvYAAU
    While: {addlineapi.rstk__poloader_process__c =
                                                                                     0 11:54:18(00:39.024)
    "Ready"}
        (i) Looping ending because the condition is not TRUE.
(i) Start of iteration 2 of 5.
                                                                                     0 11:54:18(00:39.093)
Iteration 2
    Create Object: rstk__poloader__c=>addlineId
                                                                                     0 11:54:18(00:39.093)
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        (i) Setting fields:
        (i) =Field=> rstk__poloader_poitem__c = a415f000000IOCJ
        1 =Field=> rstk__poloader_mode__c = Add Line
        i =Field=> rstk__poloader_unitprice__c = 45.23
        i =Field=> rstk__poloader_qtyreq__c = 1
        1 =Field=> rstk__poloader_pohdr__c = a3w5f000000v35QAAQ
        i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        ① =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        i =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKJzAAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKJzAAM
    SOQL Query: select
    ld,Name,rstk__poloader_pohdr__c,rstk__poloader_process__c,rstk__poloader_pakyncgroup__c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKJzAAM'=>addlineapi
        1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKJzAAM'
        (i) Query successful. Row Count: 1.
                                                                                     0 11:54:26(00:47.060)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPvdAAE
        Configuration: ValueScope:Test
        (i) Successfully set POLINEID to a445f000000pPvdAAE
    While: {addlineapi.rstk__poloader_process__c =
                                                                                     0 11:54:26(00:47.093)
        (i) Looping ending because the condition is not TRUE.
① Start of iteration 3 of 5.
```

```
Iteration 3
                                                                                   0 11:54:26(00:47.162)
                                                                                   0 11:54:26(00:47.163)
    Create Object: rstk__poloader__c=>addlineId
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        (i) Setting fields:
        i =Field=> rstk__poloader_poitem__c = a415f000000IOC9
        =Field=> rstk__poloader_mode__c = Add Line
        (i) =Field=> rstk__poloader_unitprice__c = 44.23
        i =Field=> rstk__poloader_qtyreq__c = 3
        1 =Field=> rstk__poloader_pohdr__c = a3w5f000000v35QAAQ
        =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        (i) =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        i =Field=> rstk_poloader_schedrcptdte_c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKK4AAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKK4AAM
    SOQL Query: select
    Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_pohdr_c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKK4AAM'=>addlineapi
        (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
        ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c
        from rstk__poloader__c where id = 'a485f000001aKK4AAM'
        (i) Query successful. Row Count: 1.
                                                                                   0 11:54:34(00:55.068)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPviAAE
        Configuration: ValueScope:Test
        (i) Successfully set POLINEID to a445f000000pPviAAE
    While: {addlineapi.rstk__poloader_process__c =
                                                                                   0 11:54:34(00:55.549)
    "Ready"}
        (i) Looping ending because the condition is not TRUE.
(i) Start of iteration 4 of 5.
Iteration 4
                                                                                   0 11:54:35(00:55.613)
                                                                                   0 11:54:35(00:55.613)
      Create Object: rstk__poloader__c=>addlineId
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        Setting fields:
        (i) =Field=> rstk__poloader_poitem__c = a415f000000lOCi
        i =Field=> rstk poloader mode c = Add Line
        i =Field=> rstk_poloader_unitprice_c = 303
        i =Field=> rstk__poloader_qtyreq__c = 2
        i =Field=> rstk__poloader_pohdr__c = a3w5f000000v35QAAQ
        i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        i =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        (i) =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKK9AAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKK9AAM
```

```
SOQL Query: select
            ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyngcgroup_c,rstk
            from rstk__poloader__c where id =
            'a485f000001aKK9AAM'=>addlineapi
                1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
               Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKK9AAM'
                i Query successful. Row Count: 1.
                                                                                         0 11:54:42(01:02.870)
            Set Values: POLINEID
                (i) Setting value POLINEID to a445f000000pPvnAAE
                Configuration: ValueScope:Test
                (i) Successfully set POLINEID to a445f000000pPvnAAE
            While: {addlineapi.rstk__poloader_process__c =
                                                                                         0 11:54:42(01:02.994)
            "Ready"}
                (i) Looping ending because the condition is not TRUE.
        (i) Start of iteration 5 of 5.
        Iteration 5
                                                                                         0 11:54:42(01:03.316)
                                                                                         0 11:54:42(01:03.316)
            Create Object: rstk__poloader__c=>addlineId
                ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                count: 9
                (i) Setting fields:
                (i) =Field=> rstk__poloader_poitem__c = a415f000000lOCn
                ① =Field=> rstk__poloader_mode__c = Add Line
                i =Field=> rstk_poloader_unitprice_c = 500
                i =Field=> rstk__poloader_qtyreq__c = 2
                (i) =Field=> rstk__poloader_pohdr__c = a3w5f000000v35QAAQ
                1 =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
                i =Field=> rstk__poloader_process__c = Ready
                i =Field=> Name = NP_Automation
                i =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
                PO Loader created successfully. Object Id: a485f000001aKKEAA2, Result Name: addlineId
                ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
                a485f000001aKKEAA2
            SOQL Query: select
            ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk
            from rstk__poloader__c where id =
            'a485f000001aKKEAA2'=>addlineapi
                (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
                Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c
                from rstk_poloader_c where id = 'a485f000001aKKEAA2'
                (i) Query successful. Row Count: 1.
                                                                                         @ 11:54:49(01:10.099)
            Set Values: POLINEID
                (i) Setting value POLINEID to a445f000000pPvsAAE
                Configuration: ValueScope:Test
                (i) Successfully set POLINEID to a445f000000pPvsAAE
            While: {addlineapi.rstk_poloader_process_c =
                                                                                         @ 11:54:49(01:10.154)
            "Ready"}
                (i) Looping ending because the condition is not TRUE.
        (i) Reached the end of the List.
SOQL Query: select
Id,rstk_pohdr_ordsts_c,rstk_pohdr_totamt_c,rstk_pohdr_ordno_c,CreatedDate_154:49(01:10.297)
from rstk__pohdr__c where Id
='a3w5f000000v35QAAQ'=>pohdr
```

(i) Reading a Salesforce object. Connection Name: SFConnection, Query: select Id,rstk\_pohdr\_ordsts\_\_c,rstk\_pohdr\_totamt\_\_c,rstk\_pohdr\_ordno\_\_c,CreatedDate from rstk\_pohdr\_c where Id ='a3w5f000000v35QAAQ' (i) Query successful. Row Count: 1. 0 11:54:50(01:11.508) Set Values: POTotal Setting value POTotal to 2243.92 Configuration: ValueScope:Test Successfully set POTotal to 2243.92 Set Values: POOrderNum @ 11:54:51(01:11.598) Setting value POOrderNum to 255 Configuration: ValueScope:Test i Successfully set POOrderNum to 255 (i) Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection Call SubmittoVendor 0 11:54:51(01:11.933) 0 11:54:51(01:11.933) SubmittoVendor 0 11:54:51(01:11.962) Salesforce Connect: SFConnection (Test) (1) Connecting to Salesforce as QARSF\_Admin Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https:// automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/ id/00D5f000005vwGkEAl/005ff000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbenvironment: AutomationOrg, clientId: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied] Create object id log file. Absolute path: C:\Users\Mayur\AppData\Local\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log Access Token refreshed successfully. 🌞 Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/ T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/ tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk Opening Partner connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk Topening SOAP connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0 Opening Metadata connection Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk (i) Successfully connected to Salesforce as QARSF\_Admin For Each: {POData}=>povendorsubmit 0 11:54:57(01:17.710) (i) Start of iteration 1 of 1. 0 11:54:57(01:17.903) Iteration 1 Create Object: rstk\_\_poloader\_\_c=>submittovendor 0 11:54:57(01:17.904) ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk\_poloader\_c, field count: 7

Setting fields:

=Field=> rstk\_poloader\_mode\_c = Submit to Vendor
 =Field=> rstk\_poloader\_submittovendor\_c = True

=Field=> rstk\_\_poloader\_vendno\_\_c = a4X5f000000tkbm i =Field=> rstk\_\_poloader\_div\_\_c = a8d5f0000004JbG i =Field=> rstk\_\_poloader\_pohdr\_\_c = a3w5f000000v35QAAQ =Field=> rstk\_\_poloader\_process\_\_c = Ready =Field=> Name = NP\_Automation\_HomeCurr PO Loader created successfully. Object Id: a485f000001aKKJAA2, Result Name: submittovendor 1 Logging Salesforce Object Id for clean up. Object Name: rstk\_poloader\_c, id: a485f000001aKKJAA2 (i) Reached the end of the List. (i) Handling managed resource. Name: SFConnection Closing Salesforce Connection because it is no longer being used. Name: SFConnection Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log (i) Salesforce Connection handled successfully. Name: SFConnection Fetch Quantity on Hand Before Receipt 0 11:55:02(01:23.366) Set Values: wb\_Quantitypath 0 11:55:02(01:23.523) 0 11:55:02(01:23.547) Set Values: ws\_quantity Setting value ws\_quantity to POReceipt Configuration: ValueScope:Test (i) Successfully set ws\_quantity to POReceipt 0 11:55:03(01:23.965) Call Inventory QuantityOnHand 0 11:55:03(01:23.966) Inventory QuantityOnHand Salesforce Connect: SFConnection (Test) 0 11:55:03(01:23.988) (i) Connecting to Salesforce as QARSF\_Admin Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https:// automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/ id/00D5f000005vwGkEAl/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl= environment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied] Create object id log file. Absolute path: C:\Users\Mayur\AppData\Local\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log \* Access Token refreshed successfully. Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/ T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/ tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk Opening Partner connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk TOP Opening SOAP connection  $Connection\ configurations:\ user Name:\ automation @\ rootstock.com,\ password:\ [empty],\ security Token:\ secur$ authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0 Opening Metadata connection Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.mv.salesforce.com/services/Soap/u/53.0, serviceEndpoint; https:// automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk (i) Successfully connected to Salesforce as QARSF\_Admin Qty On Hand 0 11:55:09(01:29.635) For Each: {SrcData\_InvyQty}=>InventoryQuantity 0 11:55:09(01:29.718) ① Start of iteration 1 of 3.

0 11:55:09(01:29.854)

Iteration 1

```
SOQL Query: SELECT
    Id,rstk_icitemsiteproj_item__c,rstk_icitemsiteproj_qtyalloc__c,rstk_icitemsiteproj_qtyohnn__c,rst
    FROM rstk__icitemsiteproj__c where
                                                                                     0 11:55:09(01:29.854)
    rstk__icitemsiteproj_item__c =
    '{InventoryQuantity.lcitem}'=>icitemprjs
        1 Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
        Id,rstk_icitemsiteproj_item_c,rstk_icitemsiteproj_qtyalloc_c,rstk_icitemsiteproj_qtyohn_c,rstk_icitemsiteproj_qtyohn
FROM rstk_icitemsiteproj_c where rstk_icitemsiteproj_item_c = 'a345f000000tiH8'
        1 The query returned no records.
    Set Values: ItemNumber
                                                                                     0 11:55:10(01:31.031)
        (i) Setting value ItemNumber to a345f000000tiH8
        Configuration: ValueScope:Test
        ① Successfully set ItemNumber to a345f000000tiH8
                                                                                     0 11:55:10(01:31.082)
     Set Values: QtyOnHand.QuantityBefore
        (i) Setting value QtyOnHand.QuantityBefore to <null>
        Configuration: ValueScope:Test
        Successfully set QtyOnHand.QuantityBefore to <null>
    Write: {QtyOnHand}=>templates/
    AutomationOrg/SYDATA-POtoPOAP
                                                                                     0 11:55:12(01:32.907)
    Match_AutomationOrg.xlsx
        Writing to URL templates/AutomationOrg/SYDATA-POtoPOAP Match_AutomationOrg.xlsx
        ① Start of Excel Write. WorkbookPath: templates/AutomationOrg/SYDATA-POtoPOAP
        Match_AutomationOrg.xlsx, excludeCols: [none]
        Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg\SYDATA-POtoPOAP
        Match_AutomationOrg.xlsx
        ① Applying match locator Data Count: 3, Match Locator: {lcitem = $ItemNumber}
        (i) Testing row number 1
        (i) Resolving EqualTo. a345f000000tiH8 = a345f000000tiH8, result: true
        (i) Row number 1 matched
        1 Testing row number 2
        (i) Resolving EqualTo. a345f000000tiHN = a345f000000tiH8, result: false
        1 Testing row number 3
        1 Resolving EqualTo. a345f000000tiHD = a345f000000tiH8, result: false
        1 The match locator matched 1 row(s).

    Updating data in excel sheet: POReceipt

        ① Updating Row - 2
        Updated data in excel sheet: POReceipt
① Start of iteration 2 of 3.
                                                                                     0 11:55:14(01:34.826)
Iteration 2
    SOQL Query: SELECT
    ld,rstk icitemsiteproj item c,rstk icitemsiteproj gtyalloc c,rstk icitemsiteproj gtyohnn c,rst
    FROM rstk__icitemsiteproj__c where
    rstk__icitemsiteproj_item__c =
    '{InventoryQuantity.lcitem}'=>icitemprjs
        Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
        Id,rstk\_icitemsiteproj\_item\_c,rstk\_icitemsiteproj\_qtyalloc\_c,rstk\_icitemsiteproj\_qtyohnn\_c,rstk\_icitemsiteproj\_qtyoh
        FROM rstk__icitemsiteproj__c where rstk__icitemsiteproj_item__c = 'a345f000000tiHN'
        i) The query returned no records.
                                                                                     0 11:55:15(01:36.104)
    Set Values: ItemNumber
        (i) Setting value ItemNumber to a345f000000tiHN
        Configuration: ValueScope:Test
        (i) Successfully set ItemNumber to a345f000000tiHN
                                                                                     0 11:55:15(01:36.215)
    Set Values: QtyOnHand.QuantityBefore
```

Configuration: ValueScope:Test (i) Successfully set QtyOnHand.QuantityBefore to <null> Write: {QtyOnHand}=>templates/ @ 11:55:15(01:36.276) AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Writing to URL templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Start of Excel Write. WorkbookPath: templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx, excludeCols: [none] ① Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg\SYDATA-POtoPOAP Match AutomationOrg.xlsx (i) Applying match locator Data Count: 3, Match Locator: {lcitem = \$ItemNumber} 1 Testing row number 1 (i) Resolving EqualTo. a345f000000tiH8 = a345f000000tiHN, result: false 1 Testing row number 2 (i) Resolving EqualTo. a345f000000tiHN = a345f000000tiHN, result: true (i) Row number 2 matched ① Testing row number 3 (1) Resolving EqualTo. a345f000000tiHD = a345f000000tiHN, result: false The match locator matched 1 row(s). (i) Updating data in excel sheet: POReceipt ① Updating Row - 3 Updated data in excel sheet: POReceipt (i) Start of iteration 3 of 3. Iteration 3 0 11:55:16(01:36.826) SOQL Query: SELECT Id,rstk\_\_icitemsiteproj\_item\_\_c,rstk\_\_icitemsiteproj\_qtyalloc\_\_c,rstk\_\_icitemsiteproj\_qtyohnn\_\_c,rst FROM rstk\_\_icitemsiteproj\_\_c where rstk\_\_icitemsiteproj\_item\_\_c = '{InventoryQuantity.lcitem}'=>icitemprjs Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT Id,rstk\_\_icitemsiteproj\_item\_\_c,rstk\_\_icitemsiteproj\_qtyalloc\_\_c,rstk\_\_icitemsiteproj\_qtyohnn\_\_c,rstk\_\_icitemsiteproj\_qtyohn FROM rstk\_\_icitemsiteproj\_c where rstk\_\_icitemsiteproj\_item\_\_c = 'a345f000000tiHD' i) The query returned no records. 0 11:55:17(01:37.813) Set Values: ItemNumber (i) Setting value ItemNumber to a345f000000tiHD Configuration: ValueScope:Test (i) Successfully set ItemNumber to a345f000000tiHD 0 11:55:17(01:37.945) Set Values: QtyOnHand.QuantityBefore (i) Setting value QtyOnHand.QuantityBefore to <null> Configuration: ValueScope:Test (i) Successfully set QtyOnHand.QuantityBefore to <null> Write: {QtyOnHand}=>templates/ AutomationOrg/SYDATA-POtoPOAP 0 11:55:17(01:38.032) Match\_AutomationOrg.xlsx ① Writing to URL templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Start of Excel Write. WorkbookPath: templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx, excludeCols: [none] Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg\SYDATA-POtoPOAP Match AutomationOrg.xlsx (i) Applying match locator Data Count: 3, Match Locator: {lcitem = \$ItemNumber} 1 Testing row number 1

(i) Setting value QtyOnHand.QuantityBefore to <null>

- ① Resolving EqualTo. a345f000000tiH8 = a345f000000tiHD, result: false
- 1 Testing row number 2
- (i) Resolving EqualTo. a345f000000tiHN = a345f000000tiHD, result: false
- Testing row number 3
- 1 Resolving EqualTo. a345f000000tiHD = a345f000000tiHD, result: true
- Row number 3 matched
- i) The match locator matched 1 row(s).
- (i) Updating data in excel sheet: POReceipt
- ① Updating Row 4

Updated data in excel sheet: POReceipt

- (i) Reached the end of the List.
- 1 Handling managed resource. Name: SFConnection
- Closing Salesforce Connection because it is no longer being used. Name: SFConnection
- Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log
- (1) Salesforce Connection handled successfully. Name: SFConnection

#### Call SYDATAPOReceipt

SYDATAPOReceipt

Salesforce Connect: SFConnection (Test)

11:55:18(01:38.999)11:55:18(01:39.020)

0 11:55:18(01:38.911)

- Connecting to Salesforce as QARSF\_Admin
- \*\*Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl={callbackUrl=}}

involutional organization and interest in the content of the conte

Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Loca\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- dentity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

(1) Successfully connected to Salesforce as QARSF\_Admin

SOQL Query: SELECT

Id,rstk\_\_poline\_item\_\_c,rstk\_\_poline\_ordno\_\_c FROM rstk\_\_poline\_c WHERE rstk\_\_poline\_ordno\_\_c = 'a3w5f000000v35QAAQ' and rstk\_\_poline\_potype\_\_c in ('Purchased','Subcontract')=>poline

0 11:55:24(01:44.847)

- ① Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT Id,rstk\_poline\_item\_c,rstk\_poline\_ordno\_c FROM rstk\_poline\_c WHERE rstk\_poline\_ordno\_c = 'a3w5f000000035QAAQ' and rstk\_poline\_potype\_c in ('Purchased', 'Subcontract')
- ① Query successful. Row Count: 3.

```
0 11:55:25(01:46.346)
Set Values: rownum

 Setting value rownum to 1

 Configuration: ValueScope:Test
(i) Successfully set rownum to 1
                                                                                            0 11:55:25(01:46.425)
For Each: {poline}=>poreceipt
① Start of iteration 1 of 3.
 Iteration 1
                                                                                            0 11:55:26(01:46.611)
                                                                                            @ 11:55:26(01:46.611)
     Create Object: rstk__sydata__c=>sydatald
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_sydata_c, field count: 12
        Setting fields:
        i =Field=> rstk_sydata_sylocid_c = a8s5f000000PtAg
        i =Field=> rstk_sydata_txnqty_c = 2
        i =Field=> rstk__sydata_srlnos__c = NP#HV26
        1 =Field=> rstk_sydata_lotno_c = NP#LotUnX26
        1 =Field=> rstk_sydata_backgroundprocessing_c = false
        i =Field=> rstk_sydata_packslip_c = NP_HV26
        1 =Field=> rstk__sydata_process__c = Ready
        i =Field=> rstk__sydata_locnum__c = 1
         1 =Field=> rstk__sydata_poline__c = a445f000000pPvYAAU
        ① =Field=> rstk__sydata_sydiv__c = a8d5f0000004JbG
        i =Field=> Name = NPAUTOMATION
        1 =Field=> rstk_sydata_txntype_c = PO Receipt
         SYDATA - System Transaction Object created successfully. Object Id: a8W5f000000ct1XEAQ, Result Name:
        sydatald
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_sydata_c, id: a8W5f000000ct1XEAQ
     SOQL Query: select
     Id, Name, rstk sydata process c
                                                                                           0 11:55:34(01:55.026)
    from rstk__sydata__c where Id =
     'a8W5f000000ct1XEAQ'=>poreceiptapi
         1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1XEAQ'
        (i) Query successful. Row Count: 1.
     While: {poreceiptapi.rstk__sydata_process__c =
                                                                                            0 11:55:35(01:56.585)
     "Ready"}
         Looping ending because the condition is not TRUE.
     Assert: ProcessingComplete EqualTo
                                                                                            0 11:55:36(01:56.895)
     {poreceiptapi.rstk__sydata_process__c}
         Assertion successful. (result) ProcessingComplete = ProcessingComplete (target)
                                                                                            0 11:55:36(01:56.977)
     Set Values: rownum

    Setting value rownum to 2

         Configuration: ValueScope:Test

    Successfully set rownum to 2

(i) Start of iteration 2 of 3.
 Iteration 2
                                                                                            0 11:55:36(01:57.331)
     Create Object: rstk__sydata__c=>sydatald
                                                                                            0 11:55:36(01:57.331)
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_sydata_c, field count: 12
        Setting fields:
        ① =Field=> rstk__sydata_sylocid__c = a8s5f000000PtAg
        i =Field=> rstk_sydata_txnqty_c = 1
```

```
i =Field=> rstk_sydata_srlnos_c = NP#SC26
        i =Field=> rstk_sydata_lotno_c = NP#LotUnE26
        (i) =Field=> rstk__sydata_backgroundprocessing__c = false
        i =Field=> rstk_sydata_packslip_c = NP_SA26
        i =Field=> rstk__sydata_process__c = Ready
        i =Field=> rstk__sydata_locnum__c = 1
        1 =Field=> rstk_sydata_poline_c = a445f000000pPvdAAE
        1 =Field=> rstk_sydata_sydiv_c = a8d5f0000004JbG
        i =Field=> Name = NPAUTOMATION
        i =Field=> rstk__sydata_txntype__c = PO Receipt
        SYDATA - System Transaction Object created successfully. Object Id: a8W5f000000ct1cEAA, Result Name:
        sydatald
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_sydata_c, id: a8W5f000000ct1cEAA
    SOQL Query: select
    Id,Name,rstk__sydata_process__c
                                                                                           0 11:55:45(02:05.912)
    from rstk__sydata__c where Id =
    'a8W5f000000ct1cEAA'=>poreceiptapi
        Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1cEAA'
        (i) Query successful. Row Count: 1.
    While: {poreceiptapi.rstk__sydata_process__c =
                                                                                           0 11:55:46(02:07.037)
    "Ready"}
        (i) Looping ending because the condition is not TRUE.
    Assert: ProcessingComplete EqualTo
                                                                                           0 11:55:46(02:07.218)
    {poreceiptapi.rstk__sydata_process__c}
        Assertion successful. (result) ProcessingComplete = ProcessingComplete (target)
    Set Values: rownum
                                                                                           0 11:55:46(02:07.297)

 Setting value rownum to 3

        Configuration: ValueScope:Test

    Successfully set rownum to 3

(i) Start of iteration 3 of 3.
                                                                                           0 11:55:47(02:08.187)
Iteration 3
                                                                                           0 11:55:47(02:08.362)
    Create Object: rstk sydata c=>sydatald
        (1) Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk sydata c, field count: 12
        Setting fields:
        (i) =Field=> rstk__sydata_sylocid__c = a8s5f000000PtAg
        i =Field=> rstk_sydata_txnqty_c = 3
        1 =Field=> rstk_sydata_srlnos_c = NP#AO26
        i =Field=> rstk_sydata_lotno_c = NP#LotUnQ26
        (i) =Field=> rstk__sydata_backgroundprocessing__c = true
        1 =Field=> rstk_sydata_packslip_c = NP_AM26
        i =Field=> rstk__sydata_process__c = Ready
        i =Field=> rstk__sydata_locnum__c = 1
        ① =Field=> rstk__sydata_poline__c = a445f000000pPviAAE
        i =Field=> rstk_sydata_sydiv_c = a8d5f0000004JbG
        i =Field=> Name = NPAUTOMATION
        i =Field=> rstk__sydata_txntype__c = PO Receipt
        SYDATA - System Transaction Object created successfully. Object Id: a8W5f000000ct1hEAA, Result Name:
        svdatald
```

```
① Logging Salesforce Object Id for clean up. Object Name: rstk_sydata_c, id: a8W5f000000ct1hEAA
SOQL Query: select
Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:49(02:10.313)
from rstk__sydata__c where Id =
'a8W5f000000ct1hEAA'=>poreceiptapi
    1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
    Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1hEAA'
    (1) Query successful. Row Count: 1.
While: {poreceiptapi.rstk__sydata_process__c =
                                                                                     0 11:55:50(02:11.477)
"Ready"}
    ① Start of iteration 1. Loop Counter: 1.
    Iteration 1
                                                                                     0 11:55:51(02:11.611)
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:51(02:11.612)
        from rstk sydata c where Id =
        'a8W5f000000ct1hEAA'=>poreceiptapi
            (1) Reading a Salesforce object. Connection Name: SFConnection, Query: select
            Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1hEAA'
            (i) Query successful. Row Count: 1.
    i Start of iteration 2. Loop Counter: 2.
    Iteration 2
                                                                                     0 11:55:52(02:13.110)
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:52(02:13.112)
        from rstk_sydata_c where Id =
        'a8W5f000000ct1hEAA'=>poreceiptapi
            1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
            Id,Name,rstk__sydata_process__c from rstk__sydata__c where Id = 'a8W5f000000ct1hEAA'
            (1) Query successful. Row Count: 1.
    ① Start of iteration 3. Loop Counter: 3.
    Iteration 3
                                                                                     0 11:55:53(02:14.505)
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:53(02:14.506)
        from rstk__sydata__c where Id =
        'a8W5f000000ct1hEAA'=>poreceiptapi
            1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
            Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1hEAA'
            (i) Query successful. Row Count: 1.
    i Start of iteration 4. Loop Counter: 4.
    Iteration 4
                                                                                     0 11:55:55(02:15.898)
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:55(02:15.999)
        from rstk__sydata__c where Id =
        'a8W5f000000ct1hEAA'=>poreceiptapi
            (1) Reading a Salesforce object. Connection Name: SFConnection, Query: select
            Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1hEAA'
            (i) Query successful. Row Count: 1.
    (i) Start of iteration 5. Loop Counter: 5.
                                                                                     0 11:55:56(02:17.270)
    Iteration 5
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                     0 11:55:56(02:17.271)
        from rstk__sydata__c where Id =
        'a8W5f000000ct1hEAA'=>poreceiptapi
            Reading a Salesforce object. Connection Name: SFConnection, Query: select
            ld,Name,rstk__sydata_process__c from rstk__sydata__c where Id = 'a8W5f000000ct1hEAA'
            (i) Query successful. Row Count: 1.
    Start of iteration 6. Loop Counter: 6.
```

Iteration 6 0 11:55:58(02:18.728) SOQL Query: select Id,Name,rstk\_\_sydata\_process\_\_c 0 11:55:58(02:18.730) from rstk sydata c where Id = 'a8W5f000000ct1hEAA'=>poreceiptapi 1 Reading a Salesforce object. Connection Name: SFConnection, Query: select Id,Name,rstk\_sydata\_process\_c from rstk\_sydata\_c where Id = 'a8W5f000000ct1hEAA' (1) Query successful. Row Count: 1. 1 Looping ending because the condition is not TRUE. Assert: ProcessingComplete EqualTo 0 11:55:59(02:19 849) {poreceiptapi.rstk\_\_sydata\_process\_\_c} Assertion successful. (result) ProcessingComplete = ProcessingComplete (target) 0 11:55:59(02:19.944) Set Values: rownum Setting value rownum to 4 Configuration: ValueScope:Test Successfully set rownum to 4 (i) Reached the end of the List. i Handling managed resource. Name: SFConnection Closing Salesforce Connection because it is no longer being used. Name: SFConnection Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log (i) Salesforce Connection handled successfully. Name: SFConnection Call SYDATAPOAuthorization @ 11:55:59(02:20.138) SYDATAPOAuthorization 0 11:55:59(02:20.140) 0 11:55:59(02:20.162) Salesforce Connect: SFConnection (Test) (i) Connecting to Salesforce as QARSF\_Admin Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https:// automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/ id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callback environment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied] Create object id log file. Absolute path: C:\Users\Mayur\AppData\Local\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log Access Token refreshed successfully. 🍀 Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/ T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/ tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005ywGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk Opening Partner connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk TOP Opening SOAP connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0 Opening Metadata connection Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk (i) Successfully connected to Salesforce as QARSF\_Admin SOQL Query: SELECT

Id,rstk\_\_poline\_item\_\_c,rstk\_\_poline\_ordno\_\_c FROM rstk\_\_poline\_ c WHERE rstk\_\_poline\_ordno\_\_c =

0 11:56:05(02:26.292)

```
'a3w5f000000v35QAAQ' and rstk__poline_potype__c in
('Service','Indirect Material')=>poline
    1 Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
    Id,rstk_poline_item__c,rstk_poline_ordno__c FROM rstk_poline__c WHERE rstk_poline_ordno__c =
    'a3w5f000000v35QAAQ' and rstk__poline_potype__c in ('Service','Indirect Material')
    (i) Query successful. Row Count: 2.
   Set Values: rownum
                                                                                               ① 11:56:06(02:27.577)

 Setting value rownum to 1

    Configuration: ValueScope:Test

    Successfully set rownum to 1

                                                                                               0 11:56:07(02:27.634)
   For Each: {poline}=>poauth
   (i) Start of iteration 1 of 2.
    Iteration 1
                                                                                               0 11:56:07(02:27.826)
                                                                                               0 11:56:07(02:27.828)
        Create Object: rstk sydata c=>sydatald
            ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_sydata_c, field count: 11
            Setting fields:
            i =Field=> rstk_sydata_txnqty_c = 2
            i =Field=> rstk_sydata_srlnos_c = NP#B026
            i =Field=> rstk_sydata_lotno_c = NP#LotUn326
            (i) =Field=> rstk__sydata_backgroundprocessing__c = false
            i =Field=> rstk__sydata_process__c = Ready
            i =Field=> rstk_sydata_poline_c = a445f000000pPvnAAE
            (i) =Field=> rstk__sydata_sydiv__c = a8d5f0000004JbG
            i =Field=> rstk__sydata_txnamt__c = <null>
            i =Field=> Name = NPAUTOMATION
            i =Field=> rstk__sydata_authorize__c = true
            (i) =Field=> rstk__sydata_txntype__c = PO Authorization
            SYDATA - System Transaction Object created successfully. Object Id: a8W5f000000ct1mEAA, Result Name:
            1 Logging Salesforce Object Id for clean up. Object Name: rstk_sydata_c, id: a8W5f000000ct1mEAA
        SOQL Query: select
        Id,Name,rstk__sydata_process__c
                                                                                               0 11:56:13(02:33.659)
        from rstk sydata c where Id =
        'a8W5f000000ct1mEAA'=>poreceiptapi
            1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
           Id,Name,rstk_sydata_process_c from rstk_sydata_c where Id = 'a8W5f000000ct1mEAA'
            (i) Query successful. Row Count: 1.
        While: {poreceiptapi.rstk__sydata_process__c =
                                                                                               0 11:56:14(02:34.909)
            (i) Looping ending because the condition is not TRUE.
        Assert: ProcessingComplete EqualTo
                                                                                               0 11:56:14(02:34.978)
        {poreceiptapi.rstk__sydata_process__c}
            Assertion successful. (result) ProcessingComplete = ProcessingComplete (target)
                                                                                               0 11:56:14(02:35.036)
        Set Values: rownum

 Setting value rownum to 2

            Configuration: ValueScope:Test

    Successfully set rownum to 2

   (i) Start of iteration 2 of 2.
                                                                                               0 11:56:14(02:35.242)
    Iteration 2
                                                                                               0 11:56:14(02:35.249)
        Create Object: rstk__sydata__c=>sydataId
```

① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk\_sydata\_c, field count: 11

```
i =Field=> rstk__sydata_txnqty__c = 5
                              i =Field=> rstk_sydata_srlnos_c = NP#0Z26
                              i =Field=> rstk_sydata_lotno_c = NP#LotUn126
                              (i) =Field=> rstk__sydata_backgroundprocessing__c = false
                              1 =Field=> rstk__sydata_process__c = Ready
                              1 =Field=> rstk_sydata_poline_c = a445f000000pPvsAAE
                              =Field=> rstk_sydata_sydiv_c = a8d5f0000004JbG
                              i =Field=> rstk__sydata_txnamt__c = <null>
                              1 =Field=> Name = NPAUTOMATION
                              i =Field=> rstk_sydata_authorize_c = true
                              (i) =Field=> rstk__sydata_txntype__c = PO Authorization
                              SYDATA - System Transaction Object created successfully. Object Id: a8W5f000000ct1rEAA, Result Name:
                              sydatald
                              ① Logging Salesforce Object Id for clean up. Object Name: rstk_sydata_c, id: a8W5f000000ct1rEAA
                           SOQL Query: select
                          Id,Name,rstk__sydata_process__c
                                                                                                               0 11:56:17(02:38.061)
                          from rstk__sydata__c where Id =
                           'a8W5f000000ct1rEAA'=>poreceiptapi
                              1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
                              Id, Name, rstk\_sydata\_process\_c \ from \ rstk\_sydata\_c \ where \ Id = 'a8W5f000000ct1rEAA'
                              (i) Query successful. Row Count: 1.
                           While: {poreceiptapi.rstk__sydata_process__c =
                                                                                                               0 11:56:19(02:39.596)
                           "Ready"}
                              (i) Looping ending because the condition is not TRUE.
                           Assert: ProcessingComplete EqualTo
                                                                                                               0 11:56:19(02:39.721)
                           {poreceiptapi.rstk__sydata_process__c}
                              Assertion failed. (result) ProcessingComplete = Validation Failure (target)
                          Set Values: rownum
                                                                                                                            (1)
                       Sub-Test Steps failed for iteration 2
                  (i) Handling managed resource. Name: SFConnection
                   Closing Salesforce Connection because it is no longer being used. Name: SFConnection
                   Shutting down Soap Connections. logFilePath: QARSF_Admin-objectids.log
                  (i) Salesforce Connection handled successfully. Name: SFConnection
           Fetch and Verify Quantity on Hand After Receipt
               Call Inventory QuantityOnHand
           Call SYDATAPOAPMatch
           Call SYDATA Detail
           Edit SYDATA PO AP Match record
               Call SYDATAEditPOAPMatch
           Close PO AP Batch
               Call SYDATAClosePOAPBatch
                                                                                                                            () ---
           Call POPaySession
           Call PAYTO
                                                                                                                            (i) ---
       Sub-Test Steps failed for iteration 1
   (i) Handling managed resource. Name: SFConnection
   Closing Salesforce Connection because it is no longer being used. Name: SFConnection
   Shutting down Soap Connections. logFilePath: QARSF_Admin-objectids.log
   (i) Salesforce Connection handled successfully. Name: SFConnection
                                                                                                               0 11:56:19(02:39.900)
POtoPOAPMATCHInvamtgreater.testinstance
```

Setting fields:

- $\hfill \triangle$  Called Test Case not found for Test Case Call. TestCaseCall: null, TestCaseRegistryId: IdentifierImpl{id=5e762c63-0656-4a26-8a25-66df35188869}
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POmultipleline.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseOrderReceipt.testcase
- 1 Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseOrderAuthorization.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POAPMATCH.testcase
- ⚠ Called Test Case not found for Test Case Call. TestCaseCall: null, TestCaseRegistryId: IdentifierImpl{id=9fbb5ad6-ebaf-4ac1-8094-a84360c63ba3}

### POtoPOAPMATCHInvamtgreater.testcase

### Summary

Started 16 Mar 2022, 11:56:19 Ended 16 Mar 2022, 11:56:25

Duration (mm:ss) 00:06.439
Outcome failed

### Output

Salesforce Connect: SFConnection (Test)

0 11:56:19(02:40.173)

- (i) Connecting to Salesforce as QARSF\_Admin
- Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessTolenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- \* Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ₹ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

① Successfully connected to Salesforce as QARSF\_Admin

### Reading Excel Data

ReadExcel

0 11:56:25(02:46.275)

TestCase not found for Call. Registry Id: IdentifierImpl{id=5e762c63-0656-4a26-8a25-66df35188869}

11:56:25(02:46.438)11:56:25(02:46.484)

- For Each: {VendorData}=>POData
- Handling managed resource. Name: SFConnection
   Closing Salesforce Connection because it is no longer being used. Name: SFConnection
- Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log
- (1) Salesforce Connection handled successfully. Name: SFConnection

### POtoPOAPMATCHInvamtless.testinstance

0 11:56:25(02:46.561)

⚠ Called Test Case not found for Test Case Call. TestCaseCall: null, TestCaseRegistryId: IdentifierImpl{id=5e762c63-0656-4a26-8a25-66df35188869}

- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POmultipleline.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseOrderReceipt.testcase
- 1 Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseOrderAuthorization.testcase

1 Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POAPMATCH.testcase

⚠ Called Test Case not found for Test Case Call. TestCaseCall: null, TestCaseRegistryId: IdentifierImpl{id=9fbb5ad6-ebaf-4ac1-8094-a84360c63ba3}

### POtoPOAPMATCHInvamtless.testcase

### Summary

Started 16 Mar 2022, 11:56:26 Ended 16 Mar 2022, 11:56:32

Duration (mm:ss) 00:05.985
Outcome failed

### Output

Salesforce Connect: SFConnection (Test)

0 11:56:26(02:46.717)

- (i) Connecting to Salesforce as QARSF\_Admin
- \*\*Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessTolenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ➡ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

(i) Successfully connected to Salesforce as QARSF\_Admin

Reading Excel Data

11:56:31(02:52.406)11:56:31(02:52.484)

• TestCase not found for Call. Registry ld: IdentifierImpl(id=5e762c63-0656-4a26-8a25-66df35188869)

ReadExcel

0 11:56:31(02:52.504)

For Each: {VendorData}=>POData

(a) 11:56:31(02:52:560)

- 1 Handling managed resource. Name: SFConnection
- Closing Salesforce Connection because it is no longer being used. Name: SFConnection
- Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log
- Salesforce Connection handled successfully. Name: SFConnection
- Purchase Requisition to PostPayment.testinstance

0 11:56:32(02:52.625)

- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\ReadExcelPath.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseRequisition.testcase

- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- ① Loading test case. File: D:\provar\PKTEst\Test\Test\Purchase Order\Callable\PurchaseOrder\Receipt.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- $\textbf{\textcircled{1}} \ \, \mathsf{Loading} \ \, \mathsf{test} \ \, \mathsf{case}. \ \, \mathsf{File:} \ \, \mathsf{D:} \\ \mathsf{PKTEst} \ \, \mathsf{TestProje} \\ \mathsf{tests} \ \, \mathsf{Purchase} \ \, \mathsf{Order} \\ \mathsf{Callable} \ \, \mathsf{PurchaseOrderAuthorization.test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \\ \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test} \ \, \mathsf{test}$  \\
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POAPMATCH.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\CloseBatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Account Payable\Callable\POPaySession.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Account Payable\Callable\Postpayment.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\InventoryQuantityVerificationPO.testcase
- ① Loading test case. File: D:\provar\PKTEst\Test\roje\tests\Purchase Order\Callable\POReceiptVerification.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PayableBatchHeader\Verification.testcase
- 1 Loading test case. File: D:\provar\PKTEst\TestProje\tests\Account Payable\Callable\PostPaymentVerification.testcase

### Purchase Requisition to PostPayment.testcase

### Summary

Started 16 Mar 2022, 11:56:32 Ended 16 Mar 2022, 12:08:16

Duration (mm:ss) 11:43.897
Outcome failed

### Output

Salesforce Connect: SFConnection (Test)

0 11:56:32(02:52.816)

0 11:56:39(02:59.935)

- (i) Connecting to Salesforce as QARSF\_Admin
- Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessToleenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- \* Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ₹ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- \* Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

\*Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

① Successfully connected to Salesforce as QARSF\_Admin

Then

Successfully connected to Salesforce as QARSF_Admin	
Reading Excel Data	0 11:56:38(02:59.163)
Call ReadExcelPath	0 11:56:39(02:59.782)
ReadExcelPath	0 11:56:39(02:59.784)
Salesforce Connect: SFConnection (Test)	0 11:56:39(02:59.810)
① Connecting to Salesforce as QARSF_Admin	
① Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection	
If: {GetSelectedEnvironment() = "QARSF"}	0 11:56:39(02:59.834)
Then	<b>0</b>
☆ Set Values: poui	<b>0</b>
☆ Set Values: financial	<b>0</b>
Set Values: posydata1	<b>©</b>
☆ Set Values: posydata	<b>0</b>
Set Values: poloader	<b>©</b>
<ul><li>Else</li></ul>	0 11:56:39(02:59.884)
If: {GetSelectedEnvironment() = "AutomationOrg"}	0 11:56:39(02:59.906)

Setting value financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 11:56:39(02:59.980) Set Values: posydata1 Setting value posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx 0 11:56:39(03:00.030) Set Values: posydata Setting value posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 0 11:56:39(03:00.084) Set Values: poloader ① Setting value poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 11:56:39(03:00.140) Set Values: poui Setting value poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: pouipath 0 11:56:39(03:00.179) ① Setting value pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: posydatapath1 0 11:56:39(03:00.254) ① Setting value posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Set Values: finpath 0 11:56:39(03:00.302) ① Setting value finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 11:56:39(03:00.363) Set Values: poloaderpath ① Setting value poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 11:56:39(03:00.424) Set Values: posydatapath ① Setting value posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 1 Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 11:56:39(03:00.504) ReadExcel (i) Loading data from Parameter Value Source ... 1: Loading Parameter Value Source row 1:

Set Values: financial

0 11:56:39(02:59.956)

```
1 ==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Purchased (Purchased item for automation), valueId=null,
createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 66, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Responsible = PrimitiveValueImpl [ value: Namrata Patil, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
i ==Column=> POPriceOverride = null
① ==Column=> Icitem = PrimitiveValueImpl [ value: a1E1K000008NTam, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 1226.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> QuantityAfter = PrimitiveValueImpl [value: 1228.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 2:
1 ==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Subcontract (Subcontract item for automation), valueId=null,
createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Responsible = PrimitiveValueImpl [ value: Namrata Patil, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
i ==Column=> POPriceOverride = null
🛈 ==Column=> Icitem = PrimitiveValueImpl [ value: a1E1K000008NTaw, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 695.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 697.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 2 rows from Parameter Value Source.
(i) Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Service Item (Automation testing), valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 30, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

    Loading Parameter Value Source row 2:

1 ==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Indirect Item (Automation testing), valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 12, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 2 rows from Parameter Value Source.
Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
🛈 ==Column=> Vendor = PrimitiveValueImpl [ value: SB-24808 (1103), valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> OrganizationalDepartment = PrimitiveValueImpl [ value: MFG (Manufacturing), valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
① ==Column=> BankAccount = PrimitiveValueImpl [value: Bank of Dad, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loading Parameter Value Source row 2:
🛈 ==Column=> Vendor = PrimitiveValueImpl [ value: SB Vend CAD (1128), valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> OrganizationalDepartment = PrimitiveValueImpl [ value: MFG (Manufacturing), valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
1 ==Column=> BankAccount = PrimitiveValueImpl [ value: MMDD Bank Account, valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
Loaded 2 rows from Parameter Value Source.
```

For Each: {PurReqData}=>poreqdata 0 11:56:40(03:00.757) (i) Start of iteration 1 of 2. 0 11:56:40(03:01.030) Iteration 1 0 11:56:41(03:01.877) Call PurchaseRequisition PurchaseRequisition @ 11:56:41(03:01.877) 0 11:56:41(03:01.925) Salesforce Connect: SFConnection (Test) Connecting to Salesforce as QARSF\_Admin 1 Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection 0 11:56:41(03:01.971) On SF Rootstock Site Map tab ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target?  $application = rstkf \underline{\hspace{0.2cm}} Rootstock \underline{\hspace{0.2cm}} Financials \& tab = rstk \underline{\hspace{0.2cm}} Rootstock \underline{\hspace{0.2cm}} Site \underline{\hspace{0.2cm}} Map \& page Object = page objects.rstk \underline{\hspace{0.2cm}} Manufacturing$ ① Opening Chrome webdriver instance to https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp Add Chrome browser specific capabilities Using executable from UserHome Provar. executable: C:\Users\Mayur\Provar\.chromeDriver\chromedriver.exe Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypasslist=localhost,127.0.0.1,192.168.1.14 Added desired capability for Chrome browser proxy Null Using executable from UserHome Provar. executable: C:\Users\Mayur\Provar\.chromeDriver\chromedriver.exe ① Successfully opened Chrome webdriver to https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp (1) Opening Page context. Name: screen, data: null, frame: null ① Opening Salesforce Tab. Tab Name: rstk\_\_Rootstock\_Site\_Map, Url: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC (i) Opening Salesforce user home page Navigate to home page Opening page. URL: https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp?retURL=/home/home.jsp? tsid=02u5f000000R44f&sid={accessToken} Perform page load wait Start of waitForPageToLoad. Timeout(ms): 90000 Re-attempting of waitForPageToLoad. Timeout(ms): 90000 End of waitForPageToLoad. Duration(ms): 88 Opening page. URL: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? Perform page load wait (i) Successfully opened user home page (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:57:13(03:34.374) Click the Purchase Requisition button ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=purchaseRequisition, before wait: default, after wait: default, auto retry: default (i) Locator: ui:locator?name=purchaseRequisition i Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/Manufacturing? sfdc.tabName=01r5f000000Ptu4 1 Doing before wait. waitUrl: default i End of <default&gt; wait. i Doing after wait. waitUrl: default ① Clicking WebElement. WebElement [tag: a, text: Purchase Requisition, href: https://automationtesting2--

rstk.visualforce.com/a4K?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4]

Doing after wait. waitUrl: default

- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2.my.salesforce.com/a4K?retURL=%2Fapex %2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

### On SF Purchase Requisition Purchase Requisitions list view

0 11:57:20(03:41.475)

- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_poreq\_c&action=List&listView=rstk\_RS\_Purchase\_Requistions
  - (i) Opening Page context. Name: screen, data: null, frame: null
  - (i) Going to update browser window handles.
  - W Update browser window handles.
  - Successfully updated browser window handles.

### Click the New button

0 11:57:21(03:42.074)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding %3Aobject%3Fobject%3Drstk\_poreq\_c%26action%3DNew, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_poreq\_c%26action %3DNew
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2.my.salesforce.com/a4K?retURL=%2Fapex %2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Doing after wait. waitUrl: default
- ① Getting webElement: By.xpath: //div[contains(@class,'listButtons') or contains(@class,'listHeader')]//input[@name='new' or (contains(@name,'\_\_new') and not(substring-after(@name,'\_\_new')))]
- ① Clicking WebElement. WebElement [tag: input, text: New Purchase Requisition]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- On SF rstk\_poreq page with pageobject Rstk\_poreq

- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_\_poreq&page=rstk\_\_poreq
- ① Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- **W** Update browser window handles.
- Successfully updated browser window handles.

### Set the PR Vendor select to SB-24808 (1103)

0 11:57:27(03:48.433)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=PRVendor, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=PRVendor
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: SELECT, id: null, type: null, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

### Set the PR Project field to 100 Home Project

0 11:57:29(03:49.652)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=PRProject, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=PRProject
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- i Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: poreq\_pjproj\_\_c\_autocomplete, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 100 Home Project, blur: false, selector: null
- i Doing after wait. waitUrl: default
- i) End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

### Click the PR Projectlist field

0 11:57:30(03:51.065)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=PRProjectlist, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=PRProjectlist
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default

- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: 100 Home Project]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- Successfully updated browser window handles.

### Set the Orgdept select to MFG (Manufacturing)

0 11:57:32(03:53.071)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=orgdept, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=orgdept
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName %253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Doing after wait. waitUrl: default
- (i) Got webElement. tagName: SELECT, id: null, type: null, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- Successfully updated browser window handles.

#### Click the Save button

0 11:57:33(03:54.101)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=save, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=save
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=%2Fa4K%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: input, text: Save]
- Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- Going to update browser window handles.

 Successfully updated browser window handles. On SF rstk\_poreqView page with pageobject 0 11:57:44(04:05.530) Rstk poreq View ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_\_poreqView&page=rstk\_\_poreqView ① Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:57:45(04:05.838) Inventory Requisition 0 11:57:45(04:05.886) Set Values: Rownum (i) Setting value Rownum to 1 Configuration: ValueScope:Test Successfully set Rownum to 1 @ 11:57:45(04:05.921) On SF Purchase Requisition View screen ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_\_poreq\_\_c&action=View&noOverride=true (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:57:47(04:08.264) ReadReqNum Click the Maintain Inventory Requisitions button 0 11:57:47(04:08.285) 1 Start of Interact. Connection: SFConnection, Locator: ui:locator? name=rstk\_\_Edit\_Inventory\_Requisitions&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3Drstk\_poreq\_c%26action%3Drstk\_Edit\_Inventory\_Requisitions, before wait: default, after wait: default, auto retry: default Locator: ui:locator?name=rstk\_\_Edit\_Inventory\_Requisitions&binding=sf%3Aui%3Abinding%3Aobject %3Fobject%3Drstk\_poreq\_c%26action%3Drstk\_Edit\_Inventory\_Requisitions ① Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f00000m0nB&sfdc.override=1 Doing before wait. waitUrl: default End of <default&gt; wait. Doing after wait. waitUrl: default (1) Getting webElement: By.xpath: //div[contains(@class,'pbHeader')][1]//input[@type='button' and (@name='rstk\_\_Edit\_Inventory\_Requisitions' or @name='rstk\_\_edit\_inventory\_requisitions' or @name='edit\_inventory\_requisitions')] ① Clicking WebElement. WebElement [tag: input, text: Maintain Inventory Requisitions] Doing after wait. waitUrl: default End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:57:48(04:08.781) For Each: {ICREQDataSrcData}=>regdata Start of iteration 1 of 2. Iteration 1 0 11:57:48(04:09.230) On SF rstk\_\_poreqView page with pageobject 0 11:57:48(04:09.233) Rstk\_\_poreq View 1 Start of With Screen. Connection Name: SFConnection, target: sf:ui:target?

page=rstk\_\_poreqView&pageObject=pageobjects.rstk\_\_poreqView

Update browser window handles.

- ① Opening Page context. Name: screen, data: null, frame: null
- Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

#### Click the Add button

0 11:57:51(04:11.680)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=add, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=add
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: input, text: Add]
- ① Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- i Successfully updated browser window handles.

### With Table rows {1}

0 11:57:52(04:13.140)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (i) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rownum}
- (i) Matched row number 1
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

### Set the Item No field to

# NPAuto\_Purchased (Purchased item for automation)

0 11:57:56(04:16.775)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemNo, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=itemNo
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- (i) End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: null, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto\_Purchased (Purchased item for automation), blur: false, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- Successfully updated browser window handles.

- (i) All Sub-Test Steps were successful.
- Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

#### Click the Itemnolist field

0 11:57:57(04:18.498)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemnolist, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=itemnolist
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: NPAuto\_Purchased (Purchased item for automation)]
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# With Table rows {1}

0 11:57:59(04:19.804)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (i) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rownum}
- (i) Matched row number 1
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Set the Requisition Qty field to 2

0 11:58:01(04:21.897)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=requisitionQty, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=requisitionQty
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:fm:j\_id91:j\_id92:j\_id96:j\_id97:j\_id106:j\_id108:j\_id109:gridpbs:gridTable:0:j\_id164:5:j\_id178, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 2, blur: true, selector: null
- 1 Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# 0 11:58:02(04:23.482) Set the Due Date field to 03/16/2022 ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=dueDate, before wait: default, after wait: default, auto retry: default 1 Locator: ui:locator?name=dueDate i) Interaction: ui:interaction?name=set ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/ apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1 Doing before wait. waitUrl: default i End of <default&gt; wait. i Doing after wait. waitUrl: default ① Got webElement. tagName: INPUT, id: $pg:fm:j\_id91:j\_id92:j\_id96:j\_id97:j\_id106:j\_id108:j\_id109:gridpbs:gridTable:0:j\_id164:6:j\_id178,$ type: text, selector: null ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null i Doing after wait. waitUrl: default i End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. (i) All Sub-Test Steps were successful. Going to update browser window handles. W Update browser window handles. i Successfully updated browser window handles. 0 11:58:04(04:25.375) Set Values: Rownum Setting value Rownum to 2 Configuration: ValueScope:Test (i) Successfully set Rownum to 2 All Sub-Test Steps were successful. (1) Closing Page context. Name: screen, data: null, frame: null (i) Parent window reselected. Window: null ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Start of iteration 2 of 2. Iteration 2 @ 11:58:07(04:27.917) On SF rstk\_\_poreqView page with pageobject 0 11:58:07(04:27.919) Rstk\_\_poreq View ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_poreqView&pageObject=pageobjects.rstk\_poreqView (1) Opening Page context. Name: screen, data: null, frame: null Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:58:09(04:30.418) Click the Add button ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=add, before wait:

default, after wait: default, auto retry: default

- 1 Locator: ui:locator?name=add
- i Interaction: ui:interaction?name=action
- $\textbf{①} \ Switched \ focus \ to \ main \ window. \ URL: \ https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1$
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: input, text: Add]
- 1 Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

# With Table rows {2}

0 11:58:11(04:31.723)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (1) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rownum}
- (i) Matched row number 2
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- Set the Item No field to

# NPAuto\_Subcontract (Subcontract item for automation)

0 11:58:12(04:33.441)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemNo, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=itemNo
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- 1 Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: null, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto\_Subcontract (Subcontract item for automation), blur: false, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

# Click the Itemnolist field

0 11:58:14(04:35.373)

① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemnolist, before wait: default, after wait: default, auto retry: default

- 1 Locator: ui:locator?name=itemnolist
- i Interaction: ui:interaction?name=action
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: NPAuto\_Subcontract (Subcontract item for automation)]
- 1 Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

## With Table rows {2}

0 11:58:17(04:37.717)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- ① Applying row locator to rows. Row Count: 10, Row Locator: {\$Rownum}
- (i) Matched row number 2
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- (i) Successfully updated browser window handles.

# Set the Requisition Qty field to 2

0 11:58:18(04:39.391)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=requisitionQty, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=requisitionQty
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- 1 Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:fm:j\_id91:j\_id92:j\_id96:j\_id97:j\_id106:j\_id108:j\_id109:gridpbs:gridTable:1:j\_id164:5:j\_id178, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 2, blur: true, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

#### Set the Due Date field to 03/16/2022

0 11:58:20(04:41.115)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=dueDate, before wait: default, after wait: default, auto retry: default
- i) Locator: ui:locator?name=dueDate
- 1 Interaction: ui:interaction?name=set

① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/ apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1 1 Doing before wait. waitUrl: default i End of <default&gt; wait. i Doing after wait. waitUrl: default ① Got webElement. tagName: INPUT, id:  $pg:fm:j\_id91:j\_id92:j\_id96:j\_id97:j\_id106:j\_id108:j\_id109:gridpbs:gridTable:1:j\_id164:6:j\_id178,$ type: text, selector: null ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null 1 Doing after wait. waitUrl: default i End of <default&gt; wait. (i) Going to update browser window handles. Update browser window handles. i Successfully updated browser window handles. (i) All Sub-Test Steps were successful. Going to update browser window handles. Update browser window handles. (i) Successfully updated browser window handles. 0 11:58:22(04:43.000) Set Values: Rownum (i) Setting value Rownum to 3 Configuration: ValueScope:Test (i) Successfully set Rownum to 3 All Sub-Test Steps were successful. ① Closing Page context. Name: screen, data: null, frame: null 1 Parent window reselected. Window: null ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Reached the end of the List. i All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null 1 Parent window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f000000m0nB&sfdc.override=1 ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f00000m0nB&sfdc.override=1 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:58:27(04:47.741) Click the Save button ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=save, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default 1 Locator: ui:locator?name=save i Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?

id=a4K5f00000m0nB&sfdc.override=1

1 Doing before wait. waitUrl: default i End of <default&gt; wait. ① Doing after wait. waitUrl: ui:wait:timed?seconds=10 (i) Clicking WebElement. WebElement [tag: input, text: Save] ① Doing after wait. waitUrl: ui:wait:timed?seconds=10 Start of Timed Wait Seconds: 10 10.003 End of Timed Wait. Actual duration(seconds): 10.003 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:58:38(04:59.245) Indirect/Service Requisition 0 11:58:38(04:59.387) Set Values: Rowno Setting value Rowno to 1 Configuration: ValueScope:Test (i) Successfully set Rowno to 1 0 11:58:38(04:59.422) On SF Purchase Requisition View screen Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_\_poreq\_\_c&action=View&noOverride=true (1) Opening Page context. Name: screen, data: null, frame: null Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Click the Maintain Indirect / Service Requisitions @ 11:58:43(05:03.931) button Start of Interact. Connection: SFConnection, Locator: ui:locator? name=rstk\_\_Edit\_Indirect\_Requisitions&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3Drstk\_poreq\_c%26action%3Drstk\_Edit\_Indirect\_Requisitions, before wait: default, after wait: default, auto retry: default ① Locator: ui:locator?name=rstk\_\_Edit\_Indirect\_Requisitions&binding=sf%3Aui%3Abinding%3Aobject %3Fobject%3Drstk\_\_poreq\_\_c%26action%3Drstk\_\_Edit\_Indirect\_Requisitions Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f000000m0nB&sfdc.override=1 Doing before wait. waitUrl: default End of <default&gt; wait. Doing after wait. waitUrl: default Getting webElement: By.xpath: //div[contains(@class,'pbHeader')][1]//input[@type='button' and (@name='rstk\_\_Edit\_Indirect\_Requisitions' or @name='rstk\_\_edit\_indirect\_requisitions' or @name='edit\_indirect\_requisitions')] ① Clicking WebElement. WebElement [tag: input, text: Maintain Indirect / Service Requisitions] Doing after wait. waitUrl: default End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. i All Sub-Test Steps were successful. (1) Closing Page context. Name: screen, data: null, frame: null 1 Parent window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?

id=a4K5f000000m0nB&sfdc.override=1

① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f000000m0nB&sfdc.override=1 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. For Each: {SYREQSrcData}=>syreq 0 11:58:46(05:06.917) (i) Start of iteration 1 of 2. Iteration 1 0 11:58:46(05:07.193) On SF rstk\_\_poreqView page with pageobject @ 11:58:46(05:07.194) Rstk\_\_poreq View ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_\_poreqView&pageObject=pageobjects.rstk\_\_poreqView (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null 1 Parent window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f00000m0nB&sfdc.override=1 ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f00000m0nB&sfdc.override=1 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. @ 11:58:51(05:11.974) Click the Add 1 button Start of Interact. Connection: SFConnection, Locator: ui:locator?name=add1, before wait: default, after wait: default, auto retry: default ① Locator: ui:locator?name=add1 i Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f00000m0nB&sfdc.override=1 1 Doing before wait. waitUrl: default i End of <default&gt; wait. i Doing after wait. waitUrl: default (i) Clicking WebElement. WebElement [tag: input, text: Add] Doing after wait. waitUrl: default i End of <default&gt; wait. (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:58:52(05:13.341) With Table 1 rows {1} ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table1 ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 (1) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rowno}

(i) Matched row number 1

(i) Going to update browser window handles.

- Update browser window handles.
- Successfully updated browser window handles.

# Set the Syreqitem field to NPAuto\_Service Item (Automation testing)

0 11:58:56(05:17.492)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=syreqitem, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=syreqitem
- Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- 1 Doing before wait. waitUrl: default
- End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- (i) Got webElement. tagName: INPUT, id: null, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto\_Service Item (Automation testing), blur: false, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.
- i All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Click the Itemnolist field

0 11:58:58(05:19.353)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemnolist, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=itemnolist
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: NPAuto\_Service Item (Automation testing)]
- Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

# With Table 1 rows {1}

0 11:59:00(05:20.722)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table1
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (i) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rowno}
- (i) Matched row number 1
- (i) Going to update browser window handles.
- Update browser window handles.

(i) Successfully updated browser window handles.

# Set the Qty Required field to 2

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=qtyRequired, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=qtyRequired
- Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default
- (i) Got webElement. tagName: INPUT, id:  $pg:fm:j\_id227:j\_id228:j\_id232:j\_id233:j\_id242:j\_id244:j\_id245:gridpbs:gridTable:0:j\_id300:6:j\_id314,\\$ type: text, selector: null
- 1 Typing value. tagName: INPUT, type: text, value: 2, blur: true, selector: null
- i Doing after wait. waitUrl: default
- End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Date Required field to 03/16/2022

0 11:59:03(05:24.570)

0 11:59:02(05:22.834)

- 1 Start of Interact. Connection: SFConnection, Locator: ui:locator?name=dateRequired, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=dateRequired
- Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id:  $pg:fm: \_id227: \_id228: \_id232: \_id233: \_id242: \_id244: \_id245: gridpbs: gridTable: 0: \_id300: 7: \_id314, \\$ type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null
- Doing after wait. waitUrl: default
- End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Unit Price field to 30

0 11:59:05(05:26.415)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=unitPrice, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=unitPrice
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- i Doing after wait. waitUrl: default

(i) Got webElement. tagName: INPUT, id:  $pg:fm:\_id227:\_id228:\_id232:\_id233:\_j:d242:\_id244:\_id245:gridpbs:gridTable:0:\_j:id300:13:\_id314,\\$ type: text, selector: null 1 Typing value. tagName: INPUT, type: text, value: 30, blur: false, selector: null Doing after wait. waitUrl: default i End of <default&gt; wait. (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. i All Sub-Test Steps were successful. (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 11:59:07(05:28.080) Set Values: Rowno Setting value Rowno to 2 Configuration: ValueScope:Test (i) Successfully set Rowno to 2 ① Start of iteration 2 of 2. 0 11:59:07(05:28.374) Iteration 2 On SF rstk\_\_poreqView page with pageobject 0 11:59:07(05:28.375) Rstk\_\_poreq View ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_\_poreqView&pageObject=pageobjects.rstk\_\_poreqView (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null (i) Parent window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f000000m0nB&sfdc.override=1 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Click the Add 1 button 11:59:12(05:33.210) ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=add1, before wait: default, after wait: default, auto retry: default Locator: ui:locator?name=add1 1 Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ poreqView?id=a4K5f00000m0nB&sfdc.override=1 1 Doing before wait. waitUrl: default End of <default&gt; wait. i Doing after wait. waitUrl: default (i) Clicking WebElement. WebElement [tag: input, text: Add] i Doing after wait. waitUrl: default

- i End of <default&gt; wait.
- Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

#### With Table 1 rows {2}

0 11:59:13(05:34.580)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table1
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (i) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rowno}
- (i) Matched row number 2
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Set the Syreqitem field to NPAuto\_Indirect Item (Automation testing)

0 11:59:16(05:37.054)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=syreqitem, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=syreqitem
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: null, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto\_Indirect Item (Automation testing), blur: false, selector: null
- Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Click the Itemnolist field

0 11:59:18(05:38.831)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=itemnolist, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=itemnolist
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: NPAuto\_Indirect Item (Automation testing)]

- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

#### With Table 1 rows {2}

0 11:59:20(05:41.316)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=table1
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- (i) Applying row locator to rows. Row Count: 10, Row Locator: {\$Rowno}
- Matched row number 2
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Set the Qty Required field to 1

0 11:59:23(05:44.428)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=qtyRequired, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=qtyRequired
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:fm:j\_id227:j\_id228:j\_id232:j\_id233:j\_id242:j\_id244:j\_id245:gridpbs:gridTable:1:j\_id300:6:j\_id314, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 1, blur: true, selector: null
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

#### Set the Date Required field to 03/16/2022

0 11:59:25(05:45.938)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=dateRequired, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=dateRequired
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:fm:j\_id227:j\_id228:j\_id232:j\_id233:j\_id242:j\_id244:j\_id245:gridpbs:gridTable:1:j\_id300:7:j\_id314, tvpe: text. selector: null
- ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null
- 1 Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- Going to update browser window handles.

- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Unit Price field to 12

0 11:59:27(05:47.628)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=unitPrice, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=unitPrice
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:fm:j\_id227:j\_id228:j\_id232:j\_id233:j\_id242:j\_id244:j\_id245:gridpbs:gridTable:1:j\_id300:13:j\_id314, type: text, selector: null
- 1 Typing value. tagName: INPUT, type: text, value: 12, blur: false, selector: null
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

## Set Values: Rowno

0 11:59:28(05:49.483)

- Setting value Rowno to 3
- Configuration: ValueScope:Test
- (i) Successfully set Rowno to 3
- (i) Reached the end of the List.

# Click the Save 1 button

① 11:59:28(05:49.566)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=save1, before wait: default, after wait: ui:wait:pageload?timeout=60, auto retry: default
- 1 Locator: ui:locator?name=save1
- i Interaction: ui:interaction?name=action
- $\textbf{\textcircled{1}} \ \, \textbf{Switched focus to main window. } \ \, \textbf{URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB\&sfdc.override=1 \\$
- 1 Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: ui:wait:pageload?timeout=60
- ① Clicking WebElement. WebElement [tag: input, text: Save]
- 1 Doing after wait. waitUrl: ui:wait:pageload?timeout=60
- (i) Waiting for page to load. Page URL: null, Timeout(secs): 60

Start of waitForPageToLoad. Timeout(ms): 60000

Re-attempting of waitForPageToLoad. Timeout(ms): 60000

End of waitForPageToLoad. Duration(ms): 593

- (i) End for wait for page to load.
- Going to update browser window handles.
- Update browser window handles.

- Successfully updated browser window handles.
- On SF Purchase Requisition View screen
  - ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_\_poreq\_\_c&action=View&noOverride=true
  - ① Opening Page context. Name: screen, data: null, frame: null
  - (i) Going to update browser window handles.
  - Update browser window handles.
  - (i) Successfully updated browser window handles.

#### Click the Edit button

0 11:59:31(05:51.738)

0 11:59:30(05:51.377)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=Edit&binding=sf%3Aui%3Abinding %3Aobject%3Fobject%3Drstk\_poreq\_c%26action%3DEdit, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=Edit&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_poreq\_c %26action%3DEdit
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Getting webElement: By.xpath: //div[contains(@class,'pbHeader')][1]//input[@type='button' and (@name='edit')]
- ① Clicking WebElement. WebElement [tag: input, text: Edit ]
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- 1 Parent window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nB%26sfdc.override%3D1&scontrolCaching=1&sfdc.override=1&id=a4K5f000000m0nB&returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f00000m0nB%26sfdc.override%3D1
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=https %3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nB %26sfdc.override%3D1&scontrolCaching=1&sfdc.override=1&id=a4K5f000000m0nB&returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f00000m0nB%26sfdc.override%3D1
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=https%3A %2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nB%26sfdc.override %3D1&scontrolCaching=1&sfdc.override=1&id=a4K5f000000m0nB&returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f000000m0nB%26sfdc.override%3D1
- Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.
- On SF rstk\_poreq page with pageobject Rstk\_poreq


- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_poreq&page=rstk\_poreq
- ① Opening Page context. Name: screen, data: null, frame: null
- (1) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Set the Status select to Approved

0 11:59:39(06:00.291)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=Status, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=Status
- i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=https %3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nB %26sfdc.override%3D1&scontrolCaching=1&sfdc.override=1&id=a4K5f000000m0nB&returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f00000m0nB%26sfdc.override%3D1
- i Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Got webElement. tagName: SELECT, id: pg:fm:pb:pbs\_Main:j\_id144:poreq\_status\_\_c:j\_id146:j\_id152, type: null, selector: null
- ① Doing after wait. waitUrl: default
- ① End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- Click the Save button

0 11:59:40(06:01.376)

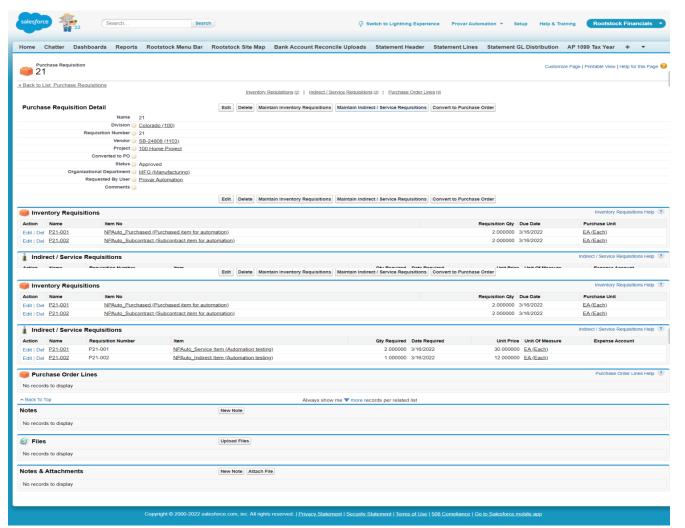

After Screenshot : 2022/03/16 11:59:52

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=save, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default
- 1 Locator: ui:locator?name=save
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreq?retURL=https %3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nB %26sfdc.override%3D1&scontrolCaching=1&sfdc.override=1&id=a4K5f000000m0nB&returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f00000m0nB%26sfdc.override%3D1
- ① Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
- ① Clicking WebElement. WebElement [tag: input, text: Save]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
- (i) Start of Timed Wait. Seconds: 10
- (i) End of Timed Wait. Actual duration(seconds): 10.006

Start of waitForPageToLoad. Timeout(ms): 90000

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 60

- ① Sending screenshot. Data length: 309607
- (i) Going to update browser window handles.
- W Update browser window handles.
- Successfully updated browser window handles.

- (i) All Sub-Test Steps were successful.
- ① Closing Page context. Name: screen, data: null, frame: null
- i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f000000m0nB&sfdc.override=1
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# On SF rstk\_\_poreqView page with pageobject Rstk\_\_poreq View

0 11:59:59(06:20.548)


- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_poreqView&page=rstk\_poreqView
  - ① Opening Page context. Name: screen, data: null, frame: null
  - (i) Going to update browser window handles.
  - Update browser window handles.
  - Successfully updated browser window handles.

## On SF Purchase Requisition View screen

0 12:00:00(06:20.987)

- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_\_poreq\_\_c&action=View&noOverride=true
- ① Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- Click the Convert to Purchase Order button

0 12:00:00(06:21.267)

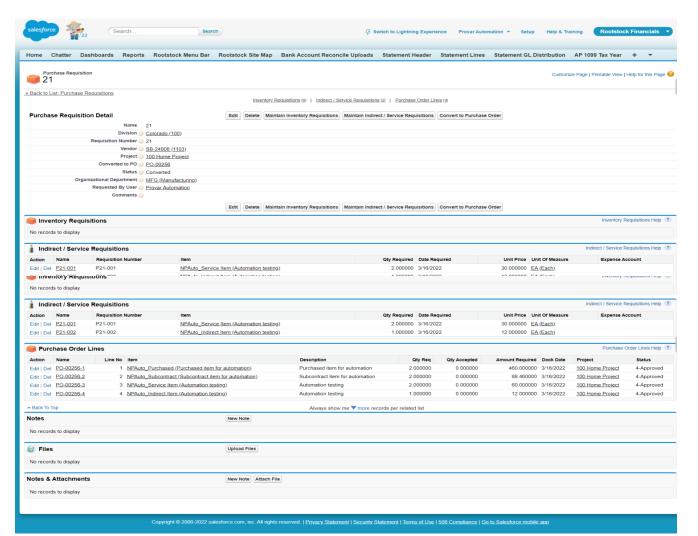

After Screenshot : 2022/03/16 12:00:31

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator? name=rstk\_\_Convert\_to\_Purchase\_Order&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3Drstk\_\_poreq\_\_c%26action%3Drstk\_\_Convert\_to\_Purchase\_Order, before wait: default, after wait: ui:wait:timed?seconds=30, auto retry: default
- ① Locator: ui:locator?name=rstk\_\_Convert\_to\_Purchase\_Order&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_\_poreq\_\_c%26action%3Drstk\_\_Convert\_to\_Purchase\_Order
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nB&sfdc.override=1
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=30
- ① Getting webElement: By.xpath: //div[contains(@class,'pbHeader')][1]//input[@type='button' and (@name='rstk\_\_convert\_to\_purchase\_order' or @name='rstk\_\_convert\_to\_purchase\_order')]
  @name='convert\_to\_purchase\_order')]
- ① Clicking WebElement. WebElement [tag: input, text: Convert to Purchase Order]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=30
- ① Start of Timed Wait. Seconds: 30
- 1 End of Timed Wait. Actual duration(seconds): 30.014

Start of waitForPageToLoad. Timeout(ms): 90000

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 58


- (i) Sending screenshot. Data length: 339122
- (i) Going to update browser window handles.

- Update browser window handles.
- Successfully updated browser window handles.
- StatusAssertion

0 12:00:36(06:57.335)

- (i) Start of UiAssert. Connection: SFConnection
- Resolving field rstk\_\_poreq\_status\_\_c
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nBEAQ
- ① Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- $\begin{tabular}{ll} \hline \textbf{0} & \textbf{0}$
- $\textbf{\textcircled{1}} \ \, \textbf{Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView? id=a4K5f00000m0nBEAQ } \\$
- ① Asserting field attributes: rstk\_\_poreq\_status\_\_c
- ① Asserting Attribute: value to PrimitiveValueImpl [ value: Converted, valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
- Assertion successful.Converted EqualTo Converted
- (i) Object read successfully. Result Name: Values
- Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.
- Click the Converted to PO reference

0 12:00:37(06:58.492)

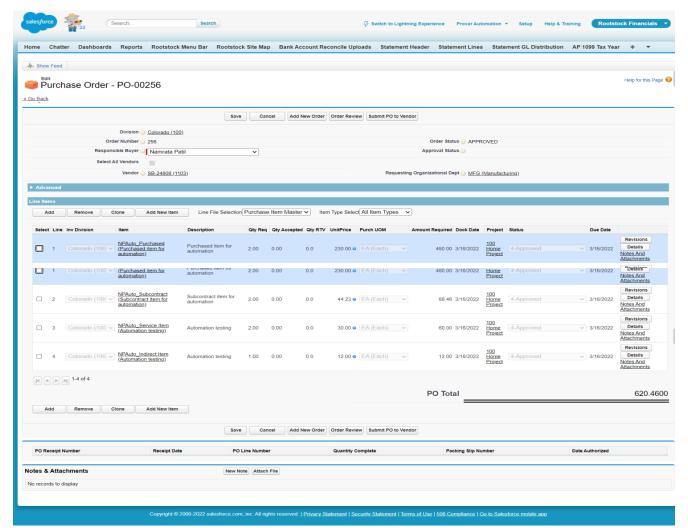

After Screenshot : 2022/03/16 12:00:38

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=rstk\_poreq\_pohdr\_c&binding=sf %3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_poreq\_c%26field%3Drstk\_poreq\_pohdr\_c, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=rstk\_poreq\_pohdr\_c&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_poreq\_c%26field%3Drstk\_poreq\_pohdr\_c
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/poreqView?id=a4K5f00000m0nBEAQ
- Doing before wait. waitUrl: default
- i) End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- $\begin{tabular}{ll} \hline \textbf{@ ide='InlineEditDialogContent']/'div[contains(@class, 'inlineEditDiv') or contains(@class, 'inlineEditCompoundDiv')]/table//tr/td[contains(@class, 'labelCol') and ( .//text() = 'Converted to PO' or normalize-space(.//text()) = 'Converted to PO' )]/following-sibling::td[1] | //div[contains(@class, 'pbBody') and not(//div[@id='InlineEditDialog' and contains(@style, 'visible')])]//div[contains(@class, 'pbSubsection')][1]/table//tr/td[contains(@class, 'labelCol') and ( .//text() = 'Converted to PO' or normalize-space(.//text()) = 'Converted to PO' )]/following-sibling::td[1] ) \\ \end{tabular}$
- ① Clicking WebElement. WebElement [tag: a, text: PO-00256, href: https://automationtesting2.my.salesforce.com/a3w5f000000v35V?returnURL=https%3A//automationtesting2--rstk.visualforce.com/apex/poreqView%3Fid%3Da4K5f00000m0nBEAQ]
- 1 Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.

Start of waitForPageToLoad. Timeout(ms): 90000

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 87

① Sending screenshot. Data length: 296705

 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. (i) All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null (i) Parent window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f00000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f000000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. (i) All Sub-Test Steps were successful. ① Closing Page context. Name: screen, data: null, frame: null i Main window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f000000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. On SF rstk\_\_PurchOrd page with pageobject Rstk\_\_ 0 12:00:58(07:19.010) Purch Ord ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_\_PurchOrd&pageObject=pageobjects.rstk\_\_PurchOrd (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. @ 12:00:58(07:19.384) ReadOrderNumber 0 12:00:58(07:19.412) Set Values: OrderNumber 0 12:00:58(07:19.451) Read PONumer 1 Start of UiAssert. Connection: SFConnection Resolving field pageTitle ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f000000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 1 Doing before wait. waitUrl: default i End of <default&gt; wait. ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f00000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 Asserting field attributes: pageTitle (i) Reading Attribute: value (i) Object read successfully. Result Name: Values

(i) Going to update browser window handles.

Successfully updated browser window handles.

Update browser window handles.

0 12:01:10(07:30.696) Split: {Values.fields.pageTitle.value}=> =>Tokens ① Splitting string. Separator: , Input: Purchase Order - PO-00256 (i) Found token. Number: 1, Token: Purchase i Found token, Number: 2, Token: Order i) Found token. Number: 3, Token: i Found token. Number: 4, Token: PO-00256 i Stored tokens. Result name: Tokens, token count: 4 0 12:01:10(07:30.812) Set Values: PONumber (i) Setting value PONumber to PO-00256 Configuration: ValueScope:Test (i) Successfully set PONumber to PO-00256 SOQL Query: select Id,CreatedDate,rstk\_\_pohdr\_ordno\_\_c,rstk\_\_pohdr\_totamt\_\_c 0 12:01:10(07:30.988) from rstk\_\_pohdr\_\_c where Name = 'PO-00256' order by CreatedDate Desc limit 1=>pohdr 1 Reading a Salesforce object. Connection Name: SFConnection, Query: select Id,CreatedDate,rstk\_pohdr\_ordno\_c,rstk\_pohdr\_totamt\_c from rstk\_pohdr\_c where Name = 'PO-00256' order by CreatedDate Desc limit 1 (i) Query successful. Row Count: 1. 0 12:01:11(07:32.565) Set Values: POTotal (i) Setting value POTotal to 620.46 Configuration: ValueScope:Test Successfully set POTotal to 620.46 Set Values: POHDRID 0 12:01:12(07:32.741) (i) Setting value POHDRID to a3w5f000000v35VAAQ Configuration: ValueScope:Test ① Successfully set POHDRID to a3w5f000000v35VAAQ Set Values: OrderNumber 0 12:01:12(07:32.872) (i) Setting value OrderNumber to 256 Configuration: ValueScope:Test Successfully set OrderNumber to 256 Set Values: CreatedDate 0 12:01:12(07:33.002) ① Setting value CreatedDate to 2022-03-16T06:30:10.000Z Configuration: ValueScope:Test ① Successfully set CreatedDate to 2022-03-16T06:30:10.000Z 0 12:01:12(07:33.183) Click the Submit PO To Vendor button (1) Start of Interact. Connection: SFConnection, Locator: ui:locator?name=submitPOToVendor, before wait: default, after wait: default, auto retry: default (i) Locator: ui:locator?name=submitPOToVendor ① Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f000000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 i Doing before wait. waitUrl: default i End of <default&gt; wait. i Doing after wait. waitUrl: default ① Clicking WebElement. WebElement [tag: input, text: Submit PO to Vendor] 1 Doing after wait. waitUrl: default i End of <default&gt; wait. (i) Going to update browser window handles.

- Update browser window handles.
- Successfully updated browser window handles.


#### Handle UI Alerts

0 12:01:13(07:34.215)

- i Start of Handle Alert. Connection: SFConnection
- (i) Start of Alert Wait. Timeout (seconds): 30
- i Polling for Alert successful. Attempt: 1
- 1 End of Alert Wait. Actual duration(seconds): 0.019
- ① Switching to alert. ExpectedMessage: Do you wish to submit the PO to Vendor?
- (i) Got alert text: Do you wish to submit the PO to Vendor?
- ① com.provar.core.model.base.java.ComparisonType\$Options@6a24088b
- ① Asserting Alert Message, To: 'Do you wish to submit the PO to Vendor?', Comparision Type: Equals
- Assertion successful. 'Do you wish to submit the PO to Vendor?' Equals 'Do you wish to submit the PO to Vendor?'
- Accepting alert.
- Switching back to current frame.
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid%3Da4K5f00000m0nBEAQ&id=a3w5f00000v35V&sfdc.override=1
- (i) Going to update browser window handles.
- \*\*Update browser window handles.
- Successfully updated browser window handles.

# Click the Cancel field

0 12:01:18(07:38.668)

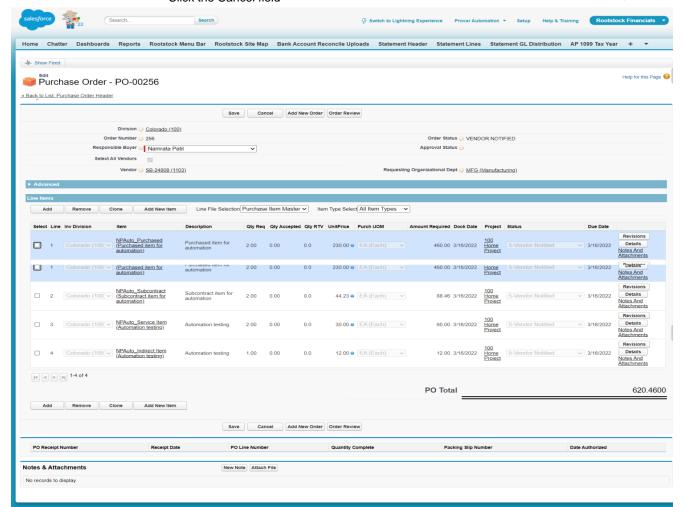

seconds=10, after wait: default, auto retry: default 1 Locator: ui:locator?name=cancel Interaction: uirinteraction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrd? returnURL=https%3A%2F%2Fautomationtesting2--rstk.visualforce.com%2Fapex%2FporeqView%3Fid %3Da4K5f000000m0nBEAQ&id=a3w5f000000v35V&sfdc.override=1 i Doing before wait. waitUrl: ui:wait:timed?seconds=10 (i) Start of Timed Wait. Seconds: 10 (i) End of Timed Wait. Actual duration(seconds): 10.01 i Doing after wait. waitUrl: default ① Clicking WebElement. WebElement [tag: button, text: Cancel] i Doing after wait. waitUrl: default i End of <default&gt; wait. Start of waitForPageToLoad. Timeout(ms): 90000 Re-attempting of waitForPageToLoad. Timeout(ms): 90000 End of waitForPageToLoad. Duration(ms): 104 (i) Sending screenshot. Data length: 296021 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. i All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null (i) Main window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/purchOrd? id=a3w5f00000v35VAAQ Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 1 Handling managed resource. Name: SFConnection \*Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 12:01:48(08:09.437) Fetch Quantity on Hand Before Receipt 0 12:01:49(08:09.713) Set Values: wb\_Quantitypath ① Setting value wb\_Quantitypath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set wb\_Quantitypath to templates/AutomationOrg/POData\_AutomationOrg.xlsx 0 12:01:49(08:09.746) Set Values: ws\_quantity Setting value ws\_quantity to InventoryRequisition Configuration: ValueScope:Test Successfully set ws\_quantity to InventoryRequisition Call Inventory QuantityOnHand 0 12:01:49(08:09.945) 0 12:01:49(08:09.947) Inventory QuantityOnHand 0 12:01:49(08:09.972) Salesforce Connect: SFConnection (Test) ① Connecting to Salesforce as QARSF\_Admin ① Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection 0 12:01:49(08:10.011) Qty On Hand 0 12:01:49(08:10.112) For Each: {SrcData\_InvyQty}=>InventoryQuantity (i) Start of iteration 1 of 2.

① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=cancel, before wait: ui:wait:timed?

```
Iteration 1
                                                                                     0 12:01:49(08:10.369)
    SOQL Query: SELECT
   ld,rstk__icitemsiteproj_item__c,rstk__icitemsiteproj_qtyalloc__c,rstk__icitemsiteproj_qtyohnn__c,rst
    FROM rstk__icitemsiteproj__c where
    rstk icitemsiteproj item c =
    '{InventoryQuantity.lcitem}'=>icitemprjs
        (1) Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
       Id,rstk_icitemsiteproj_item_c,rstk_icitemsiteproj_qtyalloc_c,rstk_icitemsiteproj_qtyohn_c,rstk_icitemsiteproj_qtyohn
FROM rstk_icitemsiteproj_c where rstk_icitemsiteproj_item_c = 'a1E1K000008NTam'
        1 The query returned no records.
                                                                                     0 12:01:51(08:12.122)
    Set Values: ItemNumber
        (i) Setting value ItemNumber to a1E1K000008NTam
        Configuration: ValueScope:Test
        (i) Successfully set ItemNumber to a1E1K000008NTam
                                                                                     0 12:01:51(08:12.378)
    Set Values: QtyOnHand.QuantityBefore
        (i) Setting value QtyOnHand.QuantityBefore to <null>
        Configuration: ValueScope:Test
        (i) Successfully set QtyOnHand.QuantityBefore to <null>
    Write: {QtyOnHand}=>templates/
                                                                                     @ 12:01:51(08:12.456)
    AutomationOrg/POData_AutomationOrg.xlsx
        Writing to URL templates/AutomationOrg/POData_AutomationOrg.xlsx
        Start of Excel Write. WorkbookPath: templates/AutomationOrg/POData_AutomationOrg.xlsx,
        excludeCols: [none]
        Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg
        \POData_AutomationOrg.xlsx
        ① Applying match locator Data Count: 2, Match Locator: {lcitem = $ItemNumber}
        1 Testing row number 1
        1 Resolving EqualTo. a1E1K000008NTam = a1E1K000008NTam, result: true
        (i) Row number 1 matched
        1 Testing row number 2
        (i) Resolving EqualTo. a1E1K000008NTaw = a1E1K000008NTam, result: false
        1 The match locator matched 1 row(s).
        ① Updating data in excel sheet: InventoryRequisition
        ① Updating Row - 2
        Updated data in excel sheet: InventoryRequisition
(i) Start of iteration 2 of 2.
Iteration 2
                                                                                     0 12:01:52(08:13.099)
    SOQL Query: SELECT
   Id,rstk__icitemsiteproj_item__c,rstk__icitemsiteproj_qtyalloc__c,rstk__icitemsiteproj_qtyohnn__c,rst
                                                                                     0 12:01:52(08:13.100)
   FROM rstk__icitemsiteproj__c where
    rstk__icitemsiteproj_item__c =
    '{InventoryQuantity.lcitem}'=>icitemprjs
        Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
        ld,rstk_icitemsiteproj_item_c,rstk_icitemsiteproj_qtyalloc_c,rstk_icitemsiteproj_qtyohnn_c,rstk_icitemsiteproj_qtyoh
        FROM rstk_icitemsiteproj_c where rstk_icitemsiteproj_item_c = 'a1E1K000008NTaw'
        1 The query returned no records.
    Set Values: ItemNumber
                                                                                     0 12:01:53(08:14.565)
        (i) Setting value ItemNumber to a1E1K000008NTaw
        Configuration: ValueScope:Test
        (i) Successfully set ItemNumber to a1E1K000008NTaw
    Set Values: QtyOnHand.QuantityBefore
                                                                                     0 12:01:54(08:14.710)
        (i) Setting value QtyOnHand.QuantityBefore to <null>
```

(i) Successfully set QtyOnHand.QuantityBefore to <null> Write: {QtvOnHand}=>templates/ 0 12:01:54(08:14.803) AutomationOrg/POData AutomationOrg.xlsx Writing to URL templates/AutomationOrg/POData\_AutomationOrg.xlsx ① Start of Excel Write. WorkbookPath: templates/AutomationOrg/POData\_AutomationOrg.xlsx, excludeCols: [none] ① Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg \POData\_AutomationOrg.xlsx ① Applying match locator Data Count: 2, Match Locator: {lcitem = \$ItemNumber} ① Testing row number 1 ① Resolving EqualTo. a1E1K000008NTam = a1E1K000008NTaw, result: false 1 Testing row number 2 1 Resolving EqualTo. a1E1K000008NTaw = a1E1K000008NTaw, result: true (i) Row number 2 matched 1 The match locator matched 1 row(s). (i) Updating data in excel sheet: InventoryRequisition ① Updating Row - 3 Updated data in excel sheet: InventoryRequisition (i) Reached the end of the List. (1) Handling managed resource. Name: SFConnection \*Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 12:01:54(08:15.304) Call PurchaseOrderReceipt 0 12:01:54(08:15.309) PurchaseOrderReceipt 0 12:01:54(08:15.356) Salesforce Connect: SFConnection (Test) (i) Connecting to Salesforce as QARSF\_Admin (i) Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection 0 12:01:54(08:15.406) ReadData On SF rstk\_\_POReceipt page with pageobject Rstk\_\_ 0 12:01:54(08:15.506) PO Receipt ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_\_POReceipt&pageObject=pageobjects.rstk\_\_POReceipt (i) Opening Page context. Name: screen, data: null, frame: null ① Opening Salesforce Page. Page Name: rstk\_\_POReceipt, Url: /apex/rstk\_\_POReceipt Opening Salesforce user home page Navigate to home page Qualified relative URL. URL: https://automationtesting2--rstk.visualforce.com/apex/rstk\_\_POReceipt Opening page. Requested URL: /apex/rstk\_\_POReceipt, Absolute URL: https://automationtesting2--rstk.visualforce.com/ apex/rstk\_\_POReceipt?//automationtesting2--rstk.visualforce.com/apex/rstk\_\_POReceipt= Perform page load wait (i) Successfully opened user home page (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:02:00(08:21.380) Set the Order Number select to 256 ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=OrderNumber, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default Locator: ui:locator?name=OrderNumber

Configuration: ValueScope:Test

```
1 Interaction: ui:interaction?name=set
   ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/rstk__POReceipt
   i Doing before wait. waitUrl: default
   i End of <default&gt; wait.
   i Doing after wait. waitUrl: ui:wait:timed?seconds=10
   (i) Got webElement. tagName: SELECT, id: null, type: null, selector: null
   ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
   i Start of Timed Wait. Seconds: 10
   10.005 End of Timed Wait. Actual duration(seconds): 10.005


    Going to update browser window handles.

    Update browser window handles.

    Successfully updated browser window handles.

  Set the Packing Slip Number field to NP-256
                                                                                                0 12:02:11(08:32.522)
   ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=packingSlipNumber, before wait:
   ui:wait:timed?seconds=10, after wait: default, auto retry: default
    Locator: ui:locator?name=packingSlipNumber
   i Interaction: ui:interaction?name=set
   ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/rstk__POReceipt
   i Doing before wait. waitUrl: ui:wait:timed?seconds=10
   i Start of Timed Wait. Seconds: 10
    End of Timed Wait. Actual duration(seconds): 10.007
   ① Doing after wait. waitUrl: default
   Got webElement. tagName: INPUT, id: pg:fm:pb:pbs_Main:j_id137:porcv_packslipno__c, type: text, selector: null
   ① Typing value. tagName: INPUT, type: text, value: NP-256, blur: false, selector: null
   i Doing after wait. waitUrl: default
   i End of <default&gt; wait.
   (i) Going to update browser window handles.
    Update browser window handles.
   ① Successfully updated browser window handles.
                                                                                                0 12:02:22(08:43.389)
Set Values: rownum
For Each: {IPList}=>poline
                                                                                                0 12:02:22(08:43.470)
   ① Start of iteration 1 of 2.
    Iteration 1
                                                                                                0 12:02:23(08:44.072)
        SOQL Query: select
        Id,Name,rstk_peitem_div_c,rstk_peitem_tracksrl_pl_c,rstk_peitem_tracklot_pl_c;
       from rstk__peitem__c where Name like
        '{poline.ltem}%'=>peitem
            1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
            Id,Name,rstk_peitem_div_c,rstk_peitem_tracksrl_pl_c,rstk_peitem_tracklot_pl_c from rstk_peitem_c where Name like 'NPAuto_Purchased (Purchased item for automation)%'
            ① Query successful. Row Count: 1.
        If: {peitem.rstk__peitem_tracksrl_pl__c = "Yes"
                                                                                                0 12:02:25(08:45.877)
        AND peitem.rstk__peitem_tracklot_pl__c = "Yes"}
            Then
                With Porcvlines rows {Item = $poline.Item}
                                                                                                               (i) ---
                    Set the Lot Numbers field to NP-
                     {UniqueId(5)}
                     Set the Lot Expiration Date field to
                     {DateFormat(DateAdd(TODAY), "MM/dd/
                                                                                                               @ ---
                     yyyy")}
```



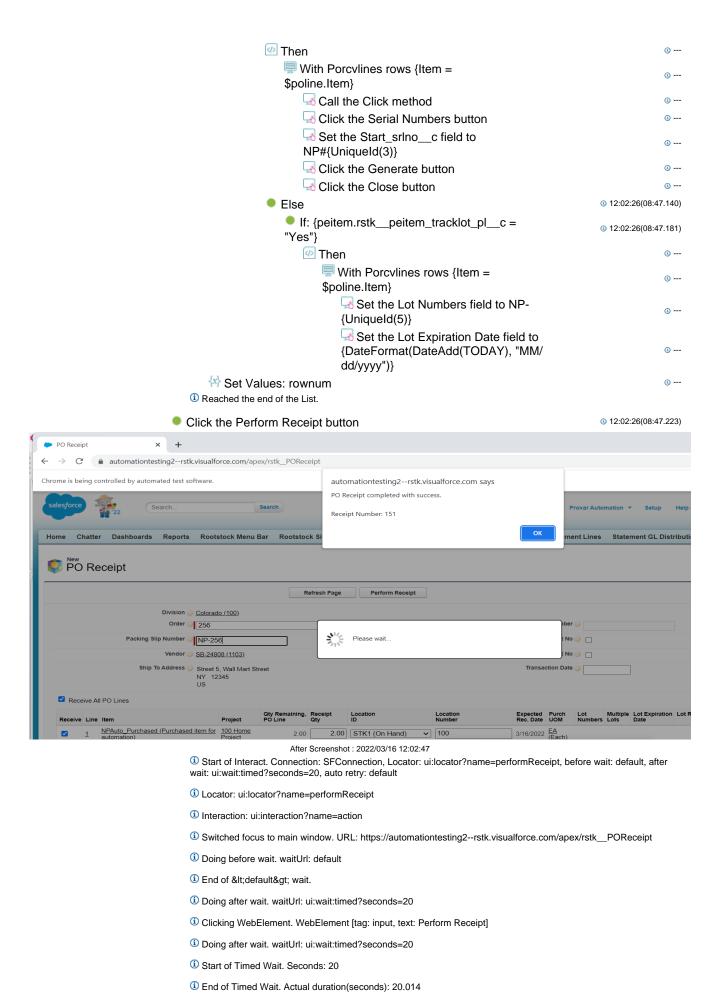

```
(i) Going to update browser window handles.
                             Update browser window handles.

    Successfully updated browser window handles.

                                                                                                                                                                                                0 12:02:47(09:08.518)
                           Handle UI Alerts
                            i Start of Handle Alert. Connection: SFConnection
                             i Start of Alert Wait. Timeout (seconds): 30
                             i Polling for Alert successful. Attempt: 1
                            1 End of Alert Wait. Actual duration(seconds): 0.014
                             (i) Switching to alert. ExpectedMessage: null
                             (1) Got alert text: PO Receipt completed with success. Receipt Number: 151
                             Assertion Not required as expectedMessage is not provided
                             i Dismissing alert.
                            Switching back to current frame.
                             ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/rstk__POReceipt
                             (i) Going to update browser window handles.
                             Update browser window handles.

    Successfully updated browser window handles.

                     i All Sub-Test Steps were successful.
                     (i) Closing Page context. Name: screen, data: null, frame: null
                     i Main window reselected. Window: main
                     ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/rstk__POReceipt
                     (i) Going to update browser window handles.
                     Update browser window handles.

    Successfully updated browser window handles.

             (i) Handling managed resource. Name: SFConnection
              *Not closing Salesforce Connection because it is still being used. Name: SFConnection
             (i) Salesforce Connection handled successfully. Name: SFConnection
                                                                                                                                                                                                0 12:02:54(09:15.146)
Fetch Quantity on Hand After Receipt
                                                                                                                                                                                                0 12:02:54(09:15.566)
       Call Inventory QuantityOnHand
               Inventory QuantityOnHand
                                                                                                                                                                                                0 12:02:54(09:15.577)
                      Salesforce Connect: SFConnection (Test)
                                                                                                                                                                                                0 12:02:55(09:15.633)
                             ① Connecting to Salesforce as QARSF_Admin
                             1 Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection
                                                                                                                                                                                                0 12:02:55(09:15.709)
                      Qty On Hand
                                                                                                                                                                                                0 12:02:55(09:15.894)
                             For Each: {SrcData_InvyQty}=>InventoryQuantity
                                    ① Start of iteration 1 of 2.
                                     Iteration 1
                                                                                                                                                                                                0 12:02:55(09:16.140)
                                             SOQL Query: SELECT
                                            Id,rstk__icitemsiteproj_item__c,rstk__icitemsiteproj_qtyalloc__c,rstk__icitemsiteproj_qtyohnn__c,rst
                                                                                                                                                                                                0 12:02:55(09:16.141)
                                            FROM rstk__icitemsiteproj__c where
                                            rstk__icitemsiteproj_item__c =
                                            '{InventoryQuantity.lcitem}'=>icitemprjs
                                                   (1) Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT
                                                   Id, rstk\_icitems iteproj\_item\_c, rstk\_icitems iteproj\_qtyalloc\_c, rstk\_icitems iteproj\_qtyohnn\_c, rstk\_icitems iteproj\_qtyohnn_c, rstk\_icitems iteproj\_qtyoh
                                                   FROM rstk__icitemsiteproj__c where rstk__icitemsiteproj_item__c = 'a1E1K000008NTam'
                                                   i) The query returned no records.
                                             Set Values: ItemNumber
                                                                                                                                                                                                0 12:02:57(09:17.613)
                                                    Setting value ItemNumber to a1E1K000008NTam
```

i Sending screenshot. Data length: 79215

Configuration: ValueScope:Test (i) Successfully set ItemNumber to a1E1K000008NTam Set Values: QtyOnHand.QuantityAfter 0 12:02:57(09:17.719) (i) Setting value QtyOnHand.QuantityAfter to <null> Configuration: ValueScope:Test (i) Successfully set QtyOnHand.QuantityAfter to <null> Write: {QtyOnHand}=>templates/ 0 12:02:57(09:17.831) AutomationOrg/POData\_AutomationOrg.xlsx Writing to URL templates/AutomationOrg/POData\_AutomationOrg.xlsx ① Start of Excel Write. WorkbookPath: templates/AutomationOrg/POData\_AutomationOrg.xlsx, excludeCols: [none] ① Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg \POData\_AutomationOrg.xlsx ① Applying match locator Data Count: 2, Match Locator: {lcitem = \$ltemNumber} ① Testing row number 1 (1) Resolving EqualTo. a1E1K000008NTam = a1E1K000008NTam, result: true (i) Row number 1 matched 1 Testing row number 2 1 Resolving EqualTo. a1E1K000008NTaw = a1E1K000008NTam, result: false 1 The match locator matched 1 row(s). (i) Updating data in excel sheet: InventoryRequisition ① Updating Row - 2 Updated data in excel sheet: InventoryRequisition (i) Start of iteration 2 of 2. 0 12:02:57(09:18.363) Iteration 2 SOQL Query: SELECT Id,rstk\_\_icitemsiteproj\_item\_\_c,rstk\_\_icitemsiteproj\_qtyalloc\_\_c,rstk\_\_icitemsiteproj\_qtyohnn\_\_c,rst FROM rstk\_\_icitemsiteproj\_\_c where rstk\_\_icitemsiteproj\_item\_\_c = '{InventoryQuantity.lcitem}'=>icitemprjs Reading a Salesforce object, Connection Name: SFConnection, Query: SELECT Id,rstk\_icitemsiteproj\_item\_c,rstk\_icitemsiteproj\_qtyalloc\_c,rstk\_icitemsiteproj\_qtyohn\_c,rstk\_icitemsiteproj\_qtyohn FROM rstk\_icitemsiteproj\_c where rstk\_icitemsiteproj\_item\_c = 'a1E1K000008NTaw' i) The query returned no records. Set Values: ItemNumber 0 12:02:59(09:19.778) ① Setting value ItemNumber to a1E1K000008NTaw Configuration: ValueScope:Test ① Successfully set ItemNumber to a1E1K000008NTaw 0 12:02:59(09:20.005) Set Values: QtyOnHand.QuantityAfter (i) Setting value QtyOnHand.QuantityAfter to <null> Configuration: ValueScope:Test (i) Successfully set QtyOnHand.QuantityAfter to <null> Write: {QtyOnHand}=>templates/ 0 12:02:59(09:20.305) AutomationOrg/POData\_AutomationOrg.xlsx Writing to URL templates/AutomationOrg/POData\_AutomationOrg.xlsx Start of Excel Write. WorkbookPath: templates/AutomationOrg/POData\_AutomationOrg.xlsx, excludeCols: [none] ① Workbook location: D:\provar\PKTEst\TestProje\templates\AutomationOrg \POData AutomationOrg.xlsx ① Applying match locator Data Count: 2, Match Locator: {lcitem = \$ltemNumber} 1 Testing row number 1

① Resolving EqualTo. a1E1K000008NTam = a1E1K000008NTaw, result: false (i) Testing row number 2 1 Resolving EqualTo. a1E1K000008NTaw = a1E1K000008NTaw, result: true (i) Row number 2 matched i) The match locator matched 1 row(s). ① Updating data in excel sheet: InventoryRequisition ① Updating Row - 3 Updated data in excel sheet: InventoryRequisition Reached the end of the List. i Handling managed resource. Name: SFConnection \*Not closing Salesforce Connection because it is still being used. Name: SFConnection (1) Salesforce Connection handled successfully. Name: SFConnection Call PurchaseOrderAuthorization 0 12:03:00(09:21.472) PurchaseOrderAuthorization 0 12:03:00(09:21.474) Salesforce Connect: SFConnection (Test) 0 12:03:00(09:21.533) (i) Connecting to Salesforce as QARSF\_Admin 1 Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection On SF Rootstock Site Map tab 0 12:03:00(09:21.590) ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target?  $pageObjects\_rstk\_Manufacturing\&application = rstkf\_Rootstock\_Financials\&tab = rstk\_Rootstock\_Site\_Mapplication = rstkf\_Rootstock\_Financials\&tab = rstk\_Rootstock\_Site\_Mapplication = rstkf\_Rootstock\_Financials\&tab = rstk\_Rootstock\_Site\_Mapplication = rstkf\_Rootstock\_Financials\&tab = rstk\_Rootstock\_Site\_Mapplication = rstkf\_Rootstock\_Site\_Mapplication =$ (i) Opening Page context. Name: screen, data: null, frame: null ① Opening Salesforce Tab. Tab Name: rstk\_\_Rootstock\_Site\_Map, Url: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC (i) Opening Salesforce user home page Navigate to home page Opening page. URL: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC Perform page load wait Successfully opened user home page Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:03:12(09:32.696) Click the Purchase Order Authorization button 1 Start of Interact. Connection: SFConnection, Locator: ui:locator?name=purchaseOrderAuthorization, before wait: default, after wait: default, auto retry: default (i) Locator: ui:locator?name=purchaseOrderAuthorization 1 Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/Manufacturing? sfdc.tabName=01r5f000000Ptu4 i Doing before wait. waitUrl: default 1 End of <default&gt; wait. ① Doing after wait. waitUrl: default ① Clicking WebElement. WebElement [tag: a, text: Purchase Order Authorization, href: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName %3D01r5f000000Ptu4] Doing after wait. waitUrl: default i End of <default&gt; wait. (i) Going to update browser window handles. Update browser window handles.

- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.

# On SF rstk\_\_PurchOrdAuth page with pageobject

0 12:03:20(09:41.399)

- Rstk\_\_ Purch Ord Auth
  - ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_\_PurchOrdAuth&page=rstk\_\_PurchOrdAuth
  - (i) Opening Page context. Name: screen, data: null, frame: null
  - Going to update browser window handles.
  - Update browser window handles.
  - (i) Successfully updated browser window handles.

# Set the Display P Os With Due Dates From field to 03/16/2022

0 12:03:21(09:41.913)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=displayPOsWithDueDatesFrom, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=displayPOsWithDueDatesFrom
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL= %2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:frm:pb:pbs\_header:j\_id154:from\_date\_\_c, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (1) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

#### Click the Select button

0 12:03:22(09:43.364)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=select, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default
- ① Locator: ui:locator?name=select
- (i) Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
- ① Clicking WebElement. WebElement [tag: input, text: Select]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
- ① Start of Timed Wait. Seconds: 10
- ① End of Timed Wait. Actual duration(seconds): 10.012

- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.

#### With Po Auth Lines rows (OrdNum = 256)

0 12:03:34(09:54.719)

- ① Start of With Row. Connection Name: SFConnection, target: sf:ui:locator:row?table=poAuthLines
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL= %2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- ① Applying row locator to rows. Row Count: 12, Row Locator: {OrdNum = \$OrderNumber}
- (i) Testing row number 1
- (i) Resolving EqualTo. 216 = 256, result: false
- (i) Testing row number 2
- (i) Resolving EqualTo. 216 = 256, result: false
- 1 Testing row number 3
- (i) Resolving EqualTo. 217 = 256, result: false
- 1 Testing row number 4
- (i) Resolving EqualTo. 217 = 256, result: false
- (i) Testing row number 5
- (i) Resolving EqualTo. 219 = 256, result: false
- (i) Testing row number 6
- (i) Resolving EqualTo. 231 = 256, result: false
- (i) Testing row number 7
- (1) Resolving EqualTo. 231 = 256, result: false
- ① Testing row number 8
- (1) Resolving EqualTo. 239 = 256, result: false
- Testing row number 9
- (i) Resolving EqualTo. 239 = 256, result: false
- (i) Testing row number 10
- (i) Resolving EqualTo. 255 = 256, result: false
- (i) Testing row number 11
- (i) Resolving EqualTo. 256 = 256, result: true
- Row number 11 matched
- (i) Matched row number 11
- (1) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.


#### Call the Check method

0 12:03:41(10:02.513)

- ① Start of Interact. Connection: SFConnection, Locator: ui:pageobject:method? pageId=pageobjects.rstk\_\_PurchOrdAuth&operation=Check, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:pageobject:method?pageId=pageobjects.rstk\_\_PurchOrdAuth&operation=Check
- 1 Interaction: ui:interaction?name=invoke
- $\textcircled{1} \label{eq:switched} \ \text{Switched focus to main window. } \ \ \text{URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth? } \ \ \text{retURL=\%2Fapex\%2Frstk\_Manufacturing\%3Fsfdc.tabName\%3D01r5f000000Ptu4}$
- ① Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- i) Doing after wait. waitUrl: default
- ① Got Page Object. Class: pageobjects.rstk\_\_PurchOrdAuth\$PoAuthLines\$\$EnhancerByCGLIB\$\$f64ac3cd

- ① Got Page Object. Class: pageobjects.rstk\_\_PurchOrdAuth
- ① Extracted arg value. Arg Name: param\_OrdNum, value: 256
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- i All Sub-Test Steps were successful.
- (i) Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.



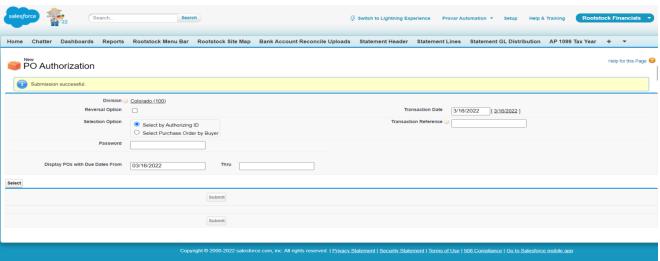

After Screenshot: 2022/03/16 12:03:55

- 1 Start of Interact. Connection: SFConnection, Locator: ui:locator?name=submit, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default
- ① Locator: ui:locator?name=submit
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- 1 Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: ui:wait:timed?seconds=10
- ① Clicking WebElement. WebElement [tag: input, text: Submit]
- ① Doing after wait. waitUrl: ui:wait:timed?seconds=10
- i Start of Timed Wait. Seconds: 10
- (i) End of Timed Wait. Actual duration(seconds): 10.001

Start of waitForPageToLoad. Timeout(ms): 90000

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 80

- (i) Sending screenshot. Data length: 111064
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# AssertAuthorization

① Start of UiAssert. Connection: SFConnection

0 12:03:59(10:20.233)

0 12:03:44(10:05.361)

- ① Resolving field Authorizedmessgae
  ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
  ① Doing before wait. waitUrl: default
  ① End of <default&gt; wait.
  ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
  ① Asserting field attributes: Authorizedmessgae
  ① Asserting Attribute: value to PrimitiveValueImpl [ value: Submission successful., valueId=0, createdUpdateSeq=-1, updatedUpdateSeq=-1]
  ☑ Assertion successful.Submission successful. EqualTo Submission successful.
  ① Object read successfully. Result Name: Values
  ① Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### ReadTransactinDate

0 12:04:01(10:22.200)

- i Start of UiAssert. Connection: SFConnection
- (i) Resolving field transactionDate
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL= %2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- ① Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL= %2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- (i) Asserting field attributes: transactionDate
- (i) Reading Attribute: value
- (i) Object read successfully. Result Name: Values
- (1) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- 1 All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- 1 Main window reselected. Window: main
- ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/PurchOrdAuth?retURL=%2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4
- Going to update browser window handles.
- Update browser window handles.
- (i) Successfully updated browser window handles.
- 1 Handling managed resource. Name: SFConnection
- \*Not closing Salesforce Connection because it is still being used. Name: SFConnection
- (i) Salesforce Connection handled successfully. Name: SFConnection

# Call POAPMATCH

0 12:04:06(10:27.047)

POAPMATCH

0 12:04:06(10:27.051)

Salesforce Connect: SFConnection (Test)

0 12:04:06(10:27.102)

- ① Connecting to Salesforce as QARSF\_Admin
- ① Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection

# On SF Rootstock Site Map tab

0 12:04:06(10:27.156)

① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? application=rstkf\_\_Rootstock\_Financials&tab=rstk\_\_Rootstock\_Site\_Map&pageObject=pageobjects.rstk\_\_Manufacturing

- (1) Opening Page context. Name: screen, data: null, frame: null Opening Salesforce Tab. Tab Name: rstk\_\_Rootstock\_Site\_Map, Url: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC Opening Salesforce user home page \* Navigate to home page Opening page. URL: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC 🍀 Perform page load wait Successfully opened user home page (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Click the P OAP Match button 0 12:04:17(10:38.134) 1 Start of Interact. Connection: SFConnection, Locator: ui:locator?name=pOAPMatch, before wait: default, after wait: default, auto retry: default 1 Locator: ui:locator?name=pOAPMatch 1 Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/Manufacturing? sfdc.tabName=01r5f000000Ptu4 i) Doing before wait. waitUrl: default i End of <default&gt; wait. ① Doing after wait. waitUrl: default ① Clicking WebElement. WebElement [tag: a, text: PO-AP Match, href: https://automationtesting2-rstk.visualforce.com/apex/POAPMatch?retURL=%2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName %3D01r5f000000Ptu4] i Doing after wait. waitUrl: default i End of <default&gt; wait. (1) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. (i) All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null 1 Main window reselected. Window: main ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. On SF rstk\_\_POAPMatch2 page with pageobject Rstk\_\_ 0 12:04:25(10:45.893) POAP Match 2 (i) Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_\_POAPMatch2&page=rstk\_\_POAPMatch2 (i) Opening Page context. Name: screen, data: null, frame: null
  - Going to update browser window handles.
  - Update browser window handles.
  - Successfully updated browser window handles.
  - Set the POAP Vendor field to SB-24808 (1103)

0 12:04:25(10:46.315)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=POAPVendor, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=POAPVendor

- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: poaphdr\_vendno\_\_c\_autocomplete, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: SB-24808 (1103), blur: false, selector: null
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Click the POAP Vendorlist field

0 12:04:27(10:47.759)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=POAPVendorlist, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=POAPVendorlist
- interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: SB-24808 (1103)]
- i Doing after wait. waitUrl: default
- i) End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.

# Set the POAPPOHDR field to 256

0 12:04:28(10:49.242)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=POAPPOHDR, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=POAPPOHDR
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- (i) Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pohdr\_\_c\_autocomplete, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 256, blur: false, selector: null
- ① Doing after wait. waitUrl: default
- End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Click the POAPHD Rlist field

0 12:04:29(10:50.331)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=POAPHDRlist, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=POAPHDRlist

- ① Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: 256]
- ① Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.

#### Click the Select PO Receipts button

0 12:04:30(10:51.512)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=selectPOReceipts, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=selectPOReceipts
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- 1 Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: input, text: Select PO Receipts]
- ① Doing after wait. waitUrl: default
- ① End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Vendor Invoice Number field to NPAuto-256

0 12:04:31(10:52.528)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=vendorInvoiceNumber, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=vendorInvoiceNumber
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- Doing before wait. waitUrl: default
- 1 End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Got webElement. tagName: INPUT, id: pg:frm:receiptsPanel:pbs\_InvoiceInfo:j\_id165:invoiceNumber, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto-256, blur: false, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.

i Successfully updated browser window handles.

#### Set the Invoice Date field to 03/16/2022

0 12:04:36(10:57.567)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=invoiceDate, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=invoiceDate
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- 1 Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:frm:receiptsPanel:pbs\_InvoiceInfo:j\_id167:invoiceDate, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 03/16/2022, blur: false, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- **W**Update browser window handles.
- (i) Successfully updated browser window handles.

#### Set the Total Invoice Amount field to 620.46

0 12:04:38(10:58.851)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=totalInvoiceAmount, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=totalInvoiceAmount
- i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: pg:frm:receiptsPanel:pbs\_InvoiceInfo:j\_id169:invoiceAmt, type: text, selector: null
- 1 Typing value. tagName: INPUT, type: text, value: 620.46, blur: false, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Check the POAP Select All field

0 12:04:39(11:00.128)


- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=POAPSelectAll, before wait: default, after wait: ui:wait:timed?seconds=20, auto retry: default
- 1 Locator: ui:locator?name=POAPSelectAll
- i Interaction: ui:interaction?name=check
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- 1 Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- i) Doing after wait. waitUrl: ui:wait:timed?seconds=20
- ① Got webElement. tagName: INPUT, id: selectAll, type: checkbox, selector: null
- ① Hover>Clicking WebElement. WebElement [tag: input, text: on]
- 1 Doing after wait. waitUrl: ui:wait:timed?seconds=20
- (i) Start of Timed Wait. Seconds: 20

1 End of Timed Wait. Actual duration(seconds): 20.011 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:05:02(11:23.030) ReadInvNumber i Start of UiAssert. Connection: SFConnection Resolving field vendorInvoiceNumber ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 i Doing before wait. waitUrl: default i) End of <default&gt; wait. ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 (i) Asserting field attributes: vendorInvoiceNumber (i) Reading Attribute: value ① Object read successfully. Result Name: invno (i) Going to update browser window handles. Update browser window handles. i Successfully updated browser window handles. 0 12:05:07(11:27.868) Set Values: InvoiceNum (i) Setting value InvoiceNum to NPAuto-256 \* Configuration: ValueScope:Test ① Successfully set InvoiceNum to NPAuto-256 0 12:05:07(11:28.080) ReadBatchNumber i Start of UiAssert. Connection: SFConnection Resolving field batchNumber ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 i Doing before wait. waitUrl: default i End of <default&gt; wait. ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 (i) Asserting field attributes: batchNumber (i) Reading Attribute: value (i) Object read successfully. Result Name: batchno (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Set Values: BatchNo 0 12:05:11(11:32.078) (i) Setting value BatchNo to 36 \* Configuration: ValueScope:Test (i) Successfully set BatchNo to 36 Read Amount Remaining 0 12:05:11(11:32.206) (i) Start of UiAssert. Connection: SFConnection (i) Resolving field amountRemaining ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 i Doing before wait. waitUrl: default 1 End of <default&gt; wait.

① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2

(i) Asserting field attributes: amountRemaining

- (i) Reading Attribute: value (i) Object read successfully. Result Name: amtrem (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:05:14(11:35.139) Set Values: AmtRemaining (i) Setting value AmtRemaining to 0 Configuration: ValueScope:Test Successfully set AmtRemaining to 0 If: {AmtRemaining != 0} 0 12:05:14(11:35.240) Then **(1)** Solick the Add GL Line field **(1)** Click the Submit button 0 12:05:14(11:35.423) ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=submit, before wait: default, after wait: ui:wait:timed?seconds=10, auto retry: default Locator: ui:locator?name=submit i Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2 1 Doing before wait. waitUrl: default i End of <default&gt; wait. ① Doing after wait. waitUrl: ui:wait:timed?seconds=10 ① Clicking WebElement. WebElement [tag: input, text: Submit] i Doing after wait. waitUrl: ui:wait:timed?seconds=10
- Handle UI Alerts
   0 12:05:26(11:46.854)

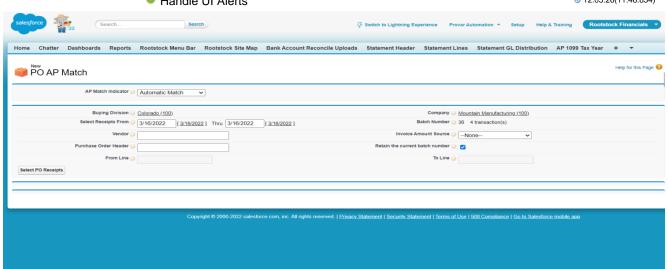

After Screenshot : 2022/03/16 12:05:36

- ① Start of Handle Alert. Connection: SFConnection
- i Start of Alert Wait. Timeout (seconds): 30

i Start of Timed Wait. Seconds: 10

Update browser window handles.

i End of Timed Wait. Actual duration(seconds): 10.0

(i) Going to update browser window handles.

Successfully updated browser window handles.

① Polling for Alert failed. Attempt: 1, cause: [NoAlertPresentException: no such alert (Session info: chrome=99.0.4844.51) (Driver info: chromedriver=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989-refs/branch-heads/4758@{#972}),platform=Windows NT 10.0.22000 x86\_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 7 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'DFORCE-MAYUR', ip:

'192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0\_181'
Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog:chromeOptions={debuggerAddress=localhost:50942}, webauthn:extension:credBlob=true, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, webauthn:extension:largeBlob=true, unexpectedAlertBehaviour=ignore, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=98.0.4758.80}
(7f0488e8ba0d8e019187c6325a16c29d9b7f4989-refs/branch-heads/4758@{#972}), userDataDir=D:\provar\PKTEst \.chromeProfiles\profile0\}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=99.0.4844.51, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}] Session ID: 49dfdc818fac225792c475c57c1c7a12]

- 1 Polling for Alert failed. Attempt: 2, cause: [NoAlertPresentException: no such alert (Session info: chrome=99.0.4844.51) (Driver info: chromedriver=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989refs/branch-heads/4758@{#972}),platform=Windows NT 10.0.22000 x86\_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 20 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0\_181' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog:chromeOptions={debuggerAddress=localhost:50942}, webauthn:extension:credBlob=true, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, webauthn:extension:largeBlob=true, unexpectedAlertBehaviour=ignore, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989-refs/branch-heads/4758@{#972}), userDataDir=D:\provar\PKTEst \.chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=99.0.4844.51, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}] Session ID: 49dfdc818fac225792c475c57c1c7a12]
- ① Polling for Alert failed. Attempt: 3, cause: [NoAlertPresentException: no such alert (Session info: chrome=99.0.4844.51) (Driver info: chromedriver=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989refs/branch-heads/4758@{#972}),platform=Windows NT 10.0.22000 x86\_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 724 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0\_181' Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP  $accept Ssl Certs=false, goog: chrome Options=\{debugger Address=local host: 50942\}, we bauthn: extension: cred Blob=true, accept Ssl Certs=false, goog: chrome Options=\{debugger Address=local host: 50942\}, we bauthn: extension: cred Blob=true, accept Ssl Certs=false, goog: chrome Options=\{debugger Address=local host: 50942\}, we bauthn: extension: cred Blob=true, accept Ssl Certs=false, goog: chrome Options=\{debugger Address=local host: 50942\}, we bauthn: extension: cred Blob=true, accept Ssl Certs=false, goog: chrome Options=\{debugger Address=local host: 50942\}, we bauthn: extension: cred Blob=true, goog: chrome Options=false, goog: chrom$ acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, webauthn:extension:largeBlob=true, unexpectedAlertBehaviour=ignore, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=98.0.4758.80  $(7f0488e8ba0d8e019187c6325a16c29d9b7f4989-refs/branch-heads/4758@\{\#972\}), userDataDir=D:\provar\pr$ \.chromeProfiles\profile0}, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=99.0.4844.51, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}] Session ID: 49dfdc818fac225792c475c57c1c7a12]
- 1 Polling for Alert failed. Attempt: 4, cause: [NoAlertPresentException: no such alert (Session info: chrome=99.0.4844.51) (Driver info: chromedriver=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989refs/branch-heads/4758@{#972}),platform=Windows NT 10.0.22000 x86\_64) (WARNING: The server did not provide any stacktrace information) Command duration or timeout: 34 milliseconds Build info: version: 'unknown', revision: 'unknown', time: 'unknown' System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0 181 Driver info: org.openqa.selenium.chrome.ChromeDriver Capabilities [{mobileEmulationEnabled=false, timeouts={implicit=0.0, pageLoad=300000.0, script=30000.0}, hasTouchScreen=false, platform=XP, acceptSslCerts=false, goog:chromeOptions={debuggerAddress=localhost:50942}, webauthn:extension:credBlob=true, acceptInsecureCerts=false, webStorageEnabled=true, browserName=chrome, takesScreenshot=true, javascriptEnabled=true, setWindowRect=true, webauthn:extension:largeBlob=true, unexpectedAlertBehaviour=ignore, rotatable=false, networkConnectionEnabled=false, chrome={chromedriverVersion=98.0.4758.80 (7f0488e8ba0d8e019187c6325a16c29d9b7f4989-refs/branch-heads/4758@{#972}), userDataDir=D:\provar\PKTEst \.chromeProfiles\profile0\, takesHeapSnapshot=true, pageLoadStrategy=normal, strictFileInteractability=false, databaseEnabled=false, handlesAlerts=true, version=99.0.4844.51, browserConnectionEnabled=false, proxy=Proxy(direct), nativeEvents=true, locationContextEnabled=true, cssSelectorsEnabled=true, webauthn:virtualAuthenticators=true}] Session ID: 49dfdc818fac225792c475c57c1c7a12]
- 1 Polling for Alert successful. Attempt: 5
- i End of Alert Wait. Actual duration(seconds): 2.918
- (1) Switching to alert. ExpectedMessage: Task completed successfully
- (i) Got alert text: Task completed successfully
- ① com.provar.core.model.base.java.ComparisonType\$Options@561741e1
- (i) Asserting Alert Message, To: 'Task completed successfully', Comparision Type: Equals
- Assertion successful. 'Task completed successfully' Equals 'Task completed successfully'
- Accepting alert.
- Switching back to current frame.
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2?bn=36

Re-attempting of waitForPageToLoad. Timeout(ms): 90000 End of waitForPageToLoad. Duration(ms): 67 (i) Sending screenshot. Data length: 116562 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:05:40(12:00.984) Set the A P Match Indicator select to Close Batch Click the Close Batch button 0 12:05:40(12:01.084) i All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null (i) Main window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2?bn=36 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 1 Handling managed resource. Name: SFConnection \*Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 12:05:43(12:03.850) Call CloseBatch CloseBatch 0 12:05:43(12:03.857) 0 12:05:43(12:03.917) Salesforce Connect: SFConnection (Test) (1) Connecting to Salesforce as QARSF\_Admin (i) Re-using existing connection. Connection: QARSF\_Admin, Result Name: SFConnection On SF Rootstock Site Map tab 0 12:05:43(12:03.976) (i) Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? application=rstkf\_Rootstock\_Financials&tab=rstk\_Rootstock\_Site\_Map&pageObject=pageobjects.rstk\_Manufacturing ① Opening Page context. Name: screen, data: null, frame: null ① Opening Salesforce Tab. Tab Name: rstk\_\_Rootstock\_Site\_Map, Url: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC (i) Opening Salesforce user home page Navigate to home page Opening page. URL: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekwyU1dpSC 🍀 Perform page load wait Successfully opened user home page (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:05:55(12:16.530) Click the P OAP Match button 1 Start of Interact. Connection: SFConnection, Locator: ui:locator?name=pOAPMatch, before wait: default, after wait: default, auto retry: default 1 Locator: ui:locator?name=pOAPMatch 1 Interaction: ui:interaction?name=action ⑤ Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/Manufacturing? sfdc.tabName=01r5f000000Ptu4 1 Doing before wait. waitUrl: default ① End of <default&gt; wait.

Start of waitForPageToLoad. Timeout(ms): 90000

- 1 Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: a, text: PO-AP Match, href: https://automationtesting2-rstk.visualforce.com/apex/POAPMatch?retURL=%2Fapex%2Frstk\_Manufacturing%3Fsfdc.tabName %3D01r5f000000Ptu4]
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- i All Sub-Test Steps were successful.
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### On SF rstk\_\_POAPMatch2 page with pageobject Rstk\_\_ POAP Match 2

0 12:06:03(12:23.876)

- ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? pageObject=pageobjects.rstk\_\_POAPMatch2&page=rstk\_\_POAPMatch2
- (i) Opening Page context. Name: screen, data: null, frame: null
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the A P Match Indicator select to Close Batch

0 12:06:03(12:24.219)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=aPMatchIndicator, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=aPMatchIndicator
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- (i) End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Got webElement. tagName: SELECT, id: pg:frm:headerPanelA:j\_id104:j\_id105:processingMode, type: null, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.


# Set the Closebatch Number select to 36

0 12:06:04(12:25.014)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=closebatchNumber, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=closebatchNumber
- ① Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- i Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default

- 1 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Got webElement. tagName: SELECT, id: pg:frm:headerPanelA:j\_id104:pbs\_batchNumSelect:fldBatchNumSlct, type: null, selector: null
- 1 Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- i Successfully updated browser window handles.
- Click the Close Batch button

0 12:06:06(12:27.345)

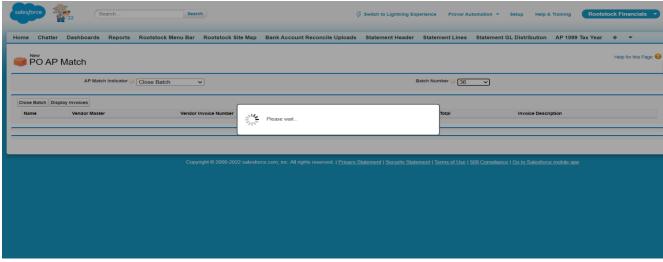

After Screenshot : 2022/03/16 12:06:08

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=closeBatch, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=closeBatch
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- ① Doing before wait. waitUrl: default
- ① End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: input, text: Close Batch]
- ① Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.


Start of waitForPageToLoad. Timeout(ms): 90000

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 79

- (i) Sending screenshot. Data length: 89275
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.
- Read PO AP Batch Status


0 12:06:11(12:32.427)

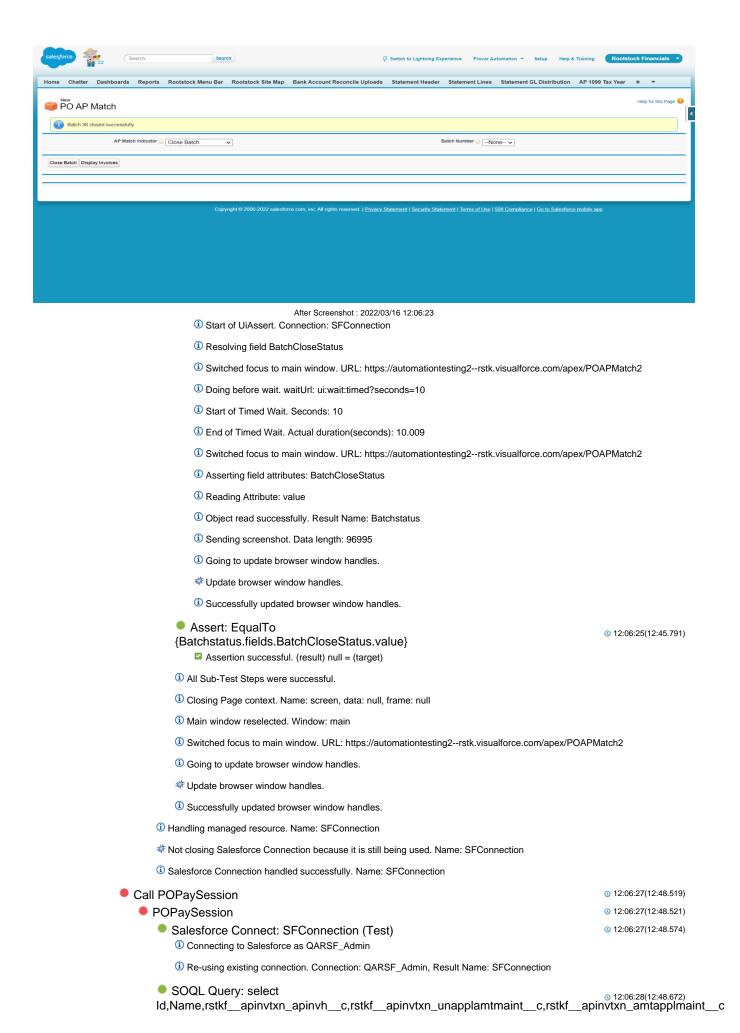

# from rstkf\_\_apinvtxn\_\_c where Name like 'NPAuto-256%'=>apinvtxn

- ① Reading a Salesforce object. Connection Name: SFConnection, Query: select Id,Name,rstkf\_apinvtxn\_apinvtn\_c,rstkf\_apinvtxn\_unapplamtmaint\_c,rstkf\_apinvtxn\_amtapplmaint\_c from rstkf\_apinvtxn\_c where Name like 'NPAuto-256%'
- (i) Query successful. Row Count: 1.
- On SF Payable Session View screen

0 12:06:29(12:50.231)

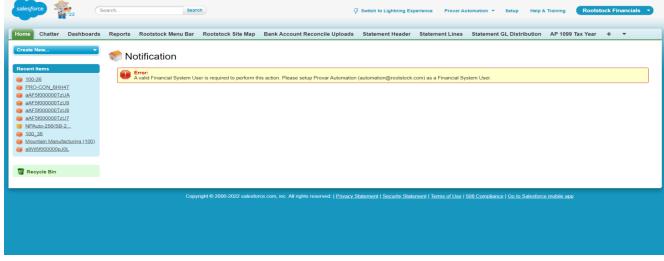

After Screenshot : 2022/03/16 12:07:55

- 1 Start of With Screen. Connection Name: SFConnection, target: sf:ui:target?object=rstkf\_apinvh\_c&action=View
- Unknown Page metadata file. Page Name: Payables Batch Header, Namespace Prefix: null
- Unknown Page metadata file. Page Name: Payables Batch Header, Namespace Prefix: null
- ① Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: rstkf\_apinvh\_c, RelatedList: null, Action: View, Page URL: /aAN5f000000sgDcGAI, Current URL: https://automationtesting2--rstk.visualforce.com/apex/POAPMatch2
- Opening Salesforce user home page
- \* Navigate to home page

Qualified relative URL. URL: https://automationtesting2--rstk.visualforce.com/aAN5f000000sgDcGAI


Opening page. Requested URL: /aAN5f000000sgDcGAI, Absolute URL: https://automationtesting2--rstk.visualforce.com/aAN5f000000sgDcGAI?//automationtesting2--rstk.visualforce.com/aAN5f000000sgDcGAI=

- Perform page load wait
- (i) Successfully opened user home page
- (i) Going to update browser window handles.
- **W** Update browser window handles.
- (i) Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Sending screenshot. Data length: 126004
- (i) Closing Page context. Name: screen, data: null, frame: null
- Main window reselected. Window: main
- ① Switched focus to main window. URL: https://automationtesting2--rstkf.visualforce.com/apex/Notify?detail=A+valid+Financial+System+User+is+required+to+perform+this+action.+Please+setup+Provar+Automation+%28automation%40rootstock.com%29+as+a+Financial+System+User.&type=ERROR
- (i) Going to update browser window handles.
- **W** Update browser window handles.
- Successfully updated browser window handles.

#### On SF rstkf\_\_apinvh page with pageobject Rstkf\_\_apinvh

0 12:07:58(14:19.493)

① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstkf\_\_apinvh&pageObject=pageobjects.rstkf\_\_apinvh

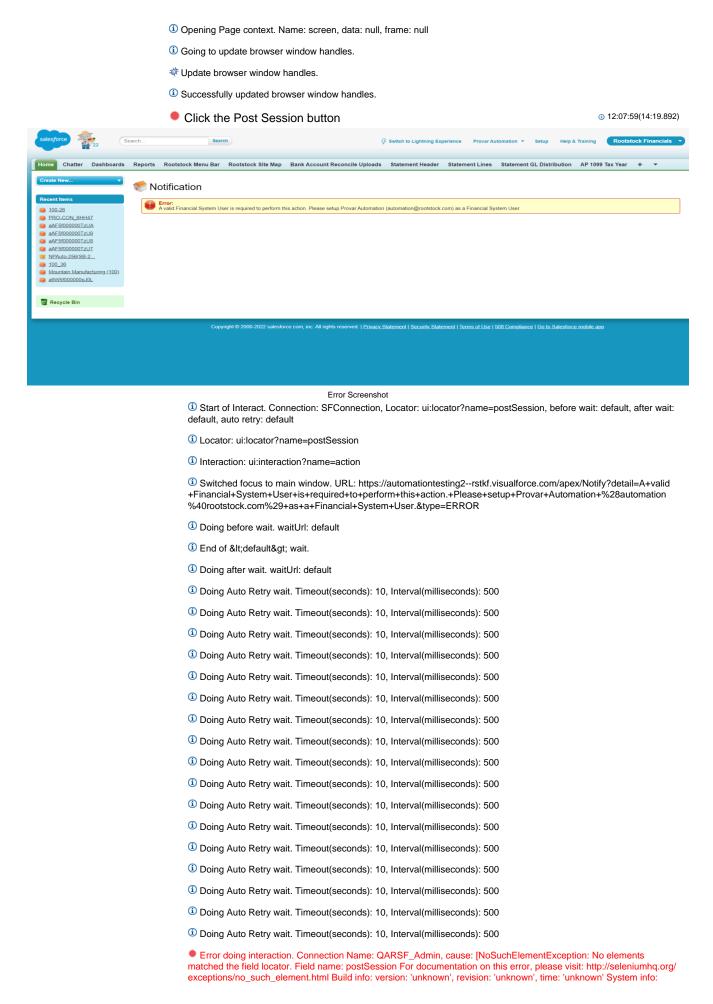

host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0\_181' Driver info: driver.version: ProvarSeleniumDriver]

- Going to update browser window handles.
- Update browser window handles.
- org.openqa.selenium.NoSuchElementException: No elements matched the field locator. Field name: postSession
- For documentation on this error, please visit: http://seleniumhq.org/exceptions/no\_such\_element.html
- Build info: version: 'unknown', revision: 'unknown', time: 'unknown'
- System info: host: 'DFORCE-MAYUR', ip: '192.168.1.14', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0\_181'
- Driver info: driver.version: ProvarSeleniumDriver

com.provar.plugins.forcedotcom.core.ui.ProvarFindByElementLocator.findElement(ProvarFindByElementLocator.java:96)

org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)

- at com.sun.proxy.\$Proxy103.getWrappedElement(Unknown Source)
- at org.openga.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:50)
- at com.google.common.collect.lterators\$7.transform(lterators.java:750)
- at com.google.common.collect.TransformedIterator.next(TransformedIterator.java:47)
- at com.google.common.collect.lterators.addAll(lterators.java:367)
- at com.google.common.collect.Lists.newArrayList(Lists.java:165)
- at com.google.common.collect.Lists.newArrayList(Lists.java:150)
- at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:571)
- at com.provar.core.testapi.ProvarSeleniumDriver.getAttributes(ProvarSeleniumDriver.java:1192)

com.provar.plugins.forced ot com.core.ui. Selenium UiHandler.get Web Element Attributes (Selenium UiHandler.java: 3722) in the contraction of th

com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performActionInteraction(SeleniumUiHandler.java:4298)

- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:2523)
- at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:5490)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.performInteraction(SeleniumUiHandler.java:2219)
- at com.provar.plugins.forcedotcom.core.ui.SfUiHandler.performInteraction(SfUiHandler.java:5445)
- at com.provar.plugins.forcedotcom.core.ui.SeleniumUiHandler.perform(SeleniumUiHandler.java:418)

com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.delegateToUiHandler(SfConnectionHandler.java:346)

- at com.provar.plugins.forcedotcom.core.connection.SfConnectionHandler.perform(SfConnectionHandler.java:337)
- at

com.provar.core.test execution.common.java.Test Execution Context Impl.do Connection Operation (Test Execution Context Impl.java:857)

- at com.provar.plugins.forcedotcom.core.ui.UiDoAction.execute(UiDoAction.java:130)
- at sun.reflect.GeneratedMethodAccessor85.invoke(Unknown Source)
- at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
- at java.lang.reflect.Method.invoke(Method.java:498)

com.provar.core.testexecution.container.java.TestExecutionContainerImpl.invokeTestApi(TestExecutionContainerImpl.java:754)

com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.doInvokeTestApi(LocalTestExecutionContainerRunne

- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner.access \$11(LocalTestExecutionContainerRunner.java:676)
- at com.provar.core.testexecution.container.java.LocalTestExecutionContainerRunner \$MessageProcessor.run(LocalTestExecutionContainerRunner.java:1400)
- Successfully updated browser window handles.

Start of waitForPageToLoad. Timeout(ms): 90000

End of waitForPageToLoad. Duration(ms): 81	
Going to update browser window handles.	
Update browser window handles.	
⑤ Successfully updated browser window handles.	
<ul> <li>∆ Handle UI Alerts</li> <li>One or more Sub-Test Steps failed.</li> </ul>	12:08:13(14:34.086)
① Closing Page context. Name: screen, data: null, frame: null	
Main window reselected. Window: main	
Switched focus to main window. URL: https://automationtesting2rstkf.visualforce.com/apex/Notify?de+Financial+System+User+is+required+to+perform+this+action.+Please+setup+Provar+Automation+%288%40rootstock.com%29+as+a+Financial+System+User.&type=ERROR	
① Going to update browser window handles.	
❖ Update browser window handles.	
① Successfully updated browser window handles.	
① Handling managed resource. Name: SFConnection	
*Not closing Salesforce Connection because it is still being used. Name: SFConnection	
① Salesforce Connection handled successfully. Name: SFConnection	
	<b>()</b>
√ Verify Inventory Quantity	<b>0</b>
Call InventoryQuantityVerificationPO	<b>©</b>
	<b>0</b>
Call PayableBatchHeaderVerification	<b>0</b>
	<b>()</b>
Sub-Test Steps failed for iteration 1	
Handling managed resource. Name: SFConnection	
Closing Salesforce Connection because it is no longer being used. Name: SFConnection	
Closing web connection.	
Closing Selenium driver	
Shutting down Soap Connections. logFilePath: QARSF_Admin-objectids.log	
Salesforce Connection handled successfully. Name: SFConnection	
RSTK-8669-Inventory Requisition to PO AP Match.testinstance  © Loading test case. File: D:\provar\PKTEst\Test\Test\Purchase Order\Callable\ReadExcelPath.testcase	12:08:18(14:38.700)
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\InventoryRequistion.testcase	
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\ICREQWorkbench.testcase	
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PurchaseOrderReceipt.testcase	
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\POAPMATCH.testcase	
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PODMDVerification.testcase	
① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\PayableBatchHeaderVerification.testcase	

Re-attempting of waitForPageToLoad. Timeout(ms): 90000

# RSTK-8669-Inventory Requisition to PO AP Match.testcase

# Summary

Started 16 Mar 2022, 12:08:18 Ended 16 Mar 2022, 12:09:42

Duration (mm:ss) 01:23.795
Outcome failed

#### Output

Salesforce Connect: SFConnection (Test)

0 12:08:18(14:39.270)

0 12:08:25(14:46.320)

- (i) Connecting to Salesforce as QARSF\_Admin
- Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessToleenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- \* Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ▼ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- \* Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

① Successfully connected to Salesforce as QARSF\_Admin

Then

Successfully connected to successful as 42 fixed _, turning	
Reading Excel Data	0 12:08:24(14:45.402)
<ul><li>Call ReadExcelPath</li></ul>	0 12:08:25(14:45.901)
ReadExcelPath	0 12:08:25(14:45.902)
Salesforce Connect: SFConnection (Test)	0 12:08:25(14:45.970)
① Connecting to Salesforce as QARSF_Admin	
① Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection	
If: {GetSelectedEnvironment() = "QARSF"}	0 12:08:25(14:46.050)
√ Then	<b>0</b>
☆ Set Values: poui	<b>0</b>
☆ Set Values: financial	<b>0</b>
Set Values: posydata1	<b>0</b>
☆ Set Values: posydata	<b>0</b>
Set Values: poloader	<b>0</b>
Else	0 12:08:25(14:46.208)
If: {GetSelectedEnvironment() = "AutomationOrg"}	0 12:08:25(14:46.255)

Setting value financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 12:08:25(14:46.386) Set Values: posydata1 Setting value posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx 0 12:08:25(14:46.510) Set Values: posydata Setting value posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 0 12:08:26(14:46.655) Set Values: poloader ① Setting value poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 12:08:26(14:46.784) Set Values: poui Setting value poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: pouipath 0 12:08:26(14:46.969) ① Setting value pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: posydatapath1 0 12:08:26(14:47.304) ① Setting value posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Set Values: finpath 0 12:08:26(14:47.398) ① Setting value finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 12:08:26(14:47.551) Set Values: poloaderpath ① Setting value poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 12:08:27(14:47.685) Set Values: posydatapath ① Setting value posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 1 Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 12:08:27(14:47.837) Read Excel (i) Loading data from Parameter Value Source ... 1: Loading Parameter Value Source row 1:

Set Values: financial

0 12:08:25(14:46.343)

```
1 ==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Purchased (Purchased item for automation), valueId=null,
      createdUpdateSeq=-1, updatedUpdateSeq=-1]
      ① ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      ① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 66, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      1 ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      🛈 ==Column=> Responsible = PrimitiveValueImpl [ value: Namrata Patil, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      i ==Column=> POPriceOverride = null
      1] ==Column=> Icitem = PrimitiveValueImpl [ value: a1E1K000008NTam, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
      1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 1226.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      ① ==Column=> QuantityAfter = PrimitiveValueImpl [value: 1228.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      1 Loading Parameter Value Source row 2:
      1 ==Column=> Item = PrimitiveValueImpl [ value: NPAuto_Subcontract (Subcontract item for automation), valueId=null,
      createdUpdateSeg=-1, updatedUpdateSeg=-1]
      ① ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      ① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      ① ==Column=> Project = PrimitiveValueImpl [ value: 100 Home Project, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      1 ==Column=> Responsible = PrimitiveValueImpl [ value: Namrata Patil, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      i ==Column=> POPriceOverride = null
      1 ==Column=> lcitem = PrimitiveValueImpl [ value: a1E1K000008NTaw, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 695.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 697.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
      Loaded 2 rows from Parameter Value Source.
                                                                                                                   0 12:08:27(14:48.229)
For Each: {SourceData}=>icreqdata
  (i) Start of iteration 1 of 2.
                                                                                                                   0 12:08:28(14:48.610)
  Iteration 1
       Call InventoryRequistion
                                                                                                                   0 12:08:28(14:48.718)
                                                                                                                   0 12:08:28(14:48.721)
           InventoryRequistion
               Salesforce Connect: SFConnection (Test)
                                                                                                                   0 12:08:28(14:48.805)
                   (i) Connecting to Salesforce as QARSF Admin
                   1 Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection
                                                                                                                   0 12:08:28(14:48.898)
                  For Each: {List}=>icreq
                   (i) Start of iteration 1 of 1.
                                                                                                                   0 12:08:28(14:49.473)
                   Iteration 1
                                                                                                                   0 12:08:28(14:49.475)
                        On SF Rootstock Site Map tab
                            Start of With Screen. Connection Name: SFConnection, target: sf:ui:target?
                           application=rstkf_Rootstock_Financials&pageObject=pageobjects.rstk_Manufacturing&tab=rstk_Rootstock_Site_Map
                            1 Opening Chrome webdriver instance to https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp
                            Add Chrome browser specific capabilities
                            Using executable from UserHome Provar. executable: C:\Users\Mayur\Provar\.chromeDriver\chromedriver.exe
                            Added Chrome command line switch to bypass proxy for local addresses: --proxy-bypass-
                            list=localhost,127.0.0.1,192.168.1.14
                           Added desired capability for Chrome browser proxy Null
                           Using executable from UserHome Provar. executable: C:\Users\Mayur\Provar\.chromeDriver\chromedriver.exe
                            Successfully opened Chrome webdriver to https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp
                           (i) Opening Page context. Name: screen, data: null, frame: null
                            (1) Opening Salesforce Tab. Tab Name: rstk Rootstock Site Map, Url:
                           https://automationtesting2.my.salesforce.com/servlet/servlet.Integration?
                           lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekw

    Opening Salesforce user home page

                            Navigate to home page
```

Opening page. URL: https://automationtesting2.my.salesforce.com/secur/frontdoor.jsp?retURL=/home/home.jsp? tsid=02u5f000000R44f&sid={accessToken} Perform page load wait Start of waitForPageToLoad. Timeout(ms): 90000 Re-attempting of waitForPageToLoad. Timeout(ms): 90000 End of waitForPageToLoad. Duration(ms): 91 Opening page. URL: https://automationtesting2.my.salesforce.com/servlet/servlet.Integration? lid=01r5f000000Ptu4&ic=1&linkToken=VmpFPSxNakF5TWkwd015MHhPRIF4TVRveE1Ub3IPUzQwTWpoYSxVeEZxVEhuMkdHekw Perform page load wait (i) Successfully opened user home page Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Click the Inventory Requisitions button 0 12:08:54(15:14.786) ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=inventoryRequisitions, before wait: default, after wait: default, auto retry: default Locator: ui:locator?name=inventoryRequisitions 1 Interaction: ui:interaction?name=action ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ Manufacturing?sfdc.tabName=01r5f000000Ptu4 Doing before wait. waitUrl: default End of <default&gt; wait. Doing after wait. waitUrl: default Clicking WebElement. WebElement [tag: a, text: Inventory Requisitions, href: https://automationtesting2-rstk.visualforce.com/a26?retURL=%2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName %3D01r5f000000Ptu41 Doing after wait. waitUrl: default End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. (i) All Sub-Test Steps were successful. (1) Closing Page context. Name: screen, data: null, frame: null (i) Main window reselected. Window: main Switched focus to main window. URL: https://automationtesting2.my.salesforce.com/a26?retURL=%2Fapex %2Frstk\_\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. On SF Inventory Requisitions Inventory Requisitions 0 12:08:59(15:20.333) list view Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? object=rstk\_\_icreq\_\_c&action=List&listView=rstk\_\_RS\_Inventory\_Requisitions (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles.

① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding %3Aobject%3Fobject%3Drstk\_icreq\_c%26action%3DNew, before wait: default, after wait: default, auto

Successfully updated browser window handles.

Click the New button

retry: default

① Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3Drstk\_\_icreq\_\_c %26action%3DNew 1 Interaction: ui:interaction?name=action Switched focus to main window. URL: https://automationtesting2.my.salesforce.com/a26?retURL= %2Fapex%2Frstk\_\_Manufacturing%3Fsfdc.tabName%3D01r5f000000Ptu4 Doing before wait. waitUrl: default End of <default&gt; wait. Doing after wait. waitUrl: default ① Getting webElement: By.xpath: //div[contains(@class,'listButtons') or contains(@class,'listHeader')]// input[@name='new' or (contains(@name,'\_\_new') and not(substring-after(@name,'\_\_new')))] Clicking WebElement. WebElement [tag: input, text: New Inventory Requisitions] Doing after wait. waitUrl: default End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. i All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null 1 Main window reselected. Window: main ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1 (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. On SF rstk\_\_lcreq page with pageobject Rstk\_\_ 0 12:09:07(15:28.346) ① Start of With Screen. Connection Name: SFConnection, target: sf:ui:target? page=rstk\_\_lcreq&pageObject=pageobjects.rstk\_\_lcreq (i) Opening Page context. Name: screen, data: null, frame: null (i) Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Set the Requisition No field to NP\_JYJ1 0 12:09:08(15:28.836) Start of Interact. Connection: SFConnection, Locator: ui:locator?name=requisitionNo, before wait: default, after wait: default, auto retry: default Locator: ui:locator?name=requisitionNo Interaction: ui:interaction?name=set ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_Manufacturing%253Fsfdc.tabName %253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1 Doing before wait. waitUrl: default End of <default&gt; wait. Doing after wait. waitUrl: default Got webElement. tagName: INPUT, id: pg:fm:pb:pbs\_Main:j\_id119:icreq\_ordno\_\_c:j\_id121:j\_id127, type: text, selector; null ① Typing value. tagName: INPUT, type: text, value: NP\_JYJ1, blur: false, selector: null Doing after wait. waitUrl: default End of <default&gt; wait.

Going to update browser window handles.

- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Icitem field to NPAuto\_Purchased (Purchased item for automation)

0 12:09:09(15:29.765)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=icitem, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=icitem
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- 1 Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- ① Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: icreq\_item\_\_c\_autocomplete, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: NPAuto\_Purchased (Purchased item for automation), blur: false, selector: null
- i Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

## Click the Icregitemlist field

0 12:09:10(15:31.486)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=icreqitemlist, before wait: default, after wait: default, auto retry: default
- (i) Locator: ui:locator?name=icreqitemlist
- i Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- ① Clicking WebElement. WebElement [tag: li, text: 0, text: NPAuto\_Purchased (Purchased item for automation)]
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

## Set the Icreqplanner select to Namrata Patil

0 12:09:12(15:32.783)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=icreqplanner, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=icreqplanner
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default

- ① Got webElement. tagName: SELECT, id: null, type: null, selector: null
- i Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Requisition Qty field to 2

0 12:09:16(15:36.667)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=requisitionQty, before wait: default, after wait: default, auto retry: default
- Locator: ui:locator?name=requisitionQty
- (i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- i Doing before wait. waitUrl: default
- End of <default&gt; wait.
- 1 Doing after wait. waitUrl: default
- Got webElement. tagName: INPUT, id: pg:fm:pb:pbs\_Main:j\_id211:icreq\_qtyreq\_\_c:j\_id213:j\_id219, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 2, blur: true, selector: null
- (i) Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Due Date field to 3/29/2021

12:09:17(15:38.095)12:09:17(15:38.209)

- Click the Dateselect button
  - ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=dateselect, before wait: default, after wait: default, auto retry: default
  - 1 Locator: ui:locator?name=dateselect
  - ① Interaction: ui:interaction?name=action
  - ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
  - Doing before wait. waitUrl: default
  - 1 End of <default&gt; wait.
  - Doing after wait. waitUrl: default
  - ① Clicking WebElement. WebElement [tag: a, text: Today, href: javascript:%20void%280%29%3B]
  - Doing after wait. waitUrl: default
  - i End of <default&gt; wait.
  - (i) Going to update browser window handles.
  - Update browser window handles.
  - Successfully updated browser window handles.

# Set the Icreqproj field to 100 Home Project

0 12:09:20(15:40.707)

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=icreqproj, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=icreqproj
- Interaction: ui:interaction?name=set

- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Got webElement. tagName: INPUT, id: icreq\_proj\_\_c\_autocomplete, type: text, selector: null
- ① Typing value. tagName: INPUT, type: text, value: 100 Home Project, blur: false, selector: null
- Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Click the Icreaprilist field

0 12:09:22(15:42.677)


- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=icreqprjlist, before wait: default, after wait: default, auto retry: default
- 1 Locator: ui:locator?name=icreqprjlist
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- Doing after wait. waitUrl: default
- Clicking WebElement. WebElement [tag: li, text: 0, text: 100 Home Project]
- ① Doing after wait. waitUrl: default
- 1 End of <default&gt; wait.
- Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

#### Set the Icreqbuyer select to Namrata Patil

0 12:09:23(15:43.853)

- Locator: ui:locator?name=icreqbuyer
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- End of <default&gt; wait.
- Doing after wait. waitUrl: default
- (i) Got webElement. tagName: SELECT, id: null, type: null, selector: null
- ① Doing after wait. waitUrl: default
- i End of <default&gt; wait.
- (i) Going to update browser window handles.
- Update browser window handles.
- Successfully updated browser window handles.

# Set the P O Price Override field to {icreq.PO Price Override}

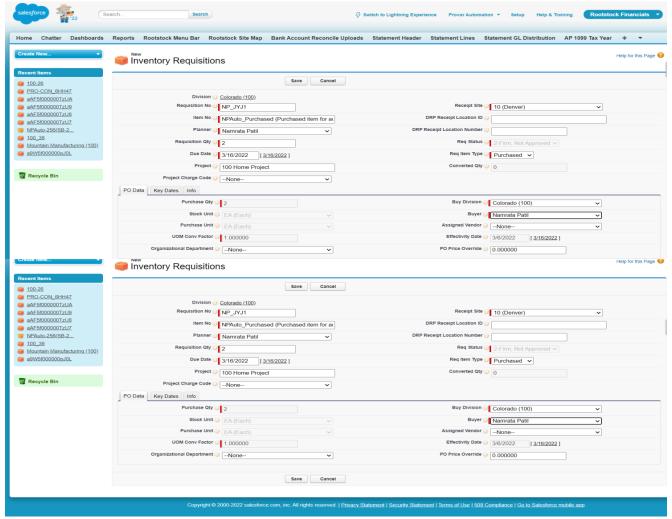

#### Error Screenshot

- ① Start of Interact. Connection: SFConnection, Locator: ui:locator?name=pOPriceOverride, before wait: default, after wait: default, auto retry: default
- ① Locator: ui:locator?name=pOPriceOverride
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/lcreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName%253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1
- Doing before wait. waitUrl: default
- i End of <default&gt; wait.
- i Doing after wait. waitUrl: default
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
   Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500
- ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500

1 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 ① Doing Auto Retry wait. Timeout(seconds): 10, Interval(milliseconds): 500 Field not found on the screen. Locator: ProvarFindByElementLocator [by=public org.openqa.selenium.WebElement pageobjects.rstk\_\_lcreq.pOPriceOverride] Doing after wait. waitUrl: default End of <default&gt; wait. Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Start of waitForPageToLoad. Timeout(ms): 90000 Re-attempting of waitForPageToLoad. Timeout(ms): 90000 End of waitForPageToLoad. Duration(ms): 64 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 12:09:39(16:00.295) Click the Save button 0 12:09:39(16:00.517) Ready ICREQ NO 12:09:39(16:00.584) Split: {Values.fields.pageTitle.value}=> =>Tokens 0 12:09:40(16:00.650) Set Values: ICREQNumber One or more Sub-Test Steps failed. (i) Closing Page context. Name: screen, data: null, frame: null i Main window reselected. Window: main Switched focus to main window. URL: https://automationtesting2--rstk.visualforce.com/apex/ Icreq?retURL=%2Fa26%3FretURL%3D%252Fapex%252Frstk\_\_Manufacturing%253Fsfdc.tabName %253D01r5f000000Ptu4&scontrolCaching=1&sfdc.override=1 Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. Sub-Test Steps failed for iteration 1 (i) Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection Call ICREQWorkbench Call PurchaseOrderReceipt Call POAPMATCH **(**) ---Call PayableBatchHeaderVerification Sub-Test Steps failed for iteration 1 (1) Handling managed resource. Name: SFConnection Closing Salesforce Connection because it is no longer being used. Name: SFConnection Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log Salesforce Connection handled successfully. Name: SFConnection

Closing web connection. Closing Selenium driver

#### 0 12:09:44(16:04.788)

## RSTK-9180-SYDATA-Close PO AP Batch.testinstance

- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\Purchase Order\Callable\ReadExcelPath.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\POLOADER\Callable\POLoader\_POCreation.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\POLOADER\Callable\SubmittoVendor.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOReceipt.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOAuthorization.testcase
- 1 Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\Inventory QuantityOnHand.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAPOAPMatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATA Detail.testcase
- ① Loading test case. File: D:\provar\PKTEst\Test\Test\Poje\tests\PO\_SYDATA\Callable\SYDATAEditPOAPMatch.testcase
- ① Loading test case. File: D:\provar\PKTEst\TestProje\tests\PO\_SYDATA\Callable\SYDATAClosePOAPBatch.testcase

# RSTK-9180-SYDATA-Close PO AP Batch.testcase

# Summary

Started 16 Mar 2022, 12:09:44 Ended 16 Mar 2022, 12:11:02

Duration (mm:ss) 01:18.133
Outcome failed

# Output

Salesforce Connect: SFConnection (Test)

0 12:09:44(16:05.318)

0 12:09:51(16:11.864)

- (i) Connecting to Salesforce as QARSF\_Admin
- Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https://automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbackUrl};accessTolenvironment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied]
- Create object id log file.

Absolute path: C:\Users\Mayur\AppData\Local\Temp\ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log

- Access Token refreshed successfully.
- ₹ Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/
  T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/tooling/,
  PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk
- \* Opening Partner connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk

Opening SOAP connection

Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0

Opening Metadata connection

Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

① Successfully connected to Salesforce as QARSF\_Admin

Then

Successfully connected to Salesforce as QARSF_Admin	
Reading Excel Data	0 12:09:50(16:10.979)
Call ReadExcelPath	0 12:09:50(16:11.520)
ReadExcelPath	0 12:09:50(16:11.521)
Salesforce Connect: SFConnection (Test)	0 12:09:50(16:11.569)
① Connecting to Salesforce as QARSF_Admin	
① Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection	
If: {GetSelectedEnvironment() = "QARSF"}	0 12:09:51(16:11.618)
Then	<b>0</b>
√ Set Values: poui	<b>0</b>
√ Set Values: financial	<b>0</b>
≪ Set Values: posydata1	<b>0</b>
√ Set Values: posydata	<b>0</b>
≪ Set Values: poloader	<b>()</b>
Else	0 12:09:51(16:11.732)
If: {GetSelectedEnvironment() = "AutomationOrg"}	0 12:09:51(16:11.795)

0 12:09:51(16:11.946) Set Values: financial Setting value financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set financial to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 12:09:51(16:12.027) Set Values: posydata1 Setting value posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx 0 12:09:51(16:12.272) Set Values: posydata Setting value posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set posydata to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 0 12:09:51(16:12.479) Set Values: poloader ① Setting value poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test Successfully set poloader to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 12:09:52(16:12.612) Set Values: poui Setting value poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poui to templates/AutomationOrg/POData\_AutomationOrg.xlsx Set Values: pouipath 0 12:09:52(16:12.731) ① Setting value pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set pouipath to templates/AutomationOrg/POData\_AutomationOrg.xlsx 0 12:09:52(16:13.008) Set Values: posydatapath1 ① Setting value posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath1 to templates/AutomationOrg/POSYDATA-AutomationOrg.xlsx Set Values: finpath ① 12:09:52(16:13.257) ① Setting value finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set finpath to templates/AutomationOrg/FinancialData\_AutomationOrg.xlsx 0 12:09:52(16:13.421) Set Values: poloaderpath ① Setting value poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set poloaderpath to templates/AutomationOrg/POLoader\_AutomationOrg.xlsx 0 12:09:52(16:13.544) Set Values: posydatapath ① Setting value posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx Configuration: ValueScope:Test ① Successfully set posydatapath to templates/AutomationOrg/SYDATA-POtoPOAP Match\_AutomationOrg.xlsx 1 Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection 0 12:09:53(16:13.677) Read Data for Close PO AP Batch (i) Loading data from Parameter Value Source ... 1: Loading Parameter Value Source row 1: 1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

```
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation_HomeCurr, valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Vendor = PrimitiveValueImpl [ value: a4X5f000000tkbm, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
(i) Loading Parameter Value Source row 2:
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation_ForeignCurr, valueId=null, createdUpdateSeq=-1,
updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Vendor = PrimitiveValueImpl [ value: a4X5f000000tkbw, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
Loaded 2 rows from Parameter Value Source.
(i) Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiH8, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 958.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 960.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 2:
1] ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Quantity = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiHN, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 55.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 56.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]

    Loading Parameter Value Source row 3:

1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> InvLocID = PrimitiveValueImpl [ value: a8s5f000000PtAg, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> LocNum = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Icitem = PrimitiveValueImpl [ value: a345f000000tiHD, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
```

```
1 ==Column=> QuantityBefore = PrimitiveValueImpl [ value: 482.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> QuantityAfter = PrimitiveValueImpl [ value: 485.0, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
Loaded 3 rows from Parameter Value Source.
(i) Loading data from Parameter Value Source ...
1: Loading Parameter Value Source row 1:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Item = PrimitiveValueImpl [ value: a415f00000IOC4, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> UnitPrice = PrimitiveValueImpl [ value: 230, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 2:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCJ, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 1, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 45.23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=nuII, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 3:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOC9, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 3, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 44.23, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 4:
1] ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCi, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> UnitPrice = PrimitiveValueImpl [ value: 303, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
1 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 Loading Parameter Value Source row 5:
1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
① ==Column=> APIMode = PrimitiveValueImpl [ value: Add Line, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> Item = PrimitiveValueImpl [ value: a415f000000IOCn, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1 ==Column=> Quantity = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
1] ==Column=> UnitPrice = PrimitiveValueImpl [ value: 500, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
🛈 ==Column=> Project = PrimitiveValueImpl [ value: a3A5f000000xGXA, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
```

Loaded 5 rows from Parameter Value Source.

```
(i) Loading data from Parameter Value Source ...
       1: Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Authorization, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionQTY = PrimitiveValueImpl [ value: 2, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1] ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1
       ① ==Column=> Auth = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 Loading Parameter Value Source row 2:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO Authorization, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> BackgroundProcessing = PrimitiveValueImpl [value: false, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionQTY = PrimitiveValueImpl [ value: 5, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Auth = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       Loaded 2 rows from Parameter Value Source.
       (1) Loading data from Parameter Value Source ...
       (i) Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: PO AP Match Using Detail, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       1 ==Column=> Process = PrimitiveValueImpl [ value: Hold, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       Loaded 1 rows from Parameter Value Source.
       (i) Loading data from Parameter Value Source ...
       Loading Parameter Value Source row 1:
       1 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       ① ==Column=> TransactionDetailType = PrimitiveValueImpl [ value: PO Receipt, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       Loaded 1 rows from Parameter Value Source.
       1 Loading data from Parameter Value Source ...
       1: Loading Parameter Value Source row 1:
       1 ==Column=> TransactionType = PrimitiveValueImpl [ value: Close PO AP Batch, valueId=null, createdUpdateSeq=-1,
       updatedUpdateSeq=-1]
       ① ==Column=> Process = PrimitiveValueImpl [ value: Ready, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> BackgroundProcessing = PrimitiveValueImpl [ value: true, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       1 ==Column=> Division = PrimitiveValueImpl [ value: a8d5f0000004JbG, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       🛈 ==Column=> Name = PrimitiveValueImpl [ value: NP_Automation, valueId=null, createdUpdateSeq=-1, updatedUpdateSeq=-1]
       Loaded 1 rows from Parameter Value Source.
                                                                                                                   0 12:09:53(16:14.179)
For Each: {AddPOCreationData}=>POData
  ① Start of iteration 1 of 2.
                                                                                                                   0 12:09:54(16:14 792)
   Iteration 1
                                                                                                                   0 12:09:54(16:15.235)
       Call POLoader_POCreation
           POLoader_POCreation
                                                                                                                   0 12:09:54(16:15.240)
               Salesforce Connect: SFConnection (Test)
                                                                                                                   0 12:09:54(16:15.322)
```

(i) Connecting to Salesforce as QARSF\_Admin

```
1 Re-using existing connection. Connection: QARSF_Admin, Result Name: SFConnection
                                                                                               0 12:09:54(16:15.380)
Read Add Both Data
Addition of PO and PO Line
                                                                                               0 12:09:54(16:15.480)
                                                                                               0 12:09:55(16:15.657)
    Add PO Header
                                                                                               0 12:09:55(16:15.805)
       For Each: {List}=>addheader
           i Start of iteration 1 of 1.
            Iteration 1
                                                                                               0 12:09:55(16:16.081)
                Create Object:
                                                                                               0 12:09:55(16:16.082)
                rstk__poloader__c=>addheaderId
                   ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                   Setting fields:
                   i =Field=> rstk__poloader_mode__c = <null>
                   i =Field=> rstk__poloader_vendno__c = a4X5f000000tkbm
                   i =Field=> rstk_poloader_div_c = a8d5f0000004JbG
                   =Field=> rstk__poloader_poagh__c = <null>
                   i =Field=> rstk__poloader_process__c = Ready
                   1 = Field => Name = NP_Automation_HomeCurr
                   PO Loader created successfully. Object Id: a485f000001aKKTAA2, Result Name: addheaderId
                   ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
                   a485f000001aKKTAA2
                SOQL Query: select
               Id,Name,rstk__poloader_pohdr__c,rstk__poloader_process__c
                                                                                               0 12:09:59(16:19.796)
               from rstk__poloader__c where id =
                'a485f000001aKKTAA2'=>poloaderhdrapi
                    1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
                   Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c from rstk_poloader_c where id = 'a485f000001aKKTAA2'
                   ① Query successful. Row Count: 1.
                Set Values: POHDRID
                                                                                               0 12:10:00(16:21.109)
                   (i) Setting value POHDRID to a3w5f000000v35aAAA
                    Configuration: ValueScope:Test
                   (i) Successfully set POHDRID to a3w5f000000v35aAAA
           (i) Reached the end of the List.
    Add PO Line
                                                                                               ① 12:10:00(16:21.372)
                                                                                               0 12:10:01(16:21.859)
        For Each: {AddLineData}=>poloaderaddline
           (i) Start of iteration 1 of 5.
                                                                                               0 12:10:01(16:22.201)
            Iteration 1
                Create Object: rstk__poloader__c=>addlineId
                                                                                               0 12:10:01(16:22.203)
                   ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                   count: 9
                   (i) Setting fields:
                   i =Field=> rstk__poloader_poitem__c = a415f000000IOC4
                   i =Field=> rstk__poloader_mode__c = Add Line
                   i =Field=> rstk__poloader_unitprice__c = 230
                   i =Field=> rstk__poloader_qtyreq__c = 2
                   1 =Field=> rstk__poloader_pohdr__c = a3w5f000000v35aAAA
                   i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
                   i =Field=> rstk__poloader_process__c = Ready
                   i =Field=> Name = NP_Automation
                   i =Field=> rstk_poloader_schedrcptdte_c = 2022-03-16
```

```
Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKKYAA2
    SOQL Query: select
    ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKKYAA2'=>addlineapi
        (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKKYAA2'
        (i) Query successful. Row Count: 1.
                                                                                    @ 12:10:08(16:28.951)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPw2AAE
        Configuration: ValueScope:Test
        (i) Successfully set POLINEID to a445f000000pPw2AAE
    While: {addlineapi.rstk__poloader_process__c =
                                                                                    0 12:10:08(16:29.144)
    "Ready"}
        (i) Looping ending because the condition is not TRUE.
(i) Start of iteration 2 of 5.
                                                                                    0 12:10:08(16:29.449)
Iteration 2
    Create Object: rstk__poloader__c=>addlineId
                                                                                    0 12:10:08(16:29.451)
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        (i) Setting fields:
        (i) =Field=> rstk__poloader_poitem__c = a415f000000IOCJ
        1 =Field=> rstk__poloader_mode__c = Add Line
        i =Field=> rstk__poloader_unitprice__c = 45.23
        i =Field=> rstk__poloader_qtyreq__c = 1
        1 =Field=> rstk__poloader_pohdr__c = a3w5f000000v35aAAA
        i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        ① =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        i =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKKdAAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKKdAAM
    SOQL Query: select
    ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_pohdr_c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKKdAAM'=>addlineapi
        1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
        Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKKdAAM'
        (i) Query successful. Row Count: 1.
                                                                                    0 12:10:15(16:36.505)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPw7AAE
        Configuration: ValueScope:Test
        (i) Successfully set POLINEID to a445f000000pPw7AAE
    While: {addlineapi.rstk__poloader_process__c =
                                                                                    0 12:10:16(16:36.679)
        (i) Looping ending because the condition is not TRUE.
① Start of iteration 3 of 5.
```

PO Loader created successfully. Object Id: a485f000001aKKYAA2, Result Name: addlineld

```
Iteration 3
                                                                                   0 12:10:16(16:36.983)
                                                                                   0 12:10:16(16:36.984)
    Create Object: rstk__poloader__c=>addlineId
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        (i) Setting fields:
        i =Field=> rstk__poloader_poitem__c = a415f000000IOC9
        =Field=> rstk__poloader_mode__c = Add Line
        (i) =Field=> rstk__poloader_unitprice__c = 44.23
        i =Field=> rstk__poloader_qtyreq__c = 3
        1 =Field=> rstk__poloader_pohdr__c = a3w5f000000v35aAAA
        =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        (i) =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        i =Field=> rstk_poloader_schedrcptdte_c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKKiAAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKKiAAM
    SOQL Query: select
    ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk
    from rstk__poloader__c where id =
    'a485f000001aKKiAAM'=>addlineapi
        (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
        ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c
        from rstk_poloader_c where id = 'a485f000001aKKiAAM'
        (i) Query successful. Row Count: 1.
                                                                                   0 12:10:24(16:45.300)
    Set Values: POLINEID
        (i) Setting value POLINEID to a445f000000pPwCAAU
        Configuration: ValueScope:Test
        (i) Successfully set POLINEID to a445f000000pPwCAAU
    While: {addlineapi.rstk__poloader_process__c =
                                                                                   0 12:10:24(16:45.462)
    "Ready"}
        (i) Looping ending because the condition is not TRUE.
(i) Start of iteration 4 of 5.
Iteration 4
                                                                                   0 12:10:25(16:45.824)
                                                                                   0 12:10:25(16:45.826)
      Create Object: rstk__poloader__c=>addlineId
        ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
        count: 9
        Setting fields:
        (i) =Field=> rstk__poloader_poitem__c = a415f000000lOCi
        i =Field=> rstk poloader mode c = Add Line
        i =Field=> rstk_poloader_unitprice_c = 303
        i =Field=> rstk__poloader_qtyreq__c = 2
        i =Field=> rstk__poloader_pohdr__c = a3w5f000000v35aAAA
        i =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
        i =Field=> rstk__poloader_process__c = Ready
        i =Field=> Name = NP_Automation
        ① =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
        PO Loader created successfully. Object Id: a485f000001aKKnAAM, Result Name: addlineId
        ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
        a485f000001aKKnAAM
```

```
SOQL Query: select
            ld,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyngcgroup_c,rstk
            from rstk__poloader__c where id =
            'a485f000001aKKnAAM'=>addlineapi
                1 Reading a Salesforce object. Connection Name: SFConnection, Query: select
               Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c from rstk_poloader_c where id = 'a485f000001aKKnAAM'
                i Query successful. Row Count: 1.
                                                                                          0 12:10:32(16:53.113)
            Set Values: POLINEID
                (i) Setting value POLINEID to a445f000000pPwHAAU
                Configuration: ValueScope:Test
                (i) Successfully set POLINEID to a445f000000pPwHAAU
            While: {addlineapi.rstk__poloader_process__c =
                                                                                          0 12:10:32(16:53.229)
            "Ready"}
                (i) Looping ending because the condition is not TRUE.

    Start of iteration 5 of 5.

        Iteration 5
                                                                                          0 12:10:32(16:53.528)
                                                                                          0 12:10:32(16:53.531)
            Create Object: rstk__poloader__c=>addlineId
                ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk_poloader_c, field
                count: 9
                (i) Setting fields:
                (i) =Field=> rstk__poloader_poitem__c = a415f000000lOCn
                ① =Field=> rstk__poloader_mode__c = Add Line
                i =Field=> rstk_poloader_unitprice_c = 500
                i =Field=> rstk__poloader_qtyreq__c = 2
                i =Field=> rstk__poloader_pohdr__c = a3w5f000000v35aAAA
                1 =Field=> rstk__poloader_proj__c = a3A5f000000xGXA
                i =Field=> rstk__poloader_process__c = Ready
                i =Field=> Name = NP_Automation
                i =Field=> rstk__poloader_schedrcptdte__c = 2022-03-16
                PO Loader created successfully. Object Id: a485f000001aKKsAAM, Result Name: addlineId
                ① Logging Salesforce Object Id for clean up. Object Name: rstk_poloader_c, id:
                a485f000001aKKsAAM
            SOQL Query: select
            ld,Name,rstk__poloader_pohdr__c,rstk__poloader_process__c,rstk__poloader_asyncgroup__c,rstk
            from rstk__poloader__c where id =
            'a485f000001aKKsAAM'=>addlineapi
                (i) Reading a Salesforce object. Connection Name: SFConnection, Query: select
                Id,Name,rstk_poloader_pohdr_c,rstk_poloader_process_c,rstk_poloader_asyncgroup_c,rstk_poloader_poline_c
                from rstk__poloader__c where id = 'a485f000001aKKsAAM'
                (i) Query successful. Row Count: 1.
                                                                                          0 12:10:39(17:00.267)
            Set Values: POLINEID
                (i) Setting value POLINEID to a445f000000pPwMAAU
                Configuration: ValueScope:Test
                (i) Successfully set POLINEID to a445f000000pPwMAAU
            While: {addlineapi.rstk_poloader_process_c =
                                                                                          @ 12:10:39(17:00.382)
            "Ready"}
                (i) Looping ending because the condition is not TRUE.
        (i) Reached the end of the List.
SOQL Query: select
Id,rstk_pohdr_ordsts_c,rstk_pohdr_totamt_c,rstk_pohdr_ordno_c,CreatedDate_012:10:39(17:00.507)
from rstk__pohdr__c where Id
='a3w5f000000v35aAAA'=>pohdr
```

(i) Reading a Salesforce object. Connection Name: SFConnection, Query: select Id,rstk\_pohdr\_ordsts\_\_c,rstk\_pohdr\_totamt\_\_c,rstk\_pohdr\_ordno\_\_c,CreatedDate from rstk\_pohdr\_c where Id ='a3w5f000000v35aAAA' (i) Query successful. Row Count: 1. 0 12:10:41(17:01.744) Set Values: POTotal Setting value POTotal to 2243.92 Configuration: ValueScope:Test Successfully set POTotal to 2243.92 0 12:10:41(17:01.902) Set Values: POOrderNum Setting value POOrderNum to 257 Configuration: ValueScope:Test i Successfully set POOrderNum to 257 (i) Handling managed resource. Name: SFConnection Not closing Salesforce Connection because it is still being used. Name: SFConnection (i) Salesforce Connection handled successfully. Name: SFConnection Call SubmittoVendor 0 12:10:41(17:02.525) @ 12:10:41(17:02.536) SubmittoVendor 0 12:10:42(17:02.748) Salesforce Connect: SFConnection (Test) (1) Connecting to Salesforce as QARSF\_Admin Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https:// automation testing 2. my. sales force. com; identity Service Url = https://login.sales force.com/dentity Service Url = hid/00D5f000005vwGkEAl/005ff000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl={callbenvironment: AutomationOrg, clientId: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied] Create object id log file. Absolute path: C:\Users\Mayur\AppData\Local\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log Access Token refreshed successfully. 🌞 Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/ T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/ tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk Opening Partner connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk Topening SOAP connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0 Opening Metadata connection Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk (i) Successfully connected to Salesforce as QARSF\_Admin For Each: {POData}=>povendorsubmit 12:10:47(17:08.249) (i) Start of iteration 1 of 1. 0 12:10:48(17:08.850) Iteration 1 Create Object: rstk\_\_poloader\_\_c=>submittovendor ① 12:10:48(17:08.852) ① Creating a new Salesforce object. Connection Name: SFConnection, Name: rstk\_poloader\_c, field count: 7

Setting fields:

=Field=> rstk\_\_poloader\_mode\_\_c = Submit to Vendor
 =Field=> rstk\_\_poloader\_submittovendor\_\_c = True

=Field=> rstk\_\_poloader\_vendno\_\_c = a4X5f000000tkbm i =Field=> rstk\_\_poloader\_div\_\_c = a8d5f0000004JbG i =Field=> rstk\_\_poloader\_pohdr\_\_c = a3w5f000000v35aAAA =Field=> rstk\_\_poloader\_process\_\_c = Ready =Field=> Name = NP\_Automation\_HomeCurr PO Loader created successfully. Object Id: a485f000001aKKxAAM, Result Name: submittovendor 1 Logging Salesforce Object Id for clean up. Object Name: rstk\_poloader\_c, id: a485f000001aKKxAAM (i) Reached the end of the List. (i) Handling managed resource. Name: SFConnection Closing Salesforce Connection because it is no longer being used. Name: SFConnection Shutting down Soap Connections. logFilePath: QARSF\_Admin-objectids.log (i) Salesforce Connection handled successfully. Name: SFConnection Fetch Quantity on Hand Before Receipt 0 12:10:53(17:14.246) Set Values: wb\_Quantitypath 0 12:10:54(17:14.701) 0 12:10:54(17:14.799) Set Values: ws\_quantity Setting value ws\_quantity to POReceipt Configuration: ValueScope:Test (i) Successfully set ws\_quantity to POReceipt 0 12:10:54(17:15.112) Call Inventory QuantityOnHand 0 12:10:54(17:15.114) Inventory QuantityOnHand Salesforce Connect: SFConnection (Test) 0 12:10:54(17:15.193) (i) Connecting to Salesforce as QARSF\_Admin Connection details. Connection name: QARSF\_Admin, result name: SFConnection, result scope: Test, urlString: sf:environment=PRERELEASE;apiLoginUrl=https:// automationtesting2.my.salesforce.com;identityServiceUrl=https://login.salesforce.com/ id/00D5f000005vwGkEAI/0055f000008Hn0WAAS;clientId={clientId};clientSecret={clientSecret};authenticationType=OAUTH;callbackUrl= environment: AutomationOrg, clientId: [supplied], clientSecret: [supplied], callBackUrl: [supplied], accessToken: [supplied], refreshToken: [supplied] Create object id log file. Absolute path: C:\Users\Mayur\AppData\Local\Temp \ProvarTestArtifacts729637417074555767170533054923700\QARSF\_Admin-objectids.log \* Access Token refreshed successfully. Identity Service successful. ToolingEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/ T/53.0/00D5f000005vwGk, ToolingRestEndpoint: https://automationtesting2.my.salesforce.com/services/data/v53.0/ tooling/, PartnerEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk, MetadataEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk, EnterpriseEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/c/53.0/00D5f000005vwGk Opening Partner connection Connection configurations: userName: automation@rootstock.com, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0/00D5f000005vwGk TOP Opening SOAP connection  $Connection\ configurations:\ user Name:\ automation @\ rootstock.com,\ password:\ [empty],\ security Token:\ secur$ authEndpoint: https://automationtesting2.my.salesforce.com/services/Soap/u/53.0, serviceEndpoint: https:// automationtesting2.my.salesforce.com/services/Soap/u/53.0 Opening Metadata connection Connection configurations: userName: null, password: [empty], securityToken: [empty], authEndpoint: https://automationtesting2.mv.salesforce.com/services/Soap/u/53.0, serviceEndpoint; https://

Successfully connected to Salesforce as QARSF\_Admin

automationtesting2.my.salesforce.com/services/Soap/m/53.0/00D5f000005vwGk

 Qty On Hand
 © 12:11:00(17:21.370)

 For Each: {SrcData\_InvyQty}=>InventoryQuantity
 © 12:11:00(17:21.494)

 ① Start of iteration 1 of 3.
 © 12:11:01(17:21.686)

<ul> <li>SOQL Query: SELECT</li> <li>Id,rstkicitemsiteproj_itemc,rstkicitemsiteproj_qtyallocc,rstk</li> <li>FROM rstkicitemsiteprojc where</li> <li>rstkicitemsiteproj_itemc =</li> <li>'{InventoryQuantity.Icitem}'=&gt;icitemprjs</li> <li>① Reading a Salesforce object. Connection Name: SFConnection, Query: SELECT Id,rstkicitemsiteproj_itemc,rstkicitemsiteproj_qtyallocc,rstkicitemsiteproj_FROM rstkicitemsiteproj_c where rstkicitemsiteproj_itemc = 'a345f0000000tile</li> </ul>	© 12:11:01(17:21.687)  qtyohnn_c,rstk_icitemsiteproj_qtyoh
① The query returned no records.	
<ul> <li>Set Values: ItemNumber</li> <li>⑤ Setting value ItemNumber to a345f000000tiH8</li> </ul>	12:11:02(17:22.833)
Configuration: ValueScope:Test	
① Successfully set ItemNumber to a345f000000tiH8	
Set Values: QtyOnHand.QuantityBefore ⑤ Setting value QtyOnHand.QuantityBefore to <null></null>	12:11:02(17:23.023)
Configuration: ValueScope:Test	
⑤ Successfully set QtyOnHand.QuantityBefore to <null></null>	
<ul><li>Write: {QtyOnHand}=&gt;{ExcelPath_SalesOrder_BaseData_SOAPI}</li><li>Writing to URL</li></ul>	© 12:11:02(17:23.180)
⑤ Start of Excel Write. WorkbookPath: null, excludeCols: [none]	
The workbook path is required.	
<ul> <li>Sub-Test Steps failed for iteration 1</li> </ul>	
Handling managed resource. Name: SFConnection	
Closing Salesforce Connection because it is no longer being used. Name: SFConnection	
Shutting down Soap Connections. logFilePath: QARSF_Admin-objectids.log	
Salesforce Connection handled successfully. Name: SFConnection	
	<b>®</b>
Sall SYDATAPOAuthorization	<b>0</b>
	<b>()</b>
Call Inventory QuantityOnHand	<b>0</b>
	0
	<b>0</b>
Edit SYDATA PO AP Match record	<b>0</b>
Call SYDATAEditPOAPMatch	<b>0</b>
Close PO AP Batch	<b>()</b>
Call SYDATAClosePOAPBatch	① <del></del>
Sub-Test Steps failed for iteration 1	
① Handling managed resource. Name: SFConnection	
❖ Closing Salesforce Connection because it is no longer being used. Name: SFConnection	
* Shutting down Soap Connections. logFilePath: QARSF_Admin-objectids.log	
Salesforce Connection handled successfully. Name: SFConnection	
⚠ Can not find Smtp valid receipients to send the mail for test plans, exiting	