

1.Login

Url:

<http://68.183.198.103/api/login>

Method:

POST

Params:

username – web username.

password – web password.

Response:

```
{
  "account_id": "1",
  "account_role": "1",
  "username": "admin",
  "access_token": "620890b015ebf5bb240f8a714a1f3485"
}
```

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://68.183.198.108/api/login
- Params:** (empty)
- Body:** form-data (selected), containing:

Key	Value	Description
username	admin	
password	admin@123	
- Response:** JSON (selected), showing:

```
{
  "account_id": "1",
  "account_role": "1",
  "username": "admin",
  "access_token": "620890b015ebf5bb240f8a714a1f3485"
}
```
- Status:** 200 OK
- Time:** 540 ms

2.Profiles

Url:

<http://68.183.198.103/api/profiles>

Method:

POST

Params:

access_token – (620890b015ebf5bb240f8a714a1f3485) This token will be generated when valid login api request.

Response:

```
{
  "name": "BusinessAccount",
  "email": "",
  "phone_number": [
    "1800112233",
    "1600112233"
  ],
  "mainline_number": [
    "1900112233",
    "1700112233"
  ],
  "caller_id": "180011447722",
  "timezone": "GMT+5:30",

  "language": "English",
  "voicemail_pin": "1471"
```

UberConference Number
+1 781-448-4785 PIN 65853
Above field is missing in this reponse , check
on UI here : <http://159.203.18.248/dashboard>

POST

http://68.183.198.108/api/profiles

Params

Send

Save

AuthorizationHeadersBodyPre-request ScriptTestsCode

form-data

x-www-form-urlencoded

raw

binary

Key	Value	Description	***	Bulk Edit
<input checked="" type="checkbox"/> access_token	3d1cf18fb78a11b169ee7d7f2b43d6b0			
New key	Value	Description		

BodyCookiesHeaders (9)Test ResultsStatus: 200 OKTime: 524 ms

PrettyRawPreviewJSON

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

```
{
  "name": "BusinessAccount",
  "email": "",
  "phone_number": [
    "1800112233",
    "1600112233"
  ],
  "mainline_number": [
    "1900112233",
    "1700112233"
  ],
  "caller_id": "180011447722",
  "timezone": "GMT+5:30",
  "language": "English",
  "voicemail_pin": "1471"
}
```

3.accounts

Url:

<http://68.183.198.103/api/profiles/accounts>

Method:


POST

Params:

access_token – (3eae9cae2d299c6f11f0506e45695a2d) This token will be generated when valid login api request.

Response:

```
{
  "name": "test hello",
  "number": [
    "1800141414"
  ],
  "email": "test@gmail.com"
}
```

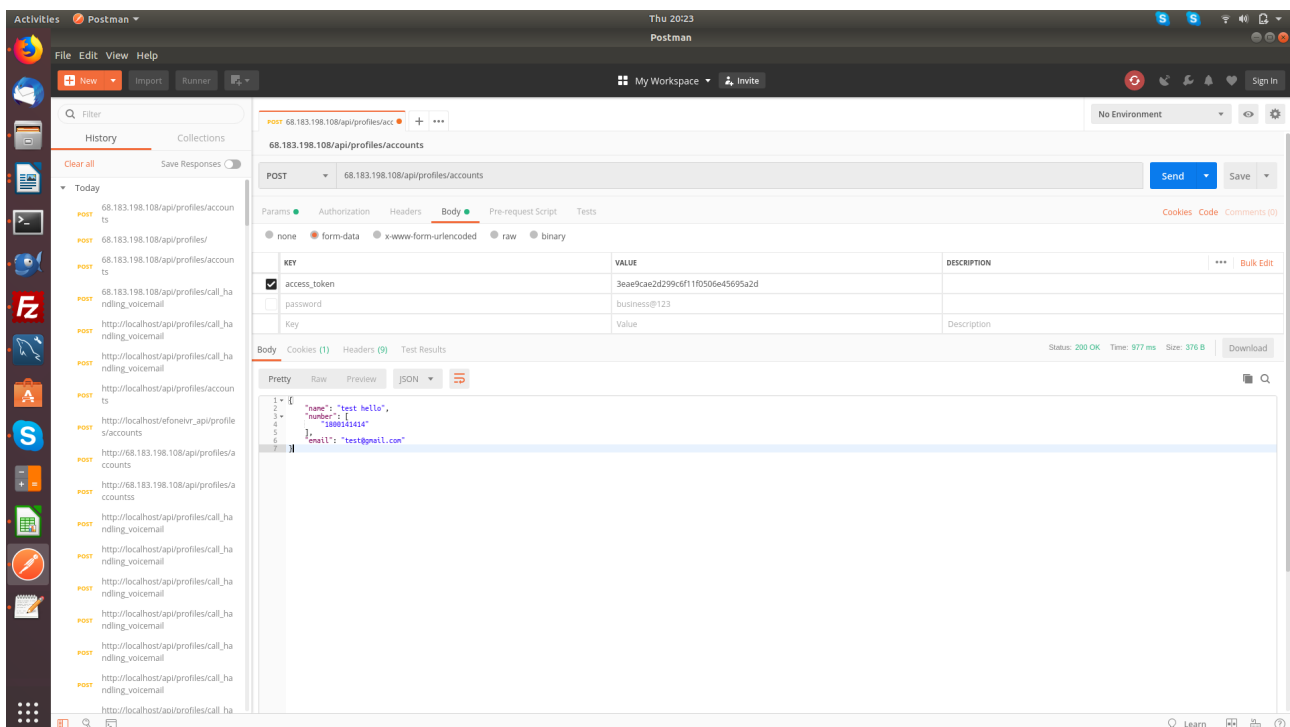

4.Call Handling & Voicemail

Url:

http://68.183.198.103/api/profiles/call_handling_voicemail

Method:

POST

Params:

access_token – (3eae9cae2d299c6f11f0506e45695a2d) This token will be generated when valid login api request.

Desc:

adv_miss_call_routing = 1 (To Voice mail).

adv_miss_call_routing = 2 (To Message (no voice mail))

adv_miss_call_routing = 3 (To Team member/ room phone)

adv_miss_call_routing = 4 (To A department).

Response:

```
{
  "voicemail_greeting": [
    {
      "id": "4",
      "name": "TESTING4",
      "path": "/var/www/html/",
      "select_flag": null
    },
    {
      "id": "2",
      "name": "Default Greeting",
      "path": "/var/www/html/tesing.mp3",
      "select_flag": "1"
    },
    {
      "id": "3",
      "name": "TESING2",
      "path": "/var/www/html/",

```

Will this recording be multiple ?
Also if we can show this field mapping
on corresponding UI point here :
<http://159.203.18.248/dashboard>

Each field mapping pointing in UI
probably in paint so that i can understand each
field relation in terms of UI

```

        "select_flag": "2"
    }
],
"receive_email_notification": "1",
"ring_duration": "10",
"adv_miss_call_routing": "2",
"data": [
    {
        "id": "1",
        "name": "TESTING",
        "path": "/var/www/html/",
        "select_flag": "1"
    },
    {
        "id": "4",
        "name": "TESTING4",
        "path": "/var/www/html/",
        "select_flag": null
    }
]
}

```

