

[Back to DeepL work](#)

DeepL - Team administration

Designing a complete bulk user deletion flow


I designed the sequence from filtering and selecting users through the destructive action, consequence confirmation and resulting state.

My role	Worked with	Why it mattered
Content designer for bulk scope, selection, action, confirmation and feedback states	Enterprise product, product design and engineering	One bulk action could remove DeepL subscription access for an entire selected group.

01 - The experience

A confirmation that names the access consequence

Deletion confirmation

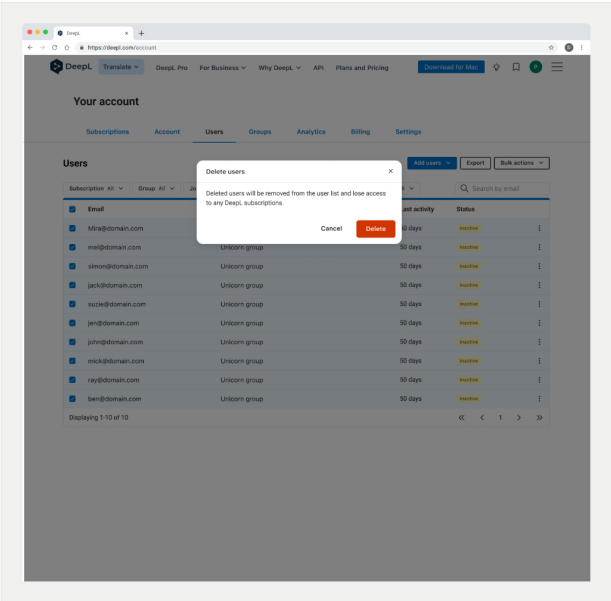

[View larger](#)

The confirmation names the downstream effect—losing access to DeepL subscriptions—before the admin commits.

02 - The problem

One bulk action could remove DeepL subscription access for an entire selected group.

The shared user table supported routine administration and irreversible actions. By the time an admin chose Delete, the interface needed to preserve the scope they had created and state what the action would do beyond removing rows.

The useful evidence is the whole interaction, not just the dialog: narrow the set, select the affected users, choose an action, confirm the access consequence and see the new state.

Constraint	Filtering, selection, reversible administration and deletion lived in the same workspace. The destructive path had to preserve scope and use action-specific language without becoming a different interface.
------------	---

04 - The judgment

The decisions doing the work

01 Make scope an explicit step

The admin filters the table to inactive users before selecting anyone, reducing a broad user list to the relevant set.

02	Keep the selected set visible The selected rows remain visible behind the menu and confirmation so the decision does not become detached from its target.
03	Use one verb across the path ‘Delete’ stays consistent in the action menu, dialog heading and final button, while other bulk actions remain clearly separate.
04	Name the access change and result The confirmation states that deletion removes subscription access; the updated list and success message show that the action completed.
The trade-off: The shared bulk-action pattern keeps administration familiar; the deletion copy has to be specific enough to interrupt a routine click path.	

05 - The sequence


From a scoped user set to a visible result

01	02	03	04	05
Narrow the scope Filter the user list to the relevant status before any destructive action is available.	Select the affected users The table makes the selected set and count visible in the working context.	Choose the bulk action Reversible administration tasks and Delete share one menu but retain distinct verbs.	Confirm the consequence The dialog states that the users will be removed and lose access to DeepL subscriptions.	Verify the result The filtered list updates and a success message confirms that the users were deleted.

06 - The admin flow

Scope and consequence remain visible from start to finish


User-management context



View larger

The action begins in the existing user-management workspace rather than a separate destructive flow.


Filtered scope



View larger

Filtering establishes a reviewable set of ten inactive demo users before selection.


Selected users



View larger

Selection stays visible in the table so the admin can verify exactly who is in scope.

Bulk action menu



View larger

The menu keeps Delete distinct from group changes, access changes and invitation management.

Resulting state

