


```
/home/osboxes/cosmos  
/source/projects/cubesat  
-kit/include/device/UARTDevice.h
```

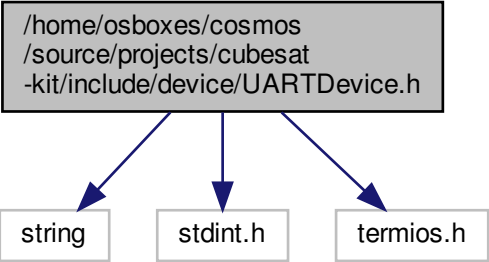

```
graph TD; A["/home/osboxes/cosmos  
/source/projects/cubesat  
-kit/include/device/UARTDevice.h"] --> B[string]; A --> C[stdint.h]; A --> D[termios.h]
```

The diagram illustrates the include paths for the file `UARTDevice.h`. A central box at the top lists the directory structure: `/home/osboxes/cosmos`, `/source/projects/cubesat`, and `-kit/include/device/UARTDevice.h`. Three blue arrows point from this box to three separate boxes below it, representing the headers it includes: `string`, `stdint.h`, and `termios.h`.

`string`

`stdint.h`

`termios.h`