Notes 6 Submission

Commands and Context


`mkdir`

1. `mkdir` - Is the command used to create a directory. Literally meaning "Make Directory". Cannot make files.

Syntax/Formula

```
mkdir [Option] [path/to/directory/new-directory-name]
```

Example

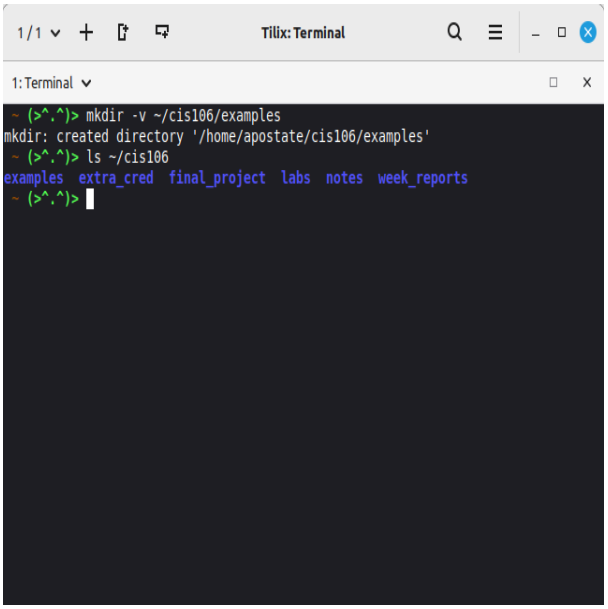


`touch`

2. `touch` - Is the command to make a file. It works almost identically to `mkdir`, except for files rather then directories.

Syntax/Formula

```
touch [option] [path/to/desired/directory/new-file-name]
```

Example

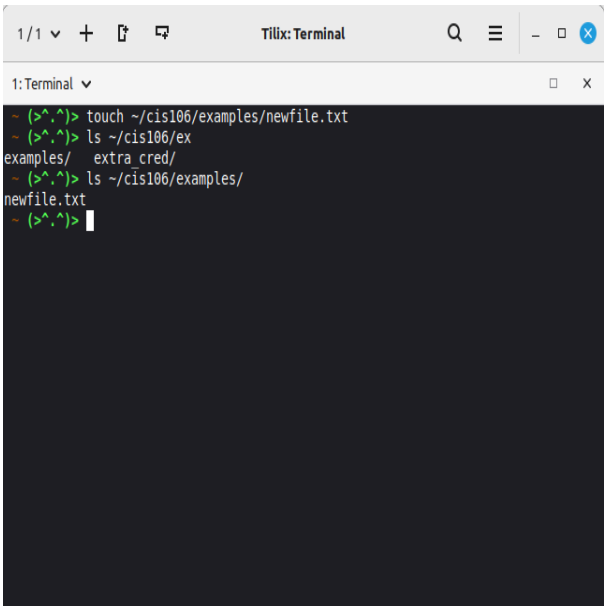


rm

3. `rm` - Is the command to remove a file. The basic command itself will remove any file completely. Directories can be removed as well so long as there is nothing within the directory, or you use the correct [option].

Syntax/Formula

```
rm [option] [path/to/directory/file-ordirectory-to-remove]
```

Example

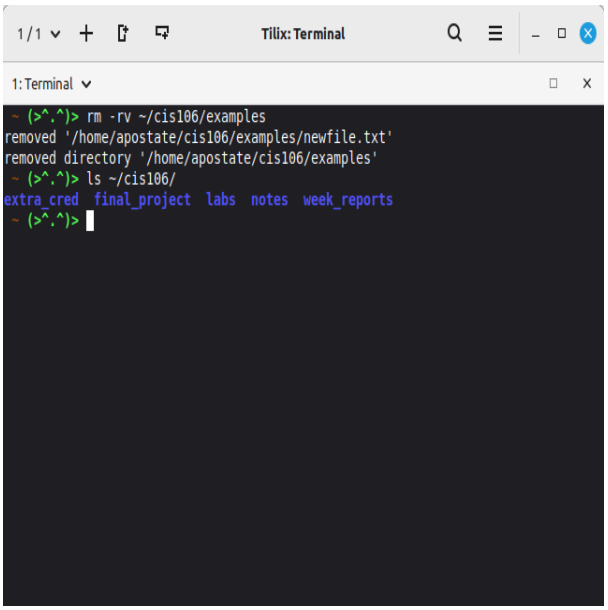


cp

4. `cp` - Is the copy command. Used to copy directories or files to a new location.

Syntax/Formula

```
cp [option] [path/to/directory/desired-file-or-folder]
[new/path/to/desired/directory]
```

Example

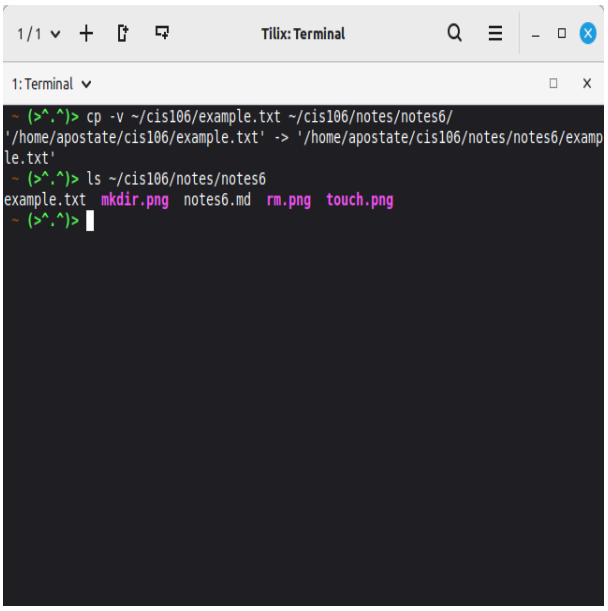

`mv`

5. `mv` - The command used to move or rename a file or directory. Works similiarly to the `cp` command.

Syntax/Formula

```
mv [option] [path/to/directory/orginal-file-name]
[new/path/to/directory/new-name-of-file]
```

Example

