


编译指令

g++ search.cpp -o search.exe -O3 -Wall -DHASH -std=c++11 hash 版本

g++ search.cpp -o search.exe -O3 -Wall RBTREE 版本

不包含大数阶乘与无理数

1、输入底数和搜索层数。

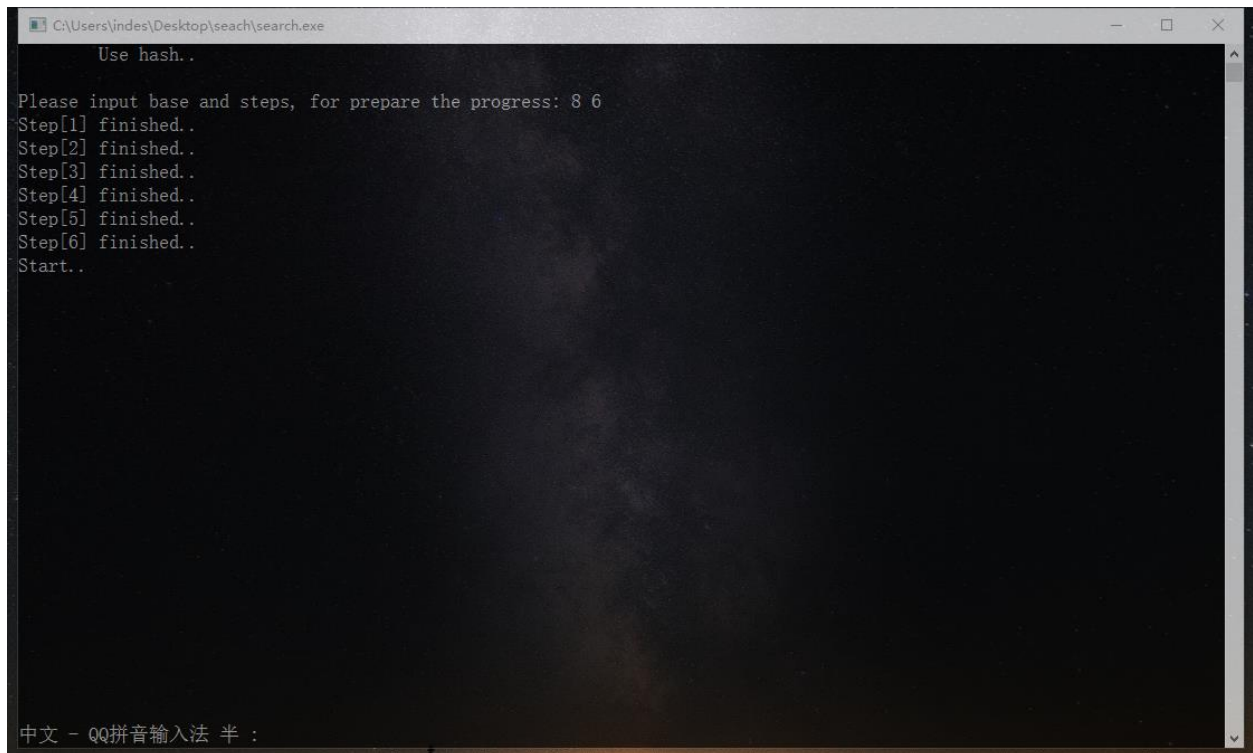

```
C:\Users\index\Desktop\seach\search.exe
Use hash..
Please input base and steps, for prepare the progress: 8 6
Step[1] finished..
Step[2] finished..
Step[3] finished..
Step[4] finished..
Step[5] finished..
Step[6] finished..
Start..
中文 - QQ拼音输入法 半:
```

2、输入要查找的数。

```
C:\Users\indes\Desktop\seach\search.exe

-----
3 = sqrt(9), cost = 3
*****

50
*****
50 = 400 / 8, cost = 6
400 = sqrt(160000), cost = 5
-----

8 is origin, cost = 1
*****

50/6
*****
(25 | 3) = 8 + (1 | 3), cost = 5
8 is origin, cost = 1
-----
(1 | 3) = 8 / 24, cost = 4
8 is origin, cost = 1
-----
24 = 8 + 16, cost = 3
8 is origin, cost = 1
-----
16 = 8 + 8, cost = 2
8 is origin, cost = 1
-----
8 is origin, cost = 1
*****
```

如 50、50/6。

```
10 const int cnt_f = 12, m = 20;
11 const long long infd = 1e16, infn = 1e2, mod = 1e9+7;
```

修改 infd, infn 分子、分母的最大值限制。

cnt_f 最大的阶乘底数。