

LECTURE 11

Core JavaScript Concepts (ES6+)

Functions, closures, and objects — the rules that make JavaScript feel different from every language you already know.

In This Lecture

- 1 JavaScript's role on the web, and how to embed it in a page
- 2 var, let, and const — plus primitive vs. reference types
- 3 Operators, type coercion, and == vs. ===
- 4 Scope, hoisting, and the temporal dead zone
- 5 Three ways to write a function, and ES6 parameter/destructuring features
- 6 How this is determined, and controlling it with call, apply, bind
- 7 Closures — what they are, why they matter, and common pitfalls
- 8 Objects, arrays, template literals, and ES6 modules

The Three Layers of a Web Page

Layer	Language	Job
Structure	HTML	What content exists on the page
Presentation	CSS	How the content looks
Behavior	JavaScript	How the page reacts and changes over time

JavaScript runs client-side, inside the browser, on the user's own computer — not on the server.

Three Ways to Add JavaScript

```
<!-- 1. Inline: avoid -- hard to maintain -->
<button onclick="alert('Hello!')">Click me</button>

<!-- 2. Internal: inside a <script> tag -->
<script>
  console.log("Hello from an internal script");
</script>

<!-- 3. External: linked .js file -- the standard approach -->
<script src="app.js"></script>
```


External scripts keep HTML and JS in separate files, and the browser can cache the .js file across page loads.

defer vs. async

```
<script src="app.js" defer></script>  
<script src="analytics.js" async></script>
```


By default a `<script>` tag stops HTML parsing, downloads, and runs immediately -- defer and async change that.

defer: Downloads in the Background

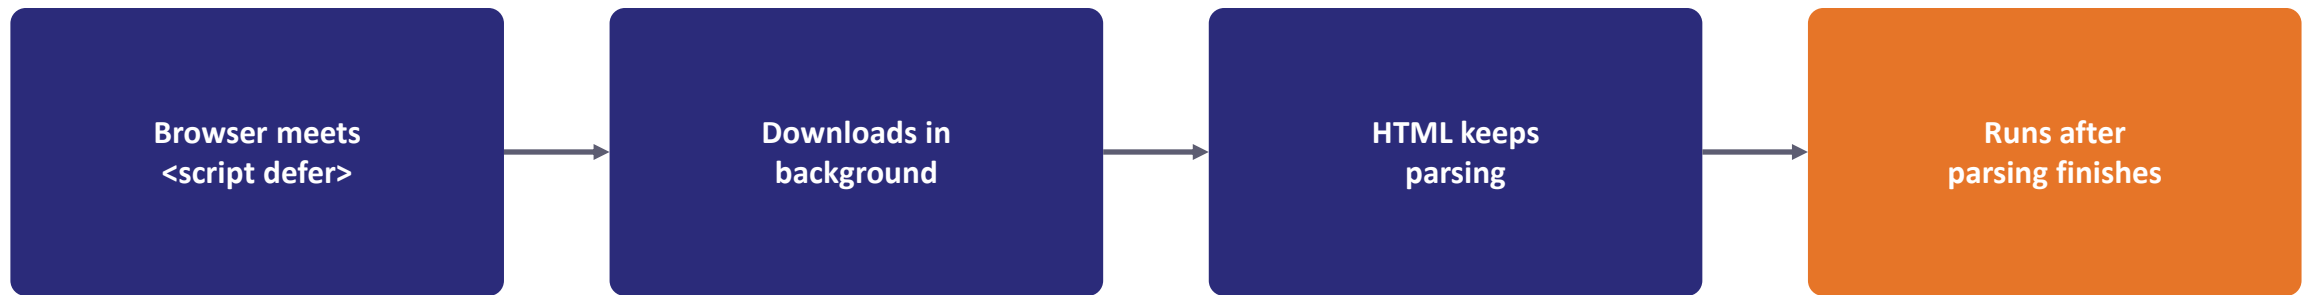

Multiple defer scripts run in the order they appear. Use defer for scripts that need the DOM to exist -- most of the time.

async: Runs the Moment It Arrives

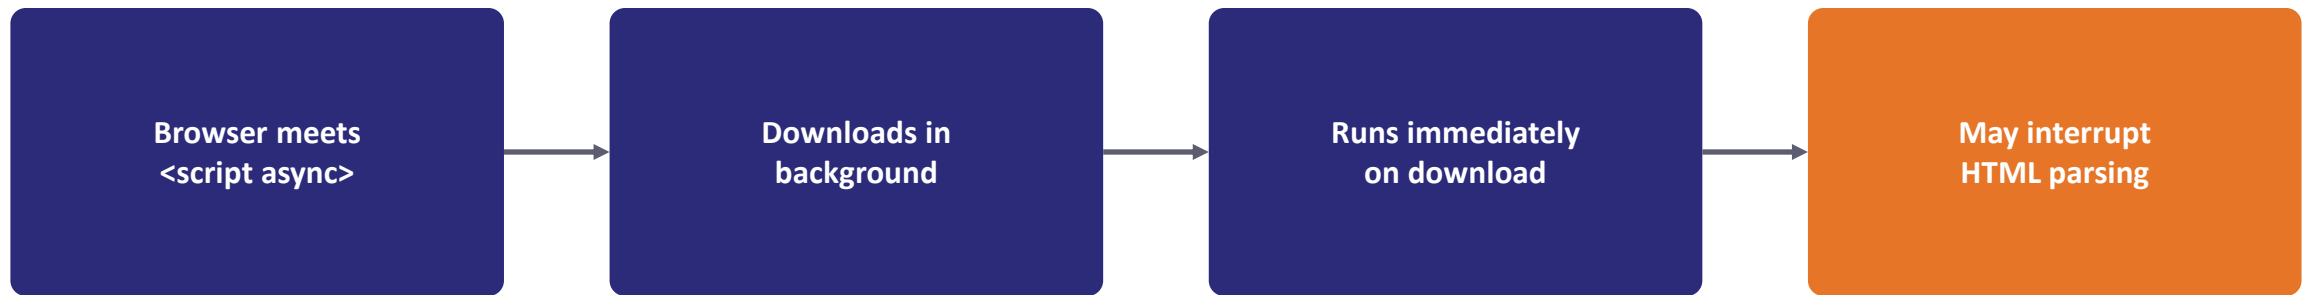

Scripts can run out of order. Use async only for independent scripts that don't touch the page, like analytics trackers.

Rule of Thumb

TIP

Put defer on almost every script you write. Reach for async only for scripts that do not depend on the DOM and do not need to run in a specific order.

VARIABLES

var, let, and const

```
var oldStyle = "avoid me";    // function-scoped, redeclarable -- legacy
let counter = 0;              // block-scoped, can be reassigned
const PI = 3.14159;           // block-scoped, cannot be reassigned
```

Use const by default. Use let when the value must change. Avoid var -- it predates modern JS and has confusing scoping rules.

const Does Not Mean "Unchangeable Value"

WARNING

const only prevents reassigning the variable itself. If the value is an object or array, its contents can still be changed.

const Locks the Binding, Not the Contents

```
const person = { name: "Ali" };  
person.name = "Sara"; // allowed -- we didn't reassign `person`  
// person = {};      // NOT allowed -- this would throw an error
```

Primitive vs. Reference Types

	Primitive types	Reference types
Examples	string, number, boolean, undefined, null, symbol, bigint	object, array, function
Stored as	The actual value	A pointer to a location in memory
Copied by	Value (a real, independent copy)	Reference (both point to the same data)

Copy by Value vs. Copy by Reference

```
// Primitives copy by value
let a = 5;
let b = a; // b gets its own copy of 5
b = 10;
console.log(a); // 5 -- unaffected

// Objects copy by reference
let obj1 = { value: 5 };
let obj2 = obj1; // obj2 points to the SAME object as obj1
obj2.value = 10;
console.log(obj1.value); // 10 -- obj1 changed too!
```

This distinction explains a huge number of beginner bugs -- keep it in mind whenever you assign one variable to another.

Type Coercion

```
console.log("5" + 3);      // "53"  -- number coerced to string, then joined
console.log("5" - 3);      // 2      -- string coerced to number
console.log(1 + true);     // 2      -- true coerced to 1
console.log(null + 1);     // 1      -- null coerces to 0
console.log(undefined + 1); // NaN    -- undefined coerces to NaN
console.log("10" == 10);   // true   -- coercion happens before comparing
console.log("10" === 10);  // false  -- no coercion, types differ
```

`==` (“loose equality”) converts both sides to a common type first. `===` (“strict equality”) compares value and type, with no conversion. `null` and `undefined` behave differently under coercion — that difference trips up beginners constantly.

Type Coercion — Tricky Gotchas

```
console.log([] + []);           // ""           -- both arrays coerce to "", then join
console.log([] + {});          // "[object Object]"
console.log([1,2] + [3,4]);     // "1,23,4"      -- arrays coerce via toString(), then join
console.log(1 + "2" + 3);       // "123"         -- left to right: 1+"2"="12", then +3="123"
console.log(1 + 2 + "3");       // "33"          -- left to right: 1+2=3, then 3+"3"="33"
console.log("" == 0);           // true           -- "" coerces to 0
console.log(null == undefined); // true          -- special case; null === undefined is false
```

Coercion happens strictly left to right, one operation at a time — the ORDER of mixed operands changes the result. These are exactly the surprises `===` avoids.

Explicit Type Conversion

```
console.log(Number("42"));    // 42      -- string to number
console.log(Number(""));      // 0        -- empty string converts to 0
console.log(Number("abc"));   // NaN      -- not a valid number
console.log(String(42));       // "42"     -- number to string
console.log(Boolean(0));       // false    -- falsy: 0, "", null, undefined, NaN
console.log(Boolean("hi"));    // true     -- any non-empty string is truthy
console.log(parseInt("42px")); // 42       -- parses leading digits, ignores the rest
```

`Number()`, `String()`, and `Boolean()` explicitly convert a value's type — unlike coercion, the conversion is intentional and visible in the code. `parseInt()/parseFloat()` pull a leading number out of a string.

Always Prefer `===` and `!==`

WARNING

Loose equality produces surprising results (`"" == 0` is true, `null == undefined` is true). Using strict equality by default avoids an entire category of bugs.

if / else and for

```
let hour = 14;
if (hour < 12) {
  console.log("Good morning");
} else if (hour < 18) {
  console.log("Good afternoon");
} else {
  console.log("Good evening");
}

for (let i = 0; i < 3; i++) {
  console.log("Iteration", i);
}
```

switch

```
let day = "Mon";
switch (day) {
  case "Sat":
  case "Sun":
    console.log("Weekend");
    break;
  default:
    console.log("Weekday");
}
```

switch compares with === internally, and each case needs a break -- otherwise execution "falls through" into the next case.

Three Kinds of Scope

- 1 Global scope: declared outside any function or block; visible everywhere
- 2 Function scope: var is visible anywhere inside the function it was declared in, even inside nested blocks
- 3 Block scope: let and const are visible only inside the { } block where they were declared

var Leaks Out of a Block; let Does Not

```
function demo() {  
  if (true) {  
    var fnScoped = "I leak out of the if-block";  
    let blockScoped = "I stay inside the if-block";  
  }  
  console.log(fnScoped);    // works  
  console.log(blockScoped); // ReferenceError  
}
```

HOISTING

Hoisting and the Temporal Dead Zone

```
console.log(x); // undefined -- not an error, it's "hoisted"  
var x = 5;  
  
console.log(y); // ReferenceError: Cannot access 'y' before initialization  
let y = 5;
```

var is hoisted and initialized with undefined. let/const are hoisted but NOT initialized -- the gap is the temporal dead zone (TDZ).

Why the TDZ Is a Good Thing

NOTE

The TDZ turns a silent bug (accidentally using a variable before it has a real value) into a loud, immediate error, which makes mistakes far easier to catch.

Three Ways to Write a Function

```
// 1. Function declaration -- hoisted, callable before it appears
function add(a, b) {
  return a + b;
}
```

```
// 2. Function expression -- NOT hoisted the same way
const subtract = function (a, b) {
  return a - b;
};
```

```
// 3. Arrow function -- shorter, ES6 (2015)
const multiply = (a, b) => { return a * b; };
const square = x => x * x; // single-expression shortcut
```

Which One Should You Use?

TIP

Use function declarations for top-level, named functions -- they are easy to read and are hoisted. Use arrow functions for short, inline callbacks.

Default and Rest Parameters

```
function greet(name = "Guest") {  
  console.log(`Hello, ${name}!`);  
}  
greet();           // "Hello, Guest!"  
greet("Ayesha");  // "Hello, Ayesha!"  
  
function sum(...numbers) {  
  return numbers.reduce((total, n) => total + n, 0);  
}  
sum(1, 2, 3, 4);  // 10
```

The Spread Operator

```
const nums = [1, 2, 3];  
console.log(Math.max(...nums)); // same as Math.max(1, 2, 3)  
  
const arr1 = [1, 2];  
const arr2 = [3, 4];  
const combined = [...arr1, ...arr2]; // [1, 2, 3, 4]  
  
const defaults = { color: "blue", size: "M" };  
const custom = { ...defaults, size: "L" }; // { color: "blue", size: "L" }
```

Rest vs. Spread -- Same Dots, Opposite Direction

NOTE

Rest gathers many values into one array (used in a function's parameter list). Spread expands one array or object into many values (used when calling a function or building a new array/object).

Unpacking Arrays and Objects

```
// Array destructuring -- position matters
const coordinates = [10, 20];
const [x, y] = coordinates;

// Object destructuring -- name matters, order doesn't
const student = { name: "Bilal", age: 21 };
const { name, age } = student;

// Renaming and default values while destructuring
const { name: studentName, gpa = 0 } = student;
```

this Depends on How You Call It

```
const car = {  
  brand: "Toyota",  
  describe: function () {  
    console.log(`This is a ${this.brand}`);  
  },  
};  
car.describe(); // "This is a Toyota" -- called as car.describe()  
  
const detached = car.describe;  
detached(); // "This is a undefined" -- `this` is no longer `car`!
```

call vs. apply

```
function introduce(greeting, punctuation) {  
  console.log(`${greeting}, I'm ${this.name}${punctuation}`);  
}  
const user = { name: "Ayesha" };  
  
introduce.call(user, "Hi", "!");    // args listed one by one  
introduce.apply(user, ["Hi", "!"]); // args passed as an array
```

call and apply both invoke the function immediately with a given this — they only differ in how you pass the arguments. Use apply when your arguments already live in an array.

bind — Locking in this

```
const user = { name: "Ayesha" };  
function greet(greeting) {  
  console.log(`${greeting}, I'm ${this.name}`);  
}  
  
const sayHi = greet.bind(user); // returns a NEW function  
sayHi("Hi"); // "Hi, I'm Ayesha"  
setTimeout(sayHi, 100, "Hello"); // still bound when called later
```

bind does NOT call the function — it returns a new function with this permanently locked in, ready to pass as a callback or call later.

Arrow Functions and this

WARNING

Arrow functions do not have their own this. Instead they use this from the surrounding ("lexical") scope where they were defined -- ideal for callbacks inside methods.

Why Arrow Callbacks Are Ideal Here

```
const timer = {  
  seconds: 0,  
  start: function () {  
    setInterval(() => {  
      this.seconds++; // `this` is `timer`, inherited from `start`  
      console.log(this.seconds);  
    }, 1000);  
  },  
};
```

A regular function() here would have its OWN this -- not timer -- and this.seconds++ would fail.

A Function That Remembers

```
function makeCounter() {  
  let count = 0; // "enclosed" by the returned function  
  return function () {  
    count++;  
    return count;  
  };  
}  
  
const counter1 = makeCounter();  
console.log(counter1()); // 1  
console.log(counter1()); // 2  
  
const counter2 = makeCounter(); // a completely separate `count`  
console.log(counter2()); // 1
```

Each call to `makeCounter()` creates a brand-new count and a brand-new inner function with a private reference to it.

Common Uses of Closures

- 1 Data privacy: count above cannot be accessed except through the returned function -- a simple form of encapsulation
- 2 Function factories: creating specialized functions, like makeCounter above
- 3 Callbacks that need context: event handlers and setTimeout callbacks often rely on closures to remember values

A Classic Loop Pitfall

```
// BUGGY: prints 3, 3, 3 -- `var` is function-scoped, all three
// callbacks share the SAME `i`, whose final value is 3.
for (var i = 1; i <= 3; i++) {
  setTimeout(() => console.log(i), 100);
}

// FIXED: prints 1, 2, 3 -- `let` creates a NEW `i` per iteration.
for (let j = 1; j <= 3; j++) {
  setTimeout(() => console.log(j), 100);
}
```

This is one of the strongest practical reasons to prefer let over var.

Reading and Updating Data

```
const book = {  
  title: "Eloquent JavaScript",  
  year: 2024,  
  tags: ["javascript", "programming"],  
};  
console.log(book.title);      // dot notation  
console.log(book["year"]);    // bracket notation -- for dynamic keys  
book.pages = 472;             // add a new property  
  
const numbers = [10, 20, 30];  
numbers.push(40);              // add to the end  
console.log(numbers.length);  // 4
```

Serializing Data with JSON

```
const student = { name: "Bilal", gpa: 3.8, courses: ["CSC336", "CSC270"] };

// Object -> JSON string, for sending over HTTP or saving to a file
const json = JSON.stringify(student);
console.log(json);

// JSON string -> object, for reading data you received
const parsed = JSON.parse(json);
console.log(parsed.name); // "Bilal"
```

JSON (JavaScript Object Notation) is the standard format APIs use to send data. `JSON.stringify()` turns a JS value into JSON text; `JSON.parse()` turns it back.

Grouping and Listing Data

```
const students = [
  { name: "Bilal", year: 2 }, { name: "Hina", year: 3 }, { name: "Ayesha", year: 2 },
];
const byYear = students.reduce((g, s) => {           // GROUP by year
  if (!g[s.year]) g[s.year] = [];
  g[s.year].push(s.name);
  return g;
}, {});
for (const [year, names] of Object.entries(byYear)) // LIST each group
  console.log(`Year ${year}: ${names.join(", ")}`);
```

reduce groups the list; Object.entries() plus join() lists it back out — a pattern you'll use constantly.

Backtick Strings

```
const name = "Hina";
const score = 92;

// Old way
console.log("Hello " + name + ", your score is " + score + "%.");

// Template literal
console.log(`Hello ${name}, your score is ${score}%.`);

const multiLine = `Line one
Line two`;
```

Template literals embed expressions with `${}` and let strings span multiple lines without special characters.

Running JavaScript Outside the Browser

```
// Browser: JS runs inside a page, with access to the DOM,  
// window, and document -- but no file system or network access.  
  
// Node.js: the SAME language, running directly on your computer  
// or a server -- with file system, network, and OS access.  
  
$ node app.js      // run a JavaScript file directly  
$ node             // or start an interactive REPL
```

Node.js takes the V8 engine (the same one inside Chrome) and runs it standalone — it's the “N” in the MERN stack you'll build on later in this course.

Modules: require vs. import

```
// CommonJS -- Node's original module system (default in .js files)
// mathUtils.js
exports.add = (a, b) => a + b;
// main.js
const { add } = require("./mathUtils");

// ES Modules -- the same import/export syntax browsers use
export const add = (a, b) => a + b;           // mathUtils.js
import { add } from "./mathUtils.js";       // main.js
```

Node supports both. CommonJS (require/exports) is the default in .js files; add "type": "module" to package.json to use import/export instead.

KEY TAKEAWAYS

Lecture 11 in Seven Points

- 1 JavaScript adds behavior to a page; use defer for scripts needing the DOM, async for independent ones.
- 2 Prefer const by default, let when reassignment is needed, and avoid var.
- 3 Primitives copy by value; objects and arrays copy by reference -- a frequent source of beginner bugs.
- 4 Use === / !== instead of == / != to avoid unexpected type coercion.
- 5 let/const are block-scoped and sit in the temporal dead zone; var is function-scoped and hoisted as undefined.
- 6 this depends on how a function is called; call/apply/bind control it explicitly, arrow functions inherit it lexically.
- 7 A closure lets an inner function remember its outer function's variables after that function has returned.