

LECTURE 8

CSS3 Features

Rounded corners, gradients, shadows, transforms, and animation — visual polish with pure CSS.

In This Lecture

- 1 Rounded corners, gradients, shadows, and opacity
- 2 2D/3D transforms, transitions, and keyframe animations
- 3 Web fonts, icon fonts, and CSS custom properties (variables)
- 4 Media queries, feature queries, and cross-browser compatibility
- 5 Vendor prefixes, and why compatibility still matters

border-radius

```
.card { border-radius: 12px; }  
.avatar { border-radius: 50%; } /* a perfect circle */  
.bubble { border-radius: 20px 20px 20px 0; }
```

A pixel value rounds by a fixed amount; a percentage rounds relative to the element's own size.

border-radius, Rendered



border-radius: 12px



border-radius: 50%



20px 20px 20px 0


Linear and Radial Gradients

```
.banner    { background: linear-gradient(to right, #4facfe, #00f2fe); }  
.spotlight { background: radial-gradient(circle, #fff, #333); }  
.diagonal  { background: linear-gradient(45deg, orange, red); }
```

Gradients, Rendered



.banner (linear, to right)

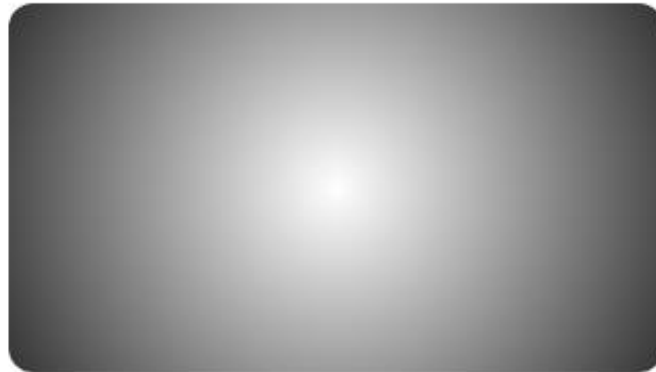

.spotlight (radial, circle)



.diagonal (linear, 45deg)

Multiple Color Stops

```
.rainbow {  
  background: linear-gradient(  
    to right,  
    red 0%, yellow 25%, green 50%, blue 75%, violet 100%  
  );  
}
```



SHADOWS

box-shadow on Hover — Live

Genuinely live on the deployed page — shown here at both states.

```
.card {  
  box-shadow: 0 4px 10px rgba(0, 0, 0, 0.2);  
}  
.card:hover {  
  box-shadow: 0 8px 20px rgba(0, 0, 0, 0.35);  
}
```

Default

Hover Me

On hover (end state)

Hover Me

SHADOWS

text-shadow

```
h1 {  
  text-shadow: 2px 2px 4px rgba(0, 0, 0, 0.5);  
}
```

Shadowed Heading

SHADOWS

Multiple Shadows

```
box-shadow: 0 1px 2px #000, 0 0 20px gold;  
/* stack shadows by separating them with commas */
```



OPACITY

opacity

opacity fades EVERYTHING inside, including text; use rgba() for a transparent background with solid text.

```
.faded {  
  opacity: 0.5; /* 50% transparent */  
}
```



opacity: 1

Default



opacity: 0.5


.faded

2D and 3D Transform Functions

Function	What It Does
<code>translate(x, y) / translateZ(z)</code>	Moves an element
<code>rotate(deg) / rotateX/Y/Z(deg)</code>	Spins an element
<code>scale(n) / scaleX/Y/Z(n)</code>	Resizes an element
<code>skew(deg)</code>	Slants an element

2D Transforms, Compared


```
.box { transform: rotate(15deg); }  
.box2 { transform: scale(1.2); }  
.box3 { transform: translate(50px, 20px); }  
.box4 { transform: skew(10deg, 0deg); }  
.box5 { transform: translate(20px, 0) rotate(10deg) scale(1.1); }
```

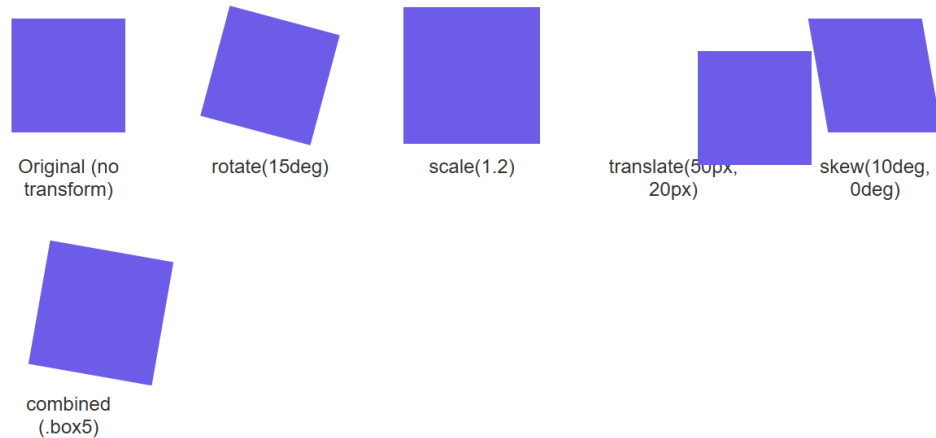


A 3D Hover Flip — Live

```
.scene { perspective: 800px; }  
  
.card-3d {  
  transform: rotateY(25deg);  
  transition: transform 0.4s ease;  
}  
.card-3d:hover { transform: rotateY(0deg); }
```

rotateY(25deg)

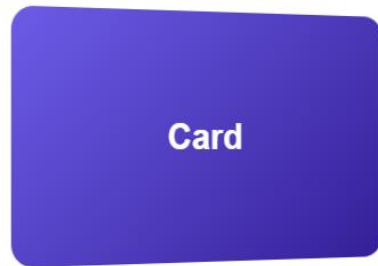

rotateY(0deg) on hover

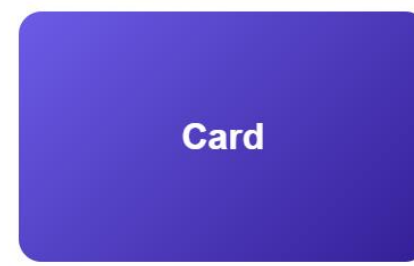

A Smooth Hover Transition — Live

```
button {  
  background-color: royalblue;  
  transition: background-color 0.3s ease, transform 0.3s ease;  
}  
button:hover {  
  background-color: darkblue;  
  transform: scale(1.05);  
}
```

Default

Hover Me

On hover (end state)

Hover Me

@keyframes — Live and Looping

```
@keyframes bounce {  
  0%   { transform: translateY(0); }  
  50%  { transform: translateY(-20px); }  
  100% { transform: translateY(0); }  
}  
  
.ball { animation: bounce 1s ease-in-out infinite; }
```

0%
translateY(0)



50%
translateY(-20px)



100%
translateY(0)



► Try it yourself
[on W3Schools](https://www.w3schools.com/css/css3_keyframes.asp)

Timing Functions

Value	Feel
linear	Constant speed, start to finish — feels mechanical
ease (default)	Starts slow, speeds up, ends slow — the most natural-feeling default
ease-in / ease-out	Slow start only / slow finish only
cubic-bezier(...)	A fully custom easing curve for a specific feel

transition vs. animation

TIP

Use a transition for simple state changes (hover, focus, a toggled class). Use a keyframe animation for anything that plays on its own, loops, or needs more than a start and end state.

Web Fonts and Icon Fonts

- Web fonts (Google Fonts, or @font-face) let every visitor see the exact same typeface
- Always end a font-family list with a generic fallback: sans-serif, serif, monospace
- Icon fonts let you use icons like text — resizable, colorable — though many projects now prefer inline SVG


CSS Variables

```
:root {  
  --main-color: #6c5ce7;  
  --spacing-unit: 8px;  
}  
  
.button {  
  background-color: var(--main-color);  
  padding: calc(var(--spacing-unit) * 2);  
}
```


A live, real value in the browser — change it once in :root and every var(--main-color) usage updates instantly.

One Rule, Two Colors

Nothing changed except the value of `--main-color` in scope — proof the variable controls the rendered color.

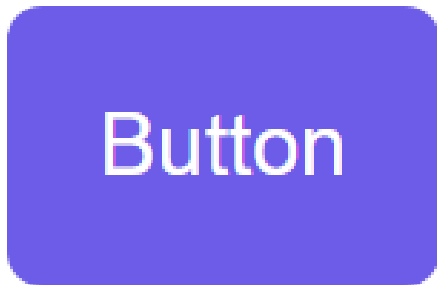

`--main-color: #6c5ce7` (default)

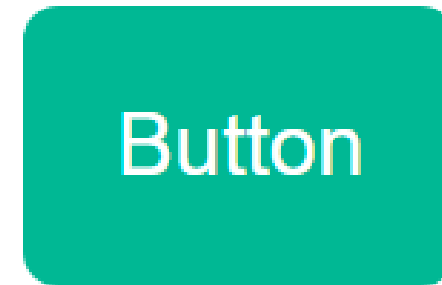

`--main-color` overridden to
`#00b894` -- same `.button` rule,
new rendered color

Media and Feature Queries


- `@media (min-width: 768px) { ... }` adapts styles to screen size — the foundation of responsive design
- `@supports (display: grid) { ... }` applies CSS only if the browser actually supports a feature
- Both check something real about the current browser before applying their block

Vendor Prefixes

Prefix	Browser Engine
-webkit-	Chrome, Safari, newer Edge
-moz-	Firefox
-ms-	old Internet Explorer / Edge
-o-	old Opera

Always place the unprefixed, standard property LAST — Autoprefixer automates this in real projects.

The Vendor-Prefix Workflow

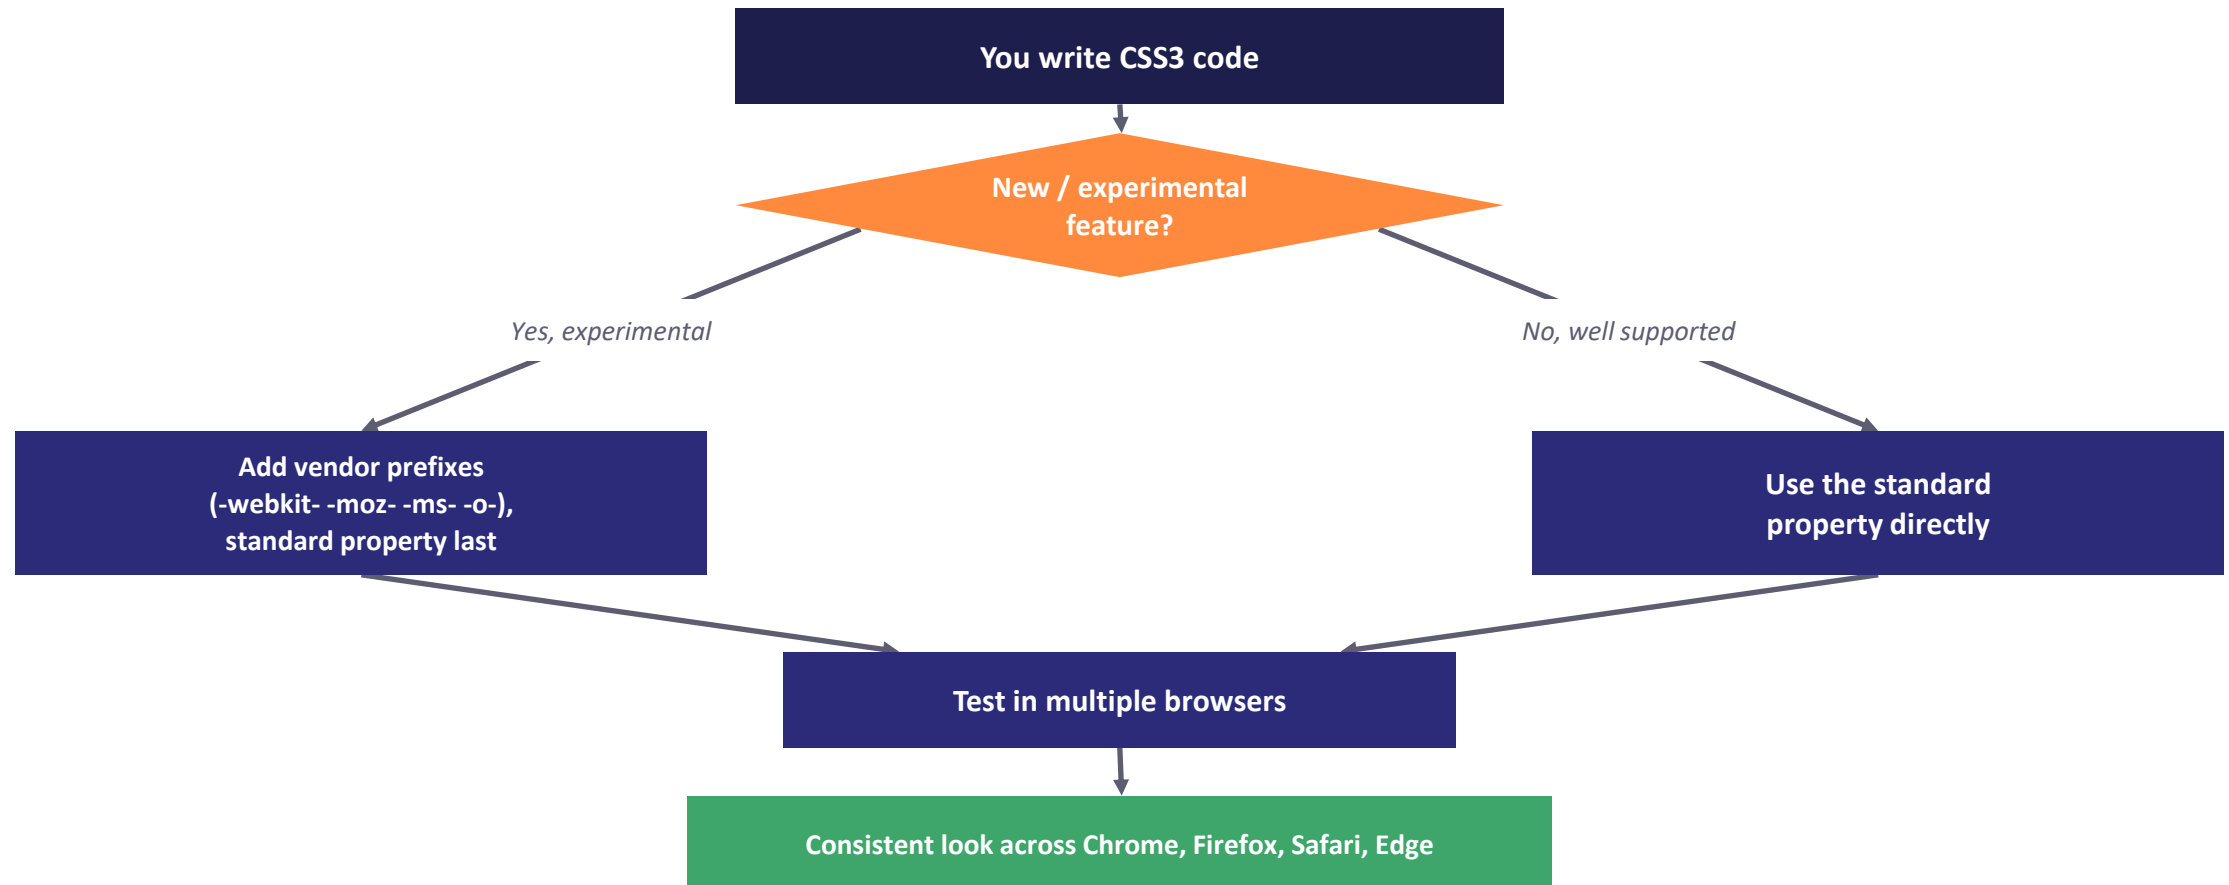

KEY TAKEAWAYS

Lecture 8 in Six Points

- 1 border-radius, gradients, box-shadow/text-shadow, and opacity build modern visual effects with no images.
- 2 transform repositions/rotates/resizes without disturbing layout; 3D transforms need perspective on a parent.
- 3 transition animates between two states; @keyframes + animation define multi-step, looping animations.
- 4 CSS custom properties (--name, read with var(--name)) power theming and dark mode from one place.
- 5 Media queries adapt to screen size; feature queries (@supports) adapt to what the browser can render.
- 6 Vendor prefixes exist for experimental features — always place the unprefixed property last.