


Basics of Web Design

Fifth Edition

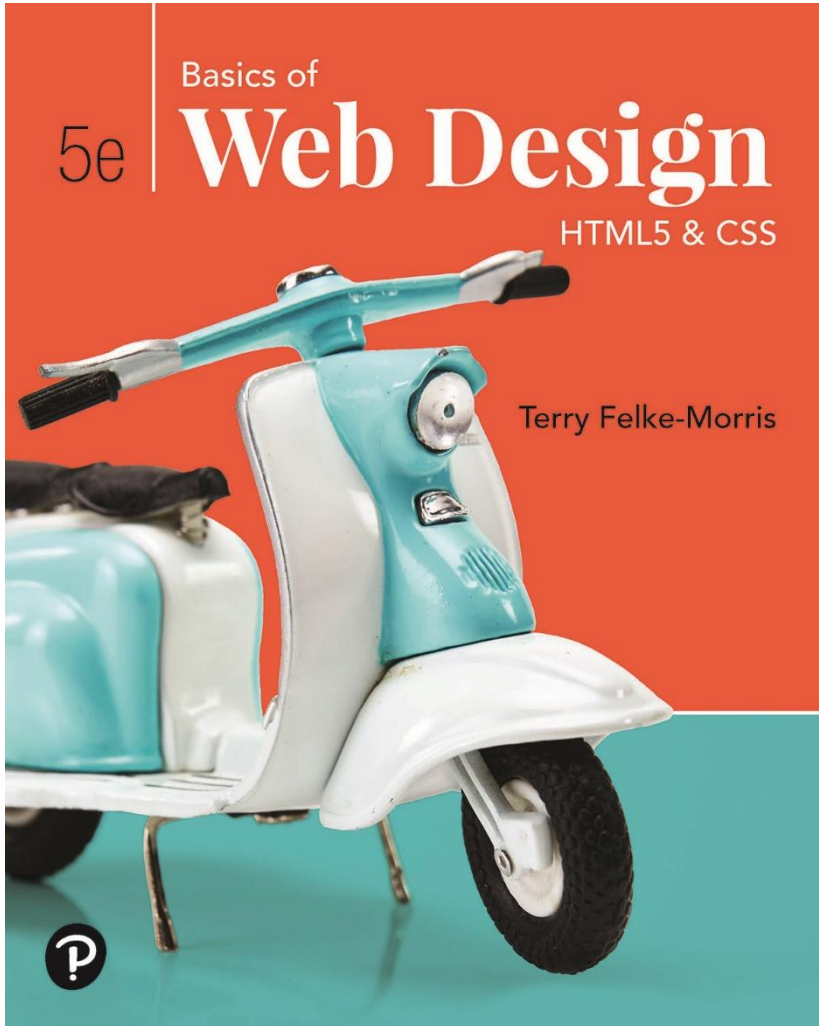

Chapter 9


Table Basics Key Concepts

Learning Outcomes

- Describe the recommended use of a table on a web page
- Configure a basic table with the table, table row, table header, and table cell elements.
- Configure a table to provide for accessibility
- Use CSS to style an HTML table
- Describe the purpose of CSS3 structural pseudo-classes

HTML Table


- Tables are used on web pages to organize tabular information
- Composed of rows and columns – similar to a spreadsheet.
- Each individual table cell is at the intersection of a specific row and column.
- Configured with table, tr, and td elements

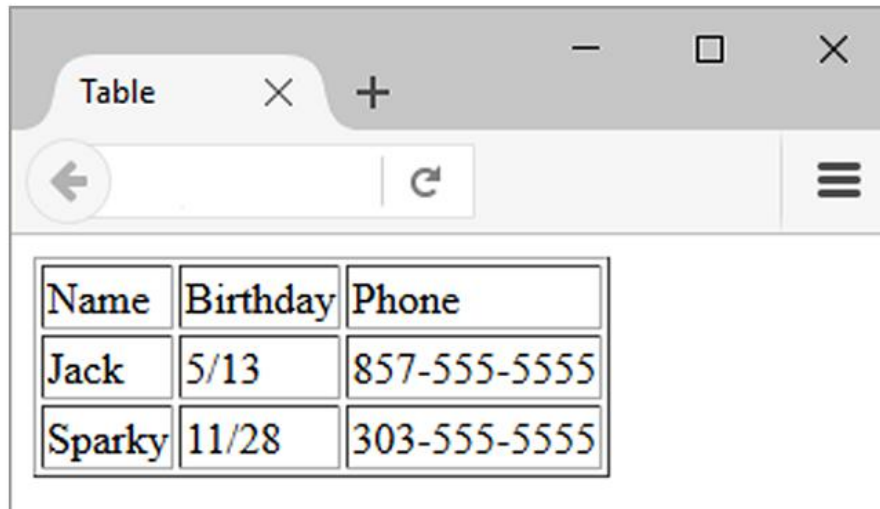A screenshot of a web browser window. The browser has a single tab titled "Table". The address bar is empty. The main content area displays an HTML table with three columns: "Name", "Birthday", and "Phone". The first row contains "Jack", "5/13", and "857-555-5555". The second row contains "Sparky", "11/28", and "303-555-5555".

Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

HTML Table Elements

- `<table>`
Contains the table elements
- `<tr>`
Table row used to group set of related data cells
- `<td>`
Table data is used to define a table data cell
- `<caption>`
Configures a description of the table

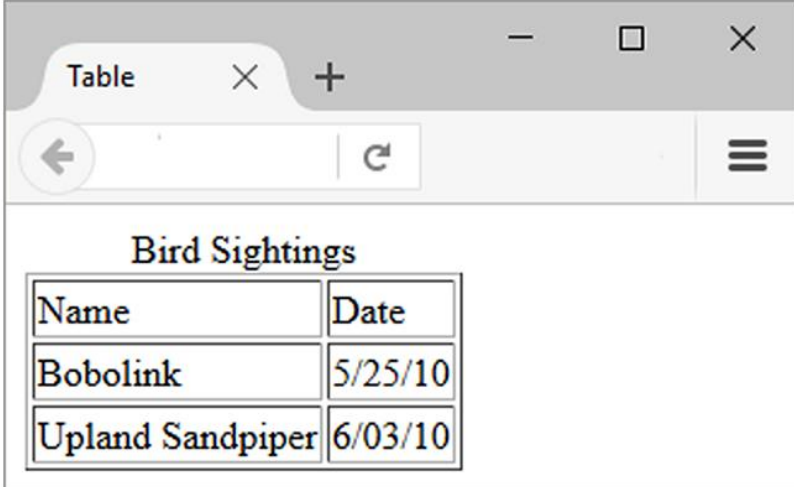

A screenshot of a web browser window. The browser has a single tab titled 'Table'. The address bar is empty. The main content area displays a table with the caption 'Bird Sightings'. The table has two columns: 'Name' and 'Date'. The first row of data contains 'Bobolink' and '5/25/10'. The second row of data contains 'Upland Sandpiper' and '6/03/10'.

Name	Date
Bobolink	5/25/10
Upland Sandpiper	6/03/10

The Table Element <table>

<tr> Element

Table Row It is a container element that holds one or more (**td or th**) elements, which represent the cells within the table row.

<td> Element

Table Data is container element that holds the content of the table cell.

<th> Element

Table Header is used to define a table header cell.

It is a container element that holds the content of a table header cell.

HTML Table Example 1

```
<table border="1">  
<caption>Birthday List</caption>  
  <tr>  
    <td>Name</td>  
    <td>Birthday</td>  
  </tr>  
  <tr>  
    <td>James</td>  
    <td>11/08</td>  
  </tr>  
  <tr>  
    <td>Karen</td>  
    <td>4/17</td>  
  </tr>  
  <tr>  
    <td>Sparky</td>  
    <td>11/28</td>  
  </tr>  
</table>
```

Birthday List

Name	Birthday
James	11/08
Karen	4/17
Sparky	11/28

HTML Table Example 2


```
<table border="1">
  <tr>
    <th>Name</th>
    <th>Birthday</th>
  </tr>
  <tr>
    <td>James</td>
    <td>11/08</td>
  </tr>
  <tr>
    <td>Karen</td>
    <td>4/17</td>
  </tr>
  <tr>
    <td>Sparky</td>
    <td>11/28</td>
  </tr>
</table>
```

Using the <th> Element

Name	Birthday
James	11/08
Karen	4/17
Sparky	11/28


HTML border Attribute

- Indicates the table is specifically not used for page layout
 - Optional
 - `border="1"`
 - Visible browser default border
 - `border=""`
 - No visible browser default border

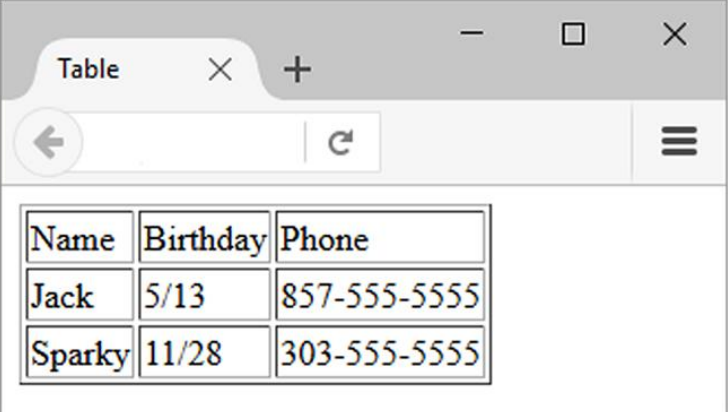

A screenshot of a web browser window with a single tab titled 'Table'. The browser's address bar is empty. The main content area displays a table with a visible border. The table has three columns: 'Name', 'Birthday', and 'Phone'. The first row contains the headers, and the next two rows contain data for 'Jack' and 'Sparky'.

Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

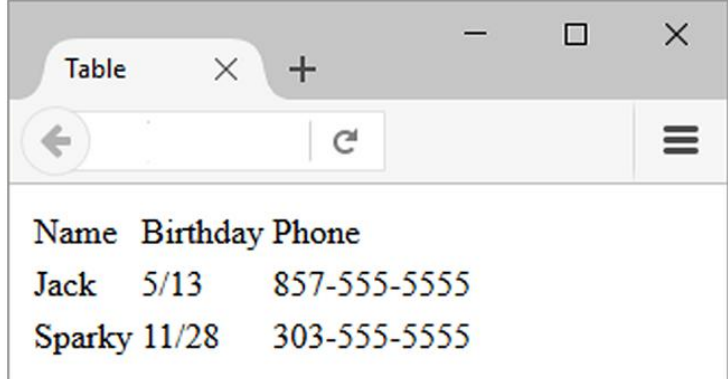

A screenshot of a web browser window with a single tab titled 'Table'. The browser's address bar is empty. The main content area displays a table without a visible border. The table has three columns: 'Name', 'Birthday', and 'Phone'. The first row contains the headers, and the next two rows contain data for 'Jack' and 'Sparky'.

Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

HTML colspan Attribute

```
<table border="1">
  <tr>
    <td colspan="2">
      Birthday List</td>
    </tr>
    <tr>
      <td>James</td>
      <td>11/08</td>
    </tr>
    <tr>
      <td>Karen</td>
      <td>4/17</td>
    </tr>
</table>
```

Birthday List	
James	11/08
Karen	4/17

HTML rowspan Attribute

This spans two rows	Row 1 Column 2
	Row 2 Column 2

```
<table border="1">  
  <tr>  
    <td rowspan="2">This spans two rows</td>  
    <td>Row 1 Column 2</td>  
  </tr>  
  <tr>  
    <td>Row 2 Column 2</td>  
  </tr>  
</table>
```

Accessibility and Tables

- Use table header elements (<th> tags) to indicate column or row headings.
- Use the summary attribute on the table element to provide an overview of the purpose and organization of the table.
- Use the caption element to provide the title/caption for the table.
- Other attributes that provide for accessibility:
 - headers & id
 - scope

Accessibility: headers & id Attributes

Work Schedule

Day	Hours
Monday	4
Tuesday	3
Total	7

```
<table>
<caption> Word Schedule</caption>
<tr>
  <th id="day">Day</th>
  <th id="hours">Hours</th>
</tr>
<tr>
  <td headers="day">Monday</td>
  <td headers="hours">4</td>
</tr>
<tr>
  <td headers="day">Tuesday</td>
  <td headers="hours">3</td>
</tr>
<tr>
  <td headers="day">Total</td>
  <td headers="hours">7</td>
</tr>
</table>
```

Using CSS to Style a Table

HTML Attribute	CSS Property
align	Align a table: <code>table { width: 75%; margin: auto; }</code> Align within a table cell: <code>text-align</code>
bgcolor	<code>background-color</code>
cellpadding	<code>padding</code>
cellspacing	<code>border-spacing</code> or <code>border-collapse</code>
height	<code>height</code>
valign	<code>vertical-align</code>
width	<code>width</code>
border	<code>border</code> , <code>border-style</code> , or <code>border-spacing</code>
---	<code>background-image</code>
---	<code>caption-side</code>

CSS3 Structural Pseudo-classes

Pseudo-class	Purpose
:first-of-type	Applies to the first element of the specified type.
:first-child	Applies to the first child of an element. (CSS2 selector)
:last-of-type	Applies to the last element of the specified type.
:last-child	Applies to the last child of an element
:nth-of-type(n)	Applies to the “nth” element of the specified type. Values: a number, odd, or even

Summary

- This chapter introduced coding techniques to create and configure tables.
- You will find these skills useful as you create web pages.

Copyright



This work is protected by United States copyright laws and is provided solely for the use of instructors in teaching their courses and assessing student learning. Dissemination or sale of any part of this work (including on the World Wide Web) will destroy the integrity of the work and is not permitted. The work and materials from it should never be made available to students except by instructors using the accompanying text in their classes. All recipients of this work are expected to abide by these restrictions and to honor the intended pedagogical purposes and the needs of other instructors who rely on these materials.