

“Most good programmers do programming not because they expect to get paid or get adulation by the public, but because it is fun to program.”
- Linus Torvalds

CSE102

Computer Programming with C

2016-2017 Fall Semester

Introduction to CSE102

© 2015-2016 Yakup Genç

Largely adapted from J.R. Hanly, E.B. Koffman, F.E. Sevilgen, and others...

History of C

- C Programming Language
 - Evolved by Ritchie from two previous programming languages, BCPL and B
 - Used to develop UNIX
 - Used to write modern operating systems
 - Hardware independent (portable)
 - By late 1970's C had evolved to "Traditional C"
- Standardization
 - Many slight variations of C existed, and were incompatible
 - Committee formed to create a "unambiguous, machine-independent" definition
 - Standard created in 1989, updated in 1999

Portability Tips

- Because C is a hardware-independent, widely available language, applications written in C can run with little or no modifications on a wide range of different computer systems.

C Standard Library

- C programs consist of pieces/modules called functions
 - A programmer can create his own functions
 - Advantage: the programmer knows exactly how it works
 - Disadvantage: time consuming
 - Programmers will often use the C library functions
 - C defines a small number of operations, instead it contains useful libraries
 - Use these as building blocks
 - Avoid re-inventing the wheel
 - If a pre-made function exists, generally best to use it rather than write your own
 - Library functions carefully written, efficient, and portable

Performance Tips

- Using Standard C library functions instead of writing your own comparable versions can improve **program performance**, because these functions are carefully written to perform efficiently.


Portability Tips

- Using Standard C library functions instead of writing your own comparable versions can improve **program portability**, because these functions are used in virtually all Standard C implementations.

Software Engineering Observation

- Read the manuals for the version of C you are using. Reference these manuals frequently to be sure you are aware of the rich collection of C features and that you are using these features correctly.

Typical C Program Development

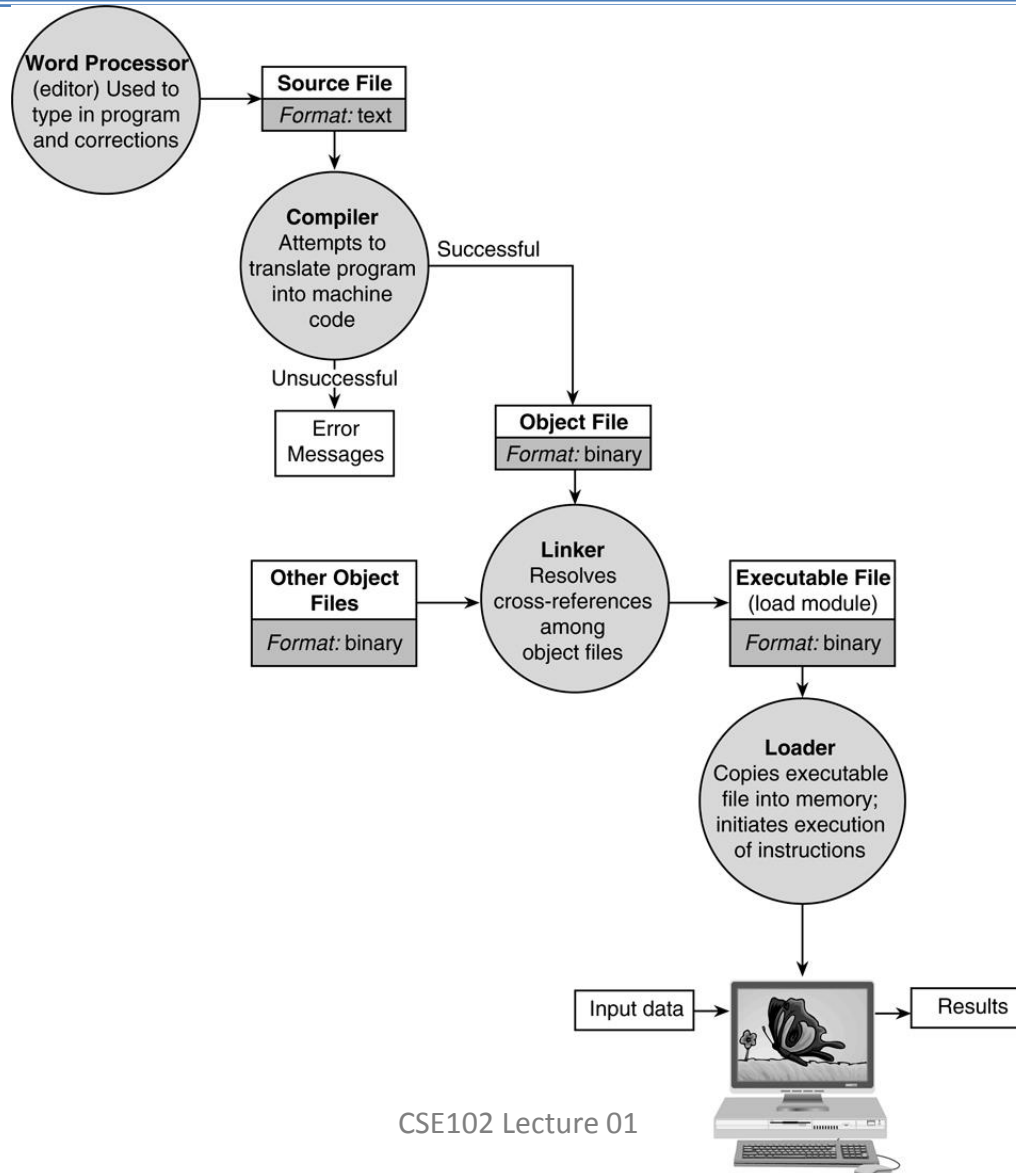

Software Engineering Observation

- Your computer and compiler are good teachers. If you are not sure how a feature of C works, write a sample program with that feature, compile and run the program and see what happens.

Software Development

- Programming = problem solving
- Methodology
 - Specify the problem requirements
 - Analyze the problem
 - Design an algorithm
 - Implement the algorithm
 - Test and verify the program
 - Maintain and update the program

Problem Requirements

- Statements of the problem
 - Understand the problem
 - Retrieve the requirements
 - Eliminate unimportant aspects
- May need to get information from specialists
- E.g. Write a program for mile to kilometer conversion

Software Development

- Programming = problem solving
- Methodology
 - Specify the problem requirements
 - Analyze the problem
 - Design an algorithm
 - Implement the algorithm
 - Test and verify the program
 - Maintain and update the program

Analysis

- Identify
 - Input data
 - Output data
 - Additional requirements and constraints
- Decide aspects of data
 - Representation
 - Relationships
- E.g.
 - Input: distance on miles
 - Output: distance on kilometers
 - Representation: floating point numbers
 - Relationship: 1 mile = 1.609 kilometers

Software Development

- Programming = problem solving
- Methodology
 - Specify the problem requirements
 - Analyze the problem
 - Design an algorithm
 - Implement the algorithm
 - Test and verify the program
 - Maintain and update the program


Designing Algorithm

- Top-down stepwise refinement
 - List major steps (sub-problems)
 - Break down each step into a more detailed list
- Desk-check your algorithm
 - Perform steps of the algorithm by yourself
- E.g.
 1. Get the distance in miles
 2. Convert the distance to kilometers
 3. Display the distance in kilometers
 - Step 2 may require further refinement
 - 2.1 The distance in kilometers is 1.609 times the distance in miles

Software Development

- Methodology
 - Specify the problem requirements
 - Analyze the problem
 - Design an algorithm
 - Implement the algorithm
 - Writing the algorithm in C by converting each step into statements of C
 - Test and verify the program
 - Run the program for several input cases
 - Maintain and update the program
 - Keep the program up-to-date


C Language Elements

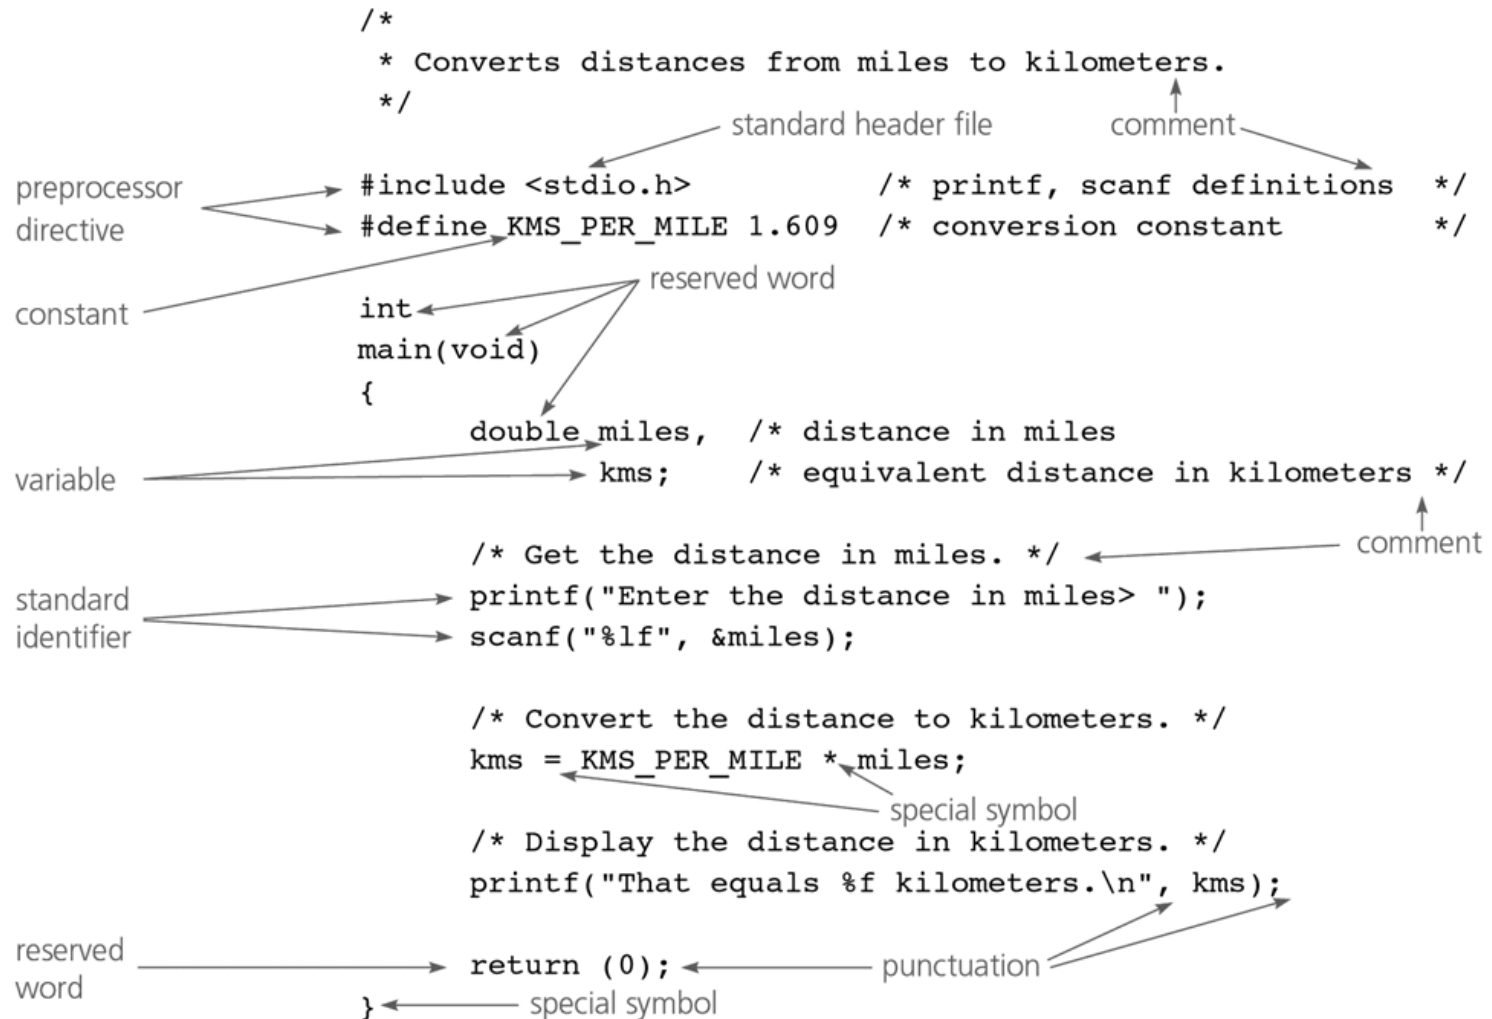

Preprocessor Directives

- Preprocessor modifies the text of a C program before compilation
- Preprocessor directives
 - Start with a #
- `#include <stdio.h>`
 - Each library has a header file. Include it to access the library
 - Preprocessor inserts definitions from the header
 - `stdio.h` includes information about standard input/output
- `#define KMS_PER_MILE 1.609`
 - Defines a constant macro
 - Value of `KMS_PER_MILE` can not change
 - Preprocessor replaces each occurrence of “`KMS_PER_MILE`” in the text with “`1.609`”
 - `KMS_PER_MILE` is easier to remember

C Language Elements

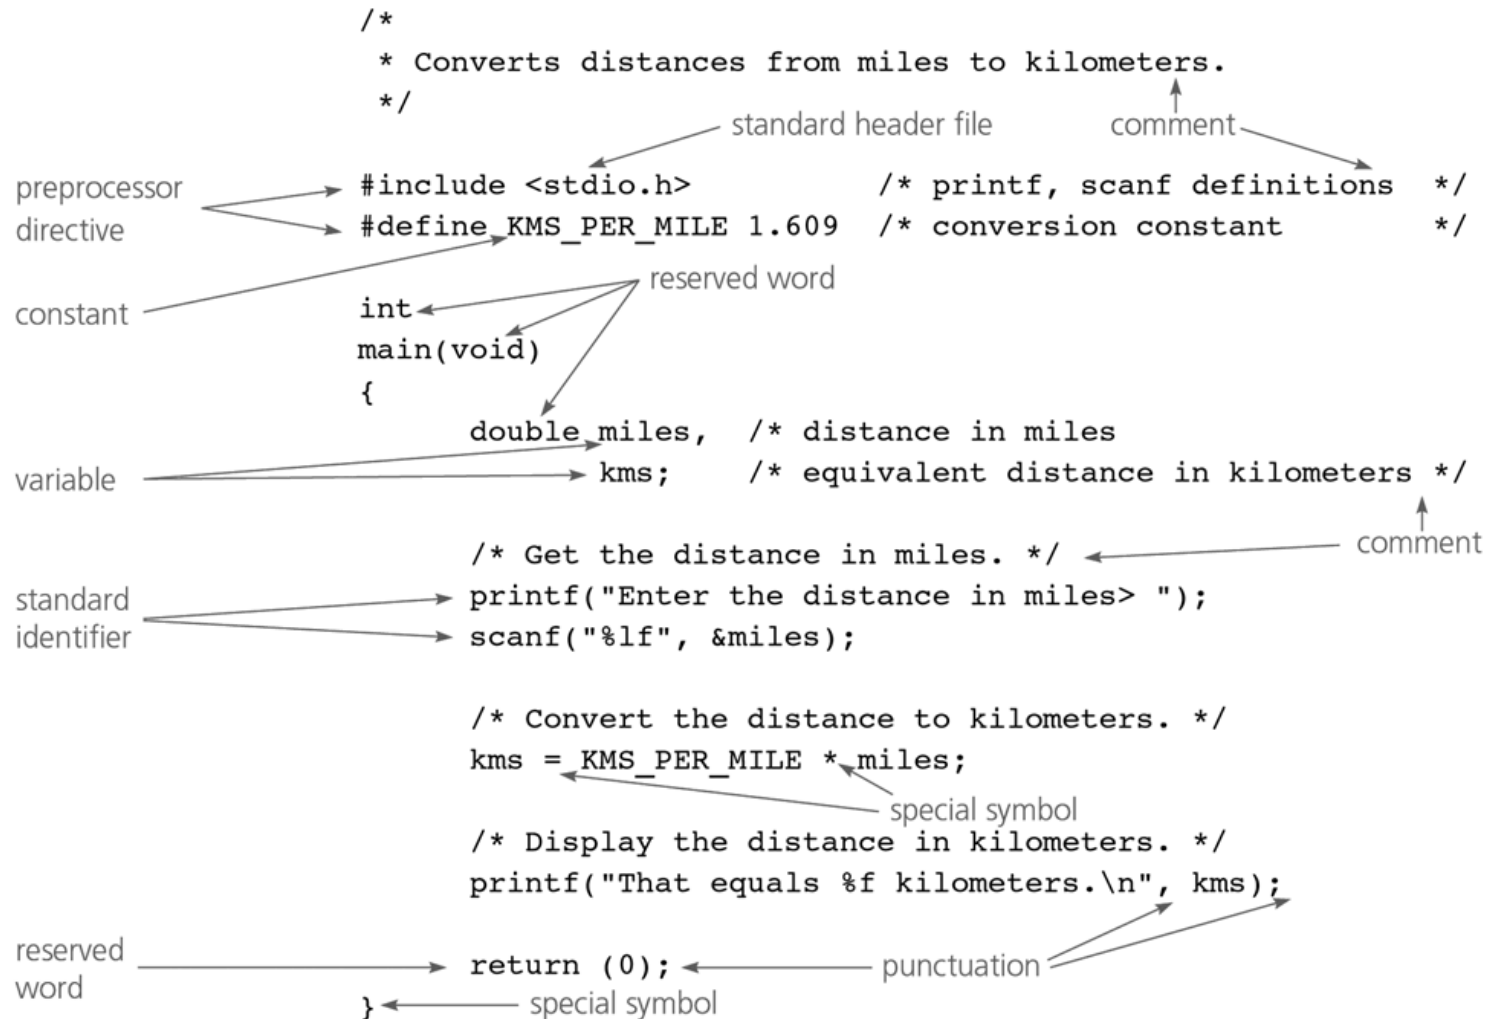

Function main

- C programs have exactly one main function
 - Marks the beginning of program execution
 - (void) indicates that function receives no data
 - int means that main "returns" an integer value
- Function bodies enclosed in braces ({ and })
 - Function body has two parts
 - Declaration
 - Executable statements

Identifiers

- Reserved words
 - Ex: “int” and “void”
 - Can not be used for any other purpose
- Standard identifiers
 - Ex: scanf, printf
 - Has a special meaning but can be redefined
- User-defined identifiers
 - Ex: name of memory cells (miles) and KMS_PER_MILE
 - Free to select the name
 - Syntax rules:
 - Includes only letters, digits and underscore
 - Can not begin with digit
- C is case sensitive!

Reserved words


Keywords

auto	double	int	struct
break	else	long	switch
case	enum	register	typedef
char	extern	return	union
const	float	short	unsigned
continue	for	signed	void
default	goto	sizeof	volatile
do	if	static	while

Program Style

- Pick meaningful identifiers
 - Long enough to convey the meaning
- If the identifier consists of two words, place an underscore character between words
- Do not choose similar identifier names
- Use uppercase letters for names of macros
 - Use lowercase letters otherwise


C Language Elements

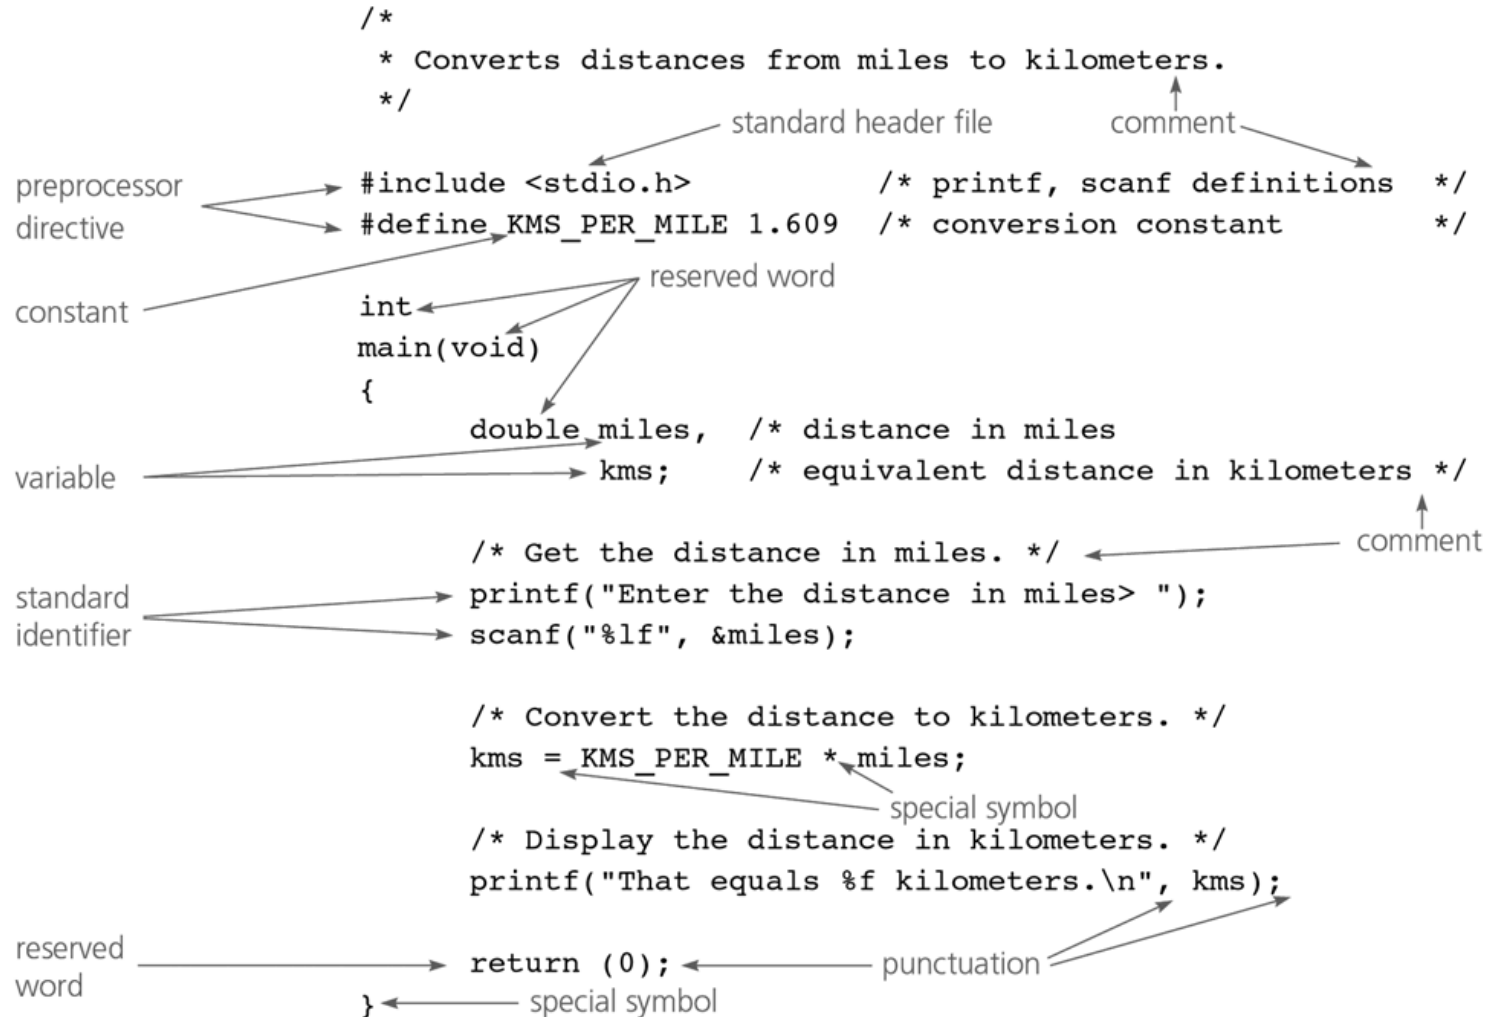


Variables

- Variables: memory cells for storing data
 - Values can change
- Every variable has:
 - Name: identifier
 - Type: int, double, char
 - Size
 - Value
- Data types: abstraction of real types
 - Predefined data types
 - User-defined data types
 - Each constant or variable has a type
 - int: whole numbers (-123, 15, 27384)
 - There is a range because of finite memory cell size
 - double: real numbers (12.345, 0.5217e-4)
 - Too large and too small numbers can not be represented
 - char: character values ('a', '5', '^', ',')

Memory (a) Before and (b) After Execution

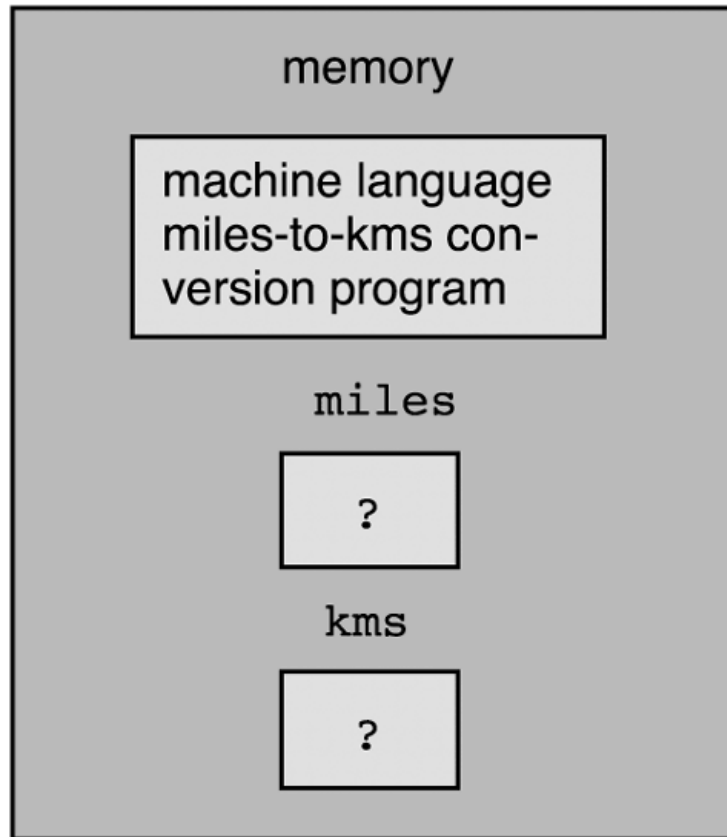


(a)

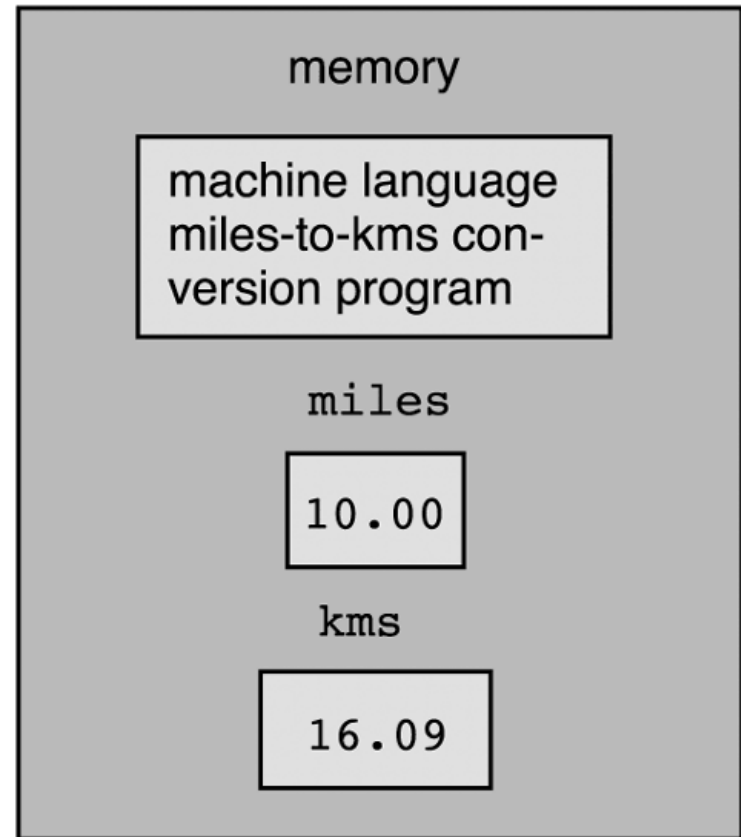

(b)

C Language Elements

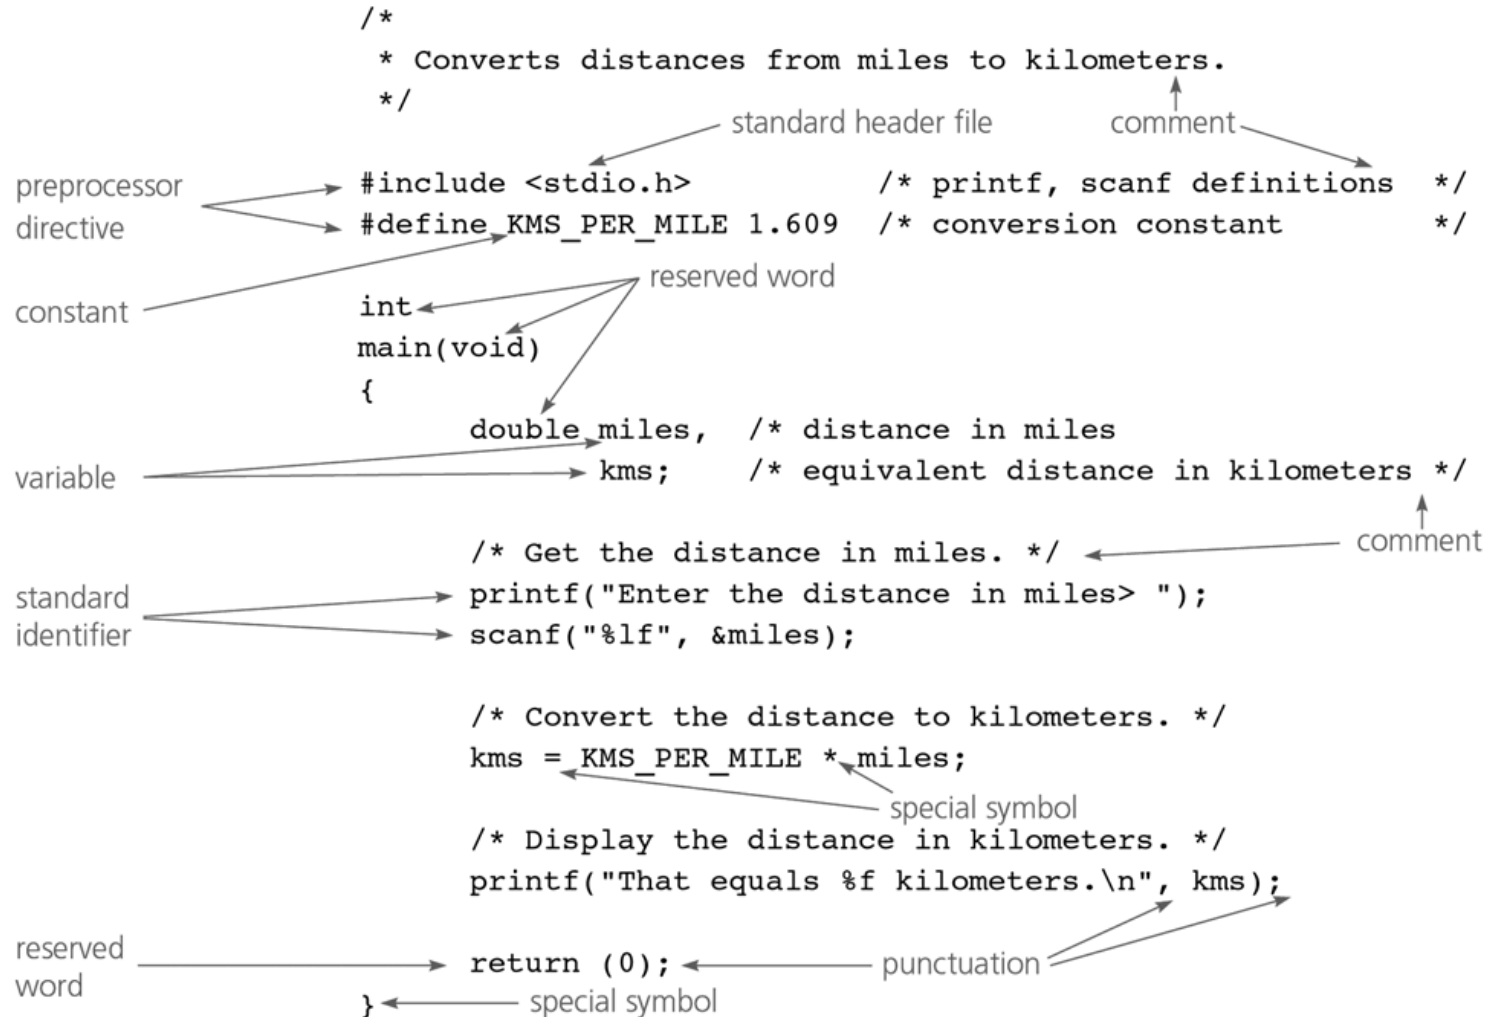

Executable Statements

- Comes after declaration
- Compiler translates to machine language code
- Assignment statements
 - Used to store value to a variable
 - Ex: `kms = KMS_PER_MILE * miles;`
 - In general
`variable = expression;`
 - Assignment operator: `=`
 - Should be read as
 - becomes
 - gets
 - takes a value of
 - Previous value of variable is lost!..

Effect of kms = KMS_PER_MILE * miles;

Before assignment

KMS_PER_MILE

miles

kms

1.609

10.00

?

*

16.090

After assignment

KMS_PER_MILE

miles

kms


1.609

10.00


16.090

Effect of $\text{sum} = \text{sum} + \text{item};$

Before assignment

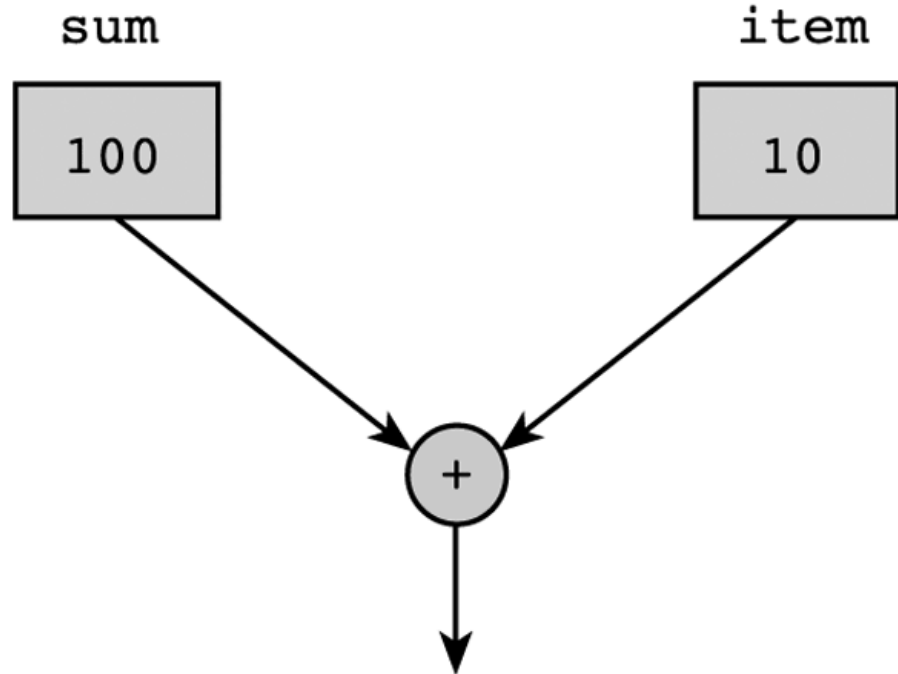

After assignment



Executable Statements

- Input/Output Operations
 - Input Operation: Reading a value into a variable by scanf
 - A different data can be entered by the user
 - Output Operation: Displaying a value by printf
- Several I/O functions in C
 - All in standard I/O library
`#include <stdio.h>`
- Function call is an executable statement.
 - Function performs the action for you.

printf

Displays the output

```
printf("That equals %f kilometers.\n",kms);
```

```
printf(format string, print list);
```

- Function name: printf
- Function arguments: in paranthesis
 - Format string: "That equals %f kilometers.\n"
 - Print list: kms
- Placeholders: %c, %d, %f, %lf
- Escape sequence:
 - \n means newline : cursor moves the beginning of the next line
 - Can be used anywhere in the format string

Escape sequences

Escape sequence	Description
-----------------	-------------

<code>\n</code>	Newline. Position the cursor at the beginning of the next line.
<code>\t</code>	Horizontal tab. Move the cursor to the next tab stop.
<code>\a</code>	Alert. Sound the system bell.
<code>\\</code>	Backslash. Insert a backslash character in a string.
<code>\"</code>	Double quote. Insert a double-quote character in a string.

scanf


Reads the data into a variable

```
scanf("%lf", &miles);
```


```
scanf(format string, input list);
```

- Function name: scanf
- Function arguments: in paranthesis
 - Format string: "%lf"
 - Input list: &miles
- Address-of operator: &
 - Used to inform scanf about the location of the variable
 - If not used, scanf knows only the value of the variable


Effect of `scanf("%lf", &miles);`

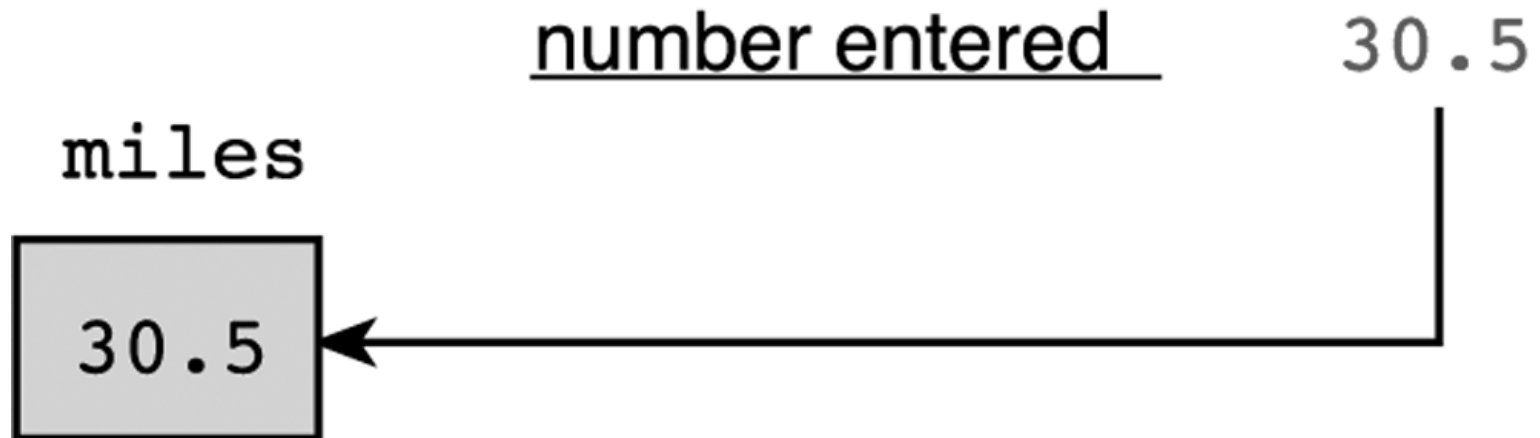

Scanning Data Line Bob

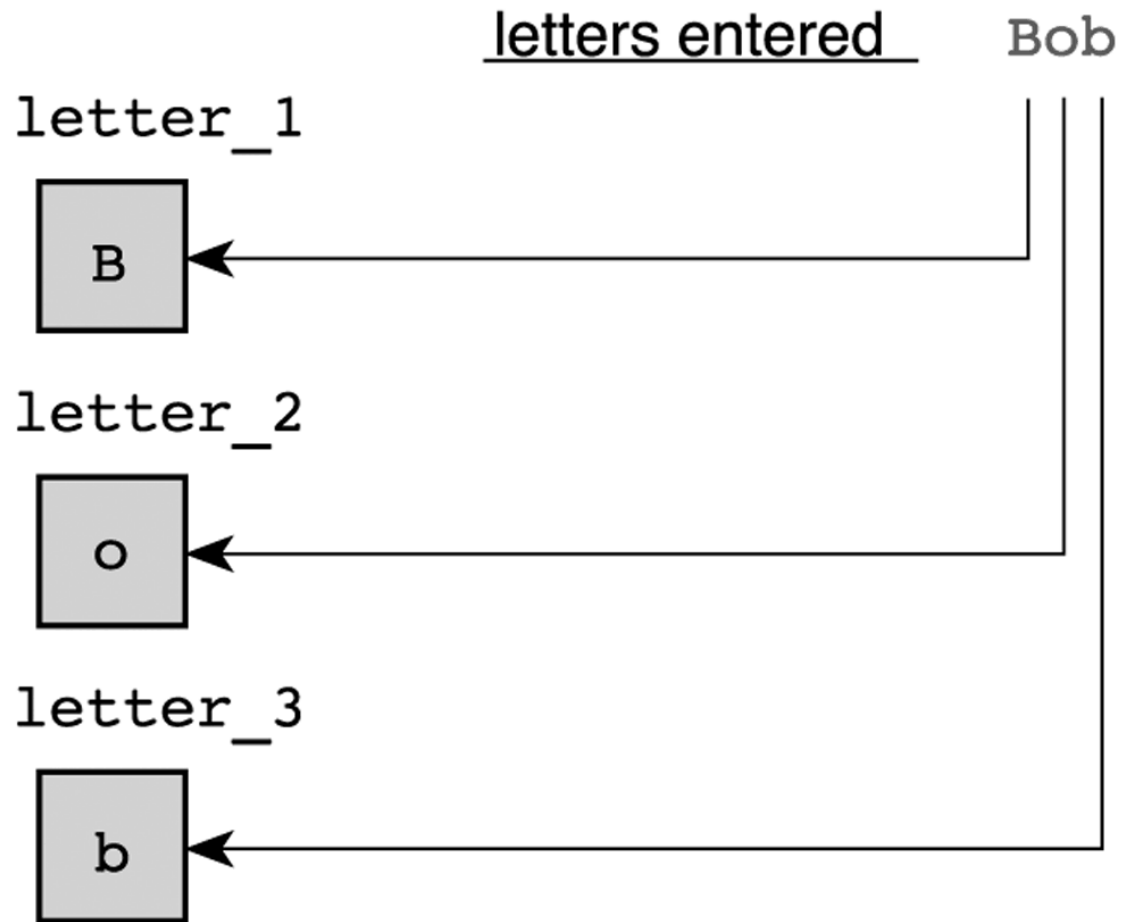

C Language Elements

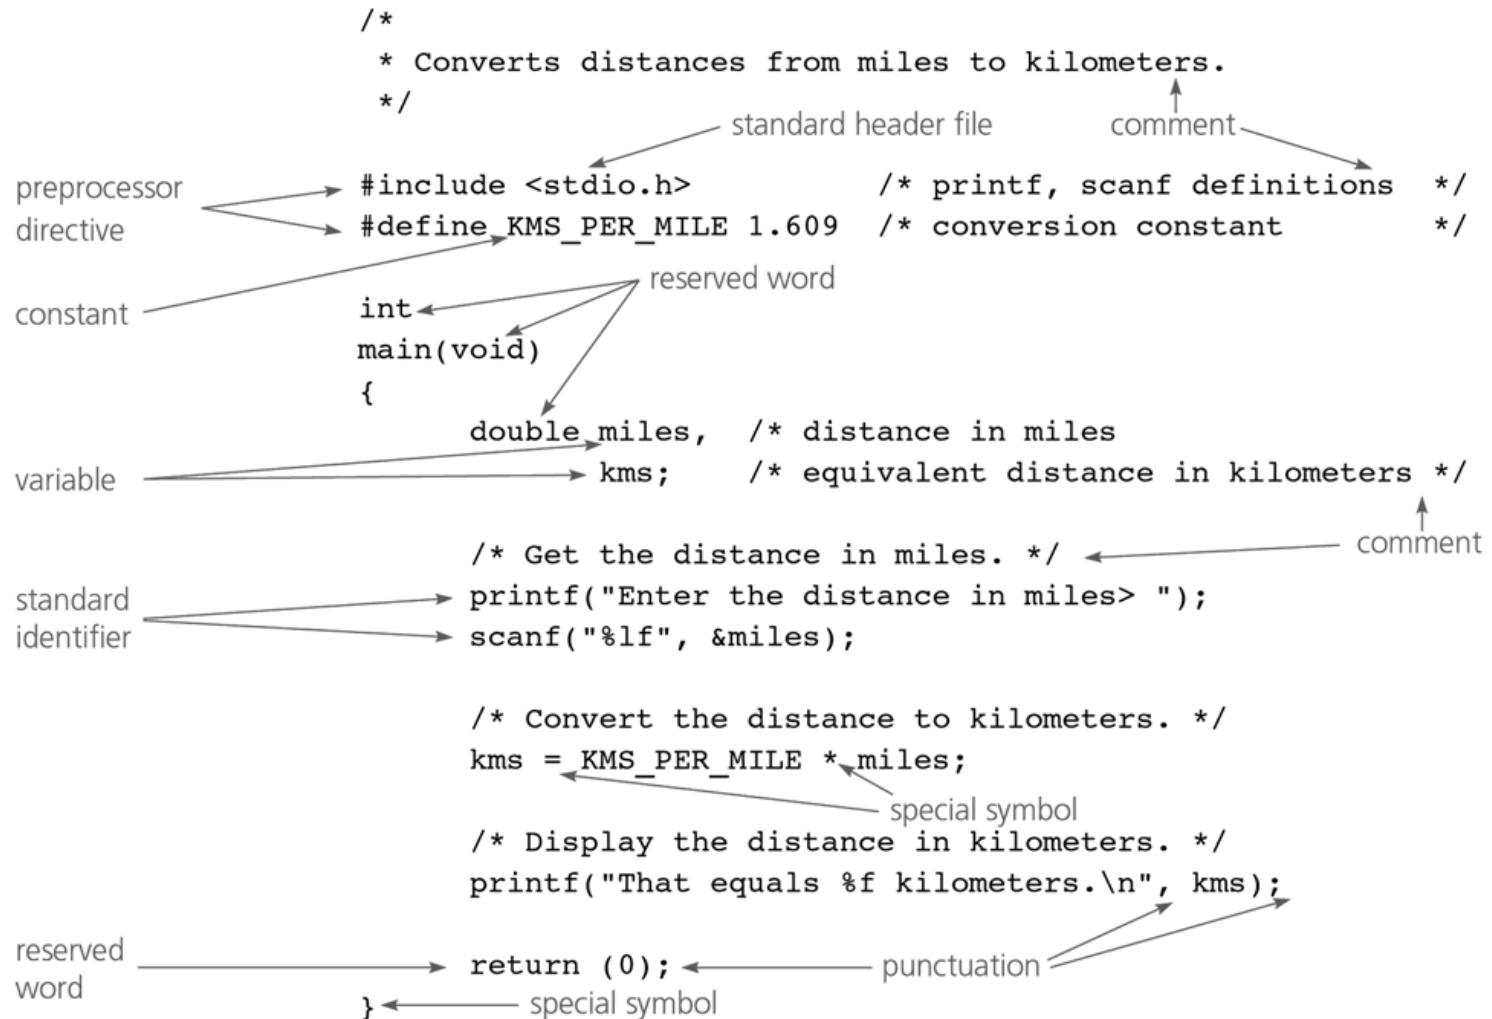

Others


- The return statement
 - Transfers the control to the OS
 - Return value indicates whether the operation is successful or not
- Comments
 - Ignored by the compiler
 - Provides information for the programmer

`/* this is a comment */`

General Form of a C Program

```
preprocessor directives  
main function heading  
{  
    declarations  
    executable statements  
}
```

C Language Elements

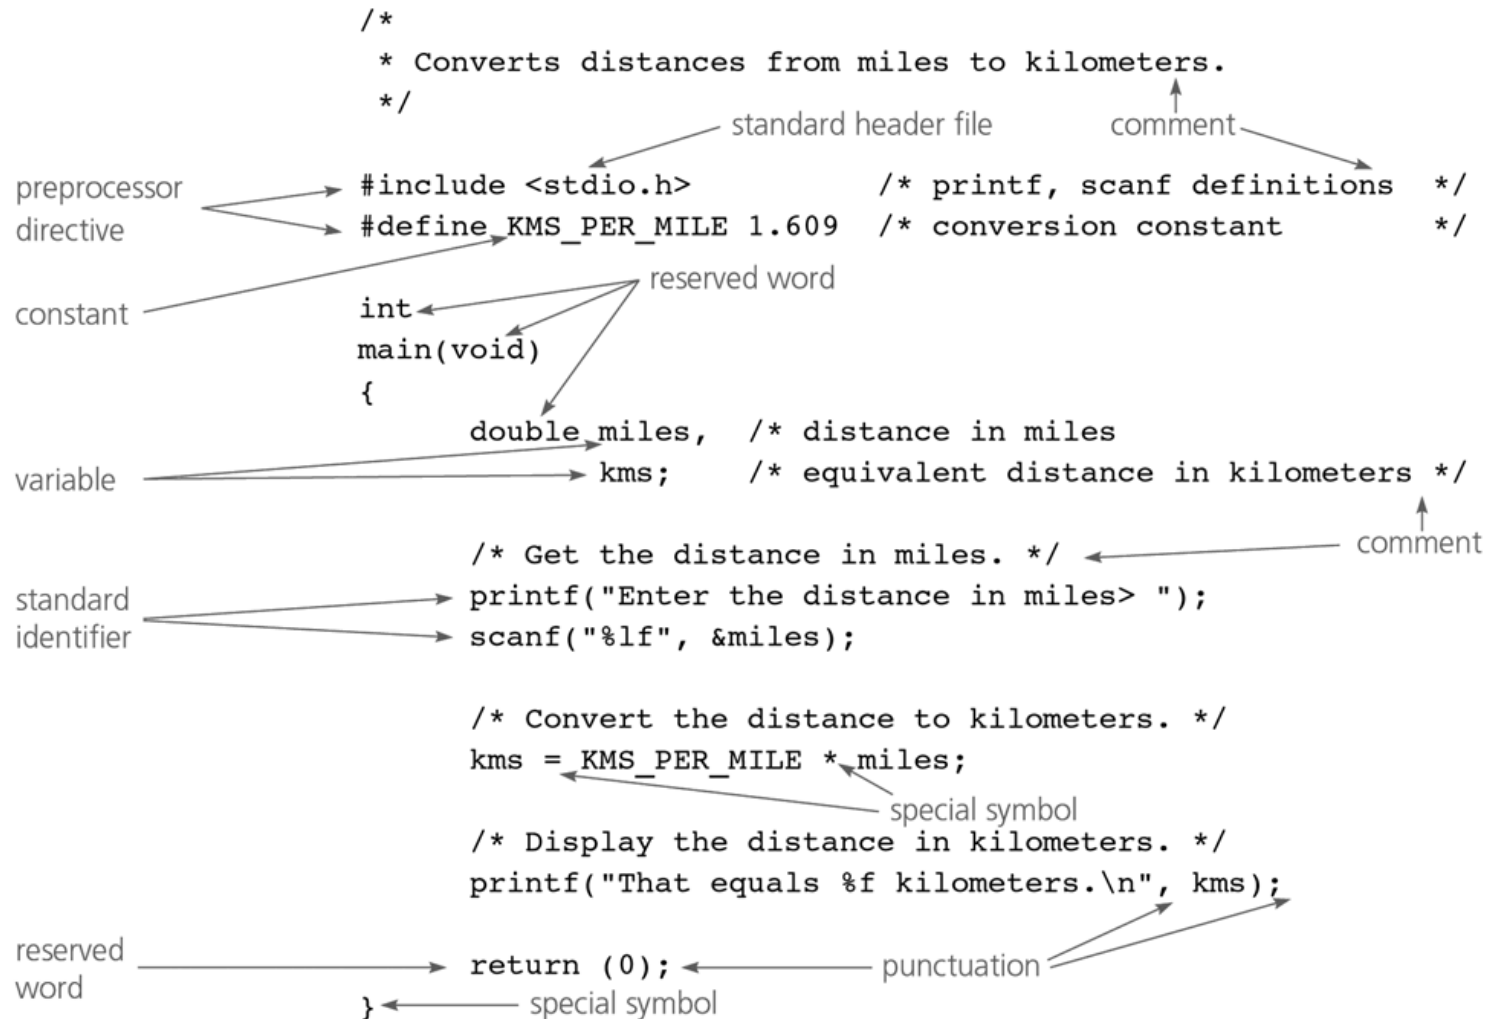

Program Style

- One statements in each line
- Use extra spaces for readability
 - Compiler ignores them
 - Leave a space before and after operators
 - Indent each block
 - Insert blank lines between sections
- Use comments
 - Write a descriptive comment for
 - the program (header section)
 - each identifier
 - each program section

Arithmetic Expressions

- Manipulates type int and double data
- Binary operators: +, -, *, /, %
 - Two operand: constant, variable or expression
 - Type of the result depend on the types of the operands
 - int if both operands are integer
 - double otherwise
 - Mixed type expression???
- / operator
 - Integer division: computes integral part of the division
 - Division by zero!..
- % operator
 - Returns integer remainder
 - Zero right operand? Undefined!..
 - Negative right operand is non standard

Arithmetic Expressions


- Unary Operators: +, -
 - One operand
- Assignment:
 - The value of expression is evaluated and result is assigned
 - What if the type of the expression and the type of the variable is different?
 - Assignment of int to double
 - Fractional part is zero
 - Assignment of double to int
 - Fractional part is lost
 - Automatic type conversion
 - Type casting
(int) 3.7

Expression Evaluation

- If there are multiple operators in an expression the order of evaluation makes a difference
 - Ex: $x / y * z$
- Evaluation Rules:
 - Parenthesis rule:
 - All expressions in parenthesis are evaluated separately
 - Nested parenthesis evaluated inside out
 - Precedence rule:
 - There is an evaluation order in operators
 - Unary +, -
 - *, /, %
 - Binary +, -
 - Associativity rule:
 - Operators in the same sub-expression and at the same precedence level
 - Unary: right to left
 - Binary: left to right

Evaluation Tree for $\text{area} = \text{PI} * \text{radius} * \text{radius};$



`area = PI * radius * radius`

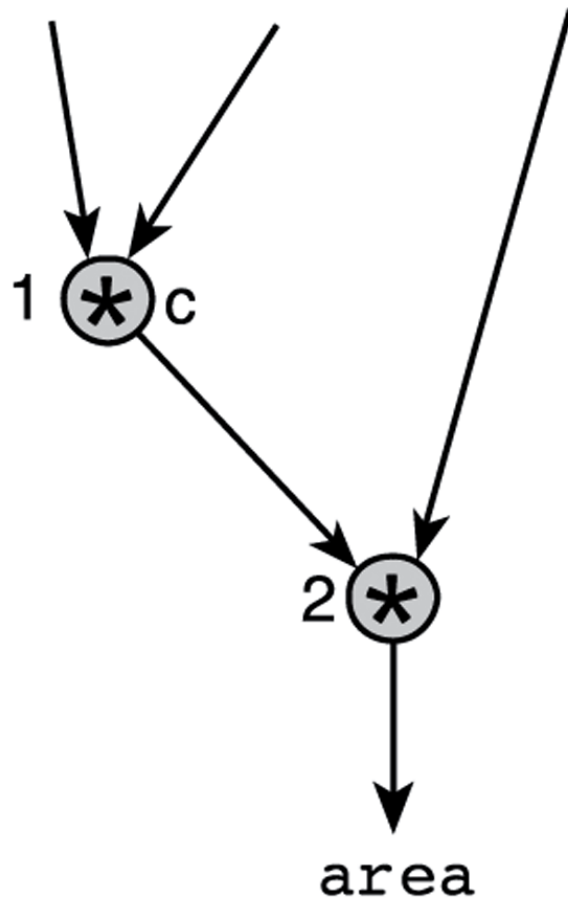


Step-by-Step Expression Evaluation

$$\begin{array}{rccccccc} \text{area} & = & & \text{PI} & * & \text{radius} & * & \text{radius} \\ & & & 3.14159 & & 2.0 & & 2.0 \\ & & & \hline & & & 6.28318 & & & & \\ & & & & & & & \hline & & & & & & & 12.56636 \end{array}$$

Evaluation for $v = (p2 - p1) / (t2 - t1);$

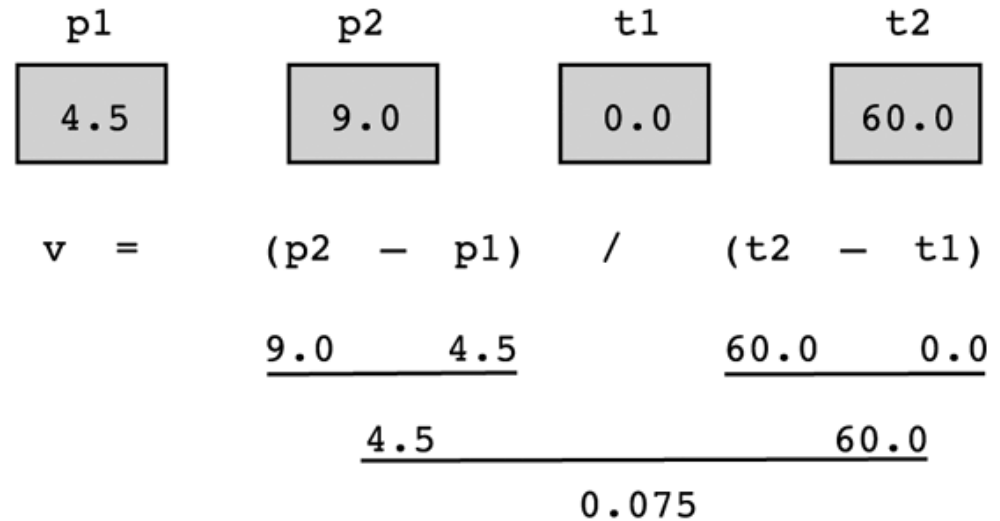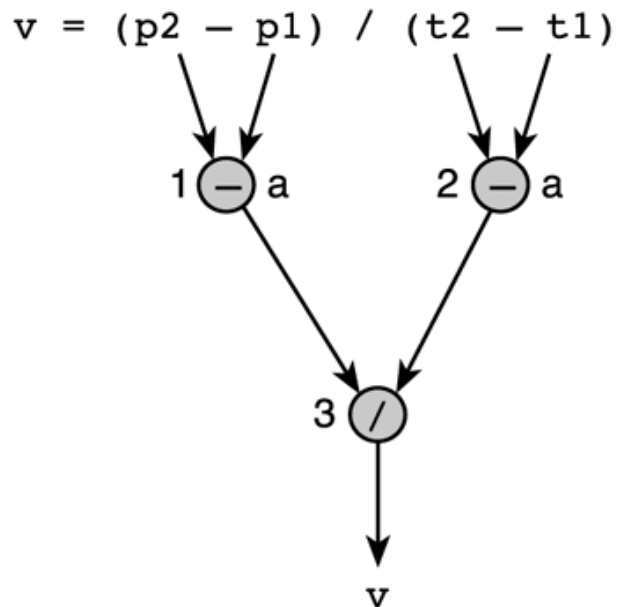

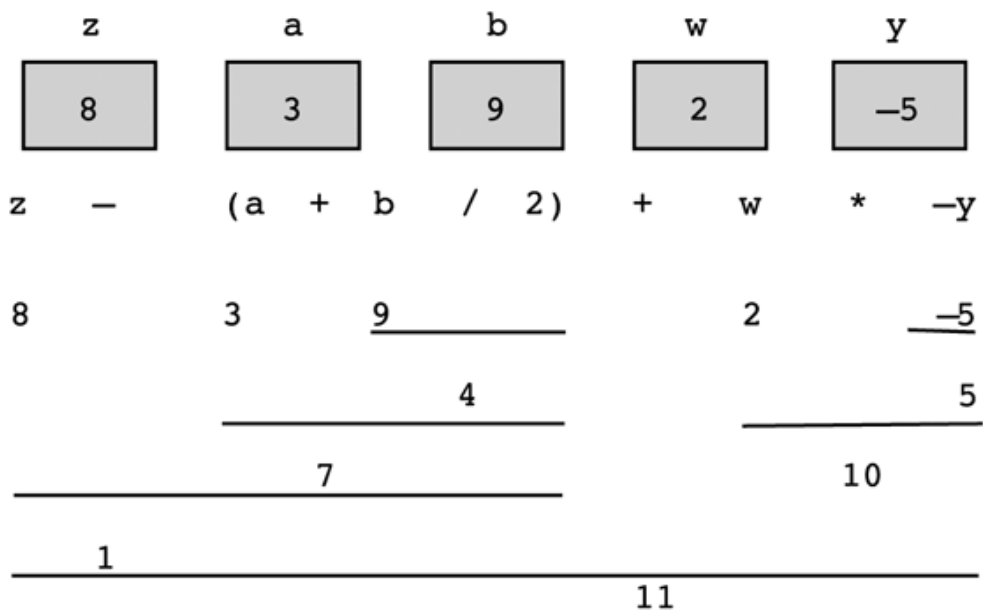

Writing Mathematical Formulas

- Use parentheses as needed to specify the order of evaluation
 - Place numerator and denominator of a division in parentheses
$$m = (a - b) / (c + d)$$
 - Use extra parentheses for readability
$$(a * b * c) + (d / e) - (a + b)$$
- Do not skip `*` as in mathematical formulas
 - In math: $d = b^2 - 4ac$
 - In C: $d = b * b - 4 * a * c;$
- Two operators can be one after the other
$$a * -(b + c)$$

Case Study: Coin Processor

- Problem requirements
 - Convert change to personalized credit slip
 - User enters the number of each kind of coin
- Analyze the problem
 - Personalizing the slip: use customers initials
 - Count for each type of coin
 - Total value of the coins in dollars and cents
 - Input data
 - Initials: first, middle, last are characters
 - Counts: dollars, quarters, dimes, nickels, pennies are integers
 - Output data
 - Dollars and cents: total_dollars and change are integers
 - Intermediate data
 - Total value in cents: total_cents is integer
 - Relationships
 - total_cents =
 - total_dollars =
 - change =

Case Study: Coin Processor

- Design an algorithm
 1. Get and display the customer's initials
 2. Get the count for each kind of coin
 3. Compute the total value in cents
 4. Find the value in dollars and cents
 5. Display dollars and cents
 - Some steps need to refine!...
- Implement the algorithm
 - In the next slide
- Test and verify the program
- Maintain and update the program

Supermarket Coin Value Program

```
1.  /*
2.   * Determines the value of a collection of coins.
3.   */
4.  #include <stdio.h>
5.  int
6.  main(void)
7.  {
8.      char first, middle, last; /* input - 3 initials          */
9.      int pennies, nickels;    /* input - count of each coin type */
10.     int dimes, quarters;     /* input - count of each coin type */
11.     int dollars;             /* input - count of each coin type */
12.     int change;              /* output - change amount          */
13.     int total_dollars;        /* output - dollar amount          */
14.     int total_cents;          /* total cents                     */
15.
16.     /* Get and display the customer's initials. */
17.     printf("Type in 3 initials and press return> ");
18.     scanf("%c%c%c", &first, &middle, &last);
19.     printf("\n%c%c%c, please enter your coin information.\n",
20.           first, middle, last);
21.
22.     /* Get the count of each kind of coin. */
23.     printf("Number of $ coins > ");
24.     scanf("%d", &dollars);
25.     printf("Number of quarters> ");
```

(continued)

Supermarket Coin Value Program (cont'd)

```
26.     scanf("%d", &quarters);
27.     printf("Number of dimes  > ");
28.     scanf("%d", &dimes);
29.     printf("Number of nickels > ");
30.     scanf("%d", &nickels);
31.     printf("Number of pennies > ");
32.     scanf("%d", &pennies);
33.
34.     /* Compute the total value in cents. */
35.     total_cents = 100 * dollars + 25 * quarters + 10 * dimes +
36.                 5 * nickels + pennies;
37.
38.     /* Find the value in dollars and change. */
39.     dollars = total_cents / 100;
40.     change = total_cents % 100;
41.
42.     /* Display the credit slip with value in dollars and change. */
43.     printf("\n\n%c%c%c Coin Credit\nDollars: %d\nChange:  %d cents\n",
44.           first, middle, last, dollars, change);
45.
46.     return (0);
47. }
```

Type in 3 initials and press return> JRH

JRH, please enter your coin information.

Number of \$ coins > 2

Number of quarters> 14

Number of dimes > 12

Number of nickels > 25

Number of pennies > 131

JRH Coin Credit

Dollars: 9

Change: 26 cents

Case Study: Coin Processor

- Test and verify the program
 - Try the program for several inputs
 - Make sure that program runs correctly
- Maintain and update the program
 - Later!...

Output Formatting

- Default formatting
- User-defined format
 - int: %4d (%nd)
 - Field width
 - Right justified
 - - sign included in the count
 - C expands the field width if necessary
 - double: %6.2f (%n.mf)
 - Field width
 - Decimal places
 - Decimal point, minus sign included in the field width
 - Values between -99.99 to 999.99 for %6.2f
 - At least one digit before decimal point
 - Values are rounded if there are more decimal places
 - -9.536 becomes -9.54
 - Use %d or %.3f not to have leading blanks

Input and Output Redirection

- Interactive mode
- Batch mode
 - Input Redirection: standard input is associated with a file instead of keyboard
`myprog < inputfile`
 - No need to display prompting message
 - Display the message about input (echo print)
 - Output Redirection: standard output is associated with a file instead of screen
`myprog > outputfile`
 - Can print the file to get the hardcopy

Batch Version of Miles-to-Km Conversion Program

```
1.  /* Converts distances from miles to kilometers.      */
2.
3.  #include <stdio.h>      /* printf, scanf definitions */
4.  #define KMS_PER_MILE 1.609 /* conversion constant */
5.
6.  int
7.  main(void)
8.  {
9.      double miles, /* distance in miles                */
10.         kms;      /* equivalent distance in kilometers */
11.
12.     /* Get and echo the distance in miles. */
13.     scanf("%lf", &miles);
14.     printf("The distance in miles is %.2f.\n", miles);
15.
16.     /* Convert the distance to kilometers. */
17.     kms = KMS_PER_MILE * miles;
18.
19.     /* Display the distance in kilometers. */
20.     printf("That equals %.2f kilometers.\n", kms);
21.
22.     return (0);
23. }
```

The distance in miles is 112.00.
That equals 180.21 kilometers.

Use of Input/Output Files

- C allows to explicitly name an input or output file
 - Declaring file pointer

```
FILE * inp;
FILE * outp;
```
 - Opening file

```
inp = fopen("filename", "r");
outp = fopen("filename", "w");
```
 - Reading from a file

```
fscanf(inp, "%d", &nickels);
```
 - Writing to a file

```
fprintf(outp, "Total is %d \n", value);
```
 - Closing file

```
fclose(inp);
```

Miles-to-Km Conversion Program with Named Files

```
1.  /* Converts distances from miles to kilometers.    */
2.
3.  #include <stdio.h>    /* printf, scanf, fprintf, fscanf, fopen, fclose
4.                        definitions                    */
5.  #define KMS_PER_MILE 1.609 /* conversion constant */
6.
7.  int
8.  main(void)
9.  {
10.     double miles, /* distance in miles                */
11.            kms;    /* equivalent distance in kilometers */
12.     FILE    *inp, /* pointer to input file            */
13.            *outp; /* pointer to output file           */
14.
15.     /* Open the input and output files.    */
16.     inp = fopen("b:distance.dat", "r");
17.     outp = fopen("b:distance.out", "w");
18.
19.     /* Get and echo the distance in miles. */
20.     fscanf(inp, "%lf", &miles);
21.     fprintf(outp, "The distance in miles is %.2f.\n", miles);
22.
23.     /* Convert the distance to kilometers. */
24.     kms = KMS_PER_MILE * miles;
25.
26.     /* Display the distance in kilometers. */
27.     fprintf(outp, "That equals %.2f kilometers.\n", kms);
28.
29.     /* Close files. */
30.     fclose(inp);
31.     fclose(outp);
32.
33.     return (0);
34. }
```

Contents of input file distance.dat
112.0

Contents of output file distance.out
The distance in miles is 112.00.
That equals 180.21 kilometers.

Case Studies:

- Compute change for a given amount of money

Programming Errors

- Error = bug
- Process of correcting errors: debugging
- Error messages
 - Depends on the system used
 - Not always easy to understand
- Three kind of errors:
 - Syntax errors
 - Violation of grammar rule
 - Detected by the compiler
 - Run-time errors
 - Detected while execution
 - Illegal operation, division by zero etc.
 - Logic errors
 - Program runs but produces incorrect result

A Program with Syntax Errors

```
221 /* Converts distances from miles to kilometers. */
222
223 #include <stdio.h>          /* printf, scanf definitions */
266 #define KMS_PER_MILE 1.609 /* conversion constant */
267
268 int
269 main(void)
270 {
271     double kms
272
273     /* Get the distance in miles. */
274     printf("Enter the distance in miles> ");
***** Semicolon added at the end of the previous source line
275     scanf("%lf", &miles);
***** Identifier "miles" is not declared within this scope
***** Invalid operand of address-of operator
276
277     /* Convert the distance to kilometers. */
278     kms = KMS_PER_MILE * miles;
***** Identifier "miles" is not declared within this scope
279
280     /* Display the distance in kilometers. */
281     printf("That equals %f kilometers.\n", kms);
282
283     return (0);
284 }
***** Unexpected end-of-file encountered in a comment
***** "}" inserted before end-of-file
```

A Program with a Run-Time Error

```
111 #include <stdio.h>
262
263 int
264 main(void)
265 {
266     int    first, second;
267     double temp, ans;
268
269     printf("Enter two integers> ");
270     scanf("%d%d", &first, &second);
271     temp = second / first;
272     ans = first / temp;
273     printf("The result is %.3f\n", ans);
274
275     return (0);
276 }
```

Enter two integers> 14 3

Arithmetic fault, divide by zero at line 272 of routine main

Revised Coin Value Program

```
1. int
2. main(void)
3. {
4.     char first, middle, last; /* input - 3 initials          */
5.     int pennies, nickels;    /* input - count of each coin type */
6.     int dimes, quarters;    /* input - count of each coin type */
7.     int dollars;            /* input - count of each coin type */
8.     int change;              /* output - change amount          */
9.     int total_dollars;       /* output - dollar amount          */
10.    int total_cents;          /* total cents                     */
11.    int year;                 /* input - year                    */
12.
13.    /* Get the current year.                                     */
14.    printf("Enter the current year and press return> ");
15.    scanf("%d", &year);
16.
17.    /* Get and display the customer's initials.                 */
18.    printf("Type in 3 initials and press return> ");
19.    scanf("%c%c%c", &first, &middle, &last);
20.    printf("\n%c%c%c, please enter your coin information for %d.\n",
21.        first, middle, last, year);
    ...
}
```


A Program That Produces Incorrect Results

```
1. #include <stdio.h>
2.
3. int
4. main(void)
5. {
6.     int    first, second, sum;
7.
8.     printf("Enter two integers> ");
9.     scanf("%d%d", first, second); /* ERROR!! should be  &first, &second */
10.    sum = first + second;
11.    printf("%d + %d = %d\n", first, second, sum);
12.
13.    return (0);
14. }
```

```
Enter two integers> 14 3
5971289 + 5971297 = 11942586
```
