



TRACKING LOCATIONS USING SEEKER

Report By- Mubasshera Zaidy

STEP 1 : Download the Seeker tool from GitHub by copying the code.

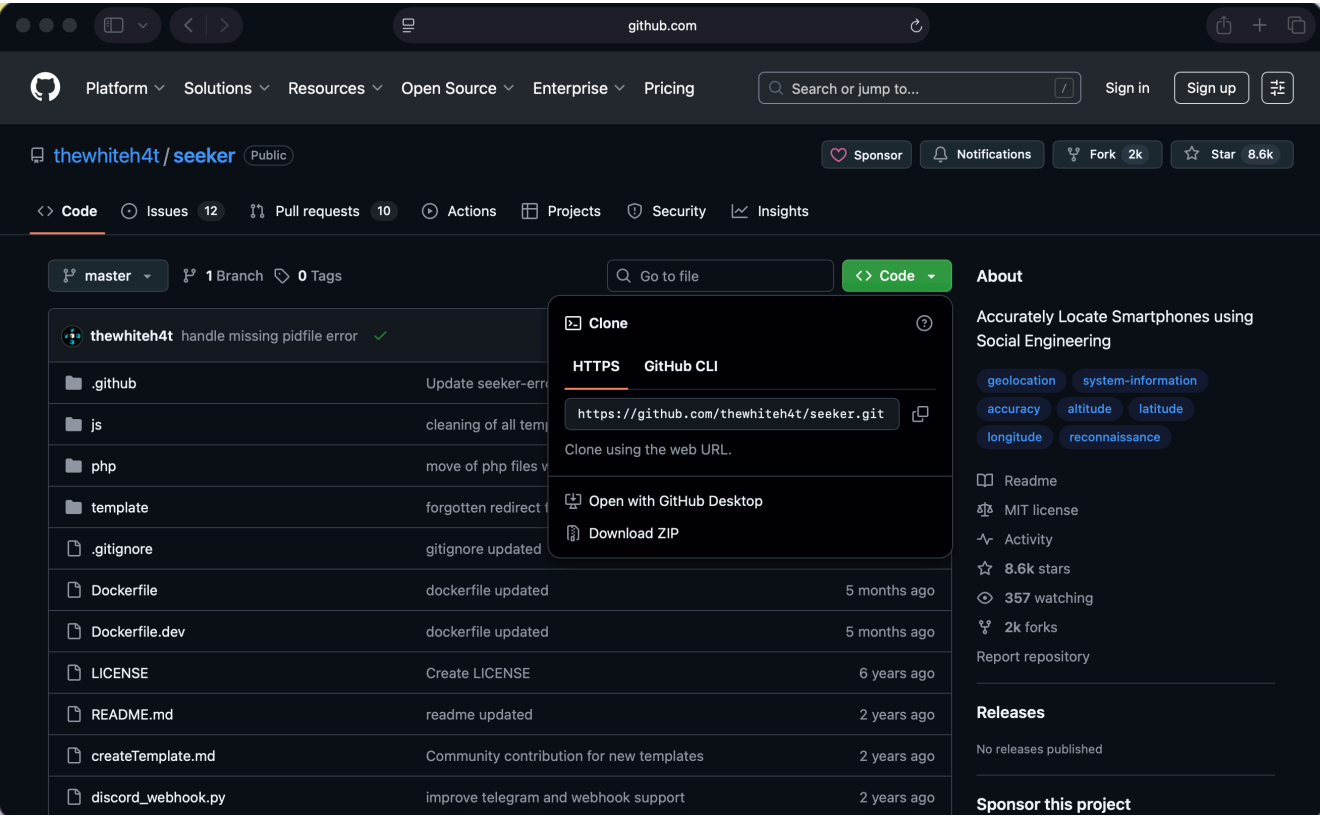

STEP 2 : In your terminal, type git clone, then paste the GitHub link you copied in Step 1, and press Enter.

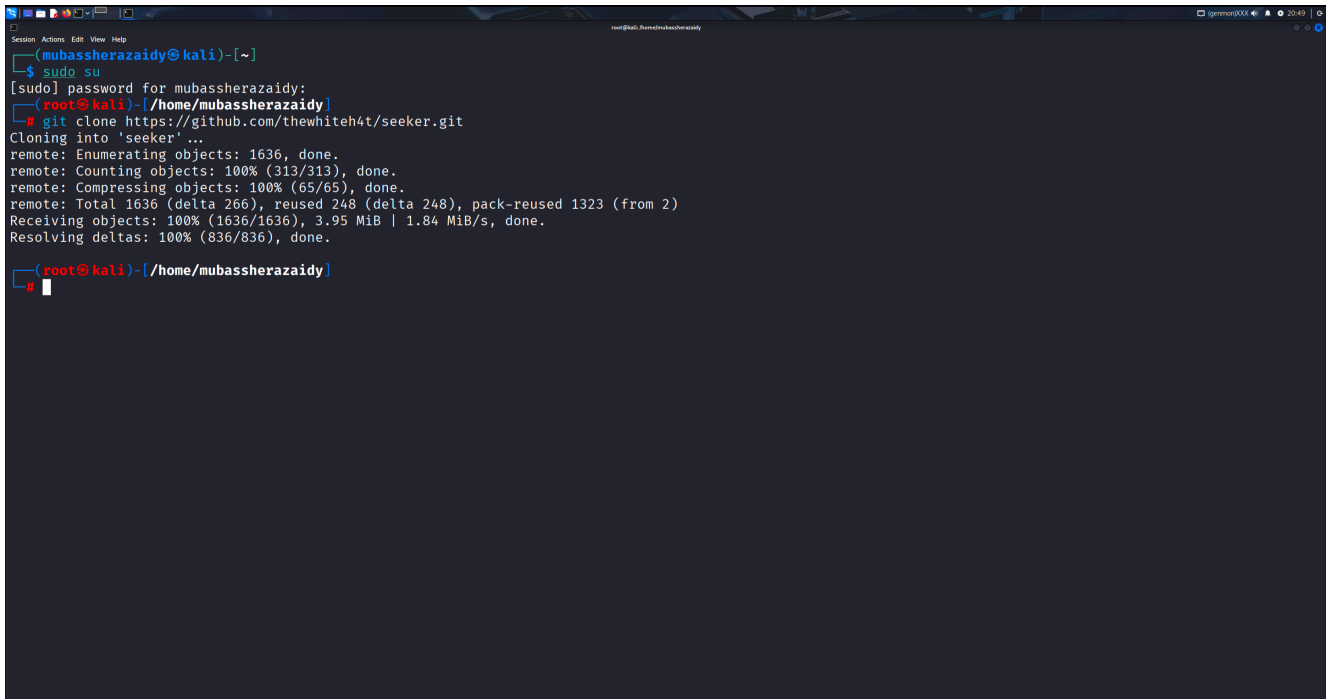A terminal window with a dark background. The prompt is (mubassherazaidy@kali)-[~]. The user enters 'sudo su', and the prompt changes to (root@kali)-[/home/mubassherazaidy]. The user then enters 'git clone https://github.com/thewhiteh4t/seeker.git'. The terminal shows the output of the git clone command, including progress bars for enumerating, counting, and compressing objects, and the total size of the repository. The prompt returns to (root@kali)-[/home/mubassherazaidy].

```
(mubassherazaidy@kali)-[~]  
$ sudo su  
[sudo] password for mubassherazaidy:  
(root@kali)-[/home/mubassherazaidy]  
# git clone https://github.com/thewhiteh4t/seeker.git  
Cloning into 'seeker'...  
remote: Enumerating objects: 1636, done.  
remote: Counting objects: 100% (313/313), done.  
remote: Compressing objects: 100% (65/65), done.  
remote: Total 1636 (delta 266), reused 248 (delta 248), pack-reused 1323 (from 2)  
Receiving objects: 100% (1636/1636), 3.95 MiB | 1.84 MiB/s, done.  
Resolving deltas: 100% (836/836), done.  
(root@kali)-[/home/mubassherazaidy]  
#
```

STEP 3 : Change into the Seeker directory by typing `cd seeker`, then make the install script executable using `chmod +x install.sh` and type `ls` to view the files in seeker directory

```
mubassherazaidy@kali:~$ sudo su
[sudo] password for mubassherazaidy:
(mubassherazaidy@kali)~$ git clone https://github.com/thewhiteh4t/seeker.git
Cloning into 'seeker' ...
remote: Enumerating objects: 1636, done.
remote: Counting objects: 100% (313/313), done.
remote: Compressing objects: 100% (65/65), done.
remote: Total 1636 (delta 266), reused 248 (delta 248), pack-reused 1323 (from 2)
Receiving objects: 100% (1636/1636), 3.95 MiB | 1.84 MiB/s, done.
Resolving deltas: 100% (836/836), done.

(mubassherazaidy@kali)~/home/mubassherazaidy$ cd seeker

(mubassherazaidy@kali)~/home/mubassherazaidy/seeker$ chmod +x install.sh

(mubassherazaidy@kali)~/home/mubassherazaidy/seeker$ ls
createTemplate.md  Dockerfile  install.sh  LICENSE  php  seeker.py  template
discord_webhook.py Dockerfile.dev js          metadata.json  README.md  telegram_api.py  utils.py

(mubassherazaidy@kali)~/home/mubassherazaidy/seeker$
```

STEP 4 : Now type `./seeker.py` to start the tool.

```
(root@kali)-[/home/mubassherazaidy/seeker]
# ./seeker.py

  _____
 /_ _ _ > _ _ _ > _ _ _ > | < _ _ _ > | <
/_ _ _ > _ _ _ > _ _ _ > | < _ _ _ > | <

[>] Created By   : thewhite4t
    |-----> Twitter : https://twitter.com/thewhite4t
    |-----> Community : https://twc1rcle.com/
[>] Version      : 1.3.1

[!] Select a Template :

[0] NearYou
[1] Google Drive
[2] WhatsApp
[3] WhatsApp Redirect
[4] Telegram
[5] Zoom
[6] Google ReCaptcha
[7] Custom Link Preview
[>]
```

STEP 5 : Select a location tracking template by entering the number that matches your chosen option. Here the template we chose is Google drive(01)

```
(root@kali)-[/home/mubassherazaidy/seeker]
# ./seeker.py

          _____|_____|_____<_____|_____v
 /_/_/>\_/_\>\_/_\>|\_/_\>\_/_\>|\_/_\>\_/_\>|\_/_\>\\
 v      v      v     v       v        v         v


[>] Created By   : thewhiteht
    ↳ Twitter    : https://twitter.com/thewhitest4t
    ↳ Community  : https://twc1rcle.com/
[>] Version      : 1.3.1

[!] Select a Template :

[0] NearYou
[1] Google Drive
[2] WhatsApp
[3] WhatsApp Redirect
[4] Telegram
[5] Zoom
[6] Google ReCaptcha
[7] Custom Link Preview
[>] 01
```

STEP 6: Enter the G-Drive URL and Note the Port Number.

```
Session Actions Edit View Help
V      V      V      V      V

[>] Created By   : thewhiteh4t
    |→ Twitter   : https://twitter.com/thewhiteh4t
    |→ Community : https://twc1rcle.com/
[>] Version      : 1.3.1

[!] Select a Template :


[0] NearYou
[1] Google Drive
[2] WhatsApp
[3] WhatsApp Redirect
[4] Telegram
[5] Zoom
[6] Google ReCaptcha
[7] Custom Link Preview
[>] 01

[+] Loading Google Drive Template...
[+] Enter GDrive File URL : random/drive.google.com


[+] Port : 8080

[+] Starting PHP Server... [ ✓ ]
```

STEP 7 : Now open your browser in kali itself and type your loopback address and the port number which you got. A drive template should be displayed.

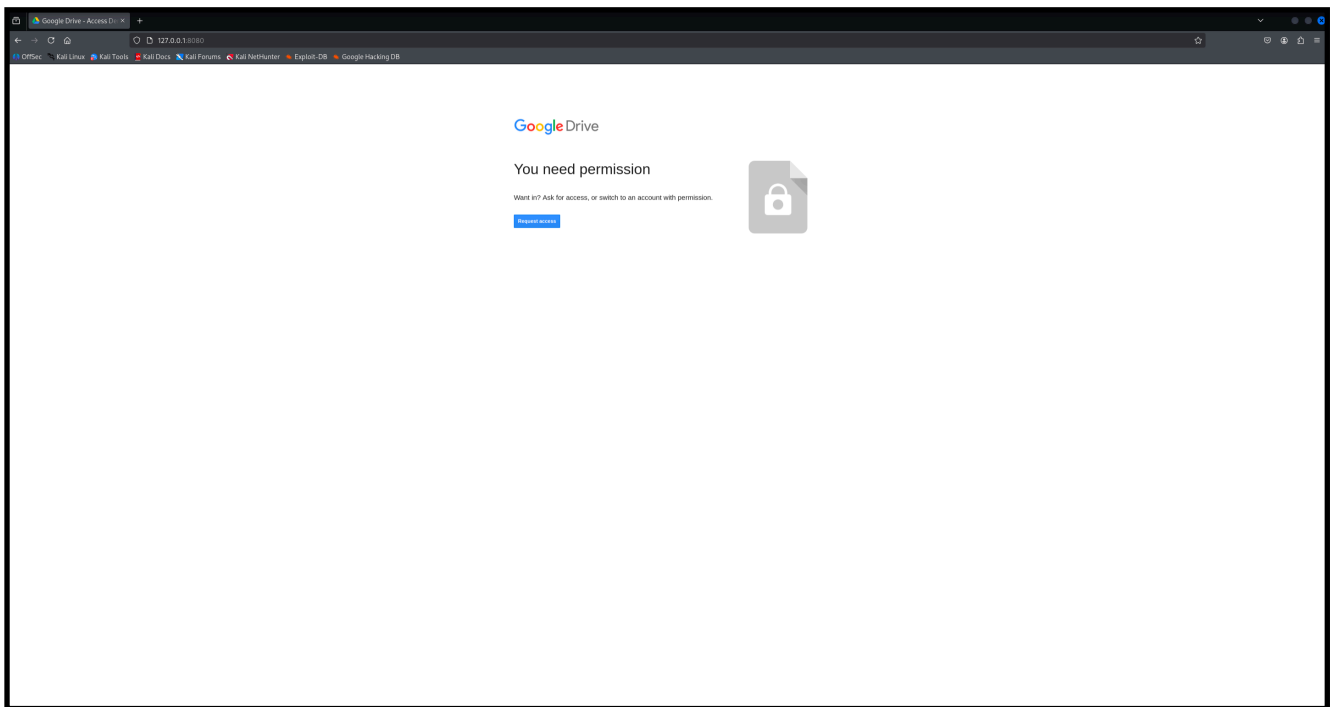

STEP 8 : When the Request Access button is clicked, a location permission prompt will appear on the target device. Once location access is granted, the Seeker tool will automatically capture and display key details such as GPS coordinates, device type, browser information, and IP address in the terminal.

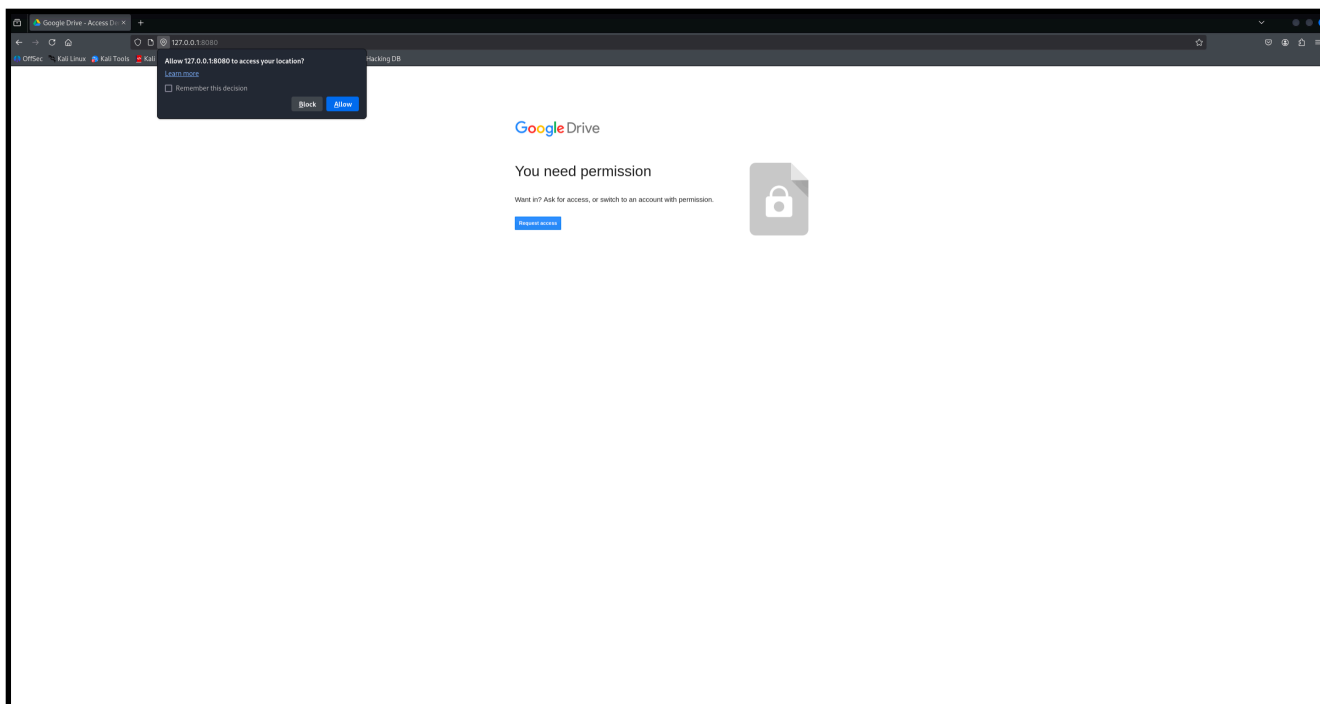

```
Session Actions Edit View Help
root@kali:~/mubassherazaidy/seeker

[+] OS : Linux x86_64
[+] Platform : Linux x86_64
[+] CPU Cores : 6
[+] RAM : Not Available
[+] GPU Vendor : Mesa
[+] GPU : llvmpipe, or similar
[+] Resolution : 2880x1556
[+] Browser : Firefox/128.0
[+] Public IP : 127.0.0.1

[!] Skipping IP recon because IP address is private
[!] Location Information :

[+] Latitude : 19.0728 deg
[+] Longitude : 72.8826 deg
[+] Accuracy : 25000 m
[+] Altitude : Not Available
[+] Direction : Not Available
[+] Speed : Not Available

[+] Google Maps : https://www.google.com/maps/place/19.0728+72.8826
[+] Data Saved : /home/mubassherazaidy/seeker/db/results.csv

[+] Waiting for Client... [ctrl+c to exit]
```