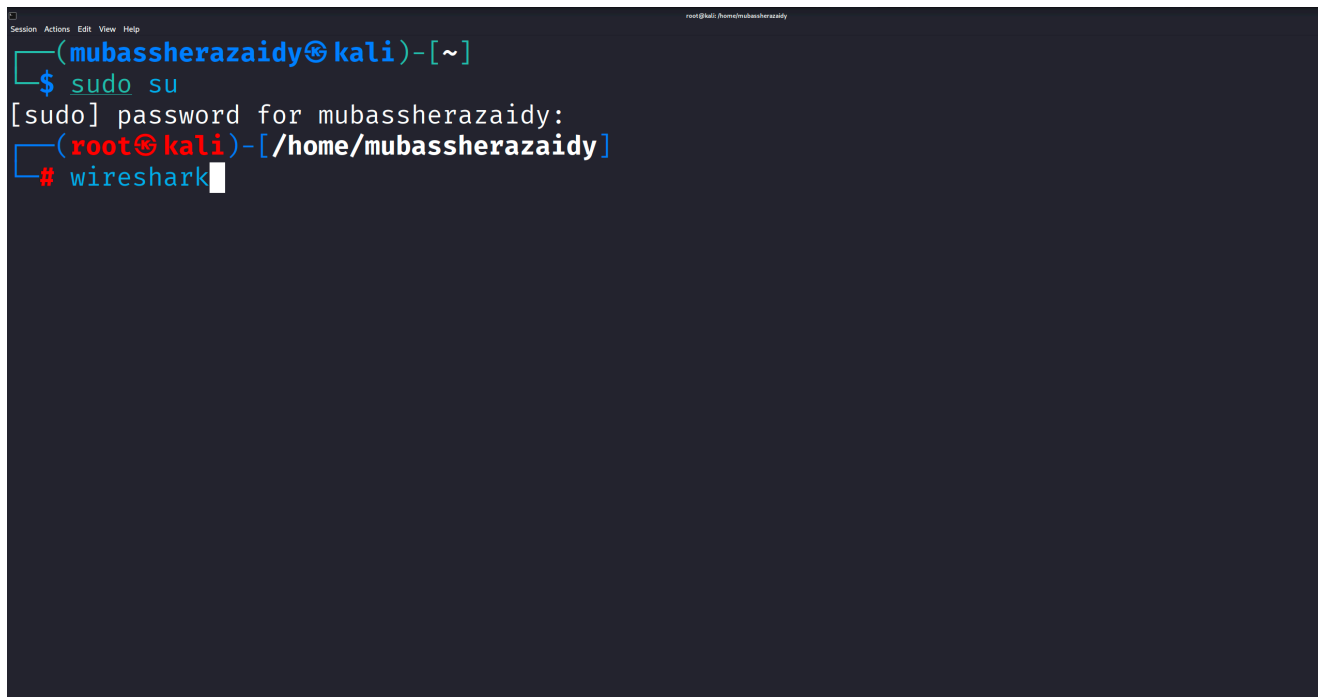

WIRESHARK SCANNING


METHODOLOGY

STEP 1 : Open terminal and switch to root user. Then type `wireshark` to start the tool.


A terminal window with a dark background. The prompt is `(mubassherazaidy@kali)~`. The user enters `sudo su`. The prompt changes to `[sudo] password for mubassherazaidy:`. The user enters a password (indicated by a white box). The prompt changes to `(root@kali)~`. The user enters `wireshark`.

```
Session Actions Edit View Help
(mubassherazaidy@kali)~
$ sudo su
[sudo] password for mubassherazaidy:
(root@kali)~
# wireshark
```


STEP 2 : Once the Wireshark tool is started click on blue icon to start scanning.

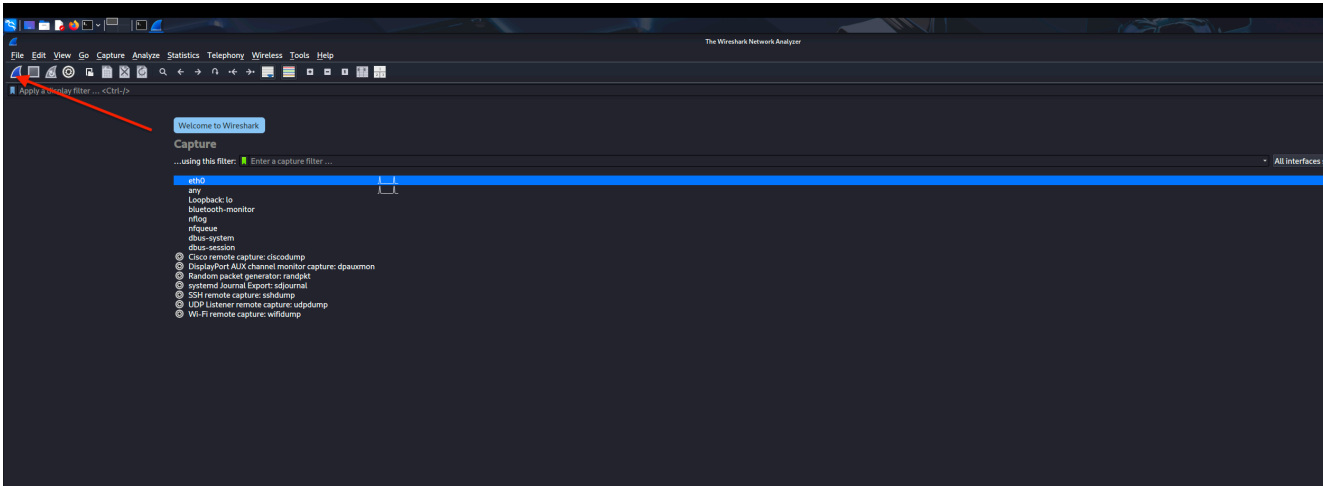

STEP 3: Wireshark will begin capturing packets to monitor live traffic. It captured packets from common protocols (TCP, UDP, ICMP, HTTP).

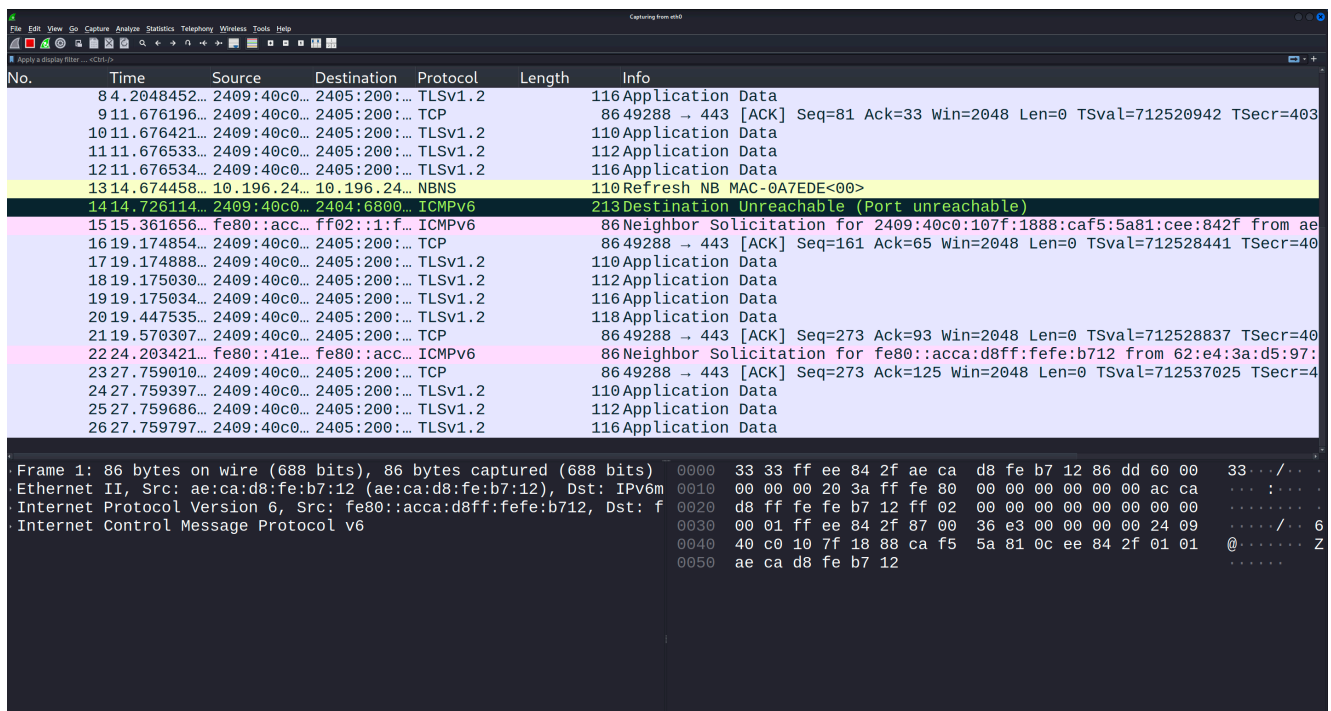

STEP 4 : Once done with scanning you can stop the scan by clicking on the red icon .

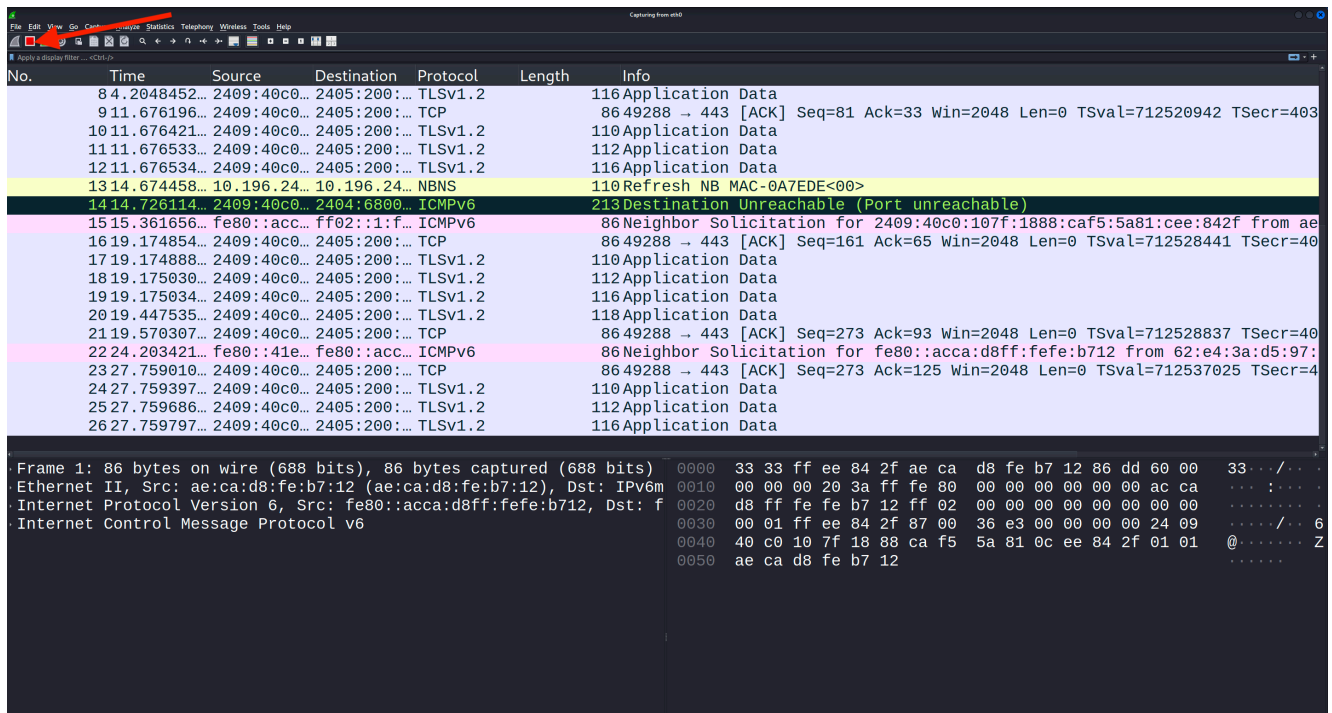

STEP 5 : Save the captured packets by clicking on “Save”.

