

1 Introduction

According to IDC (www.idc.com) – a global provider of market intelligence, advisory services, and events for the information technology, telecommunications and consumer technology markets – the worldwide shipment of smart connected devices will surpass 2.5 billion units in 2017. The decreasing trends of cost, size, and power requirements of the various devices, were accompanied by an increase in embedded computing capabilities. In addition – every device can be connected with other devices, each of which: (1) is capable of sensing/computing, communicating and actuating; (2) depends on values and state-descriptions of other devices, not necessarily within geo-spatial proximity nor with homogeneous physical characteristics, to steer the course of its own activities. Such heterogeneous device range from computers, tablets and smartphones, through embedded systems in cars and traffic lights, precision agriculture sensors and actuators, to various home appliances, bodily sensors, etc. [6, 12, 107, 134]. According to recent a study by Goldman & Sachs, over 12 billion devices are already connected to the Internet of Thing (IoT) and by 2020 that number should become 20 billion ¹.

Recent works have already attempted to capitalize on the results from social networks research [5, 59, 115, 164] – namely [11, 66] have specifically pointed how the experiences from social networks of users equipped with smart devices could be generalized to *social networks of devices* in the IoT realm. In a similar spirit, attempts have been made to demonstrate the benefits of *virtual objects* as a good abstraction for tackling IoT-related problems [120]. Studies regarding integration of heterogeneous devices in various contexts abound – e.g., from smart homes in a manner that would balance the Quality of Experience (QoE) and Energy consumption [50]; to better use of smart grid [98] and enabling smart cities [182].

One of the core motivations for the proposed project is based on the observation that current practices related to the design of IoT systems are still rather compartmentalized, and the dynamics-aware fusion of data collection, analytics processing and actuation across a variety of heterogeneous IoTs has limited support. As a simple example, consider a scenario where one has a (collection of) smart bed(s), such as, e.g., RestBed (<https://www.restperformance.com/>) with a surface equipped with multiple sensors to improve sleeping experience. A smart home may, in addition to a RestBed, also have smart refrigerators such as, e.g., Family Hub from Samsung (<http://www.samsung.com/us/explore/family-hub-refrigerator/>). While the QoE estimate can be obtained based on customers survey (or, even from bodily sensors), and it can even be balanced with the energy-efficiency (cf. [50]) “in-concert” with such devices, there are some important functionalities that are lacking, and could yet significantly improve the overall experience and efficient use of the available devices/technology:

- The quality/satisfaction of sleeping is not correlated with the nutritional habits (i.e., the content of the food in the smart refrigerator and consumption patterns). This, in turn, prevents the respective manufacturers from improving their products/devices in a collaborative and context-aware manner.
- There is no formal methodology of *where* the data assembling (as well as data aggregation and decision/recommendation as well as actuation) should take place. For instance, should all the nutrition-relevant data from an ensemble of smart refrigerators be sent at the local grocery store to optimize deliveries, or should it be aggregated at some geo-social level of hierarchy. Moreover, this raises the question of how the aspects of privacy and security should be handled.

Extending the above scenario, one may consider an evolution along spatio-temporal dimension. For instance, during a lunch-break, Jack decides to lower by 5F the set temperature of his home heating system to activate when he is less than 1 mile from his home and in any case no later than 6PM. However, if the outside temperature drops below 55F, the home temperature must go up by 5 degrees. A colleague gives Jack a list of instructions corresponding to a new method for washing wool sweaters; he sends the file directly to his home through the social network where a service will adapt the instructions to his washing machines particular technical features and his personal preferences (e.g., extra soft cloths). At home a tip from the network tells Jack to turn off all TVs to avoid getting further depressed. During the night the washing machine starts the cycle at the time the electric company informs it to be the most favorable.

The above describes a single user interacting seamlessly with multiple devices. We observe that one could attempt to generalize the existing approaches for Social Network of Things [66, 120] that can be generated/organized and dissolved on-the-fly, and enable scalability. However, even in the context of “Jack” scenario, there are certain aspects that span across heterogeneous domains/types and at different levels of certain (e.g., hierarchical) relationships. For instance, collaboratively regulating the temperature with other units in Jacks building has one kind of spatial, temporal, and devices extent, whereas collaboratively deciding about the cycle of the washing machine may go beyond the building – i.e., optimizng grid-demand within a city-block.

¹<http://www.goldmansachs.com/our-thinking/pages/iot-meets-everything.html>

By establishing a dynamic instantiations of various components/devices comprising Internet of Things (IoT) structures, we aim to provide an automatic resource optimization and other intelligence into these evolving collections of smart connected objects, going beyond the social networks of things. Rather than endowing them with autonomously cognitive chips, we aim to enable manufacturers, retailers and users/owners, to elaborate finely tuned dispatches to be distributed toward the smart objects through *middleware fogs* located various units (e.g., homes). As part of the proposed research we plan to provide novel data analytics methodologies that will: (a) incorporate the fact that some users may not be cooperative in terms of suggested regime of use for certain devices/task; (b) provide a specific behavioral insights to be used by various manufacturers when planning the design of certain devices so that they can be better adapted to changing conditions of use. A high-level description of the architecture we target to develop for supporting such scenarios is depicted in Figure 4, providing methodologies and tools for two basic modes:

(I) The first setup consists of a set of middleware fogs, located in each smart box/gateway of a smart home or public area, grouped together in an evolving (social-like) network along with profiles of manufacturers, retailers and users/owners. The lower layer is formed by all the real devices/objects (things), such as a fridge, a washing machine, a heater, a TV, a Hi-Fi, etc., where each one is abstracted by what we refer to as WiThing (WiT) for Wireless Thing. The WiT is the first level of the device abstraction and its role is to (1) uniquely identify an object/device (2) represent the object in terms of its properties/functionalities through an MIB (Management Information Base), and (3) constitute a bidirectional interface for all communications between the object and the middleware fog located in the smart box/gateway. The intermediate layer contains the smart box/gateway where the middleware fog is implemented. The latter is composed of an ensemble of interconnected modules that will govern all the requests issued by the user through a proper front-end application. To this end, this smart box must interface with any object/device it meets in the surroundings, i.e., any virtual device communicated by the real objects/devices. The upper layer illustrates the complexity of the different couplings to form ensembles of (networks of) manufacturers, retailers and users/owners with the generic representations of their objects/devices.

(II) The second setup complements the previous one in terms of inter-contexts couplings and dynamic formations (and dissolution) of corresponding instances of ensembles with heterogeneous participants. In terms of notation in Figure 1. this can be explained by the following consideration: (a) If we have an instance of a “network” of particular devices (e.g., a washers) from a collection of residential units, depending on the geographical context we may want to compose instances of collections corresponding a group of same devices but operating in a group of buildings in a near-downtown area. (b) Complementary to this, we may need to couple the “entity” corresponding to the ensemble of washers in different units in an apartment complex, with the one of entertainment devices in the same and/or neighboring buildings.

One could readily generalize this in other/multiple contexts – e.g., the instances representing the traffic-density in different geographical regions may be tied with the crime-rate in those and/or near-by regions and with the ones corresponding to activities of electronic devices in the police cars.

To enable such situational awareness that is flexible enough to incorporate the dynamic formation of instances that can span not only from networks of users to network of heterogeneous devices, but also through the existence of ensembles comprised of different contextual impacts (space, time, objective to be optimized, etc.) we propose the concept of Heterogeneity And Context Aware Dynamic Avatars (HACADA) illustrated in Figure 1. We note that, in addition to the scenario-oriented discussions above, the HACADA’s may be created, updated/modified and ceased based on different criteria: (a) particular cyber-properties: e.g., status of network infrastructure, privacy constraints, etc.; (b) Logical or semantical properties which may entail dynamically forming (and dissolving) hierarchies of HACADAs; (c) “expiration” of certain criteria (e.g., past 10PM) enabling the leftover descriptors in two different HACADA-instances to be merged into one.

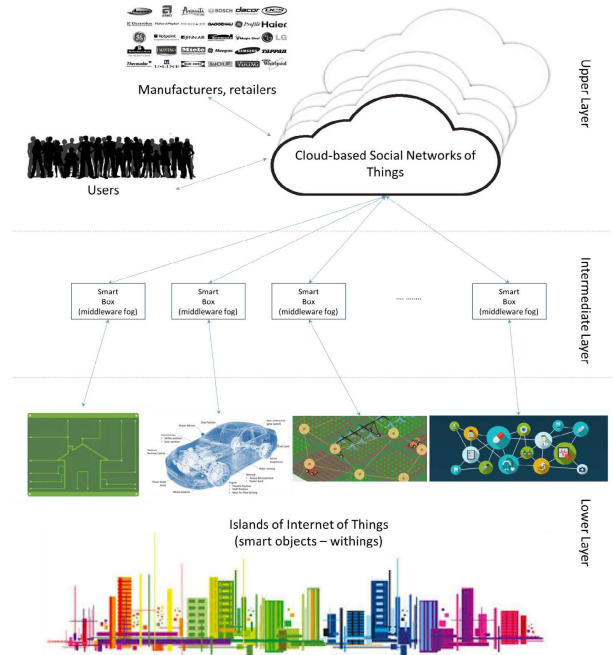


Fig. 1: Contexts (devices, users, location) and instantiations of HACADAs

Intellectual Merits:

Throughout this complex environment, and in order to automate the deployment and control, as well as optimize the use of such ensembles of HACADAs comprising multiple instances of operational Internet of Things, a plethora of issues in data collection and processing (representation, distributed allocation and querying, and information fusion), knowledge discovery, and security and privacy need to be investigated in unified framework. We assert that such integrated large scale effort, involving researchers from diverse backgrounds, is necessary to enable exploiting the full potential of the Internet of Things technology and make it ubiquitous of use. The proposed project has the following list of collaborative research activities as its main Intellectual Merits:

– *Design and development of novel techniques and abstractions for acquisition and representation of data from IoT devices and users:* What separates the HACADAs from both managing and integration of traditional distributed heterogeneous datasets is that, in addition to the set of *observed data values*, one needs to seamlessly integrate the notion of *dynamic states and transitions*. A peculiarity is that the representation of a state and the rules for valid transitions may differ among HACADA instances – and yet one may need to use two (or more) such distinct instances for a particular query. Towards that, we will identify a collection of key events spanning multiple contexts (space/location, time, device, network-features) and a collection of basic operands with various overloads to enable collaborative creation of new HACADAs, merging of existing ones into an instance of a new category, with different consumption modes regarding the “parents”. We will also investigate the problem of actual placement (and migration) of the representation of HACADAs, to cater to different analytics and privacy/security objectives.

– *Development of privacy-preserving analytics to discover hidden correlations and usage patterns and behaviors* **NOTE: mention a summary from the section written by Vladimir and Ashfaq.**

– *Design and development of network protocols to mitigate the DoS and greedy behavior in IoT devices* **NOTE: Alek and Farid section-summary**

– *Development of simulation platform as well as real-world testbed of heterogeneous IoTs (devices and users).* **NOTE: mention a realization of application scenario(s).**

Broader Impacts: The salient broader impacts of the proposed project are:

NOTE: need to expand

This research effort aims to contribute to the rapid development of national and local capacity to respond to critical events and to develop technology to advance the ability and scope of Internet of Things to detect and monitor events in applications of high priority, such as surveillance and habitat monitoring. The proposed research activity is a multidisciplinary effort involving researchers with expertise in distributed databases, security, and data management and analytics. This work will also contribute to, and complement efforts under way for, the design and management of reliable smart facilities. Leveraging on the existing cooperation between Illinois Institute of Technology, Northwestern University and Rutgers University. The PIs have a long record of working on collaborative research projects and have extensively involved undergraduate students, minority students and women in their research.

The proposed collaborative project will be executed by a team of six highly accomplished researchers and their students from three different institutions, who have expertise in all the complimentary areas relevant to the research activities proposed in this project, including: Human Computer Interface, Machine Learning, Information Systems and Data Sciences, Sensor and Sensor Networking, Security, and Privacy. The PI and Co-PIs have a long and well established record of collaborating on different federal government and industry funded research projects. In the following we provide a brief introduction of the PIs and their relevant expertise.

- Ashfaq Khokhar, Illinois Institute of Technology: Wireless Sensor Networks, Data Mining, Cloud Computing
- Farid Nait-Abdesselam, Illinois Institute of Technology: Network Security, Wireless Sensor Networks
- Mubbasir Kapadia, Rutgers University: Human Computer Interface, Virtual Human Systems
- Vladimir Pavlovic, Rutgers University: Machine Learning, Dynamic System Modeling, Computer Vision
- Aleksander Kuzmanovic, Northwestern University: Networks Security, Denial-of-service Resiliency, Content Distribution
- Goce Trajcevski, Northwestern University: Moving Objects Databases, Data Management in Sensor Networks

2 State of the art

We now present an overview of the state of the art, both from the perspective of the current properties of devices and networking technology features, as well as from the perspective of related works in several fields that, in one way or another, may be used to achieve our objectives however, the fall short of several important aspects.

2.1 Whatever Proper title of this sub-section

The vast majority of devices are endowed with electronic interfaces, made of buttons and the like, inviting users to operate selections from among a limited set of options pre-featured by the manufacturers. They may concern options,

such as, ventilation on/off button in an oven, a selection of delicate option in a washing machine, air-condition on/off button in a car, and so on. While these older devices are considered somehow efficient and simple, the trend is towards more technological and ubiquitous devices. The operational innovation of our approach is to make a move of the interface a step ahead and a step farther so as to realize a deep, remote and smart control. In this case, the manufacturer makes all/most of the operational parameters, such as spin speed and duration, totally manageable and configurable by the user. In turn, the user drives these parameters via software, hence makes them obeying to automatic procedures/instructions that have been elaborated and optimized in advance, with the help of the manufacturer, other contributors, and/or the networked intelligence. Thus, we need to have this new hardware/software interface managing signals/data back and forth between actuators/sensors and a logic unit with the result of detaching the user from any physical contact with the device (thing). To this end, in the project we will use open source electronic boards, such as Arduino boards (<https://www.arduino.cc/>), Parallella boards (<https://www.parallella.org/>) and/or Raspberry-Pi boards (<https://www.raspberrypi.org/>). They are powerful prototyping boards based on flexible, open and easy-to-use hardware and software. These devices are wirily and/or wirelessly connected to the Internet from which they can be easily visible and accessible. We foresee that their exploitation will lead microelectronic companies to develop specific chips for a massive diffusion of this new technology in a near future. In order to realize the vision of an Ambient Intelligence in a future network and service environment, heterogeneous wireless sensor and actuator networks have to be integrated into a common framework of global scale and made available to services and applications via universal service interfaces [99]. The goal is to reach a distributed open architecture with interoperability of heterogeneous systems, neutral and easy access, clear layering and resilience. It should provide the necessary network and information management services to enable reliable, secure and accurate interactions with the physical environment. The idea is to provide an integrated platform that offers unified data access, processing and services on top of existing ubiquitous services of the Internet of Things to integrate heterogeneous sensors/actuators in a uniform way. From an application perspective, a set of basic services encapsulates sensor/actuator network infrastructures hiding the underlying layers with the network communication details and heterogeneous sensor hardware and lower level protocols.

A heterogeneous networking environment indeed calls for means to hide the complexity from the end-user, as well as applications, by providing intelligent and adaptable connectivity services, thus providing an efficient application development framework. To face the coexistence of many heterogeneous set of things, a common trend in Internet of Things applications is the adoption of an abstraction layer capable of harmonizing the access to different devices with a common language and procedures [45]. Standard interfaces and data models ensure a high degree of interoperability among multiple systems. However, typical drawbacks of misconfigurations and traffic congestions are normally exasperated by the node heterogeneity. These drawbacks will be overcome in the project through the adoption of islands architecture. On the one hand, smart gateways in their locations will hide all the complexities of the underlying standards. Hence, wireless connections of the devices/machines to the web/Internet, using communication technologies like Zigbee [9], Z-wave [170], Wi-Fi [171], plus the mapping of every device to a unique ID, will provide full, intelligent and secure control over it. With these smart boxes/gateways, technological limitations will completely disappear and the devices will become identifiable only through their functionalities with clear and consistent APIs. On the other hand, the middleware fog constitutes an abstraction level where all the devices, viewed as entities sharing their functionalities (avatars), are transparently managed and used. The goal is to manage the collaboration between heterogeneous devices through a simple API level in conjunction with the mentioned communication protocol able to reach the peer within the location singularly.

Most existing solutions for middleware adopt in general a service-oriented design tailored mainly to support a network topology of sensors that is both unknown and dynamic. But while some projects focus on abstracting the sensors in the network as services (such as in HYDRA [46, 184, 185], SENSEI [126], SOCRADES [57], and COBIS [127]), other projects devote more attention to data/information abstractions and their integrations with services (among which are SOFIA [63], SATware [104], and Global Sensor Networks GSN [3]). A common thread throughout all of these solutions, however, is that they handle the challenge of an unknown topology through the use of discovery methods that are largely based on the well-known traditional service/resource discovery approaches of the existing Internet, ubiquitous environments and wireless sensor and actuator networks [7, 108, 189]. For instance, SOCRADES provides discovery on two levels, the sensor level and the service level, which can employ either standard web-service discovery or a RESTful discovery mechanism (for RESTful services). COBIS, on the other hand, uses its own service description language COBIL 2 (Collaborative Business Item Language), where service functions and keywords are annotated with a verbal description. Another point of agreement in the state-of-the-art of middleware solutions is in the widespread use of semantics and metadata to overcome heterogeneity challenges. Indeed, it is standard practice to use ontologies to model sensors, their domains, and sensor data repositories [44, 46, 97]. Some projects

even go a step further and also include context information [126], or service descriptions [46, 184, 185]. And as a type of service composition, many projects support the concept of virtual/semantic sensors (for instance, in HYDRA, GSN and SATware), i.e. entities that abstract several aggregated physical devices under a single service. A different implementation of a similar idea, though, is provided in the SATware project, where virtual sensors actually correspond to transformations applied to a set of raw sensor streams to produce another semantically meaningful stream.

Regarding scalability, most projects address this challenge by pursuing modifications in the underlying sensor/actuator network topology. Sometimes, this is done by adopting fully-distributed infrastructures (such as in COBIS and SOFIA), and sometimes through an architecture of peer-to-peer clusters (e.g., GSN). In our view, however, while these approaches work well for the existing Internet, where traffic is made up of a relatively small amount of service interactions, they will not fit for the complex weave of interactions that will be commonplace in the Internet of Things. In the Internet of Things, a large number of requests will involve intricate coordination among millions of things and services, whereas on today's Internet most requests are largely point-to-point. Therefore, the number of packets transmitted in the network will grow strongly and nonlinearly as the number of available services increases. In such an environment, performing even a simple service discovery may exceed acceptable time, processing, and memory constraints. //NOTE: the last paragraph needs to be tied (cf. (2)/Fig.2 in the intro with the problems related to "Possible Worlds Semantics" and the efficient pruning the needs to be performed

2.2 Data and Process Integration

Heterogeneous data integration is a topic which, in addition to the database community broadly [32, 60], has also been investigated by more specialized research foci: – bioinformatics [80, 116]; information management and text retrieval [35, 61, 154]; sensing/actuation and tracking [13, 29, 134] (to name but a few). While the role and the impact of the semantics have been recognized and addressed [25, 27], the existing results still have limited cross-contextual support. For instance, the works investigating the benefits of semantics for resource discovery (cf. [27]) do not take into consideration the role of different devices that may enter and/or leave a particular "geo-social" network dynamically, as well as their impact on real-time adjustments (as well as the impact of their cessation). To-Do – Goce: Overview of:

- a. Data integration + distributed query processing; workflows [93, 121, 125]; Wireless Actuator Networks
- b. Analytics and platforms in-context (Cloud/Hadoop; NoSQL; Warehousing) [153]

3 Proposed research overview

We now proceed with identifying the main challenges that the proposed project will address, with a brief overview of the proposed research tasks (research challenges), followed by an introduction of the team and their expertise.

Research Challenge 1 (RC-1): Data collection and processing

Research Challenge 2 (RC-2): Knowledge discovery

Research Challenge 3 (RC-3): Security, privacy (anonymity) and trust

The Internet of Things is foreseen to bring a multitude of services with a vision of creating a smart self-configuring and interconnected world for the benefit of end users. With the extensive research and development of computer, communication and control technologies, it is possible to connect all things to the Internet such that the so-called Internet of Things (IoT) can be formed. These things may be equipped with devices such as sensors, actuators, and tags, in order to allow people and things to be connected anytime and anywhere, with anything and anyone. IoT will enable collaborations and communications among people and things, and among things themselves, which expand the current Internet and will radically change our personal, corporate, and community environments. However, a plethora of security, privacy, and trust challenges need to be addressed in order to fully realize this vision [20, 21, 22, 23]. When more and more things connect to the Internet, security and privacy issues become more serious, especially in the case that these things are equipped with actuators and can support control. For better protection of secure communication and user privacy, including location, identity and behavior habits, it is necessary to develop anonymous communication theories, methods and key technologies of anonymous communication systems in all

varieties of application environments. Anonymous communication is used to hide communication participants or communication relations to achieve effective protection for network nodes and user identities. Anonymous communication can address potential network security issues, and becomes one of the hot topics in the field of network and information security. With reference to security, data anonymity, confidentiality, and integrity need to be guaranteed, along with providing authentication and authorization mechanisms in order to prevent unauthorized users (i.e., humans and devices) to access any system. Concerning privacy requirement, both data and user personal information have to be confidentially manipulated since devices may manage sensitive information (e.g., user habits, locations, etc). Finally, trust is also a fundamental issue since the IoT environment is characterized by multiple devices that have to process and handle the data in compliance with user needs and rights.

To realize a trusted, secure, and privacy preserving social network of things, we plan to address in this proposal the following security, privacy, and trust management related tasks:

T-3.1: Define a new scheme of anonymizing things and representing them as avatars in the social network of things.

T-3.2: Authentication of data collected in fogs in the presence of malicious attackers, despite the attack surface being very broad, ranging from PHY layer to application layer.

T-3.3: Achieving end-to-end secure and privacy-preserving information flow monitoring between users and things, covering all sort of things and access networks using physiological and physical layer properties.

T-4.3: Design of secure, fast and friendly authentication schemes to allow users of the social network of things to access the data of interest through diverse mobile devices such as smartphones and tablets.

4 Research tasks

We now present a detailed discussion of the main research topics and approaches to be undertaken by the proposed project.

4.1 Data collection and processing

===== HEAD To motivate this part of the project, consider the following rule: *R1: Whenever more than 60% of the WiT in an ensemble represented as a single HACADA have attributes from a particular class, generate a separate instance to store their data/description*, along with the following constraint: *C1: No more than 100 objects should be stored in a MIB, and the total geo-coverage of their location should not span more than 1 mile radius*. Essentially, *R1* states that if we have a mix of 60 (descriptions of) home-appliances, when 49 of them happen to be refrigerators, they should have their own HACADA instance. However, if there were already 100 HACADAs stored at a particular MIB then, because of *C1* we may need to re-assign the physical storage of the corresponding representations. The co-existence of *R1* and *C1* has to be *entangled* [58] with the dynamics of various operational entities – from static (e.g., in-home) devices but of different, heterogeneous types, to entities described with various contexts such as user's location, motion-type and type of a mobile device. ===== Updated upstream origin/master

Advances in global positioning technologies (GPS) [103] enabled a fusion of spatial [19, 62, 139] and temporal [47] databases, extending them to the field of spatio-temporal and mobile data management [42, 53, 110, 123]. The main relevance for the proposed project is that the popular query categories are *continuous* (i.e., their answers may have to be re-evaluated based on the changes in the motion of the entities); and/or *persistent* (i.e., their answers may need to be re-evaluated based both on the changes of the motion as well as the history of such changes) [42]. From a complementary perspective, research works in energy-efficient tracking [13, 96, 128] and query processing [102] in Wireless Sensor Networks (WSN) brought about the concepts of distributed/localized processing (i.e., minimizing the communication) along with the selection of nodes in-charge of a particular data-gathering and processing – e.g., *tracking principals* [54], *cluster-heads* [81, 152], etc.

In the settings focal to the proposed project and management of evolving HACADAs, both bodies of existing works – for which the co-PIs have research contributions and experience [13, 42, 54, 157, 188] – can be used as leverage, however, there are quite a few additional unique challenges that we need to address.

Operands, Operations and Placements We assume that, at minimum, each WiT object will have the attributes described in Table 1:

At a first approximation, a particular HACADA can be (logically) considered as a triplet $H_i = ([WiT]_i, R(WiT_i, Wit_j), [C_g])$, where $[WiT]_i$ denotes the list of its WiT constituents/objects; $R(WiT_{ij}, Wit_{ik})$ encodes a (possible) relationship

Table 1: WiT structure

IP_Id	[(Value _i , Description _i)]	Location	Other Description
Unique IP	Types of values (sensed, transmitted, descriptive)	geo-location	Semantics; Operational Mode; etc.

between the j -th and k -th WiT; and $[C_g]$ denotes a (possible) list of *global constraints* such as CI introduced in Sec. ?? or other kinds, limiting the number of possible transitions among states.

One of the primary tasks of the proposed work will be to *define a set of operations* over the universe of HACADAs, along with efficient algorithms for their processing. But few examples:

- $merge(H_i, H_j)$ – this operand will merge the representations H_i and H_j into a single HACADA H_j . The need to execute this operation may be due to optimization of various analytics tasks (e.g., detecting association rules).
- $split(H, H_i, H_j, A)$ – this operand will split an existing instance of a HACADA (H) into two new instances, based on a criterion pertaining to attribute A .

Even the two simple examples above have a lot of inherent complexities. Firstly, one may observe that different overloadings are possible: for instance, $merge(H_i, H_j)$ can also have a signature $merge(H_i, H_j, H_k)$, indicating that a brand new HACADA instance is to be created – and some of the traditional techniques and approaches (cf. [55, 69]) may need to be revisited for incorporating them in the IoT context [4, 28]. Secondly, context-based policies will need to be considered which, in turn, may affect the implementation: for example, should any of the input-operands continue to exist as an independent instance. Thirdly, as much as one can attempt to rely on existing techniques for integrating heterogeneous data [25, 32, 35, 60, 134] – how can different networking and/or security requirements be brought “in concert” with the specification of the declarative and/or procedural semantics of the operators?

An important question in its own right for this part of the proposed research is how can one selectively *place the operands and operations’ execution* for the purpose of efficient execution of particular operations *and* how are the outputs of the operations to be placed, having in mind not only representation-related issues, but also the possibility of analytics and/or security based requirements. There are plethora of works from distributed query processing through processing aggregates in sensor networks, to resources re-allocation [?, ?, 41, 67, 117, 145] to leverage upon – however, one cannot expect that a straightforward adaptation and/or extension of the existing techniques can yield good performance, especially in dynamic scenarios of multiple WiTs from completely heterogeneous sources entering and exiting the working-context. We will attempt to couple the existing works with our recent results on on-demand resource guidance in mobile sensor networks and detection of motion trends [14, 109] in order to ensure that the processing of the operands of interests, as well as evaluation of queries/predicates of interest is done in an optimized and balanced manner [?].

Uncertainty and Data Compression in Evolving Contexts One of the challenges to be addressed in the proposed project is how to properly incorporate the uncertainty in all the aspects of the query/operations processing. Its sources can be plentiful – from errors in the values sensed, to errors due to attempting to represent a continuous phenomenon with a discrete samples and use of interpolation in-between [40, 56, 64]. A specific source of uncertainty is the quest for a compactness in the representation – i.e., data compression, which is sometimes essential (like in the settings of streaming data) [33, 34]. However, unless it is properly captured in the very syntax of the predicates and operators, as well as in the processing algorithms – its impact can be unpredictable [157]. Throughout the proposed work, we will capitalize on the works coupling aggregation and compression in WSNs [70, 95, 122] and our recent results on fusing uncertain data from heterogeneous sources [?] to formalize the representation of the uncertainty when managing the instances of HACADAs and the execution of the novel operands.

An important component of our research will be how to pro-actively steer the collaborative orchestration of the processes of data generation, compression, (re)placement – along with queries processing and actuation. We will leverage on our works on proactive management of resources in WSNs [106] and attempt to apply the concept of evolving triggers [156] to balance the impact of the (bounded) uncertainty on the quality of the service/experience. This part of the research will be coupled with the challenges addressed in the context of detecting the placement of the predicates whenever multiple levels of granularity may need to be maintained about a data of evolving nature and with semantic annotations [155, 163].

Knowledge Representation and Reasoning The processed data from above will be represented as a set of discrete time series, or *fluents* which encode the states and properties of different *avatar* which change over time. *give example*. To facilitate efficient reasoning and knowledge discovery in a dynamic smart and inter-connected system of avatars, we will consider a level of abstraction, termed as *events*. Events constitute meaningful interactions between two or more *avatar* and serve as the basis for identifying relationships between them towards creating social networks of avatars. *give example*. We define the specific terms and concepts we will use for event-centric knowledge representation and reasoning below.

Smart Avatars The notion of smart objects [?] has been popularly used in the graphics and animation community to

embed intelligence and semantics in virtual objects. We extend this formalism to represent both IoT objects as well as IoT users. This unified formalism allows us to seamlessly consider sensors, controllers, actuators, and human users within the same social community. We define a smart avatar $w \in \mathcal{W}$ as $w = \langle \mathbf{F}, s \rangle$ with a set of advertised affordances \mathbf{F} and a state s . An affordance $f(w_o, w_u) \in \mathbf{F}$ is an advertised capability offered by a smart avatar that manipulates the states of the owner of an affordance w_o and a smart avatar user w_u .

State. The state $s = \langle \theta, R \rangle$ of a smart object w comprises a set of attribute mappings θ (fluents), and a collection of pairwise relationships R with other avatars. With this representation, we can make logical inferences between objects using a declarative PROLOG-like knowledge reasoning engine.

Events. Events are used to encode context-specific interactions between two or more smart avatars, and provide an appropriate level of abstraction for knowledge discovery. An event is formally defined as $e = \langle t, \Phi, \Omega \rangle$. A precondition $\Phi : \mathbf{s}_w \leftarrow \{\text{TRUE}, \text{FALSE}\}$ is a logical expression on the compound state \mathbf{s}_w of a particular set of smart avatars $\mathbf{w} : \{w_1, w_2, \dots, w_{|\mathbf{r}|}\}$ that checks the validity of the states of each smart object. Φ is represented as a conjunction of clauses $\phi \in \Phi$ where each clause ϕ is a literal that specifies the desired attributes of smart objects, and relationships between pairs of participants. A precondition is fulfilled by $\mathbf{w} \subseteq \mathcal{W}$ if $\Phi_e(\mathbf{w}) = \text{TRUE}$. The event postcondition $\Omega : \mathbf{s} \rightarrow \mathbf{s}'$ transforms the current state of all event participants \mathbf{s} to \mathbf{s}' by executing the effects of the event. We can extend this definition to model non-deterministic, fuzzy events with a probabilistic notion of success or failure. Events may optionally have a controller which defines the series of affordance activations within the smart avatars to produce its desired outcome. We represent this control logic using an extended version of Behavior Trees that facilitate parameterization. Parameterized Behavior Tree (PBT) [143] are an effective model for representing coordinated control logic between multiple smart avatars.

PI Kapadia has extensive prior experience in developing event-centric knowledge bases for inference and reasoning in virtual worlds [72–74, 144] which will be extended to represent the IoT domain.

This symbolic representation of avatars and their dynamic states in terms of key events will facilitate the development of an event calculus ? allowing us make inferences about the relationships and properties of these avatars using first and second-order logic. This reasoning will be used as the basis for knowledge discovery described in Section XX. Knowledge discovery will entail the identification of relationships between the properties of different avatars, clustering of avatar to create compound entities, and the discovery of salient events.

4.2 Knowledge discovery: social network of avatars (virtual world)

(Ashfaq + Vladimir)

Tasks:

- Build spatio-temporal avatar profiles
- Group avatars into groups according to similar profiles. I.e., construct social network of profiles and do graph clustering.
- Predict avatar behavior from group profiles

We will use Gaussian Process dynamic models (GPDM) as profiles. GPDMs can be used for both modeling isolated avatars and interactions between avatars. We can use a framework similar to [140–142]. Then extend using our trajectory refinement and optimization approaches [180].

However, we need to consider the fact that this system is heterogeneous, i.e., things and humans. So should have a hierarchical model, one level for things, one for humans, then merge on higher level.

Modeling the state of the cyber-human IoT avatar world is a critical component necessary for optimal IoT behavior prediction and, subsequently, decision making. This research task focuses on novel data-driven computational models and algorithms that will enable efficient, scalable and accurate estimation of the IoT world state from a (social) network of individual IoT avatars. In particular, we aim to solve this task by exploiting the parallel between data-driven modeling in IoT avatar worlds and modeling of complex heterogeneous crowd behaviors.

Prior Art. Consider the context of crowds, where the goal is not only to estimate the location of individuals in a group but also to predict group behavior, short (immediate flow) and long-term movement (e.g., crowd moving toward exit A), as well as the interaction of the crowd with the environment (e.g., residents entering or leaving an apartment). This problem is similar to the one we are facing. However, in the IoT context, the state will not only be represented by physical spatio-temporal locations of entities but also by their general "characteristics", such as the power usage or temperature time course, etc. Crowd state estimation may focus on macroscopic modeling (coarse flow), mesoscopic (blobs, groups of individuals), or microscopic level (individuals within a group) [183]. Models such as the Discrete Choice [10] and the social force (SF) [36, 124] model were primarily designed in the context of analytics and simulation. Combining simple person sensing (tracking) with crowd modeling is essential to address the interaction of

Table 2: Multiple objective terms for global crowd-environment state estimation.

Measurement Compatibility $E_{gt}(\mathbf{t}_i^t)$	Kinetic energy $E_{kn}(\mathbf{t}_i^t, \mathbf{t}_i^{t+1})$	Physical constraint $E_{mv}(\mathbf{t}_i^t, \mathbf{t}_i^{t+1})$	Social constraint $C_s(\mathbf{t}_i^t, \mathbf{t}_j^t, \mathbf{t}_i^{t+1}, \mathbf{t}_j^{t+1}, r_i, r_j)$	Environmental constraint $C_e(\mathbf{t}_i^t, \mathbf{t}_i^{t+1}, r_i, \mathbf{z}_{k1}^t, \mathbf{z}_{k2}^t)$
$u_i^t \ \mathbf{t}_i^t - \mathbf{o}_i^t\ ^2$	$c_{kn} \ \mathbf{t}_i^{t+1} - \mathbf{t}_i^t\ ^2$	$\begin{cases} 0 & \text{if } \ \mathbf{t}_i^{t+1} - \mathbf{t}_i^t\ \leq c_{mv}, \\ \infty & \text{otherwise.} \end{cases}$	$\begin{cases} 0 & \text{if } \ \alpha(\mathbf{t}_i^{t+1} - \mathbf{t}_j^{t+1}) + (1 - \alpha)(\mathbf{t}_i^t - \mathbf{t}_j^t)\ \\ & \geq (r_i + r_j), \quad \forall \alpha \in [0, 1] \\ \infty & \text{otherwise} \end{cases}$	$\begin{cases} 0 & \text{if } \ \alpha(\mathbf{t}_i^{t+1} + (1 - \alpha)\mathbf{t}_i^t) - (\beta\mathbf{z}_{k1}^t + (1 - \beta)\mathbf{z}_{k2}^t)\ \\ & \geq r_i, \quad \forall \alpha, \beta \in [0, 1] \\ \infty & \text{otherwise} \end{cases}$

entities. Those approaches, e.g., [22–24], use crowd simulators to constrain the dynamics of measured individuals' locations by taking into account collisions. Recent data-driven approaches [165, 187] aim to produce more realistic estimates of behaviors but are limited to simple environments and motion patterns and relatively short-term predictions. Broad environments such as large residential areas, necessitate distributed models to enable sufficient coverage and efficient computation. However, no work to-date considers the detailed aspect of the joint crowd-environment state estimation in long-term planning scenarios, particularly when the states of each entity become truly multidimensional and the crowd is heterogeneous, as is the case in our social networks of IoTs.

Proposed Research. This research focuses on the key questions of how to estimate, and subsequently predict, the joint state of the social network of IoT system. We assume that the sporadic, potentially interrupted, measurements of IoT profiles, called tracklets, can be obtained from multiple sensors using existing acquisition algorithms. However, the observed tracklets will include noise and significant amount of missing information. State of the environment will be similarly measured using other static or dynamic sensors. The state estimation will then be formulated as: **Task 1: Fusion.** Fuse and link the local measurements from multiple distributed sensors to identify correspondences between measurements of the same target process. **Task 2: IoT Crowd State Estimation.** Using the fused/linked measurements estimate the state of the IoT crowd and the environment, taking into account their social or physical interactions. **Task 3: Data-driven Estimation.** Include historical and/or simulation data to constrain and improve local and global state estimation. To solve these Tasks we propose a global optimization framework that builds upon our preliminary work in [180]. We consider the following setup of the problem.

Consider the crowd-environment state space $\mathcal{X} = \{(\mathbf{T}_i, l_i), \mathbf{Z}\}$, $\forall i \in (1, J)$ defined as the union of the set of J IoT agent "trajectories" \mathbf{T}_i and the environmental configuration \mathbf{Z} . The trajectories have the associated agent ID $l_i \in \{1, \dots, J\}$ and temporally ordered agent states $\mathbf{T}_i = \{\mathbf{t}_i^t = (x_i^t, y_i^t)\}$, $\forall t \in (1, N_i)$, $x_i^t, y_i^t \in \mathbb{R}$, where N_i denotes the number of track points available for the trajectory i . The environment is modeled as a set of 2D linear segments, with state $\mathbf{Z} = \{(z_{k,x1}^t, z_{k,x2}^t, z_{k,y1}^t, z_{k,y2}^t)\}$, $\forall k = (1, N_k)$, where e.g., $z_{k,x1}^t, z_{k,x2}^t$ denote the horizontal minimum and maximum bound of the k -th linear obstacle at time t . For example, a rectangular wall is a set of four linear obstacles. Our goal will be to reconstruct \mathbf{T}_i and \mathbf{Z} from the measurements collected by distributed IoT crowd sensors, tracklets $\mathcal{O} = \{\mathbf{O}_i\}$, $i = 1, \dots, M$, and the environment sensors $\mathcal{E} = \{\mathbf{E}_i\}$, $i = 1, \dots, N$. Associated with each measurement will be a quantifier of uncertainty, the measurement noise precision u_i^t (e.g., supposing a Gaussian noise model).

Task A.1 - We will assume that the association problem, associating each tracklet \mathbf{O}_i with an agent $j \in \{1, \dots, J\}$, need only be solved for the agents while the associations of measurements with the environment states are known and remain constant. Typically, local sensor can produce tracklets of reasonable duration along with the profile features \mathbf{f}_i describing this agent (e.g., device model, personal social profile). The linking process amounts to solving a combinatorial min-flow problem on the graph defined by tracklet compatibility costs such as the tracklet profile feature differences (e.g., $\|\mathbf{f}_i - \mathbf{f}_j\|$), spatio-temporal proximity of tracklets, etc. This is a challenging task, with approaches spanning the spectrum of exact solutions based on e.g., the Hungarian algorithm, to more tractable approximations c.f., [8, 105, 162, 165] or stochastic solutions such as JPDAF and its extensions, c.f., [51, 135]. In this project we will first investigate solutions based on the min-flow problem formulation, which have shown reasonable performance based on our preliminary studies [180]. We will also compare these solutions to stochastic approximations of the JPDAF type, given their ability to handle online and distributed settings [71].

Task A.2 - Given the estimated associations from Task 1, the goal here is to reconstruct \mathbf{T}_i and \mathbf{Z} from the now associated measurements \mathbf{O}_i , $i = 1, \dots, J$, and the environment sensors \mathbf{E}_i , $i = 1, \dots, N$. To illustrate our proposed approach we will focus on the specific case when the environmental configuration is known and static. We will then first define the agent state estimation as a global multiobjective energy minimization problem. The choice of the multiple objectives will be driven by specific and unique problem (crowd/environment) considerations. For example, we will initially consider the following key sub-objectives, summarized in Tab. 2:

Compatibility with Associated Measurements: dependency of the estimate agent trajectory on the measured tracklets; *Kinetic energy:* the agents whose objective is to reach the goal position following the minimum travelled distance; *Physical constraint:* the human body set limits on the maximum walking speed c_{mv} of an agent. Depending on the context, these constraints may also include the minimum

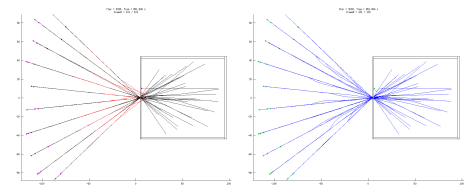


Fig. 2: Preliminary results [180] of global microscopic trajectory refinement when 20% of the tracklets are missing. Black are the trajectories of 40 agents in a bottleneck benchmark simulated using the SF model, red indicate missing data, blue are refined trajectories after optimization.

speed and other biomechanical limitations, c.f., [20]; *Social constraint*: Avoidance of collisions with other agents encoded through pairwise constraint functions that depend on the size of agents r_i ; *Environmental constraint*: Collisions between agents and the environment.

Combining the multiple objectives, our global objective will determine each track point of each i -th agent by solving the optimization problem $\arg \min_{\mathbf{t}_i^t} \sum_i \sum_{t=1}^{N_i} E_{gt} + \sum_{t=1}^{N_i-1} E_{kn} + \sum_{t=1}^{N_i-1} E_{mv} + \sum_{t=1}^{N_i} \sum_{i \neq j} C_{ij} + \sum_{t=1}^{N_i} \sum_{(i,k)} C_{e}$. However, direct minimization of this global objective is infeasible. In particular, collision constraints are non-convex and we desire to solve this task in a distributed manner, enabling local data processing. Additive objectives of this type are amenable to general distributed optimization using the alternating direction method of multipliers (ADMM). A particular version of that approach, investigated in [20, 21, 180], focuses on a message-passing solution to ADMM, specifically suitable for networked sensor settings. Here the global objective can be considered as a consensus optimization problem, where the consensus constraints stem from the need to satisfy pairwise agent-agent and agent-environment interaction "rules." In Fig. 2 we illustrate the effectiveness of this approach from our preliminary studies in [180]. Our method is able to effectively reconstruct large portions of the missing information, while ensuring the reconstructed trajectories are without collisions and discontinuities, and still preserve the original essence of the crowd. While this approach is appealing, its convergence may be slow (typically on order of minutes). We will consider recent ADMM acceleration approaches particularly suitable for this setting, including our own distributed adaptive penalty Fast ADMM [146]. Another challenge will be to extend this point-based estimation approach to a fully probabilistic setting, with quantifiers of posterior uncertainty. We propose to tackle this task using our recent work on ADMM for probabilistic models [15, 181], which can also be used to construct online versions of the global optimization approach. We will compare these approaches to state-of-the-art distributed dynamical system methods, including [37, 71] and the recent generative-based models of [187].

Task A.3 - One of the main limitations of the global optimization approaches in the limited physical and social constraints (e.g., kinetic, repulsion, etc.) that may not be fully representative of the actual IoT entity behavior. While one can overcome these drawbacks when the tracklets are accurate and densely measured, sensor failures, etc. can result in poor state estimates. We propose to use data-driven IoT profile priors to improve the state estimation approach. To construct such priors we propose to use both the data from actual IoTs as well as the data simulated in our simulators. However, such "raw" sources of data typically produce dense measurements that do not capture the "essence" of the behaviors, a desideratum for good generalization. We thus propose to first construct summaries of behavior patterns from the raw data using methods such as dynamic trajectory clustering [26, 68, 114, 175, 186]. These summaries $\tilde{\mathcal{D}} = \{\tilde{\mathbf{T}}_m, \mathbf{Z}\}$ will be specific to environment configurations \mathbf{Z} . Given the summaries, we will define an additional energy term $E_{av}(\mathbf{t}_i^{t-1}, \mathbf{t}_i^t, \mathbf{t}_i^{t+1}, \tilde{\mathbf{t}}_m^{t-1}, \tilde{\mathbf{t}}_m^t, \tilde{\mathbf{t}}_m^{t+1}) = \sum_m s_{m,i}^t \|\theta_i^t - \tilde{\theta}_m^t\|^2$ that models the compatibility of \mathbf{t} with the cluster centers $\tilde{\mathbf{t}}$, where $s_{m,i}^t$ are the compatibility weights. This energy term will be added as another subobjective to the global optimization in Task 2. Compatibility weights can be either set apriori to estimated in the optimization process (e.g., in an EM-type of recursive estimation). We will contrast these approaches to other learning-based crowd sensing models, including [187] and [23].

Note that all three Task possess clear dependencies. Therefore, we will also investigate the utility of a closed-loop estimation system where the results of Task 2 and Task 3 can be used to improve the associations in Task 1.

4.3 Security, privacy and anonymity

Security poses a great challenge for IoT. In addition to security threats common for networked systems in general, IoT systems are further confronted by the fact that they necessarily rely on wireless signals for communication. We propose to address challenges stemming from the *physical layer* attacks on IoT systems. In particular, while Multi-User Multiple Input Multiple Output (MU-MIMO) systems are considered the ultimate next step in the wireless bandwidth race (because they leverage spatial multiplexing to send independent data streams to multiple terminals simultaneously, effectively improving spatial reuse), they could be utilized as an effective and sophisticated *denial-of-service* tool. Indeed, by creating controlled signals in an area, it can selectively disrupt performance of Wi-Fi networks and sensors in an area, while still making it hard to detect or classify such behavior (precisely due to uneven signal properties at different locations). Such an attack is relevant in many scenarios. Consider a location densely populated with wireless APs. Can one of the APs turn itself into a rogue mode to disrupt the other APs, i.e., clear the air, and thus improve performance for itself, while staying largely invisible to the other APs? Another example is Wi-Fi backscatter, i.e., scenarios where a device backscatters Wi-Fi signals to communicate. In presence of the attack, such communication might be severely degraded, while at the same time it becomes hard to know that the attack is taking place. Given that Wi-Fi backscatter was recently proposed as a solution to communication with implanted medical devices, this scenario significantly raises the bar for addressing this emerging problem. Below, we first outline our current results in this

domain, and the outline a research agenda.

Background and Current Work

A fundamental requirement in MU-MIMO systems is that up-to-date Channel State Information (CSI), as perceived by the clients, must be obtained by the AP over short time scales. We show that both explicit and implicit *client-fed* CSI feedback open the door to a fundamental vulnerability of MU-MIMO systems. We demonstrate that a single attacker (a Neo) can mount strategic attack, called Matrix-bending, that can dramatically reduce the throughput of an MU-MIMO system. Moreover, we show that a small number of Neos (or a single Sybil-enabled Neo) can reduce the throughput of an MU-MIMO system to a level *below* that of a corresponding single-user (SU-MIMO) system. Such a degradation translates to a significantly impaired user experience, *e.g.*, increasing the number of perceivable freeze periods while video-streaming by a factor of 10 and their total duration by a factor of 20, spending 34% of the streaming duration frozen, in comparison to merely 1.7% when using MU-MIMO under the same conditions [1, 82].

The key behind Matrix-bending is a strategically disruptive behavior in which a Neo reports its CSI with the goal of deliberately “populating” the clients’ signal space as seen by the AP. By doing so, the Neo confuses the AP, which in turn fails to create “good” user clusters. In particular, by becoming a desired member of most client groups, and by driving the system towards generating extremely sub-optimal groups, the Neo effectively breaks client selection algorithms, leading to substantial throughput degradation.

We demonstrate the following important features of the Matrix-bending attack: (i) Matrix-bending is a *low-profile* attack. A Neo does not apply any jamming, and transmits data using only a single antenna. Moreover, it generates CSI that is statistically indistinguishable from the CSI generated by regular clients, and is capable of achieving its full impact while generating traffic at volumes that are more than an order of magnitude smaller than those generated by a regular client. (ii) A single Neo has the capacity to considerably decrease MU-MIMO’s throughput gains, *i.e.*, by up to one third, even in the presence of 100 legitimate clients. To bring an MU-MIMO system performance to the level of a corresponding single-user system, the number of Neos in the system need not be large, and does not depend on the number of regular clients in the system. Instead, the required number of Neos corresponds to the number of clients in a beamforming group, which is theoretically upper bounded by the number of antennas at an AP, and in practice often bounded by a smaller number, *e.g.*, 4 in 802.11ac [65].

We design and implement a real-time 802.11ac beamforming system on a software-defined radio platform that allows us to evaluate Matrix-bending on over-the-air 5 GHz channels with complete access to CSI [2]. We evaluate MU-MIMO client selection algorithms and policies in the presence of Neos. We show that falsifying the CSI, *i.e.*, the V-matrix, of a single Neo is sufficient to reduce a substantial portion of MU-MIMO’s throughput gain, *i.e.*, approximately by one third. Using 3 Neos, the throughput degrades by approximately $3\times$, often experiencing performance below the corresponding SU-MIMO system. We find that Matrix-bending’s effect is most dominant over APs that attempt to maximize throughput, while it is expectedly less pronounced for the schemes that do not focus on throughput.

We further study the potential defenses against Matrix-bending. First, we evaluate random user selection algorithms. While they are less vulnerable to Matrix-bending attacks than other algorithms, such a feature comes with a significant cost: the throughput of such systems decreases below the levels achieved in SU-MIMO systems, even in the absence of a Matrix-bending attack. Second, we evaluate client CSI encryption. We find that Matrix-bending is quite effective in such scenarios when it has *no knowledge about the CSI from other clients*. The key reason is that as long as the Neos’ responses are near-orthogonal to each other, they will affect other users as well. Third, we find Matrix-bending to be equally effective when it has no knowledge about its own CSI. In particular, we evaluate a method that utilizes unknown sounding preambles which aim to prevent CSI manipulation. However, we show that all realistic preamble transformations still preserve the *relative signal properties* such that the attack is still effective.

Research Agenda

We propose to address challenges stemming from the *physical layer* attacks on IoT systems. We will evaluate the attacks, and defenses, enabled by MU-MIMO systems. In particular, we propose research in the following directions: *Silent DoS*. In this scenario, the attacker can jam all communication between clients and an AP in both directions, while *quiet-bubbling* the APs antennas, therefore preventing it from sensing the disturbance. The key research questions are how to effectively use *implicit* CSI in order to quiet bubble the APs and to understand the impact on the APs performance.

Silent scrambler. In this scenario, we consider Wi-Fi-enabled backscatter communication, where signals generated by a Wi-Fi source are backscattered by a client device. In this case, the attacker node (an 8-antenna 802.11ac AP) transmits a time-varying signal while quiet-bubbling the Wi-Fi source. The backscatter client-device responds to the scrambled signal it receives, thus disrupting the communication. *Power-killer attack*. In this scenario, we again assume the above Wi-Fi-enabled backscatter communication. The goal of this attack would be to null the signal at the backscatter device, such that the energy harvested by the backscatter client is insufficient to enable transmissions. The key research question is to determine critical time-scales and its impact on the effectiveness of the attack.

Countermeasures. We propose to analyze countermeasures to the above attacks. The most promising approach for the silent DoS attack is to equip APs with an additional, passive antenna, that would collect the information from the environment. Then, we would further conduct statistical analysis to find critical time scales that enable the attack detection with appropriate confidence guarantees. For the silent-scrambler and power-killer attacks, we will pursue solutions that do not require additional hardware. In all cases, we will conduct experiments on a real-time 802.11ac beamforming system on a software-defined radio platform on over-the-air 5 GHz channels [2].

(Farid + Alex)

Data security
System level security
Privacy, anonymity

Greedy behavior (?)
Key sharing problem
Privacy, trust and anonymity

=====

4.4 Knowledge discovery: social network of avatars (virtual world)

(Ashfaq + Vladamir)

.

4.5 Security, privacy and anonymity

(Farid + Alex)

Data security
System level security
Privacy, anonymity

Greedy behavior (?)
Key sharing problem
Privacy, trust and anonymity

~~~~~ Stashed changes

#### **4.6 Implementation and validation**

(All)

Letters of Collaboration)  
Campus wide implementation  
Letters of Commitment  
Shall we rely on KAA?  
APIs: flexibility of formats/schemas  
~~~~~ Updated upstream

~~~~~ HEAD Given the interdisciplinary nature of the tasks in the proposed project, it is necessary to have well-defined mechanisms for assessing the validity and benefits of our findings. We will base our demonstration on variations of the two methodologically interdependent scenarios used in the introductory section. We now discuss both the broad categories of evaluation environments, and the details of the particular evaluation methodologies. We will adopt a three-fold analysis of the different aspects of our system: (1) agent-based computer simulations, (2) experiments with real humans controlling avatars in shared virtual worlds, and (3) experiments with real humans in actual real-life environments. Each of these experimental paradigms allow us stress our system along a combination of the following three axes: (1) human stress, (2) replicating the noise inherent in using humans as sensors, and (3) scalability ? i.e., the number of participants (humans or agents). Agent-based simulations harness computation to simulate high-stress events in arbitrarily large crowds of computer agents, but are unable to accurately model humans. Shared online virtual worlds provide a unique opportunity to conduct experiments with real humans in controlled settings. While experiments with human subjects in the real world offer the closest possible parallel to reality, these experiments are

limited in number of subjects and the extent of stress that we can induce on the participants. However, by leveraging combinations of all 3 paradigms, we are uniquely positioned to evaluate our models and technologies in a rigorous manner.

#### 4.6.1 Simulation-based Evaluations: Agents.

The first part of our efforts will focus on developing simulator for the two demonstration settings. Throughout the different phases of the project we will be capitalizing upon ? as well as augmenting the current capabilities of ? the SIDnet SWANS simulator [195] and SteerSuite: The Human Movement and Crowd Simulator [196], being developed at Northwestern and Rutgers respectively. SIDnet is used to evaluate various routing and tracking protocols, shapes detection, and even to evaluate the benefits of high-level programming constructs for WSN-users [113, 160, 187, 191]. SteerSuite is an open-source framework for simulating human movement, deliberation, and is especially geared towards dense crowd situations. We will integrate the functionality of these two systems and further augment them with the capability of having heterogeneous nodes and capturing various mobility models and communications between subsets of such nodes. In addition, we will augment its visualization component as well as introduce a new class of nodes with the proper interfaces to encode the following important features: (1) camera/video/audio based sensing and (2) human and human-operated sensors. For the multimodal mashup scenario, we will simulate a simplified version of the ?Gold Miner? using computer imagery, with virtual objects and sensors. The main use of the simulator in the initial stages of the proposal will be to test the various impacts of uncertainty (sensors, network structure/communication) on the quality of detecting the novel categories of spatio-temporal predicates (cf. Section 3.4) and the impact of different policies for local state-estimation and information extraction (cf. Section 3.1 and 3.3). We will employ a large variety of crowd datasets to train and validate our computational models, and in particular leverage our collaboration with Prof. Dirk Helbing who has significant expertise in crowd data collection, analysis, and modeling [197]. In particular, we will integrate our simulation infrastructure with the NervousNet platform [198] that is being actively developed by Prof. Helbing and his colleagues as part of the larger effort on the Planetary Nervous System project [199], which provides a large-scale distributed research platform for real-time mining of social activities using heterogeneous sensor networks.

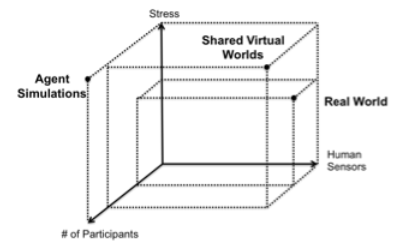


Fig. 3: Evaluation using Agent simulations, Shared Online Virtual Worlds, and Real World Experiments.

#### 4.6.2 Task E-2. Game Playing Evaluation: Avatars.

Agent-based simulations, such as those described above provide an efficient way to test and evaluate the different aspects of our system in an automated fashion. However, in an effort to come closer to actual human experimentation, we will conduct experiments using real human users in shared online virtual environments. The Rutgers team is uniquely positioned to conduct these experiments ? Co-PI Kapadia has developed HeapCraft [200, 2001]: a modular, extensible, and open framework for studying human behavior in shared virtual worlds such as Minecraft. HeapCraft has already been successfully demonstrated to study player behavior and incentivize cooperation in online societies [202, 203]. Additionally, Kapadia and his collaborators have also conducted lab experiments to study crowd evacuations using serious games. We will augment the existing HeapCraft framework to design the two scenarios described in Task E-3 below. HeapCraft?s modular and extensible nature allows us to easily develop emulators for the technologies being developed here, which can be rigorously and robustly tested in shared virtual worlds using real human users. In addition, we will augment the knowledge-base for emulating behavioral aspects of the avatars using large datasets of preferences and semantic relations from real social networks obtained from 4C Insights Inc. (Letter of Commitment is available in the Supplementary Documents). Our experiments will be conducted in two phases: (I) laboratory studies where up to 40 participants will be recruited to participate in a controlled experiment; (II) online server with our tools released to setup a virtual world with hundreds of human-users expected to participate.

#### 4.6.3 Task E-3. Real-World Environment Evaluations.

The system we intend to develop is intrinsically oriented to be open source. It will need obviously the contribution of community members to feed, more or less automatically, the database of avatars in the social network of things. It also relies on a proactive contribution of users to improve the rules generator services. Rules generator, indeed, should not be a static repository of rules. Rather, it is a module which dynamically generates and improves rules at runtime. The way to accomplish these tasks, i.e., the software to do it, is based on well assessed algorithms. Nevertheless, it should be also open to improvements by the users. As common practice in open source communities, a third party serves as the booster of the software and the filter of contributions from users. We expect also that manufacturers and retailers will be highly motivated to foster this software so as to maintain the performance of their apparatuses at the high end of the market, with economic consequences. Users, meanwhile, are naturally inclined to communicate their best practices and analysis. They can do so at two levels: (1) just by issuing rules/instructions in a highly simplified script

language involving both experience and their logical capabilities of formalizing it in a few well-formed expressions, and (2) by more sophisticated interventions on the open source codes, profiting their high level software experience and their knowledge of cognitive disciplines.

The primers of this community will be represented by two kinds of experiments respectively realizing small scale and large scale assets of our system.

**Small scale:** A mock-up of the system will be physically realized in the lab of one of the partners (IIT?) with virtual extension to the other partners labs. Namely the former will consist of:

- a set of 4 to 6 household appliances/IoTs connected to a middleware fog.
- a middleware fog hosted by a gateway that is connected to Internet.
- a social network instance hosted by a local server.

Equally relevant features validating the system will be:

(1) its reliability and recovery procedures w.r.t. any kind of inconvenience, ranging from power breakdown to loss of the Internet connection, or even hostile attack from an insider/outsider. The mock-up will also constitute a ground truth reference for the second class of experiments.

(2) its manageability on the part of the ordinary people, both in terms of realizing a middleware fog and connecting IoTs/appliances to it, and in terms of efficiently ruling the appliances/IoTs.

As for the last aspect, the cognitive capabilities of the networked intelligence will be dynamically improved as the entire project evolves.

This mock-up will constitute a continual ground truth reference for the second type of experiments.

**Large scale:** Due to the great computational effort and massive statistics database required, this social community can survive only if attracts a huge number of members. Therefore, a main task of this project is to promote the functionalities of our infrastructure within the research community. In particular we plan to implement a cluster grouping from 1,000 to 10,000 domestic gateways (middleware fogs). Basing our dimensioning on the lower bound, the cluster should manage a total of 1,000,000 nodes. Many of the middleware functionalities are implemented locally on gateways (fogs). However, most of them needs frequent connections to the social networks of things, for instance to consult catalogues, reference instructions, tuning parameters, etc. We plan to attribute 2 GB of memory mass to each middleware which is comparable with normal memory supply of smartphones and other smart personal appliances for a total of 2 Terabytes. Moreover, given the scarce criticality of the ruled functions, we assume the clock stroke to be of the order of 1 second, and we prepare our software to manage a flow of 5,000 requests per second. These requests should be handled through 50 parallel processes entailing 25 GB RAM. As for the social network we plan to use 10 servers with 50GB RAM and 1TB memory for managing their operations in a modular and scalable way.

===== Given the interdisciplinary nature of the tasks in the proposed project, it is necessary to have well-defined mechanisms for assessing the validity and benefits of our findings. We will base our demonstration on variations of the two methodologically interdependent scenarios used in the introductory section. We now discuss both the broad categories of evaluation environments, and the details of the particular evaluation methodologies. We will adopt a three-fold analysis of the different aspects of our system: (1) agent-based computer simulations, (2) experiments with real humans controlling avatars in shared virtual worlds, and (3) experiments with real humans in actual real-life environments. Each of these experimental paradigms allow us stress our system along a combination of the following three axes: (1) human stress, (2) replicating the noise inherent in using humans as sensors, and (3) scalability ? i.e., the number of participants (humans or agents). Agent-based simulations harness computation to simulate high-stress events in arbitrarily large crowds of computer agents, but are unable to accurately model humans. Shared online virtual worlds provide a unique opportunity to conduct experiments with real humans in controlled settings. While experiments with human subjects in the real world offer the closest possible parallel to reality, these experiments are limited in number of subjects and the extent of stress that we can induce on the participants. However, by leveraging combinations of all 3 paradigms, we are uniquely positioned to evaluate our models and technologies in a rigorous manner.

#### 4.6.4 Simulation-based Evaluations: Agents.

The first part of our efforts will focus on developing simulator for the two demonstration settings. Throughout the different phases of the project we will be capitalizing upon ? as well as augmenting the current capabilities of ? the SIDnet SWANS simulator [195] and SteerSuite: The Human Movement and Crowd Simulator [196], being developed at Northwestern and Rutgers respectively. SIDnet is used to evaluate various routing and tracking protocols, shapes detection, and even to evaluate the benefits of high-level programming constructs for WSN-users [113, 160, 187, 191]. SteerSuite is an open-source framework for simulating human movement, deliberation, and is especially geared towards dense crowd situations. We will integrate the functionality of these two systems and further augment them with the capability of having heterogeneous nodes and capturing various mobility models and communications between subsets of such nodes. In addition, we will augment its visualization component as well as introduce a new class of nodes with the proper interfaces to encode the following important features: (1) camera/video/audio based sensing and (2) human and human-operated sensors. For the multimodal mashup scenario, we will simulate a simplified version of the ?Gold Miner? using computer imagery, with virtual objects and sensors. The main use of the simulator in the initial stages of the proposal will be to test the various impacts of uncertainty (sensors, network structure/communication) on the quality of detecting the novel categories of spatio-temporal predicates (cf. Section 3.4) and the impact of different policies for local state-estimation and information extraction (cf. Section 3.1 and 3.3). We will employ a large variety of crowd datasets to train and validate our computational models, and in particular leverage our collaboration with Prof. Dirk Helbing who has significant expertise in crowd data collection, analysis, and modeling [197]. In particular, we will integrate our simulation infrastructure with the NervousNet platform [198] that is being actively developed by Prof. Helbing and his colleagues as part of the larger effort on the Planetary Nervous System project [199], which provides a large-scale distributed research platform for real-time mining of social activities using heterogeneous sensor networks.

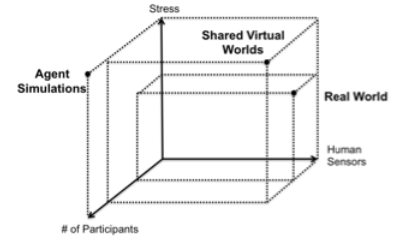


Fig. 4: Evaluation using Agent simulations, Shared Online Virtual Worlds, and Real World Experiments.

4.6.5 **Task E-2. Game Playing Evaluation: Avatars.** Agent-based simulations, such as those described above provide an efficient way to test and evaluate the different aspects of our system in an automated fashion. However, in an effort to come closer to actual human experimentation, we will conduct experiments using real human users in shared online virtual environments. The Rutgers team is uniquely positioned to conduct these experiments ? Co-PI Kapadia has developed HeapCraft [200, 2001]: a modular, extensible, and open framework for studying human behavior in shared virtual worlds such as Minecraft. HeapCraft has already been successfully demonstrated to study player behavior and incentivize cooperation in online societies [202, 203]. Additionally, Kapadia and his collaborators have also conducted lab experiments to study crowd evacuations using serious games. We will augment the existing HeapCraft framework to design the two scenarios described in Task E-3 below. HeapCraft?s modular and extensible nature allows us to easily develop emulators for the technologies being developed here, which can be rigorously and robustly tested in shared virtual worlds using real human users. In addition, we will augment the knowledge-base for emulating behavioral aspects of the avatars using large datasets of preferences and semantic relations from real social networks obtained from 4C Insights Inc. (Letter of Commitment is available in the Supplementary Documents). Our experiments will be conducted in two phases: (I) laboratory studies where up to 40 participants will be recruited to participate in a controlled experiment; (II) online server with our tools released to setup a virtual world with hundreds of human-users expected to participate.

#### 4.6.5 Task E-2. Game Playing Evaluation: Avatars.

4.6.6 **Task E-3. Real-World Environment Evaluations.** The system we intend to develop is intrinsically oriented to be open source. It will need obviously the contribution of community members to feed, more or less automatically, the database of avatars in the social network of things. It also relies on a proactive contribution of users to improve the rules generator services. Rules generator, indeed, should not be a static repository of rules. Rather, it is a module which dynamically generates and improves rules at runtime. The way to accomplish these tasks, i.e., the software to do it, is based on well assessed algorithms. Nevertheless, it should be also open to improvements by the users. As common practice in open source communities, a third party serves as the booster of the software and the filter of contributions from users. We expect also that manufacturers and retailers will be highly motivated to foster this software so as to maintain the performance of their apparatuses at the high end of the market, with economic consequences. Users, meanwhile, are naturally inclined to communicate their best practices and analysis. They can do so at two levels: (1) just by issuing rules/instructions in a highly simplified script language involving both experience and their logical capabilities of formalizing it in a few well-formed expressions, and (2) by more sophisticated interventions on the open source codes, profiting their high level software experience and their knowledge of cognitive disciplines.

#### 4.6.6 Task E-3. Real-World Environment Evaluations.

The primers of this community will be represented by two kinds of experiments respectively realizing small scale and large scale assets of our system.



**Small scale:** A mock-up of the system will be physically realized in the lab of one of the partners (IIT?) with virtual extension to the other partners labs. Namely the former will consist of:

- a set of 4 to 6 household appliances/IoTs connected to a middleware fog.
- a middleware fog hosted by a gateway that is connected to Internet.
- a social network instance hosted by a local server.

Equally relevant features validating the system will be:

(1) its reliability and recovery procedures w.r.t. any kind of inconvenience, ranging from power breakdown to loss of the Internet connection, or even hostile attack from an insider/outsider. The mock-up will also constitute a ground truth reference for the second class of experiments.

(2) its manageability on the part of the ordinary people, both in terms of realizing a middleware fog and connecting IoTs/appliances to it, and in terms of efficiently ruling the appliances/IoTs.

As for the last aspect, the cognitive capabilities of the networked intelligence will be dynamically improved as the entire project evolves.

This mock-up will constitute a continual ground truth reference for the second type of experiments.

**Large scale:** Due to the great computational effort and massive statistics database required, this social community can survive only if attracts a huge number of members. Therefore, a main task of this project is to promote the functionalities of our infrastructure within the research community. In particular we plan to implement a cluster grouping from 1,000 to 10,000 domestic gateways (middleware fogs). Basing our dimensioning on the lower bound, the cluster should manage a total of 1,000,000 nodes. Many of the middleware functionalities are implemented locally on gateways (fogs). However, most of them needs frequent connections to the social networks of things, for instance to consult catalogues, reference instructions, tuning parameters, etc. We plan to attribute 2 GB of memory mass to each middleware which is comparable with normal memory supply of smartphones and other smart personal appliances for a total of 2 Terabytes. Moreover, given the scarce criticality of the ruled functions, we assume the clock stroke to be of the order of 1 second, and we prepare our software to manage a flow of 5,000 requests per second. These requests should be handled through 50 parallel processes entailing 25 GB RAM. As for the social network we plan to use 10 servers with 50GB RAM and 1TB memory for managing their operations in a modular and scalable way.

===== `llllllll` Stashed changes `llllllll` origin/master

## 5 Broader Impact

From Rutgers:

The proposed highly interdisciplinary project combines computer vision, human modelling and simulation, optimization, robotics and autonomy, and control theory, and has the potential to impact several research areas. The proposed sensing, simulation, and optimization framework will have wide applicability in various scientific areas involving decision-making in heterogeneous and dynamic networks comprising human-operated, and autonomous sensors, with concepts that could easily generalize to event understanding in complex social, economical or cyber-biological systems, thus impacting multiple societal applications including urban infrastructure, emergency response, safety, and quality of life.

**Datasets.** We will release the reconstructed time-stamped behaviors that are collected as part of our real-world experiments in the classroom and the dining hall. This real-world dataset will include both the original, unprocessed, noisy, incomplete trajectories, as well as the processed trajectories for researchers to use and compare, when developing their own algorithms. We will also release synthetic datasets from our simulation experiments using the data-driven crowd simulator that will be developed as part of this research. All crowd datasets (both real and synthetic) will be captured for both the original, non-optimized environments, as well as the optimized layouts. We will also release extended designs actuated of environmental elements such as mobile queue separators and mobile furniture.

**Open-Source Software.** The PIs have an established record of releasing software packages related to crowd modeling and simulation [?, ?]. We will build on top of these foundations and extend our existing open-source platforms to include software solutions for: (1) crowd trajectory reconstruction, (2) data-driven crowd simulation, (3) static and dynamic analysis of environments, (4) crowd-aware environment optimization, and (5) environment reconfiguration planning.

**Kaggle Competitions.** We plan to organize 2 public data analytics competitions using the collected data, hosted on kaggle.com. Kaggle is a platform for predictive modelling and analytics competitions, which is often used in academia to incentivize students to tackle challenging problems through a combination of research, system building, and peer-competitions. The goals will include trajectory estimation and reconstruction, data-driven crowd modelling, and computer-assisted designs of environments.

**Curriculum Development and Outreach.** The PIs will generate educational material on the autonomy, hardware design, sensing and simulation aspects. PI Kapadia will design a graduate seminar on *Crowd-Aware Smart Environments* that will introduce students to concepts in crowd simulation, and environment optimization. Advanced undergraduate students will also be permitted to enroll. PI Pavlovic will introduce an assignment in the machine learning course where students will learn generative models of crowd movement. The PI's will collectively organize a workshop on crowd-aware cyber-physical environments during CPS week (tentatively April 2017), which will bring together researchers from various disciplines including computer vision, machine learning, simulation, robotics, and potential adopters of the technology. Our research environment will provide interdisciplinary training ranging from distributed sensing and control, simulation and optimization, to robot motion planning.

**Under-Represented Groups and K-12 Level.** Our project can help attract a diverse group of students and broaden the diversity of students recruited into these and other STEM disciplines. Rutgers office of Enrollment Management conducts the Rutgers Future Scholars Program (RFS), which provides mentoring activities to grade 9-12 minority students from disadvantaged backgrounds and full scholarships to undergraduate programs. We will closely work with this office to participate in outreach, enrichment, and mentoring activities. We will also leverage other programs to recruit and mentor students from under-represented groups: the summer undergraduate Project RiSE (Research in Science and Engineering) for undergraduates from underrepresented populations for 8/1-week intensive summer research internships; and the Aresty Center for Rutgers Undergraduate Research- places Rutgers undergraduates in research laboratories on campus. PI Pavlovic has a multi-year track record of working with over 14 minority and female students through Aresty and RiSE, as well as multiple REUs. We will leverage the extensive diversity programs at Rutgers to recruit and support women and underrepresented minorities.

## 6 Results from current and recent prior NSF support

**Pavlovic:** The prior most closely related NSF award is IIS 1135717 RI: Small: Novel structured regression approaches to high-dimensional motion analysis, 9/1/09 - 8/31/13, \$370,292. *Intellectual Merit:* Predictive learning methods for human motion and human affective signals. Developed methods include novel dynamic ordinal regression approaches for modeling of the discrete intensity signal envelopes, and methods for inclusion of contextual information (subject-specific, event-specific) for improved event state estimation. *Broader Impacts:* Contribution to the development of human resources in science and engineering by supporting and training over ten graduate students on these grants, in addition to 14 undergraduate researchers (five of them women and minorities) supported by REUs. Products resulting from both projects are 17 publications in leading conferences (CVPR, ICCV, NIPS, ICML, ECCV) and journal publications (T-PAMI, T-KDE, IJCV) [31, 75–79, 118, 119, 129–133, 136–138, 176–179]. Two open source software were released at <http://seqam.rutgers.edu>.

**Aleksandar Kuzmanovic** has done extensive work in congestion control [30, 83, 84, 88, 90, 92, 113], DoS resiliency [43, 52, 86, 89, 91, 100, 111, 112, 151], measurements [38, 39, 85, 87, 94, 147, 148, 151, 159, 160, 166], and Web [16–18, 48, 49, 101, 149, 150, 158, 161, 166–169, 172–174]. He is currently the PI of CNS-1319086, \$473,445, 8/30/13 through 8/29/17, *NetS: Small: Endpoint User Profile Control*. The **Intellectual Merit** of this proposal lies in developing auditing mechanisms on the web, and the key **Broader Impact** of this proposal is the deployment of a set of first such tools for the Web; the list of publications resulted from this project is [48, 101, 149, 150, 167–169, 174], and the list of research products from this project is available at <http://networks.cs.northwestern.edu/audit-content/>.

...

...

## **7 Data management plan**

....

...

## 8 Project Collaboration and Management Plan

The collaboration efforts and the management structure are organized around the objectives of the project, the outcome assessment, and research team expertise. The collaborative effort will extend beyond the scientific research to teaming on testbed development, student supervision and training, and educational activity.

### 8.1 Research team members and their expertise

The research project pools diverse expertise from Illinois Institute of Technology (IIT), Northwestern University, and Rutgers University needed for the successful completion of the proposed interdisciplinary research activity. The project team has a prior history of successful collaborations. The team members and their complementary research expertise are as follows:

**Ashfaq Khokhar (AAK)**, IIT, (Routing and MAC Layer in WSN, Data Security, Privacy Preserving Data Mining, Power Efficient Scalable Computing),

**Farid Nait-Abdesselam (FN)**, IIT, (Wireless Networks, Protocol Security, Data Analytics),

**Mubbasir Kapadia (MK)**, Rutgers University, (Machine Learning, Computer Vision),

**Vladimir Pavlovic (VP)**, Rutgers University, (xxx),

**Aleksander Kuzmanovic (AK)**, Northwestern University (xxx),

**Goce Trajcevski (GT)**, Northwestern University, (Moving Objects Databases, Uncertainty in Mobile Data, Active Databases and Triggers).

The PIs involved in this project have a history of research collaboration on jointly funded projects. Dr. Khokhar, Dr. Trajcevski, and Dr. Nait-Abdesselam (then an international partner from France) have collaborated on a Large NeTS-NSF award, have co-advised PhD students, and have co-authored several conference and journal publications.

**ADD OTHERS HERE**

The collaborative effort will extend beyond the scientific research to teaming on testbed development, student supervision and training, course development, workshop organization, and performance evaluation of the technology developed.

### 8.2 PI research collaboration

If the team awarded the funding, a kick-off meeting will be held within a week of the announcement for all investigators, participating senior research personnel, and graduates students. A broad overview of the research activities will be presented and yearly research targets and deliverables will be set. We will hold biweekly meetings with the attendance of the PIs and Ph.D students from all the campuses. Towards this end we plan to use social media tools such as Google Hangouts and Zoom.

The major research tasks, group interactions, research outcomes, deliverables, and possible applications likely to emerge out of the proposed research are depicted in Figure 5. The activities in the four research threads and their linkages are captured in the four rectangular boxes on the left. We will have the following collaborative roles for the PIs in the research activities of the project effort, with the team lead identified in bold:

**Trajcevski**, Kapadia, Pavlovic: Data Processing and Information Modeling

**Pavlovic**, Khokhar, Kuzmanovic, Nait-Abdesselam: Data Analytics

**Kuzmanovic**, Khokhar, Nait Abdessselam: Security and Proivacy

**Nait-Abdessselam**, Kapadia, Trajcevski: Testbed Implementation and Validation

These roles are also identified (with the abbreviations of their first and last names) as white ovals in Figure 5. Also, we envision realization of the objectives defined for the research activities will produce three outcome components (i) Efficient IoT Representations, (ii) Privacy Preserving Data Analytics, and (iii) Private Secure Connectivity among heterogeneous devices and users. These in turn will be assembled into the overall deliverable of comprehensive software system and testbed for realizing Dynamic Data Driven Cyber Human Networks consisting of IoT avatars. Research in all key areas will proceed in parallel and overlapping phases, and the planned progress over a three-year timeline is shown in quarters at the bottom in Figure 5.

The management structure is organized around the main research themes identified in Section 4. Prof. Khokhar will assume overall responsibility for coordination of research activity. He will be in regular contact with the other investigators and personnel. He has extensive experience in managing large domestic and international teams and has organized NSF-sponsored workshops. The progress of then project will be monitored by a Project Steering Committee, consisting of one Co-PI from each institution. Three working groups will oversee the research on the main research

threads described in the proposal, and will be responsible for assessing the research outcomes. Due to the need for collaborative work on the research activities, each investigator will serve on at least two of the three working groups.

### 8.3 PI research collaboration and student supervision

Upon the award of the project, a kick-off meeting will be held within a week of the announcement for all investigators, participating senior research personnel, and graduates students. A broad overview of the research activities will be presented and yearly research targets and deliverables will be set. We will hold monthly cross-institutional and bi-weekly intra-institutional meetings with the attendance of the PIs and Ph.D students.

In the first eight quarters, the proposed research activity will include participation of *one post-doc and three graduate students* supported by the project and several undergraduate students carrying out Honors College activity. During the last eight quarters, the project will support *seven graduate students and a Post-doctoral researcher*. The students will receive research training in diverse emerging topics such as Information abstraction, data analytics, and robust privacy and security of networks and its components. Since the work requires collaboration beyond the immediate field of interest, the students will be co-supervised by faculty from participating institutions and will gain extensive experience in inter-disciplinary research activity.

### 8.4 Dissemination plan

A project website will be established to disseminate the results and the code developed during the project. We will organize at least one workshops in a leading conference on IoTs promote our research among peers working on related research issues. In addition we will work to organize special issues of journals on these topics. The travel cost budgeted in the proposal is related to these dissemination activities

### 8.5 Management of testbed development and technology transfer

The protocols and techniques developed in this project will be evaluated using an experimental testbed consisting of a network of IoT devices. This effort will be managed jointly by Dr. Khokhar and Dr. Trajcevski. Furthermore multiple commercial organizations working the domain of smart sensor systems and applications has indicated strong interest in the proposed project. For additional details please we refer to the letters of collaboration uploaded as single copy documents.

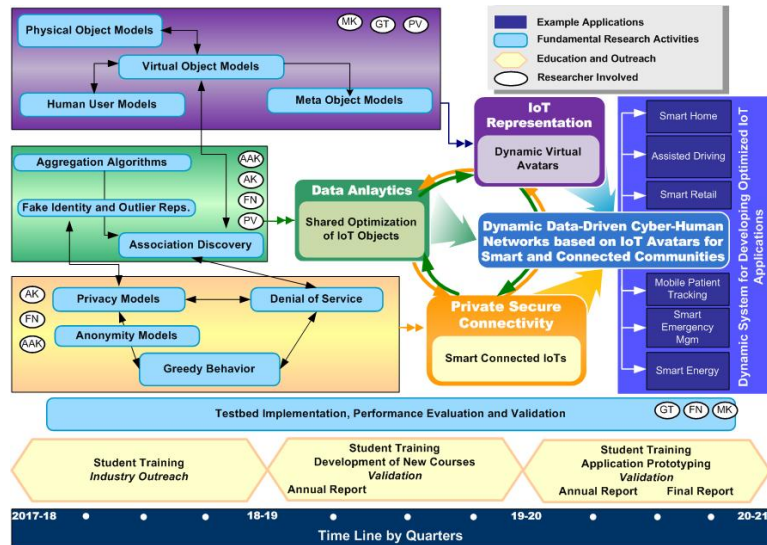


Fig. 5: Relationship of major research tasks, group interactions, research outcomes, deliverables, and possible applications likely to emerge out of the proposed research

The students will receive research training in diverse emerging topics such as Information abstraction, data analytics, and robust privacy and security of networks and its components. Since the work requires collaboration beyond the immediate field of interest, the students will be co-supervised by faculty from participating institutions and will gain extensive experience in inter-disciplinary research activity.

## References

- [1] MU-MIMO and the User Experience. [www.signalsresearch.com/issue/mu-mimo-and-the-user-experience/](http://www.signalsresearch.com/issue/mu-mimo-and-the-user-experience/).
- [2] WARP project. <http://warpproject.org>.
- [3] K. Aberer, M. Hauswirth, and A. Salehi. Infrastructure for data processing in large-scale interconnected sensor networks. In *International Conference on Mobile Data Management*, 2007.
- [4] R. Adaikkalavan and S. Chakravarthy. Formalization and detection of events using interval-based semantics. In *COMAD*, 2005.
- [5] Khaled Ahmed, Neamat El-Tazi, and Ahmad Hany Hossny. Sentiment analysis over social networks: An overview. In *2015 IEEE International Conference on Systems, Man, and Cybernetics, Kowloon Tong, Hong Kong, October 9-12, 2015*, pages 2174–2179, 2015.
- [6] Ala I. Al-Fuqaha, Mohsen Guizani, Mehdi Mohammadi, Mohammed Aledhari, and Moussa Ayyash. Internet of things: A survey on enabling technologies, protocols, and applications. *IEEE Communications Surveys and Tutorials*, 17(4):2347–2376, 2015.
- [7] E. Al-Masri and Q. H. Mahmoud. Investigating web services on the world wide web. In *17th international conference on World Wide Web. ACM*, 2008.
- [8] Alexandre Alahi, Vignesh Ramanathan, and Li Fei-Fei. Socially-aware large-scale crowd forecasting. In *Computer Vision and Pattern Recognition (CVPR), 2014 IEEE Conference on*, pages 2211–2218. IEEE, 2014.
- [9] ZigBee Alliance, 2012.
- [10] G. Antonini, S.V. Martinez, M. Bierlaire, and J.P. Thiran. Behavioral priors for detection and tracking of pedestrians in video sequences. *International Journal of Computer Vision*, 96:159–180, 2006.
- [11] Luigi Atzori, Davide Carboni, and Antonio Iera. Smart things in the social loop: Paradigms, technologies, and potentials. *Ad Hoc Networks*, 18:121–132, 2014.
- [12] Luigi Atzori, Antonio Iera, and Giacomo Morabito. The internet of things: A survey. *Computer Networks*, 54(15):2787–2805, 2010.
- [13] Besim Avci, Goce Trajcevski, and Peter Scheuermann. Tracking uncertain shapes with probabilistic bounds in sensor networks. In *Advances in Databases and Information Systems - 20th East European Conference, ADBIS 2016, Prague, Czech Republic, August 28-31, 2016, Proceedings*, pages 338–351, 2016.
- [14] Besim Avci, Goce Trajcevski, Roberto Tamassia, Peter Scheuermann, and Fan Zhou. Efficient detection of motion trend predicates in sensor networks. *Computer Communication*, 2016. (accepted, to appear).
- [15] Behnam Babagholami Mohamadabadi, Sejong Yoon, and Vladimir Pavlovic. Decentralized Approximate Bayesian Inference for Distributed Senso. In *The 30th AAAI Conference on Artificial Intelligence (AAAI)*, 2016.
- [16] A. Ballew, A. Kuzmanovic, and C. C. Lee. Fusion of Live Audio Recordings for Blind Noise Reduction. In *Proceedings of FUSION '11*, Chicago, IL, July 2011.
- [17] A. Ballew, C. C. Lee, and A. Kuzmanovic. Rayleigh-normalized Gaussian Noise in Blind Signal Fusion. In *Proceedings of FUSION '13*, Istanbul, Turkey, July 2013.
- [18] A. Ballew, S. Srivastava, N. Valtchanov, C.-C. Lee, and A. Kuzmanovic. Characterization of Vision-aided Indoor Localization and Landmark Routing. In *In Proceedings of The Sixth International Conference on Innovative Mobile and Internet Services in Ubiquitous Computing (IMIS-2012)*, Palermo, Italy, July 2012.
- [19] Y. Bedard, T. Merrett, and J. Han. *Fundamentals of spatial data warehousing for geographic knowledge discovery*. Taylor and Francis, 2001. Geographic Data Mining and Knowledge Discovery.
- [20] José Bento, Nate Derbinsky, Javier Alonso-Mora, and Jonathan Yedidia. A message-passing algorithm for multi-agent trajectory planning. In *Advances in Neural Information Processing Systems*, 2013.

- [21] José Bento, Nate Derbinsky, Charles Mathy, and Jonathan S. Yedidia. Proximal Operators for Multi-Agent Path Planning. In *Association for the Advancement of Artificial Intelligence*, 2015.
- [22] A. Bera, N. Galoppo, D. Sharlet, A. Lake, and D. Manocha. Adapt: Real-time adaptive pedestrian tracking for crowded scenes. In *Robotics and Automation (ICRA), 2014 IEEE International Conference on*, pages 1801–1808, May 2014.
- [23] Aniket Bera, Sujeong Kim, and Dinesh Manocha. Efficient Trajectory Extraction and Parameter Learning for Data-Driven Crowd Simulation. In *Graphics Interface*, 2015.
- [24] Aniket Bera and Dinesh Manocha. Realtime Multilevel Crowd Tracking using Reciprocal Velocity Obstacles. In *22nd International Conference on Pattern Recognition*, 2014.
- [25] Sonia Bergamaschi, Silvana Castano, Maurizio Vincini, and Domenico Beneventano. Semantic integration of heterogeneous information sources. *Data Knowl. Eng.*, 36(3):215–249, 2001.
- [26] B. Cancela, A. Iglesias, M. Ortega, and M. Penedo. Unsupervised trajectory modeling using temporal information via minimal paths. In *IEEE CVPR*, 2014.
- [27] Silvana Castano, Alfio Ferrara, Stefano Montanelli, and Gianpaolo Racca. A semantic approach for resource discovery in distributed systems. In *Proceedings of the Twelfth Italian Symposium on Advanced Database Systems, SEBD 2004, S. Margherita di Pula, Cagliari, Italy, June 21-23, 2004*, pages 442–450, 2004.
- [28] S. Chakravarthy, V. Krishnaprasad, E. Anwar, and S.K. Kim. Composite events for active databases: Semantics, contexts and detection. In *20th VLDB Conference*, 1994.
- [29] Sudarshan S. Chawathe, Venkat Krishnamurthy, Sridhar Ramachandran, and Sanjay E. Sarma. Managing RFID data. In *(e)Proceedings of the Thirtieth International Conference on Very Large Data Bases, Toronto, Canada, August 31 - September 3 2004*, pages 1189–1195, 2004.
- [30] D. Choffnes, J. Lange, S. Rossof, and A. Kuzmanovic. On the use of parallel connections in web browsers. Technical report, October 2006. Tech. Report NWU-EECS-06-15, Department of EECS, Northwestern University.
- [31] Andre Cohen and Vladimir Pavlovic. Reinforcement Learning for Robust and Efficient Real-World Tracking. In *Pattern Recognition (ICPR), 2010 20th International Conference on*, pages 2989–2992, 2010.
- [32] William W. Cohen. Integration of heterogeneous databases without common domains using queries based on textual similarity. In *SIGMOD 1998, Proceedings ACM SIGMOD International Conference on Management of Data, June 2-4, 1998, Seattle, Washington, USA.*, pages 201–212, 1998.
- [33] Graham Cormode, Minos N. Garofalakis, Peter J. Haas, and Chris Jermaine. Synopses for massive data: Samples, histograms, wavelets, sketches. *Foundations and Trends in Databases*, 4(1-3):1–294, 2012.
- [34] Graham Cormode, S. Muthukrishnan, Ke Yi, and Qin Zhang. Continuous sampling from distributed streams. *J. ACM*, 59(2):10, 2012.
- [35] Adrien Coulet, Yael Garten, Michel Dumontier, Russ B. Altman, Mark A. Musen, and Nigam H. Shah. Integration and publication of heterogeneous text-mined relationships on the semantic web. *J. Biomedical Semantics*, 2(S-2):S10, 2011.
- [36] A. Johansson D. Helbing, L. Buzna and T. Werner. Self-organized pedestrian crowd dynamics: Experiments, simulations, and design solutions. *Transportation Science*, 39(1):1–24, 2005.
- [37] S Das and J M F Moura. Distributed state estimation in multi-agent networks. In *2013 IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 4246–4250, May 2013.
- [38] L. Deng and A. Kuzmanovic. Pong: Diagnosing spatio-temporal Internet congestion properties. In *Proceedings of ACM SIGMETRICS '07 (poster paper)*, San Diego, California, June 2007.
- [39] L. Deng and A. Kuzmanovic. Monitoring persistently congested Internet links. In *Proceedings of ICNP '08*, Orlando, FL, October 2008.



- [40] Aarthi Aishwarya Devendran and Gnanappazham Lakshmanan. A review on accuracy and uncertainty of spatial data and analyses with special reference to urban and hydrological modelling. *ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 2(8), 2014.
- [41] Hasanat M. Dewan, Salvatore J. Stolfo, Mauricio A. Hernández, and Jae-Jun Hwang. Predictive dynamic load balancing of parallel and distributed rule and query processing. In *SIGMOD Conference*, 1994.
- [42] Hui Ding, Goce Trajcevski, and Peter Scheuermann. Towards efficient maintenance of continuous queries for trajectories. *GeoInformatica*, 12(3), 2008.
- [43] D. Dumitriu, E. Knightly, A. Kuzmanovic, I. Stoica, and W. Zwaenepoel. Denial of service resilience in peer-to-peer file sharing systems. In *Proceedings of ACM SIGMETRICS '05*, Banff, Canada, 2005.
- [44] M. Eid, R. Liscano, and A. El Saddik. A universal ontology for sensor networks data. In *IEEE International Conference on Computational Intelligence for Measurement Systems and Applications*, 2007.
- [45] M. Eisenhauer, P. Rosengren, and P. Antolin. A development platform for integrating wireless devices and sensors into ambient intelligence systems. In *Sixth Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks Workshops*, 2009.
- [46] M. Eisenhauer, P. Rosengren, and P. Antolin. Hydra: A development platform for integrating wireless devices and sensors into ambient intelligence systems. In *The Internet of Things*, 2010.
- [47] O. Etzion, S. Jajodia, and S. Sripada (eds.). *Temporal Databases: Research and Practice*. Springer, LNCS, 1998.
- [48] M. Flores and A. Kuzmanovic. Searching for Spam: Detecting Fraudulent Accounts via Web Search. In *Proceedings of Passive and Active Measurement Conference*, Los Angeles, California, March 2013.
- [49] M. Flores and A. Kuzmanovic. Synthoid: Endpoint User Profile Control. In *Proceedings of IEEE/WIC/ACM International Conference on Web Intelligence*, Warsaw, Poland, August 2014.
- [50] Alessandro Floris, Alessio Meloni, Virginia Pilloni, and Luigi Atzori. A qoe-aware approach for smart home energy management. In *2015 IEEE Global Communications Conference, GLOBECOM 2015, San Diego, CA, USA, December 6-10, 2015*, pages 1–6, 2015.
- [51] Thomas E Fortmann, Yaakov Bar-Shalom, and Mathias Scheffe. Multi-target tracking using joint probabilistic data association. In *Decision and Control including the Symposium on Adaptive Processes, 1980 19th IEEE Conference on*, pages 807–812. IEEE, 1980.
- [52] Y. Gao, L. Deng, A. Kuzmanovic, and Y. Chen. Internet cache pollution attacks and countermeasures. In *Proceedings of IEEE ICNP '06*, Santa Barbara, CA, November 2006.
- [53] Bugra Gedik and Ling Liu. Mobieyes: A distributed location monitoring service using moving location queries. *IEEE Transactions on Mobile Computing*, 5(10), 2006.
- [54] Oliviu Ghica, Goce Trajcevski, Fan Zhou, Roberto Tamassia, and Peter Scheuermann. Selecting tracking principals with epoch-awareness. In *Proceedings of the 18th ACM SIGSPATIAL GIS Conference*, pages 222–231, 2010.
- [55] Joseph A. Goguen and José Meseguer. Order-sorted algebra I: equational deduction for multiple inheritance, overloading, exceptions and partial operations. *Theor. Comput. Sci.*, 105(2):217–273, 1992.
- [56] Michael F. Goodchild, Jingxiong Zhang, and Phaedon C. Kyriakidis. Discriminant models of uncertainty in nominal fields. *T. GIS*, 13(1):7–23, 2009.
- [57] D. Guinard, V. Trifa, S. Karnouskos, P. Spiess, and D. Savio. Interacting with the soa-based internet of things: Discovery, query, selection, and ondemand provisioning of web services. *IEEE transactions on Services Computing*, 3(3), 2010.
- [58] Nitin Gupta, Lucja Kot, Sudip Roy, Gabriel Bender, Johannes Gehrke, and Christoph Koch. Entangled queries: enabling declarative data-driven coordination. In *SIGMOD Conference*, 2011.

- [59] Shalin Hai-Jew. *Social Media Data Extraction and Content Analysis*. IGI Global, 2016.
- [60] Alon Y. Halevy, Anand Rajaraman, and Joann J. Ordille. Data integration: The teenage years. In *Proceedings of the 32nd International Conference on Very Large Data Bases, Seoul, Korea, September 12-15, 2006*, pages 9–16, 2006.
- [61] Joachim Hammer, Hector Garcia-Molina, Kelly Ireland, Yannis Papakonstantinou, Jeffrey D. Ullman, and Jennifer Widom. Information translation, mediation, and mosaic-based browsing in the TSIMMIS system. In *Proceedings of the 1995 ACM SIGMOD International Conference on Management of Data, San Jose, California, May 22-25, 1995.*, page 483, 1995.
- [62] Gisli R. Hjaltason and Hanan Samet. Distance browsing in spatial databases. *ACM Trans. Database Syst.*, 24(2):265–318, 1999.
- [63] J. Honkola, H. Laine, R. Brown, and O. Tyrkko. Smart-m3 information sharing platform. In *IEEE Symposium on Computers and Communications (ISCC)*, 2010.
- [64] Gary J. Hunter and Michael F. Goodchild. Communicating uncertainty in spatial databases. *Trans. GIS*, 1(1):13–24, 1996.
- [65] IEEE Std 802.11ac-2013. Amendment 4: Enhancements for very high throughput for operation in bands below 6 ghz, 2013.
- [66] Antonio Iera, Giacomo Morabito, and Luigi Atzori. The social internet of things. In *2015 IEEE International Conference on Cloud Engineering, IC2E 2015, Tempe, AZ, USA, March 9-13, 2015*, page 1, 2015.
- [67] Chun Jin and Jaime G. Carbonell. Incremental aggregation on multiple continuous queries. In *ISMIS*, 2006.
- [68] N. Johnson and D. Hogg. Learning the distribution of object trajectories for event recognition. *Image and Vision computing*, 14(8):609–615, 1996.
- [69] Jean-Pierre Jouannaud, Claude Kirchner, Hélène Kirchner, and Aristide Mégreli. Programming with equalities, subsorts, overloading and parametrization in OBJ. *J. Log. Program.*, 12(3&4):257–279, 1992.
- [70] Ismail Kadayif and Mahmut T. Kandemir. Tuning in-sensor data filtering to reduce energy consumption in wireless sensor networks. In *DATE*, pages 852–857, 2004.
- [71] Ahmed Kamal, Jay Farrell, and Amit Roy-Chowdhury. Information consensus for distributed multi-target tracking. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 2403–2410, 2013.
- [72] Mubbasir Kapadia, Jessica Falk, Fabio Zünd, Marcel Marti, Robert W. Sumner, and Markus Gross. Computer-assisted authoring of interactive narratives. In *Proceedings of the 19th Symposium on Interactive 3D Graphics and Games, i3D '15*, pages 85–92, New York, NY, USA, 2015. ACM.
- [73] Mubbasir Kapadia, Seth Frey, Alexander Shoulson, Robert W. Sumner, and Markus Gross. Canvas: Computer-assisted narrative animation synthesis. In *Proceedings of the ACM SIGGRAPH/Eurographics Symposium on Computer Animation, SCA '16*, pages 199–209, Aire-la-Ville, Switzerland, Switzerland, 2016. Eurographics Association.
- [74] Mubbasir Kapadia, Fabio Zund, Jessica Falk, Marcel Marti, Robert W. Sumner, and Markus Gross. Evaluating the authoring complexity of interactive narratives with interactive behaviour trees. In *Foundations of Digital Games, FDG'15*, 2015.
- [75] Jongpil Kim and Vladimir Pavlovic. Attribute rating for classification of visual objects. In *Proceedings of the 21st International Conference on Pattern Recognition, ICPR 2012, Tsukuba, Japan, November 11-15, 2012*, pages 1611–1614, 2012.
- [76] Jongpil Kim, Sejong Yoon, and Vladimir Pavlovic. Relative spatial features for image memorability. In *ACM Multimedia Conference, MM '13, Barcelona, Spain, October 21-25, 2013*, pages 761–764, 2013.

- [77] Minyoung Kim and Vladimir Pavlovic. Structured output ordinal regression for dynamic facial emotion intensity prediction. In Kostas Daniilidis, Petros Maragos, and Nikos Paragios, editors, *Computer Vision - ECCV 2010*, volume 6313 of *Lecture Notes in Computer Science*, pages 649–662, Berlin, Heidelberg, 2010. Springer-Verlag.
- [78] Minyoung Kim and Vladimir Pavlovic. Central subspace dimensionality reduction using covariance operators. *IEEE Trans. Pattern Anal. Mach. Intell.*, 33(4):657–670, 2011.
- [79] Minyoung Kim and Vladimir Pavlovic. Sequence classification via large margin hidden Markov models. *Data Min. Knowl. Discov.*, 23(2):322–344, 2011.
- [80] Toralf Kirsten and Erhard Rahm. Biofuice: Mapping-based data integration in bioinformatics. In *Data Integration in the Life Sciences, Third International Workshop, DILS 2006, Hinxton, UK, July 20-22, 2006, Proceedings*, pages 124–135, 2006.
- [81] J. Kulik, W.R. Heinzelman, and H. Balakrishnan. Adaptive protocols for information dissemination in wireless sensor networks. In *Proc. 5th ACM/IEEE MobiCom Conference (MobiCom '99)*, 1999.
- [82] S. Kumar, D. Cifuentes, S. Gollakota, and D. Katabi. Bringing Cross-Layer MIMO to Today's Wireless LANs. In *Proceedings of ACM SIGCOMM '13*, Hong Kong, China, August 2013.
- [83] A. Kuzmanovic. The power of explicit congestion notification. In *Proceedings of ACM SIGCOMM '05*, Philadelphia, PA, August 2005.
- [84] A. Kuzmanovic, S. Floyd, and K. Ramakrishnan. Adding explicit congestion notification (ECN) to TCP SYN/ACK packets, October 2005. IETF draft, work in progress.
- [85] A. Kuzmanovic and E. Knightly. Measuring service in multi-class networks. In *Proceedings of IEEE INFOCOM '01*, Anchorage, Alaska, April 2001.
- [86] A. Kuzmanovic and E. Knightly. Low-rate TCP-targeted denial of service attacks (the shrew vs. the mice and elephants). In *Proceedings of ACM SIGCOMM '03*, Karlsruhe, Germany, August 2003.
- [87] A. Kuzmanovic and E. Knightly. Measurement-based characterization and classification of QoS-enhanced systems. *IEEE Transactions on Parallel and Distributed Systems*, 14(7):671–685, July 2003.
- [88] A. Kuzmanovic and E. Knightly. TCP-LP: A distributed algorithm for low priority data transfer. In *Proceedings of IEEE INFOCOM '03*, San Francisco, CA, April 2003.
- [89] A. Kuzmanovic and E. Knightly. Low-rate TCP-targeted denial of service attacks and counter strategies. *IEEE/ACM Transactions on Networking*, 14(5), October 2006.
- [90] A. Kuzmanovic and E. Knightly. TCP-LP: Low-priority service via end-point congestion control. *IEEE/ACM Transactions on Networking*, 14(5), October 2006.
- [91] A. Kuzmanovic and E. Knightly. Receiver-centric congestion control with a misbehaving receiver: Vulnerabilities and end-point solutions. *Journal of Computer Networks*, to appear, 2007.
- [92] A. Kuzmanovic, E. Knightly, and R. Cottrell. HSTCP-LP: A protocol for low-priority data transfer in high-speed high-RTT networks. In *Proceedings of PFLDnet '04*, Argonne, IL, February 2004.
- [93] Xiaorong Li, Rodrigo N. Calheiros, Sifei Lu, Long Wang, Henry Novianus Palit, Qin Zheng, and Rajkumar Buyya. Design and development of an adaptive workflow-enabled spatial-temporal analytics framework. In *18th IEEE International Conference on Parallel and Distributed Systems, ICPADS 2012, Singapore, December 17-19, 2012*, pages 862–867, 2012.
- [94] Z. Li, A. Goyal, Y. Chen, and A. Kuzmanovic. Measurement and diagnosis of address-misconfigured p2p traffic. In *Proceedings of INFOCOM '10*, San Diego, CA, March 2010.
- [95] Song Lin, Dimitrios Gunopulos, Vana Kalogeraki, and Stefano Lonardi. A data compression technique for sensor networks with dynamic bandwidth allocation. In *TIME*, pages 186–188, 2005.
- [96] Hechen Liu and Markus Schneider. Querying moving objects with uncertainty in spatio-temporal databases. In *DASFAA (1)*, pages 357–371, 2011.

- [97] J. Liu and F. Zhao. Towards semantic services for sensor-rich information systems. In *2nd International Conference on Broadband Networks*, 2005.
- [98] Qi Luo, Kartik B. Ariyur, and Anoop K. Mathur. Will the smart grid be stable: Approaches for supply-demand imbalances. *IEEE Trans. Smart Grid*, 5(3):1361–1368, 2014.
- [99] A. Wolisz M. Sgroi and J. M. Rabaey A. Sangiovanni-Vincetelli. A service-based universal application interface for ad hoc wireless. In W. Weber, J. Rabaey, and E. H. Aarts, editors, *Ambient Intelligence*. Springer, 2005.
- [100] G. Macia, Y. Wang, R. Rodriguez, and A. Kuzmanovic. ISP-enabled behavioral ad targeting without deep packet inspection. In *Proceedings of INFOCOM '10*, San Diego, CA, March 2010.
- [101] G. Macia, Y. Wang, R. Rodriguez, and A. Kuzmanovic. ISP-Enabled Behavioral Ad Targeting without Deep Packet Inspection. In *Proceedings of INFOCOM '10*, San Diego, CA, May 2010.
- [102] S. Madden, M.J. Franklin, J.M. Hellerstein, and W. Hong. Tinydb: An acquisitional query processing system for sensor networks. *ACM TODS*, 30(1), 2005.
- [103] Anthony J. Mannuci and Chi-On Ao. Toward new scientific observations from gps occultations: Advances in retrieval methods. In *Remote Sensing Applications of the GPS*, 2004.
- [104] D. Massaguer, M. Diallo, S. Mehrotra, and N. Venkatasubramanian. Middleware for pervasive spaces: Balancing privacy and utility. In *10th International Middleware Conference Middleware: ACM/IFIP/USENIX*, 2009.
- [105] Riccardo Mazzon and Andrea Cavallaro. Multi-camera tracking using a Multi-Goal Social Force Model. *Neurocomputing*, 100:41–50, 2013.
- [106] Jedidiah McClurg, Goce Trajcevski, and Jesse Yanutola. Collaborative reactive behavior in heterogeneous wireless sensor networks. In *The 10th ACM Conference on Embedded Network Sensor Systems, SenSys '12, Toronto, ON, Canada, November 6-9, 2012*, pages 389–390, 2012.
- [107] Tommaso Melodia, Dario Pompili, Vehbi C. Gungor, and Ian F. Akyildiz. Communication and coordination in wireless sensor and actor networks. *IEEE Trans. Mob. Comput.*, 6(10):1116–1129, 2007.
- [108] E. Meshkova, J. Riihijarvi, M. Petrova, and P. Mahonen. A survey on resource discovery mechanisms, peer-to-peer and service discovery frameworks. *Computer networks, Elsevier*, 52(11), 2008.
- [109] Mohamed M. Ali Mohamed, Ashfaq A. Khokhar, and Goce Trajcevski. Energy efficient data indexing and query processing for static and mobile wireless sensor networks. *IJNGC*, 6(2), 2015.
- [110] Mohamed F. Mokbel and Walid G. Aref. SOLE: scalable on-line execution of continuous queries on spatio-temporal data streams. *VLDB Journal*, 17(5):971–995, 2008.
- [111] A. Mondal and A. Kuzmanovic. A poisoning-resilient TCP stack. In *Proceedings of ICNP '07*, Beijing, China, October 2007.
- [112] A. Mondal and A. Kuzmanovic. When TCP frinedliness becomes harmful. In *Proceedings of INFOCOM '07*, Anchorage, AL, May 2007.
- [113] A. Mondal and A. Kuzmanovic. Removing exponential backoff from TCP. *ACM Computer Comm. Review*, 38(5):17–28, 2008.
- [114] B. T. Morris and M. M. Trivedi. Trajectory learning for activity understanding: Unsupervised, multi-level, and long-term adaptive approach. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 33(11):22872301, 2011.
- [115] Meredith Ringel Morris, Jaime Teevan, and Katrina Panovich. A comparison of information seeking using search engines and social networks. In *Proceedings of the Fourth International Conference on Weblogs and Social Media, ICWSM 2010, Washington, DC, USA, May 23-26, 2010*, 2010.
- [116] Sara Mostafavi and Quaid Morris. Fast integration of heterogeneous data sources for predicting gene function with limited annotation. *Bioinformatics*, 26(14):1759–1765, 2010.

- [117] Suman Nath, Phillip B. Gibbons, Srinivasan Seshan, and Zachary R. Anderson. Synopsis diffusion for robust aggregation in sensor networks. In *SenSys '04: Proceedings of the 2nd international conference on Embedded networked sensor systems*, pages 250–262, 2004.
- [118] Mihalis A. Nicolaou, Vladimir Pavlovic, and Maja Pantic. Dynamic probabilistic CCA for analysis of affective behaviour. In *Computer Vision - ECCV 2012 - 12th European Conference on Computer Vision, Florence, Italy, October 7-13, 2012, Proceedings, Part VII*, pages 98–111, 2012.
- [119] Mihalis A. Nicolaou, Vladimir Pavlovic, and Maja Pantic. Dynamic probabilistic CCA for analysis of affective behavior and fusion of continuous annotations. *IEEE Trans. Pattern Anal. Mach. Intell.*, 36(7):1299–1311, 2014.
- [120] Michele Nitti, Virginia Pilloni, Giuseppe Colistra, and Luigi Atzori. The virtual object as a major element of the internet of things: A survey. *IEEE Communications Surveys and Tutorials*, 18(2):1228–1240, 2016.
- [121] Suraj Pandey and Rajkumar Buyya. Scheduling workflow applications based on multi-source parallel data retrieval in distributed computing networks. *Comput. J.*, 55(11):1288–1308, 2012.
- [122] Sundeep Pattem, Bhaskar Krishnamachari, and Ramesh Govindan. The impact of spatial correlation on routing with compression in wireless sensor networks. *TOSN*, 4(4), 2008.
- [123] Mindaugas Pelanis, Simonas Saltenis, and Christian S. Jensen. Indexing the past, present, and anticipated future positions of moving objects. *ACM Trans. Database Syst.*, 31(1), 2006.
- [124] Stefano Pellegrini, Andreas Ess, Konrad Schindler, and Luc Van Gool. You’ll never walk alone: Modeling social behavior for multi-target tracking. In *Computer Vision, 2009 IEEE 12th International Conference on*, pages 261–268. IEEE, 2009.
- [125] Deepak Poola, Kotagiri Ramamohanarao, and Rajkumar Buyya. Enhancing reliability of workflow execution using task replication and spot instances. *TAAS*, 10(4):30, 2016.
- [126] M. Presser, P. Barnaghi, M. Eurich, and C. Villalonga. The sensei project: Integrating the physical world with the digital world of the network of the future. *IEEE Communications Magazine*, 47(4), 2009.
- [127] CoBIs project. Cobis final project report. Technical Report deliverable 104 v 2.0, [Online]. Available: [http://www.cobis-online.de/files/Deliverable\\_D104V2.pdf](http://www.cobis-online.de/files/Deliverable_D104V2.pdf), 2007.
- [128] Q. Ren, J. Li, and S. Cheng. Target tracking under uncertainty in wireless sensor networks. In *IEEE-MASS*, 2011.
- [129] O. Rudovic, V. Pavlovic, and M. Pantic. Context-sensitive conditional ordinal random fields for facial action intensity estimation. In *Computer Vision Workshops (ICCVW), 2013 IEEE International Conference on*, pages 492–499, Dec 2013.
- [130] Ognjen Rudovic, Vladimir Pavlovic, and Maja Pantic. Kernel conditional ordinal random fields for temporal segmentation of facial action units. In *Computer Vision - ECCV 2012. Workshops and Demonstrations - Florence, Italy, October 7-13, 2012, Proceedings, Part II*, pages 260–269, 2012.
- [131] Ognjen Rudovic, Vladimir Pavlovic, and Maja Pantic. Multi-output laplacian dynamic ordinal regression for facial expression recognition and intensity estimation. In *2012 IEEE Conference on Computer Vision and Pattern Recognition, Providence, RI, USA, June 16-21, 2012*, pages 2634–2641, 2012.
- [132] Ognjen Rudovic, Vladimir Pavlovic, and Maja Pantic. Automatic pain intensity estimation with heteroscedastic conditional ordinal random fields. In *Advances in Visual Computing - 9th International Symposium, ISVC 2013, Rethymnon, Crete, Greece, July 29-31, 2013. Proceedings, Part II*, pages 234–243, 2013.
- [133] Ognjen Rudovic, Vladimir Pavlovic, and Maja Pantic. Context-sensitive dynamic ordinal regression for intensity estimation of facial action units. *IEEE Trans. Pattern Anal. Mach. Intell.*, 37(5):944–958, 2015.
- [134] Hamidreza Salarian, Kwan-Wu Chin, and Fazel Naghdy. Coordination in wireless sensor-actuator networks: A survey. *J. Parallel Distrib. Comput.*, 72(7):856–867, 2012.

- [135] Dirk Schulz, Wolfram Burgard, Dieter Fox, and Armin B Cremers. People tracking with mobile robots using sample-based joint probabilistic data association filters. *The International Journal of Robotics Research*, 22(2):99–116, 2003.
- [136] Shahriar Shariat and Vladimir Pavlovic. Isotonic CCA for sequence alignment and activity recognition. In *IEEE International Conference on Computer Vision, ICCV 2011, Barcelona, Spain, November 6-13, 2011*, pages 2572–2578, 2011.
- [137] Shahriar Shariat and Vladimir Pavlovic. Improved sequence classification using adaptive segmental sequence alignment. In *Proceedings of the 4th Asian Conference on Machine Learning, ACML 2012, Singapore, Singapore, November 4-6, 2012*, pages 379–394, 2012.
- [138] Shahriar Shariat and Vladimir Pavlovic. A new adaptive segmental matching measure for human activity recognition. In *IEEE International Conference on Computer Vision, ICCV 2013, Sydney, Australia, December 1-8, 2013*, pages 3583–3590, 2013.
- [139] S. Shekhar and S. Chawla. *Spatial Databases: A Tour*. Prentice Hall, 2003.
- [140] Y Shen. *Social Network Mining and Its Applications*. PhD thesis, Kent State University, 2015.
- [141] Y Shen, R Jin, D Dou, N Chowdhury, J Sun, B Piniewski, and D Kil. Socialized gaussian process model for human behavior prediction in a health social network. In *2012 IEEE 12th International Conference on Data Mining*, pages 1110–1115, December 2012.
- [142] Yelong Shen, Nhathai Phan, Xiao Xiao, Ruoming Jin, Junfeng Sun, Brigitte Piniewski, David Kil, and Dejing Dou. Dynamic socialized gaussian process models for human behavior prediction in a health social network. *Knowl. Inf. Syst.*, 49(2):455–479, 31 December 2015.
- [143] Alexander Shoulson, Francisco M. Garcia, Matthew Jones, Robert Mead, and Norman I. Badler. Parameterizing behavior trees. In *Proceedings of the 4th International Conference on Motion in Games, MIG'11*, pages 144–155, Berlin, Heidelberg, 2011. Springer-Verlag.
- [144] Alexander Shoulson, Max L. Gilbert, Mubbasir Kapadia, and Norman I. Badler. An event-centric planning approach for dynamic real-time narrative. In *Proceedings of Motion on Games, MIG '13*, pages 99:121–99:130, New York, NY, USA, 2013. ACM.
- [145] Nisheeth Shrivastava, Chiranjeev Buragohain, Subhash Suri, and Divyakant Agrawal. Medians and Beyond: New Aggregation Techniques for Sensor Networks. In *SenSys'04*, 2004.
- [146] Changkyu Song, Sejong Yoon, and Vladimir Pavlovic. Fast ADMM Algorithm for Distributed Optimization with Adaptive Penalty. In *The 30th AAAI Conference on Artificial Intelligence (AAAI)*, 2016.
- [147] A.-J. Su, D. Choffnes, F. Bustamante, and A. Kuzmanovic. Relative network positioning via CDN redirections. In *Proceedings of ICDCS '08*, Beijing, China, June 2008.
- [148] A.-J. Su, D. Choffnes, A. Kuzmanovic, and F. Bustamante. Drafting behind Akamai (Travelocity-based detouring). In *Proceedings of ACM SIGCOMM '06*, Pisa, Italy, September 2006.
- [149] A.-J. Su, Y. C. Hu, A. Kuzmanovic, and C.-K. Koh. How to Improve Your Google Ranking: Myths and Reality. In *Proceedings of IEEE/WIC/ACM International Conference on Web Intelligence*, Toronto, CA, August 2010.
- [150] A.-J. Su, Y. C. Hu, A. Kuzmanovic, and C.-K. Koh. How to improve your search engine ranking: Myths and reality. *ACM Transactions on the Web*, March 2014.
- [151] A.-J. Su and A. Kuzmanovic. Thinning Akamai. In *USENIX/ACM IMC*, Vouliagmeni, Greece, October 2008.
- [152] B. Tavli and W. Heinzelman. *Mobile Ad Hoc Networks: Energy-Efficient Real-Time Data Communications*. Springer, 2006.
- [153] Adel Nadjaran Toosi, Rodrigo N. Calheiros, and Rajkumar Buyya. Interconnected cloud computing environments: Challenges, taxonomy, and survey. *ACM Comput. Surv.*, 47(1):7:1–7:47, 2014.
- [154] Riccardo Torlone. Two approaches to the integration of heterogeneous data warehouses. *Distributed and Parallel Databases*, 23(1):69–97, 2008.

- [155] Goce Trajcevski, Ivana Donevska, Alejandro A. Vaisman, Besim Avci, Tian Zhang, and Di Tian. Semantics-aware warehousing of symbolic trajectories. In *Proceedings of the 6th ACM SIGSPATIAL International Workshop on GeoStreaming, IWGS 2015, Bellevue, WA, USA, November 3-6, 2015*, pages 1–8, 2015.
- [156] Goce Trajcevski, Peter Scheuermann, Oliviu C. Ghica, A. Hinze, and A. Voisard. Evolving triggers for dynamic environments. In *Extending Database Technology*, pages 1039–1048, 2006.
- [157] Goce Trajcevski, Ouri Wolfson, Klaus Hinrichs, and Sam Chamberlain. Managing uncertainty in moving objects databases. *ACM Trans. Database Syst.*, 29(3), 2004.
- [158] I. Trestian, K. Huguenin, L. Su, and A. Kuzmanovic. Understanding Human Movement Semantics: A Point of Interest Based Approach. In *Poster paper in proceedings of WWW '12*, Lyon, France, April 2012.
- [159] I. Trestian, S. Ranjan, A. Kuzmanovic, and A. Nucci. Unconstrained endpoint profiling: Googling the Internet. In *Proceedings of ACM SIGCOMM '08*, Seattle, WA, August 2008.
- [160] I. Trestian, S. Ranjan, A. Kuzmanovic, and A. Nucci. Measuring serendipity: Connecting people, interests and locations in a mobile 3G network. In *ACM IMC '09*, Chicago, IL, 2009.
- [161] I. Trestian, C. Xiao, and A. Kuzmanovic. A Glance at an Overlooked Part of the World Wide Web. In *Proceedings of the 1st International Web Observatory Workshop, WOW2013*, Rio De Janeiro, Brazil, May 2013.
- [162] Roberto Tron and Rene Vidal. Distributed Computer Vision Algorithms. *IEEE Signal Processing Magazine*, 28:32–45, 2011.
- [163] Alejandro A. Vaisman and Esteban Zimányi. What is spatio-temporal data warehousing? In *DaWaK*, pages 9–23, 2009.
- [164] Tommaso Venturini, Pablo Jensen, and Bruno Latour. Fill in the gap: A new alliance for social and natural sciences. *J. Artificial Societies and Social Simulation*, 18(2), 2015.
- [165] Xiaogang Wang. Intelligent multi-camera video surveillance: A review. *Pattern Recognition Letters*, 2013.
- [166] Y. Wang, D. Burgener, M. Flores, A. Kuzmanovic, and C. Huang. Towards Street-Level Client-Independent IP Geolocation. In *Proceedings of NSDI '11*, Cambridge, MA, March 2011.
- [167] Y. Wang, D. Burgener, A. Kuzmanovic, and G. Macia. Analyzing Content-Level Properties of the Web Adversphere. In *Poster paper in proceedings of WWW '10*, Raleigh, NC, April 2010.
- [168] Y. Wang, D. Burgener, A. Kuzmanovic, and G. Macia. Understanding the network and user-targeting properties of web advertising networks. In *Proceedings of ICDCS '11*, Minneapolis, MN, June 2011.
- [169] Y. Wang, K. Pal, and A. Kuzmanovic. Understanding Crowds' Migration on the Web. In *Proceedings of IEEE/WIC/ACM International Conference on Web Intelligence*, Lion, France, August 2011.
- [170] Z wave Alliance, 2012.
- [171] Wi-Fi.
- [172] N. Xia, S. Miskovic, M. Baldi, A. Kuzmanovic, and A. Nucci. GeoEcho: Inferring User Interests from Geotag Reports in Network Traffic. In *Proceedings of IEEE/WIC/ACM International Conference on Web Intelligence*, Warsaw, Poland, August 2014.
- [173] N. Xia, H. Song, Y. Liao, M. Iliofotou, A. Nucci, Z. Zhang, and A. Kuzmanovic. Mosaic: Quantifying Privacy Leakage in Mobile Networks. In *Proceedings of ACM SIGCOMM '13*, Hong Kong, China, August 2013.
- [174] C. Xiao, L. Su, J. Bi, Y. Xue, and A. Kuzmanovic. Selective Behavior in Online Social Networks. In *Proceedings of IEEE/WIC/ACM International Conference on Web Intelligence*, Macao, China, December 2012.
- [175] Hongteng Xu, Yang Zhou, Weiyao Lin, and Hongyuan Zha. Unsupervised Trajectory Clustering via Adaptive Multi-Kernel-based Shrinkage. In *International Conference on Computer Vision (ICCV)*, 2015.
- [176] Shuang Yang, Ognjen Rudovic, Vladimir Pavlovic, and Maja Pantic. Personalized modeling of facial action unit intensity. In *Advances in Visual Computing - 10th International Symposium, ISVC 2014, Las Vegas, NV, USA, December 8-10, 2014, Proceedings, Part II*, pages 269–281, 2014.



- [177] Saehoon Yi, Piotr W. Mirowski, Tin Kam Ho, and Vladimir Pavlovic. Pose invariant activity classification for multi-floor indoor localization. In *22nd International Conference on Pattern Recognition, ICPR 2014, Stockholm, Sweden, August 24-28, 2014*, pages 3505–3510, 2014.
- [178] Saehoon Yi and V. Pavlovic. Spatio-temporal context modeling for bow-based video classification. In *Computer Vision Workshops (ICCVW), 2013 IEEE International Conference on*, pages 779–786, Dec 2013.
- [179] Saehoon Yi and Vladimir Pavlovic. Sparse granger causality graphs for human action classification. In *Proceedings of the 21st International Conference on Pattern Recognition, ICPR 2012, Tsukuba, Japan, November 11-15, 2012*, pages 3374–3377, 2012.
- [180] Sejong Yoon, Mubbasir Kapadia, Pritish Sahu, and Vladimir Pavlovic. Filling in the Blanks: Reconstructing Microscopic Crowd Motion from Multiple Disparate Noisy Sensors. In *1st Workshop on Computer Vision Applications in Surveillance and Transportation (AVSTI) in conjunction with IEEE Winter Conference on Applications of Computer Vision (WACV)*, 2016.
- [181] Sejong Yoon and Vladimir Pavlovic. Distributed probabilistic learning for camera networks with missing data. In *Advances in Neural Information Processing Systems (NIPS)*, 2012.
- [182] Andrea Zanella, Nicola Bui, Angelo Paolo Castellani, Lorenzo Vangelista, and Michele Zorzi. Internet of things for smart cities. *IEEE Internet of Things Journal*, 1(1):22–32, 2014.
- [183] B. Zhan, D.N. Monekosso, P. Remagnino, S.A. Velastin, and L.-Q. Xu. Crowd analysis: a survey. *Machine Vision Applications*, 19:345–357, 2008.
- [184] W. Zhang and K. Hansen. Semantic web based self-management for a pervasive service middleware. In *Second IEEE International Conference on Self-Adaptive and Self-Organizing Systems*, 2008.
- [185] W. Zhang and K. Hansen. An evaluation of the nsga-ii and mocell genetic algorithms for self-management planning in a pervasive service middleware. In *14th IEEE International Conference on Engineering of Complex Computer Systems*, 2009.
- [186] B. Zhou, X. Wang, and X. Tang. Random field topic model for semantic region analysis in crowded scenes from tracklets. In *IEEE CVPR*, 2011.
- [187] B. Zhou, X. Wang, and X. Tang. Understanding collective crowd behaviors: Learning a mixture model of dynamic pedestrian-agents. In *IEEE CVPR*, 2012.
- [188] Fan Zhou, Goce Trajcevski, Oliviu Ghica, Roberto Tamassia, Ashaq Khokhar, and Peter Scheuermann. Deflection aware tracking principal selection in active wireless sensor networks. *IEEE Trans. on Vehicular Technology*, 61(7), 2012.
- [189] F. Zhu, M. Mutka, and L. Ni. Service discovery in pervasive computing environments. *Pervasive Computing, IEEE*, 4(4), 2005.