

付録2 サンプル表

付録2 サンプル表

サンプル表

セールス・データベース

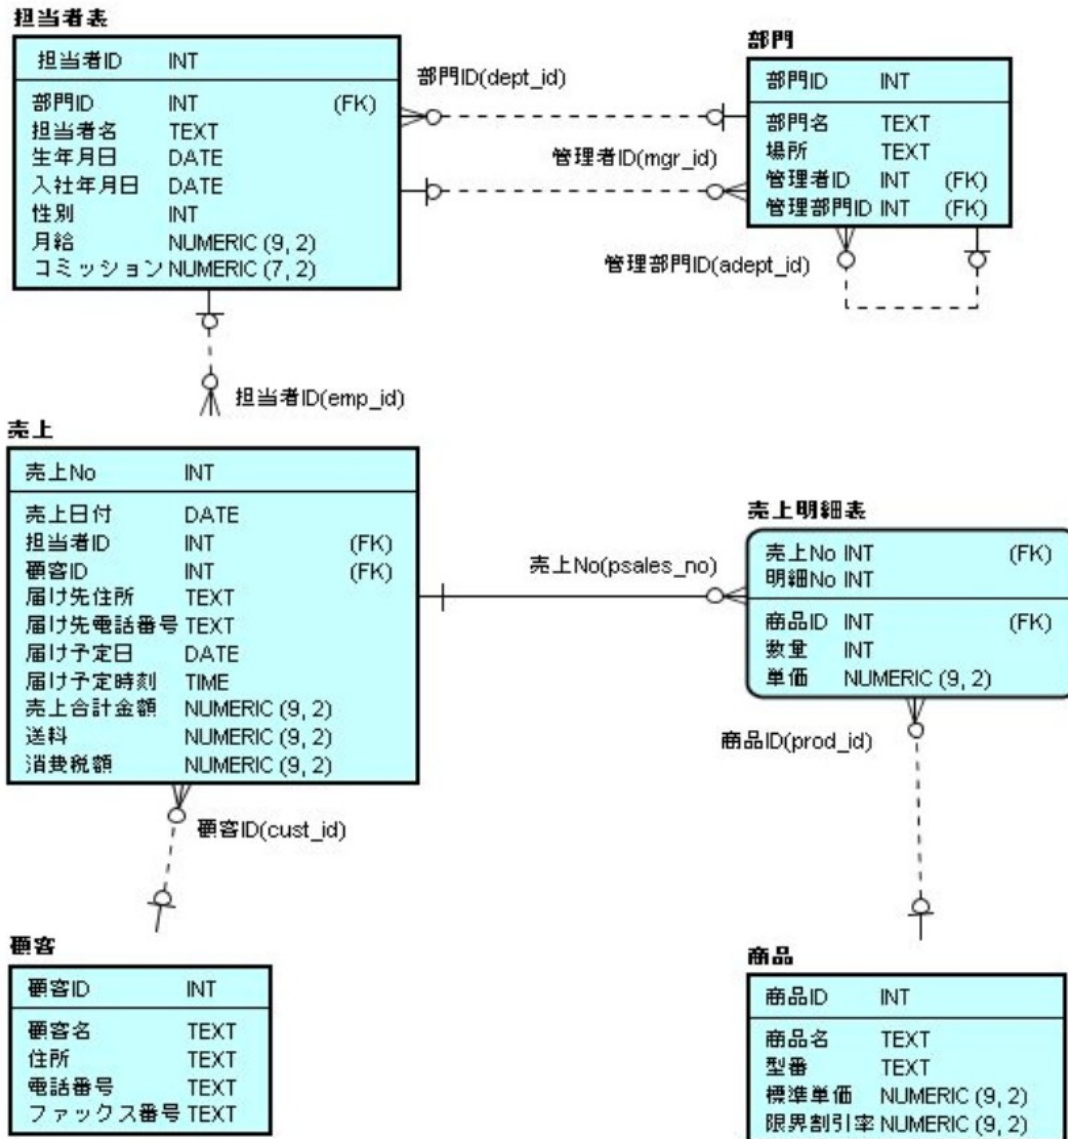


図 セールス・データベース（論理DB）

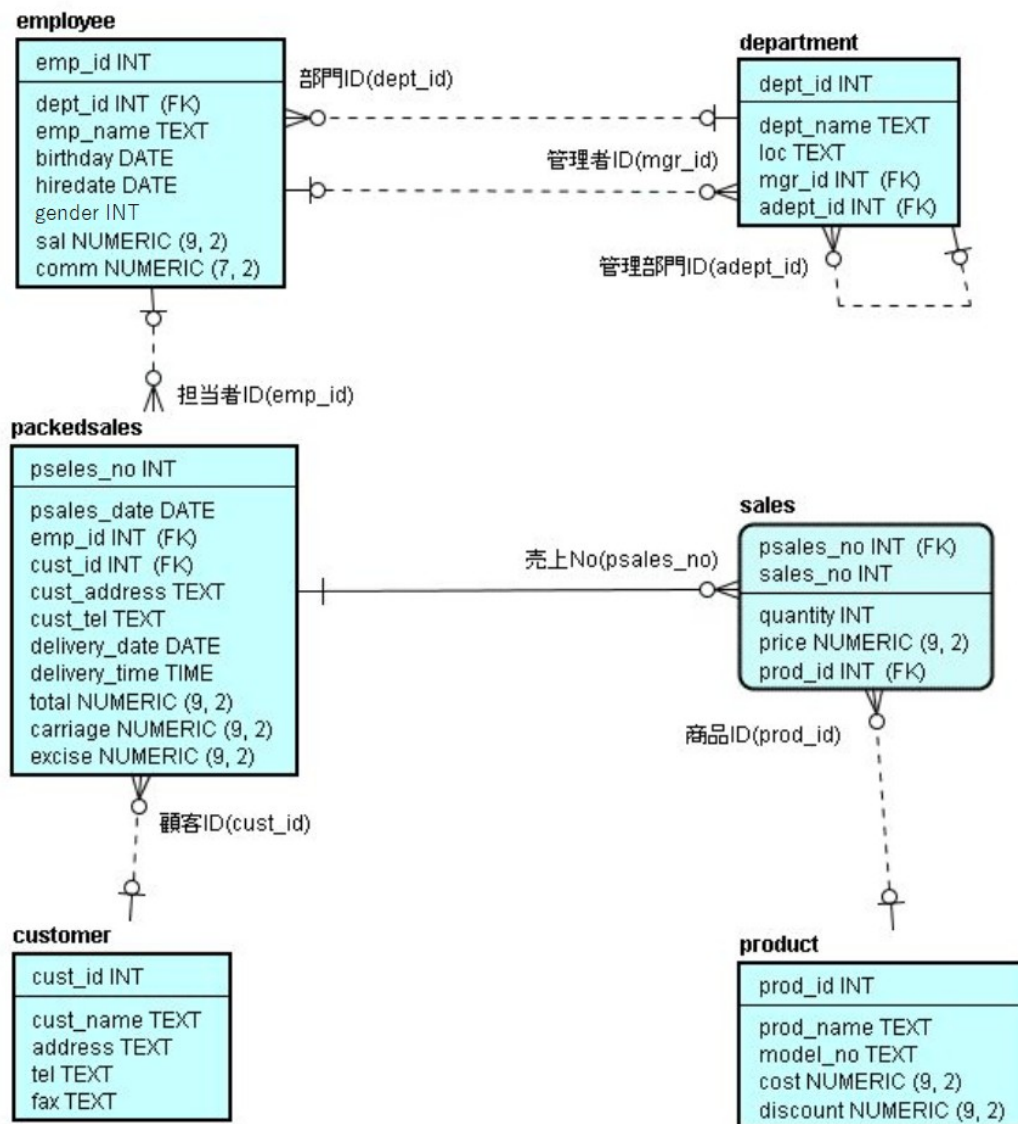


図 セールス・データベース（物理DB）

売上表(packedsales)

PK	psales_no	INTEGER	売上 NO
	psales_date	DATE	売上日付
FK1	emp_id	INTEGER	担当者 ID
FK2	cust_id	INTEGER	顧客 ID
	cust_address	VARCHAR(40)	届け先住所
	cust_tel	VARCHAR(20)	届け先電話番号
	delivery_date	DATE	届け予定日
	delivery_time	TIME	届け予定時刻
	total	NUMERIC(9,2)	売上合計金額
	carriage	NUMERIC(9,2)	送料
	excise	NUMERIC(9,2)	消費税額

psale s_no	psales_da te	emp_ id	cust_ id	cust_address	cust_tel	delivery_date	deliv ery_t ime	total	carri age	exci se
1	1994-07-13	1	1	和歌山県和歌山市	073-123-XXXX	2001-07-20	10:00	60000	100	3000
2	1994-07-14	1	2	大阪府大阪市	06-6123-XXXX	2001-07-21	10:00	60000	100	1000
3	1994-07-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	2001-07-22	10:00	85000	0	4250
4	1994-08-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	2001-07-23	10:00	120000	0	3000
5	1994-08-18	3	5	東京都千代田区大手町	03-3123-XXXX	2001-07-24	10:00	25000	0	1250
6	1994-08-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	2001-07-26	10:00	30000	0	1500
7	1994-09-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	2001-07-27	10:00	60000	0	2000
8	1994-09-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	1994-07-20	10:00	10000	100	500
9	1994-09-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	1994-08-21	10:00	45000	0	2250
10	1994-09-18	5	10	東京都中央区日本橋	03-3123-XXXX	1994-08-22	10:00	24000	0	300
111	1994-10-13	1	1	和歌山県和歌山市	073-123-XXXX	1994-08-23	10:00	60000	100	3000
112	1994-10-14	1	2	大阪府大阪市	06-6123-XXXX	1994-09-24	10:00	20000	100	1000
113	1994-11-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1994-09-26	10:00	85000	0	4250
114	1994-11-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1994-09-27	10:00	60000	0	3000
115	1994-12-18	3	5	東京都千代田区大手町	03-3123-XXXX	1994-11-20	10:00	25000	0	1250
116	1994-12-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	1994-11-21	10:00	30000	0	1500
217	1995-01-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	1994-12-22	10:00	40000	0	2000
218	1995-01-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	1994-12-23	10:00	10000	100	500
219	1995-04-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	1995-01-24	10:00	60000	0	2250
220	1995-04-18	5	10	東京都中央区日本橋	03-3123-XXXX	1995-04-26	10:00	6000	0	300
221	1995-09-13	1	1	和歌山県和歌山市	073-123-XXXX	1995-04-27	10:00	60000	100	3000
222	1995-09-14	1	2	大阪府大阪市	06-6123-XXXX	1995-12-20	10:00	20000	100	1000
223	1995-12-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1995-12-21	10:00	85000	0	4250
224	1995-12-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1996-03-22	10:00	120000	0	3000
325	1996-03-18	3	5	東京都千代田区大手町	03-3123-XXXX	1996-03-23	10:00	25000	0	1250
326	1996-03-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	1996-07-24	10:00	30000	0	1500
327	1996-07-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	1996-10-26	10:00	40000	0	2000
328	1996-07-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	1996-10-27	10:00	10000	100	500
329	1996-10-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	1997-05-20	10:00	45000	0	2250
330	1996-10-18	5	10	東京都中央区日本橋	03-3123-XXXX	1997-05-21	10:00	6000	0	300
431	1997-02-13	1	1	和歌山県和歌山市	073-123-XXXX	1997-08-22	10:00	60000	100	3000
432	1997-02-14	1	2	大阪府大阪市	06-6123-XXXX	1997-08-23	10:00	20000	100	1000
433	1997-05-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1997-11-24	10:00	115000	0	4250
434	1997-05-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1998-07-20	10:00	60000	0	3000
435	1997-08-18	3	5	東京都千代田区大手町	03-3123-XXXX	1998-07-21	10:00	25000	0	1250
436	1997-08-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	1998-07-22	10:00	30000	0	1500
437	1997-11-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	1998-10-24	10:00	40000	0	2000
438	1997-11-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	1999-03-20	10:00	10000	100	500
541	1998-03-13	1	1	和歌山県和歌山市	073-123-XXXX	1999-03-21	10:00	120000	100	3000
542	1998-03-14	1	2	大阪府大阪市	06-6123-XXXX	1999-03-22	10:00	20000	100	1000
543	1998-07-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1999-06-23	10:00	85000	0	4250
544	1998-07-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1999-06-24	10:00	60000	0	3000
545	1998-07-18	3	5	東京都千代田区大手町	03-3123-XXXX	1999-09-26	10:00	25000	0	1250
547	1998-10-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	1999-09-27	10:00	40000	0	2000
548	1998-10-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	2000-01-20	10:00	10000	100	500
653	1999-03-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	2000-05-21	10:00	85000	0	4250
654	1999-03-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	2000-05-22	10:00	60000	0	3000
655	1999-03-18	3	5	東京都千代田区大手町	03-3123-XXXX	2000-07-23	10:00	75000	0	1250
656	1999-06-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	2000-07-24	10:00	30000	0	1500
657	1999-06-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	2000-09-26	10:00	40000	0	2000
658	1999-09-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	2000-09-27	10:00	10000	100	500
659	1999-09-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	2001-01-20	10:00	45000	0	2250
660	1999-09-18	5	10	東京都中央区日本橋	03-3123-XXXX	2001-01-21	10:00	6000	0	300
771	2000-01-13	1	1	和歌山県和歌山市	073-123-XXXX	2001-03-22	10:00	90000	100	3000

772	2000-01-14	1	2	大阪府大阪市	06-6123-XXXX	2001-03-23	10:00	20000	100	1000
773	2000-01-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	2001-05-24	10:00	85000	0	4250
774	2000-05-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	2001-05-26	10:00	60000	0	3000
775	2000-05-18	3	5	東京都千代田区大手町	03-3123-XXXX	2001-05-27	10:00	25000	0	1250
776	2000-07-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	2001-07-18	10:00	30000	0	1500
777	2000-07-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	2001-07-19	10:00	40000	0	2000
778	2000-09-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	2001-07-25	10:00	10000	100	500
779	2000-09-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	1994-07-18	10:00	45000	0	2250
780	2000-09-18	5	10	東京都中央区日本橋	03-3123-XXXX	1994-07-19	10:00	30000	0	300
781	2000-12-13	1	1	和歌山県和歌山市	073-123-XXXX	1994-09-25	10:00	60000	100	3000
782	2000-12-14	1	2	大阪府大阪市	06-6123-XXXX	1994-10-18	10:00	20000	100	1000
883	2001-01-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1994-10-19	10:00	85000	0	4250
884	2001-01-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1995-01-25	10:00	60000	0	3000
885	2001-03-18	3	5	東京都千代田区大手町	03-3123-XXXX	1995-09-18	10:00	50000	0	1250
886	2001-03-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	1995-09-19	10:00	30000	0	1500
887	2001-05-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	1996-07-25	10:00	40000	0	2000
888	2001-05-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	1997-02-18	10:00	10000	100	500
889	2001-05-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	1997-02-19	10:00	45000	0	2250
890	2001-05-18	5	10	東京都中央区日本橋	03-3123-XXXX	1997-11-25	10:00	6000	0	300
1001	2001-07-13	1	1	和歌山県和歌山市	073-123-XXXX	1998-03-18	10:00	90000	100	3000
1002	2001-07-14	1	2	大阪府大阪市	06-6123-XXXX	1998-03-19	10:00	20000	100	1000
1003	2001-07-18	2	3	東京都港区赤坂2丁目	03-3123-XXXX	1998-10-25	10:00	85000	0	4250
1004	2001-07-18	2	4	東京都中央区銀座3丁目	03-3123-XXXX	1999-09-25	10:00	180000	0	3000
1005	2001-07-18	3	5	東京都千代田区大手町	03-3123-XXXX	2000-01-18	10:00	25000	0	1250
1006	2001-07-18	3	6	東京都品川区西五反田XXX-XX	03-3123-XXXX	2000-01-19	10:00	30000	0	1500
1007	2001-07-18	4	7	東京都台東区下谷X-X-X	03-3123-XXXX	2000-09-25	10:00	40000	0	2000
1008	2001-07-18	4	8	大阪市大淀区大淀南	06-6123-XXXX	2000-12-18	10:00	10000	100	500
1009	2001-07-18	5	9	東京都渋谷区広尾XX-X	03-3123-XXXX	2000-12-19	10:00	45000	0	2250
1010	2001-07-18	5	10	東京都中央区日本橋	03-3123-XXXX	2001-05-25	10:00	6000	0	300

売上明細表(sales)

PK	sales_no	INTEGER	売上明細 NO
PK,FK1	psales_no	INTEGER	売上 NO
FK2	prod_id	INTEGER	商品 ID
	quantity	NUMERIC(9,2)	数量
	price	NUMERIC(9,2)	売価

sales_no	psales_no	prod_id	quantity	price
1	1	101	1	30000
2	1	103	1	30000
1	2	102	3	20000
1	3	103	1	30000
2	3	105	1	25000
3	3	106	1	30000
1	4	104	2	60000
1	5	105	1	25000
1	6	106	1	30000
1	7	102	1	20000
2	7	106	2	20000
1	8	108	1	10000
1	9	106	1	30000
2	9	109	1	15000
1	10	110	4	6000
1	111	101	1	30000

sales_no	psales_no	prod_id	quantity	price
2	111	103	1	30000
1	112	102	1	20000
1	113	103	1	30000
2	113	105	1	25000
3	113	106	1	30000
1	114	104	1	60000
1	115	105	1	25000
1	116	106	1	30000
1	217	102	1	20000
2	217	106	1	20000
1	218	108	1	10000
1	219	106	1	30000
2	219	109	2	15000
1	220	110	1	6000
1	221	101	1	30000
2	221	103	1	30000
1	222	102	1	20000
1	223	103	1	30000
2	223	105	1	25000
3	223	106	1	30000
1	224	104	2	60000
1	325	105	1	25000
1	326	106	1	30000
1	327	102	1	20000
2	327	106	1	20000
1	328	108	1	10000
1	329	106	1	30000
2	329	109	1	15000
1	330	110	1	6000
1	431	101	1	30000
2	431	103	1	30000
1	432	102	1	20000
1	433	103	1	30000
2	433	105	1	25000
3	433	106	2	30000
1	434	104	1	60000
1	435	105	1	25000
1	436	106	1	30000
1	437	102	1	20000
2	437	106	1	20000
1	438	108	1	10000
1	541	101	1	30000
2	541	103	3	30000
1	542	102	1	20000
1	543	103	1	30000
2	543	105	1	25000
3	543	106	1	30000
1	544	104	1	60000
1	545	105	1	25000
1	547	102	1	20000
2	547	106	1	20000
1	548	108	1	10000
1	653	103	1	30000
2	653	105	1	25000
3	653	106	1	30000
1	654	104	1	60000
1	655	105	3	25000
1	656	106	1	30000
1	657	102	1	20000
2	657	106	1	20000
1	658	108	1	10000
1	659	106	1	30000
2	659	109	1	15000
1	660	110	1	6000
1	771	101	2	30000

sales_no	psales_no	prod_id	quantity	price
2	771	103	1	30000
1	772	102	1	20000
1	773	103	1	30000
2	773	105	1	25000
3	773	106	1	30000
1	774	104	1	60000
1	775	105	1	25000
1	776	106	1	30000
1	777	102	1	20000
2	777	106	1	20000
1	778	108	1	10000
1	779	106	1	30000
2	779	109	1	15000
1	780	110	5	6000
1	781	101	1	30000
2	781	103	1	30000
1	782	102	1	20000
1	883	103	1	30000
2	883	105	1	25000
3	883	106	1	30000
1	884	104	1	60000
1	885	105	2	25000
1	886	106	1	30000
1	887	102	1	20000
2	887	106	1	20000
1	888	108	1	10000
1	889	106	1	30000
2	889	109	1	15000
1	890	110	1	6000
1	1001	101	2	30000
2	1001	103	1	30000
1	1002	102	1	20000
1	1003	103	1	30000
2	1003	105	1	25000
3	1003	106	1	30000
1	1004	104	3	60000
1	1005	105	1	25000
1	1006	106	1	30000
1	1007	102	1	20000
2	1007	106	1	20000
1	1008	108	1	10000
1	1009	106	1	30000
2	1009	109	1	15000
1	1010	110	1	6000

担当者表(employee)

PK	emp_id	INT	担当者 ID
FK	dept_id	INT	部門 ID 部門表(department)と関係
	emp_name	VARCHAR(20)	担当者名
	birthday	DATE	生年月日
	hiredate	DATE	入社年月日
	gender	INT	性別 (1:男 2:女)
	sal	NUMERIC(9,2)	給与額
	comm	NUMERIC(7,2)	歩合給

emp_id	dept_id	emp_name	birthday	hiredate	gender	sal	comm
1	10	羽生 章洋	1978-10-10	1990-12-17	1	800	100
2	10	釜本 喜美子	1975-5-20	1991-2-20	2	1600	10
3	20	安部 弘江	1974-6-1	1991-2-22	2	1250	-

4	20	松村 秀和	1970-9-13	1991-4-2	1	2975	-
5	30	萩原 恵理子	1985-3-16	2008-9-28	2	1250	10
6	30	岡田 奈緒子	1983-12-24	2007-5-1	2	2850	10
7	30	井上 尚志	1971-10-17	2000-11-15	1	2450	10
8	40	西口 麻衣子	1986-12-14	2008-12-3	2	3000	-
9	40	滝本 順三	1978-4-2	2004-12-18	1	5000	-
10	40	工藤 新一	1990-2-10	2009-4-1	1	1500	-
11	90	毛利 光太郎	1970-12-31	1990-4-1	1	8000	-

部門表(department)

PK	dept_id	INT	部門 ID
	dept_name	VARCHAR(20)	部門名
	loc	VARCHAR(20)	場所
FK1	mgr_id	INT	管理者 ID 従業員表(employee)と関係
FK2	adept_id	INT	管理部門 ID 部門表(department)と関係

dept_id	dept_name	loc	mgr_id	adept_id
10	営業部	東京都千代田区	1	30
20	開発部	東京都港区	3	30
30	企画部	東京都中央区	5	40
40	管理部	東京都台東区	8	40
50	製造部	東京都大田区	NULL	50

顧客表(customer)

PK	cust_id	INTEGER	顧客 ID
	cust_name	VARCHAR(20)	顧客名
	address	VARCHAR(40)	住所
	tel	VARCHAR(20)	電話番号
	fax	VARCHAR(20)	FAX 番号

cust_id	cust_name	address	tel	fax
1	阪上 徹	和歌山県和歌山市	073-123-XXXX	073-123-XXXX
2	松坂 宏	東京都千代田区	03-3158-XXXX	03-3258-XXXX
3	北島 浩二	大阪府大阪市北区	06-1234-XXXX	06-1234-XXXX
4	永井 光夫	東京都渋谷区	03-3124-XXXX	03-0124-XXXX
5	関根 修一	大阪府泉佐野市	0724-99-XXXX	0724-99-XXXX
6	木田 直美	東京都中央区	03-3333-XXXX	NULL
7	片桐 昇	東京都新宿区	03-1111-XXXX	03-1111-XXXX
8	田中 正敏	東京都品川区	03-2222-XXXX	03-2222-XXXX
9	西口 和夫	東京都目黒区下目黒	03-3333-XXXX	03-3333-XXXX
10	山口 克巳	東京都大田区	03-4444-XXXX	03-4444-XXXX
11	加藤 昭夫	神奈川県川崎市	044-505-XXXX	044-505-XXXX
12	石橋 健太郎	札幌市中央区	011-555-XXXX	NULL
13	米田 恵美子	東京都港区虎ノ門	03-3987-XXXX	03-3987-XXXX
14	松田 純一	東京都千代田区大手町	03-3975-XXXX	03-3975-XXXX
15	松下 晴彦	東京都板橋区	03-3123-XXXX	03-3123-XXXX
16	安井 和義	愛知県東海市	0560-448-XXXX	0560-448-XXXX
17	高沢 千夏	大阪府大阪市淀川区	06-6777-XXXX	06-6777-XXXX
18	島田 良子	東京都渋谷区	03-3698-XXXX	NULL
19	吉田 正也	神奈川県川崎市	044-888-XXXX	044-888-XXXX
20	藤田 幹夫	東京都中央区	03-3578-XXXX	NULL

商品表(product)

PK	prod_id	INTEGER	商品 ID
	prod_name	VARCHAR(20)	商品名
	model_no	VARCHAR(20)	型番
	cost	NUMERIC(9,2)	標準単価
	discount	NUMERIC(9,2)	限界割引率

prod_id	prod_name	model_no	cost	discount
101	テレビ	A1111	25000	0.7
102	ビデオ	B2222	12000	0.8
103	MD プレーヤー	C3333	23500	0.8
104	ステレオ	D4444	56000	0.7
105	デジタルカメラ	E5555	18600	0.8
106	プリンタ	F6666	23500	0.8
107	電気シェーバー	G7777	13800	NULL
108	ホイールマウス	H8888	8500	NULL
109	アイロン	I9999	10000	0.8
110	リモコン	J0000	5800	NULL

データ作成 SQL

```

CHARSET cp932;

DROP TABLE IF EXISTS packedsales CASCADE;
DROP TABLE IF EXISTS sales CASCADE;
DROP TABLE IF EXISTS employee CASCADE;
DROP TABLE IF EXISTS customer CASCADE;
DROP TABLE IF EXISTS product CASCADE;
DROP TABLE IF EXISTS department CASCADE;
DROP TABLE IF EXISTS nextsalary CASCADE;
DROP TABLE IF EXISTS account CASCADE;

-- 売上テーブル
CREATE TABLE packedsales (
  psales_no      INTEGER      PRIMARY KEY  -- 売上 NO
, psales_date    DATE          -- 売上日付
, emp_id         INTEGER      -- 担当者 ID
, cust_id        INTEGER      -- 顧客 ID
, cust_address   VARCHAR(40)   -- 届け先住所
, cust_tel       VARCHAR(20)   -- 届け先電話番号
, delivery_date  DATE          -- 届け予定日
, delivery_time  TIME          -- 届け予定時刻
, total          NUMERIC(9, 2) -- 売上合計金額
, carriage       NUMERIC(9, 2) -- 送料
, excise         NUMERIC(9, 2) -- 消費税額
);

-- 売上明細テーブル
CREATE TABLE sales (
  sales_no      INTEGER      -- 売上明細 NO
, psales_no     INTEGER      -- 売上 NO
, prod_id       INTEGER      -- 商品 ID
, quantity      NUMERIC(9, 2) -- 数量
, price         NUMERIC(9, 2) -- 売価
, PRIMARY KEY(sales_no, psales_no)
);

-- 担当者テーブル
CREATE TABLE employee (
  emp_id        INTEGER      PRIMARY KEY  -- 担当者 ID
, dept_id       INTEGER      -- 部門 ID
, emp_name      VARCHAR(20)   -- 担当者名
, birthday      DATE         -- 生年月日
, hiredate      DATE         -- 入社年月日
, gender        INTEGER      -- 性別 (1:男 2:女)
, sal           NUMERIC(9, 2) -- 給与額
, comm          NUMERIC(7, 2) -- コミッション
);

-- 部門テーブル
CREATE TABLE department (
  dept_id       INTEGER      PRIMARY KEY  -- 部門 ID
, dept_name     VARCHAR(20)   -- 部門名
, loc           VARCHAR(32)   -- 場所
, mgr_id        INTEGER      -- 管理者 ID
, adept_id      INTEGER      -- 管理部門 ID
);

-- 顧客テーブル
CREATE TABLE customer (

```

```

    cust_id          INTEGER      PRIMARY KEY    -- 顧客 ID
    , cust_name       VARCHAR(20)              -- 顧客名
    , address         VARCHAR(40)              -- 住所
    , tel             VARCHAR(20)              -- 電話番号
    , fax             VARCHAR(20)              -- FAX 番号
);

-- -----
-- 商品テーブル
-- -----
CREATE TABLE product (
    prod_id          INTEGER      PRIMARY KEY    -- 商品 ID
    , prod_name       VARCHAR(20)              -- 商品名
    , model_no        VARCHAR(20)              -- 型番
    , cost            NUMERIC(9, 2)            -- 標準単価
    , discount        NUMERIC(9, 2)            -- 限界割引率
);

-- -----
-- 顧客テーブル
-- -----
TRUNCATE customer;
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(1, '阪上 徹', '和歌山県和歌山市', '073-123-XXXX', '073-123-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(2, '松坂 宏', '東京都千代田区', '03-3158-XXXX', '03-3258-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(3, '北島 浩二', '大阪府大阪市北区', '06-1234-XXXX', '06-1234-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(4, '永井 光夫', '東京都渋谷区', '03-3124-XXXX', '03-0124-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(5, '関根 修一', '大阪府泉佐野市', '0724-99-XXXX', '0724-99-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(6, '木田 直美', '東京都中央区', '03-3333-XXXX', NULL);
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(7, '片桐 昇', '東京都新宿区', '03-1111-XXXX', '03-1111-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(8, '田中 正敏', '東京都品川区', '03-2222-XXXX', '03-2222-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(9, '西口 和夫', '東京都目黒区下目黒', '03-3333-XXXX', '03-3333-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(10, '山口 克巳', '東京都大田区', '03-4444-XXXX', '03-4444-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(11, '加藤 昭夫', '神奈川県川崎市', '044-505-XXXX', '044-505-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(12, '石橋 健太郎', '札幌市中央区', '011-555-XXXX', NULL);
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(13, '米田 恵美子', '東京都港区虎ノ門', '03-3987-XXXX', '03-3987-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(14, '松田 純一', '東京都千代田区大手町', '03-3975-XXXX', '03-3975-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(15, '松下 晴彦', '東京都板橋区', '03-3123-XXXX', '03-3123-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(16, '安井 和義', '愛知県東海市', '0560-448-XXXX', '0560-448-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(17, '高沢 千夏', '大阪府大阪市大淀区', '06-6777-XXXX', '06-6777-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(18, '島田 良子', '東京都渋谷区', '03-3698-XXXX', NULL);
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(19, '吉田 正也', '神奈川県川崎市', '044-888-XXXX', '044-888-XXXX');
INSERT INTO customer(cust_id, cust_name, address, tel, fax)
VALUES(20, '藤田 幹夫', '東京都中央区', '03-3578-XXXX', NULL);

-- -----
-- 商品テーブル
-- -----
TRUNCATE product;
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(101, 'テレビ', 'A1111', 25000, 0.7);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(102, 'ビデオ', 'B2222', 12000, 0.8);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(103, 'MD プレーヤー', 'C3333', 23500, 0.8);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(104, 'ステレオ', 'D4444', 56000, 0.7);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(105, 'デジタルカメラ', 'E5555', 18600, 0.8);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(106, 'プリンタ', 'F6666', 23500, 0.8);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(107, '電気シェーバー', 'G7777', 13800, NULL);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(108, 'ホイールマウス', 'H8888', 8500, NULL);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(109, 'アイロン', 'I9999', 10000, 0.8);
INSERT INTO product(prod_id, prod_name, model_no, cost, discount)
VALUES(110, 'リモコン', 'J0000', 5800, NULL);

-- -----
-- 担当者テーブル
-- -----
TRUNCATE employee;
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(1, 10, '羽生 章洋', '1978/10/10', '1990/12/17', 1, 800, 100);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(2, 10, '金本 喜美子', '1975/05/20', '1991/02/20', 2, 1600, 10);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(3, 20, '安部 弘江', '1974/06/01', '1991/02/22', 2, 1250, NULL);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(4, 20, '松村 秀和', '1970/09/13', '1991/04/02', 1, 2975, NULL);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(5, 30, '萩原 恵理子', '1985/03/16', '2008/09/28', 2, 1250, 10);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(6, 30, '岡田 奈緒子', '1983/12/24', '2007/05/01', 2, 2850, 10);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(7, 30, '井上 尚志', '1971/10/17', '2000/11/15', 1, 2450, 10);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(8, 40, '西口 麻衣子', '1986/12/14', '2008/12/03', 2, 3000, NULL);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(9, 40, '滝本 順三', '1978/04/02', '2004/12/18', 1, 5000, NULL);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(10, 40, '工藤 新一', '1990/02/10', '1999/04/01', 1, 1500, NULL);
INSERT INTO employee(emp_id, dept_id, emp_name, birthday, hiredate, gender, sal, comm)
VALUES(11, 90, '毛利 光太郎', '1970/12/31', '1990/04/01', 1, 8000, NULL);

-- -----
-- 部門テーブル
-- -----
TRUNCATE department;
INSERT INTO department(dept_id, dept_name, loc, mgr_id, adept_id)

```

```
VALUES (10, '営業部', '東京都千代田区', 1, 30);
INSERT INTO department (dept_id, dept_name, loc, mgr_id, adept_id)
VALUES (20, '開発部', '東京都港区', 3, 30);
INSERT INTO department (dept_id, dept_name, loc, mgr_id, adept_id)
VALUES (30, '企画部', '東京都中央区', 5, 40);
INSERT INTO department (dept_id, dept_name, loc, mgr_id, adept_id)
VALUES (40, '管理部', '東京都台東区', 8, 40);
INSERT INTO department (dept_id, dept_name, loc, mgr_id, adept_id)
VALUES (50, '製造部', '東京都大田区', NULL, 50);

-----
-- 売上テーブル
-----
TRUNCATE packedsales;
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1001, '2001/07/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '2001/07/18', '10:00', 90000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1002, '2001/07/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '2001/07/19', '10:00', 20000, 0, 1000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1003, '2001/07/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '2001/07/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1004, '2001/07/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '2001/07/21', '10:00', 180000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1005, '2001/07/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '2001/07/22', '10:00', 25000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1006, '2001/07/18', 3, 6, '東京都品川区西五反田 XXX-XX', '03-3123-XXXX', '2001/07/23', '10:00', 30000, 0, 1500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1007, '2001/07/18', 4, 7, '東京都台東区下谷 X-X-X', '03-3123-XXXX', '2001/07/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1008, '2001/07/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '2001/07/25', '10:00', 10000, 0, 500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1009, '2001/07/18', 5, 9, '東京都渋谷区広尾 XX-X', '03-3123-XXXX', '2001/07/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1010, '2001/07/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '2001/07/27', '10:00', 6000, 0, 300);

-----
-- 1994年7月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (1, '1994/07/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '1994/07/18', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (2, '1994/07/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '1994/07/19', '10:00', 60000, 0, 1000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (3, '1994/07/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1994/07/20', '10:00', 85000, 0, 4250);

-----
-- 1994年8月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (4, '1994/08/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1994/08/21', '10:00', 120000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (5, '1994/08/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1994/08/22', '10:00', 25000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (6, '1994/08/18', 3, 6, '東京都品川区西五反田 XXX-XX', '03-3123-XXXX', '1994/08/23', '10:00', 30000, 0, 1500);

-----
-- 1994年9月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (7, '1994/09/18', 4, 7, '東京都台東区下谷 X-X-X', '03-3123-XXXX', '1994/09/24', '10:00', 60000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (8, '1994/09/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '1994/09/25', '10:00', 10000, 0, 500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (9, '1994/09/18', 5, 9, '東京都渋谷区広尾 XX-X', '03-3123-XXXX', '1994/09/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (10, '1994/09/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '1994/09/27', '10:00', 24000, 0, 300);

-----
-- 1994年10月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (111, '1994/10/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '1994/10/18', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (112, '1994/10/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '1994/10/19', '10:00', 20000, 0, 1000);

-----
-- 1994年11月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (113, '1994/11/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1994/11/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (114, '1994/11/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1994/11/21', '10:00', 60000, 0, 3000);

-----
-- 1994年12月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (115, '1994/12/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1994/12/22', '10:00', 25000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (116, '1994/12/18', 3, 6, '東京都品川区西五反田 XXX-XX', '03-3123-XXXX', '1994/12/23', '10:00', 30000, 0, 1500);

-----
-- 1995年1月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (217, '1995/01/18', 4, 7, '東京都台東区下谷 X-X-X', '03-3123-XXXX', '1995/01/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (218, '1995/01/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '1995/01/25', '10:00', 10000, 0, 500);

-----
```

```

-- 1995年4月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (219, '1995/04/18', 5, 9, '東京都渋谷区広尾XX-X', '03-3123-XXXX', '1995/04/26', '10:00', 60000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (220, '1995/04/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '1995/04/27', '10:00', 6000, 0, 300);

-- 1995年9月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (221, '1995/09/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '1995/09/18', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (222, '1995/09/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '1995/09/19', '10:00', 20000, 0, 1000);

-- 1995年12月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (223, '1995/12/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1995/12/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (224, '1995/12/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1995/12/21', '10:00', 120000, 0, 3000);

-- 1996年3月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (325, '1996/03/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1996/03/22', '10:00', 25000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (326, '1996/03/18', 3, 6, '東京都品川区西五反田XXX-XX', '03-3123-XXXX', '1996/03/23', '10:00', 30000, 0, 1500);

-- 1996年7月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (327, '1996/07/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '1996/07/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (328, '1996/07/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '1996/07/25', '10:00', 10000, 0, 500);

-- 1996年10月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (329, '1996/10/18', 5, 9, '東京都渋谷区広尾XX-X', '03-3123-XXXX', '1996/10/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (330, '1996/10/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '1996/10/27', '10:00', 6000, 0, 300);

-- 1997年2月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (431, '1997/02/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '1997/02/18', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (432, '1997/02/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '1997/02/19', '10:00', 20000, 0, 1000);

-- 1997年5月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (433, '1997/05/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1997/05/20', '10:00', 115000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (434, '1997/05/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1997/05/21', '10:00', 60000, 0, 3000);

-- 1997年8月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (435, '1997/08/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1997/08/22', '10:00', 25000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (436, '1997/08/18', 3, 6, '東京都品川区西五反田XXX-XX', '03-3123-XXXX', '1997/08/23', '10:00', 30000, 0, 1500);

-- 1997年11月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (437, '1997/11/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '1997/11/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (438, '1997/11/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '1997/11/25', '10:00', 10000, 0, 500);

-- 1998年3月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (541, '1998/03/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '1998/03/18', '10:00', 120000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (542, '1998/03/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '1998/03/19', '10:00', 20000, 0, 1000);

-- 1998年7月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (543, '1998/07/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1998/07/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (544, '1998/07/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1998/07/21', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (545, '1998/07/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1998/07/22', '10:00', 25000, 0, 1250);

-- 1998年10月
-----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (547, '1998/10/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '1998/10/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (548, '1998/10/18', 4, 8, '大阪市大淀区大淀南', '06-6123-XXXX', '1998/10/25', '10:00', 10000, 0, 500);

```

```
-- 1999年3月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (653, '1999/03/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '1999/03/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (654, '1999/03/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '1999/03/21', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (655, '1999/03/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '1999/03/22', '10:00', 75000, 0, 1250);

-- 1999年6月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (656, '1999/06/18', 3, 6, '東京都品川区西五反田XXX-XX', '03-3123-XXXX', '1999/06/23', '10:00', 30000, 0, 1500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (657, '1999/06/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '1999/06/24', '10:00', 40000, 0, 2000);

-- 1999年9月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (658, '1999/09/18', 4, 8, '大阪市淀川区大淀南', '06-6123-XXXX', '1999/09/25', '10:00', 10000, 0, 500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (659, '1999/09/18', 5, 9, '東京都渋谷区広尾XX-X', '03-3123-XXXX', '1999/09/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (660, '1999/09/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '1999/09/27', '10:00', 6000, 0, 300);

-- 2000年1月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (771, '2000/01/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '2000/01/18', '10:00', 90000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (772, '2000/01/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '2000/01/19', '10:00', 20000, 0, 1000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (773, '2000/01/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '2000/01/20', '10:00', 85000, 0, 4250);

-- 2000年5月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (774, '2000/05/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '2000/05/21', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (775, '2000/05/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '2000/05/22', '10:00', 25000, 0, 1250);

-- 2000年7月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (776, '2000/07/18', 3, 6, '東京都品川区西五反田XXX-XX', '03-3123-XXXX', '2000/07/23', '10:00', 30000, 0, 1500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (777, '2000/07/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '2000/07/24', '10:00', 40000, 0, 2000);

-- 2000年9月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (778, '2000/09/18', 4, 8, '大阪市淀川区大淀南', '06-6123-XXXX', '2000/09/25', '10:00', 10000, 0, 500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (779, '2000/09/18', 5, 9, '東京都渋谷区広尾XX-X', '03-3123-XXXX', '2000/09/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (780, '2000/09/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '2000/09/27', '10:00', 30000, 0, 300);

-- 2000年12月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (781, '2000/12/13', 1, 1, '和歌山県和歌山市', '073-123-XXXX', '2000/12/18', '10:00', 60000, 0, 3000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (782, '2000/12/14', 1, 2, '大阪府大阪市', '06-6123-XXXX', '2000/12/19', '10:00', 20000, 0, 1000);

-- 2001年1月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (883, '2001/01/18', 2, 3, '東京都港区赤坂2丁目', '03-3123-XXXX', '2001/01/20', '10:00', 85000, 0, 4250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (884, '2001/01/18', 2, 4, '東京都中央区銀座3丁目', '03-3123-XXXX', '2001/01/21', '10:00', 60000, 0, 3000);

-- 2001年3月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (885, '2001/03/18', 3, 5, '東京都千代田区大手町', '03-3123-XXXX', '2001/03/22', '10:00', 50000, 0, 1250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (886, '2001/03/18', 3, 6, '東京都品川区西五反田XXX-XX', '03-3123-XXXX', '2001/03/23', '10:00', 30000, 0, 1500);

-- 2001年5月
-- -----
INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (887, '2001/05/18', 4, 7, '東京都台東区下谷X-X-X', '03-3123-XXXX', '2001/05/24', '10:00', 40000, 0, 2000);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (888, '2001/05/18', 4, 8, '大阪市淀川区大淀南', '06-6123-XXXX', '2001/05/25', '10:00', 10000, 0, 500);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (889, '2001/05/18', 5, 9, '東京都渋谷区広尾XX-X', '03-3123-XXXX', '2001/05/26', '10:00', 45000, 0, 2250);

INSERT INTO packedsales (psales_no, psales_date, emp_id, cust_id, cust_address, cust_tel, delivery_date, delivery_time, total, carriage, excise)
VALUES (890, '2001/05/18', 5, 10, '東京都中央区日本橋', '03-3123-XXXX', '2001/05/27', '10:00', 6000, 0, 300);

-- 売上明細テーブル
-- -----
TRUNCATE sales;
```

```

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1001,101,2,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,1001,103,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1002,102,1,20000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1003,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,1003,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(3,1003,106,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1004,104,3,60000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1005,105,1,25000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1006,106,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1007,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,1007,106,1,20000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1008,108,1,10000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1009,106,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,1009,109,1,15000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1010,110,1,6000);

-- 1994年7月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,1,101,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,1,103,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,2,102,3,20000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,3,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,3,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(3,3,106,1,30000);

-- 1994年8月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,4,104,2,60000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,5,105,1,25000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,6,106,1,30000);

-- 1994年9月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,7,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,7,106,2,20000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,8,108,1,10000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,9,106,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,9,109,1,15000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,10,110,4,6000);

-- 1994年10月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,11,101,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,11,103,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,112,102,1,20000);

-- 1994年11月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,113,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,113,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(3,113,106,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,114,104,1,60000);

-- 1994年12月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,115,105,1,25000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)

```

```
VALUES (1, 116, 106, 1, 30000);

-----
-- 1995年1月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 217, 102, 1, 20000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 217, 106, 1, 20000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 218, 108, 1, 10000);

-----
-- 1995年4月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 219, 106, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 219, 109, 2, 15000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 220, 110, 1, 6000);

-----
-- 1995年9月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 221, 101, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 221, 103, 1, 30000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 222, 102, 1, 20000);

-----
-- 1995年12月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 223, 103, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 223, 105, 1, 25000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (3, 223, 106, 1, 30000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 224, 104, 2, 60000);

-----
-- 1996年3月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 325, 105, 1, 25000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 326, 106, 1, 30000);

-----
-- 1996年7月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 327, 102, 1, 20000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 327, 106, 1, 20000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 328, 108, 1, 10000);

-----
-- 1996年10月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 329, 106, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 329, 109, 1, 15000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 330, 110, 1, 6000);

-----
-- 1997年2月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 431, 101, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 431, 103, 1, 30000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 432, 102, 1, 20000);

-----
-- 1997年5月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 433, 103, 1, 30000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 433, 105, 1, 25000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (3, 433, 106, 2, 30000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 434, 104, 1, 60000);

-----
-- 1997年8月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 435, 105, 1, 25000);

INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 436, 106, 1, 30000);

-----
-- 1997年11月
-----
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (1, 437, 102, 1, 20000);
INSERT INTO sales(sales_no, psales_no, prod_id, quantity, price)
VALUES (2, 437, 106, 1, 20000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,438,108,1,10000);
```

```
-- 1998年3月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,541,101,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,541,103,3,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,542,102,1,20000);
```

```
-- 1998年7月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,543,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,543,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (3,543,106,1,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,544,104,1,60000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,545,105,1,25000);
```

```
-- 1998年10月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,547,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,547,106,1,20000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,548,108,1,10000);
```

```
-- 1999年3月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,653,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,653,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (3,653,106,1,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,654,104,1,60000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,655,105,3,25000);
```

```
-- 1999年6月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,656,106,1,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,657,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,657,106,1,20000);
```

```
-- 1999年9月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,658,108,1,10000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,659,106,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,659,109,1,15000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,660,110,1,6000);
```

```
-- 2000年1月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,771,101,2,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,771,103,1,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,772,102,1,20000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,773,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,773,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (3,773,106,1,30000);
```

```
-- 2000年5月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,774,104,1,60000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,775,105,1,25000);
```

```
-- 2000年7月
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,776,106,1,30000);
```

```
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (1,777,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES (2,777,106,1,20000);
```



```

-- 2000年9月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,778,108,1,10000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,779,106,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,779,109,1,15000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,780,110,5,6000);

-- 2000年12月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,781,101,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,781,103,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,782,102,1,20000);

-- 2001年1月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,883,103,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,883,105,1,25000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(3,883,106,1,30000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,884,104,1,60000);

-- 2001年3月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,885,105,2,25000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,886,106,1,30000);

-- 2001年5月
--
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,887,102,1,20000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,887,106,1,20000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,888,108,1,10000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,889,106,1,30000);
INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(2,889,109,1,15000);

INSERT INTO sales(sales_no,psales_no,prod_id,quantity,price)
VALUES(1,890,110,1,6000);

--
UPDATE packedsales SET carriage = 100
  where cust_tel NOT like '03%'
;

-- 来年給与テーブル
--
CREATE TABLE nextsalary (
  emp_id    INTEGER PRIMARY KEY
  , current  NUMERIC(9, 2)
  , next     NUMERIC(9, 2)
);
INSERT INTO nextsalary VALUES( 1, 800.00, 1000.00);
INSERT INTO nextsalary VALUES( 2, 1600.00,  0.00);
INSERT INTO nextsalary VALUES( 3, 1250.00, null);
INSERT INTO nextsalary VALUES( 4, 2975.00, null);
INSERT INTO nextsalary VALUES( 5, 1250.00,  0.00);
INSERT INTO nextsalary VALUES( 6, 2850.00, null);
INSERT INTO nextsalary VALUES( 7, 2450.00, 2500.00);
INSERT INTO nextsalary VALUES( 8, 3000.00, 2500.00);
INSERT INTO nextsalary VALUES( 9, 5000.00, null);
INSERT INTO nextsalary VALUES(10, 1500.00,  0.00);
INSERT INTO nextsalary VALUES(11, 8000.00, 6000.00);

-- 口座テーブル
--
CREATE TABLE account(emp_id INTEGER, balance INTEGER);
INSERT INTO account VALUES(6, 1000);
INSERT INTO account VALUES(8, 1000);
-- SELECT * FROM account;

```