

Date

--	--	--	--	--	--	--

*while Loop :-

→ Syntax

```
while (condition)
{
    //
}
```

→ Example

```
* int i = 1;
while (*i < 3)
{
    cout << i << endl;
    *i++;
}
```

//	1
//	2


→ Entry Control Loop :-

→ If not update i so it will be infinite loop.



Date

→ Flow chart

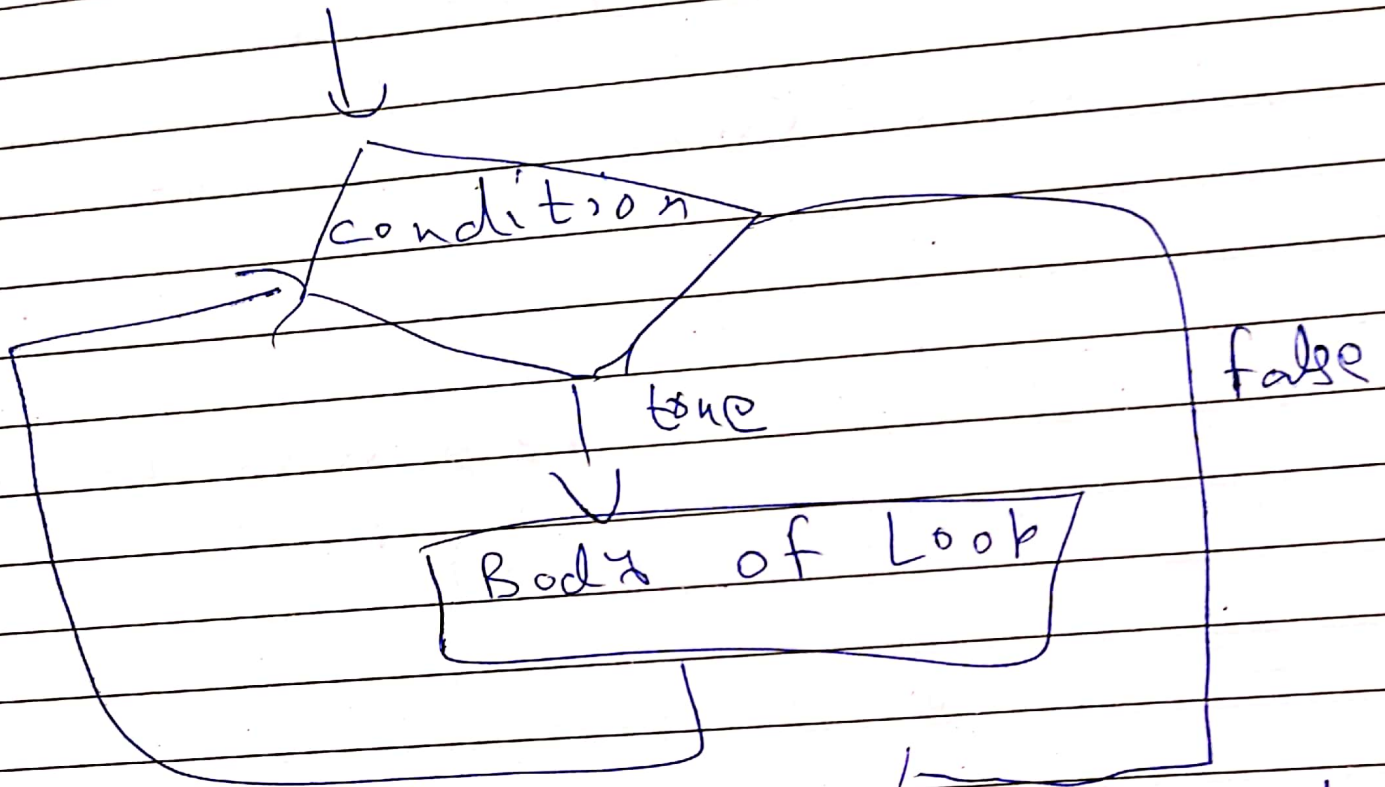

outside of while
exit loop.

→ it can be use to validate input.

int ^{num} n; cout << "enter number greater
cin >> num; then 6.
while (num <= 6)



{ cout << "between enter greater
than 6.
{ cin >> num;
- cout << "thanks";

Date

→ what for b/w 2 & 7.

while (num <= 2 || num >= 7)

{

→ only +ve numbers.

while (num < 0)

→ count down

while (num > 0)

{
 count <= num <= endd;

num-- ;
}





Date									
------	--	--	--	--	--	--	--	--	--

→ using flag concept:

```
int num;
bool flag = false;
contains blw 2 & 7" cir"ning
while (1. false)
{
    if (n <= 2 || n >= 7)
        continue; // valid num
    else
    {
        cout << "thank";
        flag = true;
    }
}
```

* Tricky things with while loop:

```
int i = 1;
while (i = 1)
{
    cout << i;
    i++;
}
cout << "out of loop";
```

} in finite loop.
if i is 4
if condition
right?
No.



Date

--	--	--	--	--	--	--	--	--	--

→ change $i=1$ to $i==1$

so it will only run
1 time & show 1.

→ change loop to while (i)

✓ infinite loop ???
No, by wrap-up concept

← it will ~~stop~~ reach at max
val & then from min
it will start & it will
stop at value '0' for false.

→ if value of i is -5
then what will be the output-

→ while (1)
infinite loop
either don't enter or

Date

--	--	--	--	--	--	--	--	--	--

→ while (c) ;

{

→

what will be the

output?