

Cross-view identity in image-based fruit counting: A systematic review and design space for class-wise inventories

Muhammad Zainal Muttaqin^{a,*}, Fatma Indriani^a

^a*Department of Computer Science, Universitas Lambung Mangkurat, Banjarbaru, Indonesia*

ARTICLE INFO

Keywords:

Fruit counting
Cross-view identity
Data association
Multi-object tracking
Class-wise inventory
Oil palm

ABSTRACT

Image-based fruit inventories count fruit from photographs, but a camera moving along a row or around a tree sees most fruit several times, so a sum of detections overstates the true number. Earlier reviews organize this literature by sensor, detector family, or yield-estimation route, and none takes the identity of a fruit across observations as its organizing variable. This systematic mapping review examines how the literature decides which observations belong to the same fruit and how class labels such as maturity are attached to each unique fruit. Reporting follows PRISMA 2020 where its items apply; a Scopus search on 28 September 2026 returned 6,491 records, 5,723 titles were screened, and 1,002 studies published between 2012 and 2026 were included. The 195 studies that combine several observations of the same fruit were coded by association mechanism (no association, statistical correction, appearance matching, temporal tracking, geometric or 3D association, and learned association), acquisition design, and reporting of counts per class, and were summarized with descriptive statistics and a structured narrative synthesis. Temporal tracking dominates recent work, whereas geometric association provides the most direct calibration-free counts when camera pose and depth are reliable. On fruit that look alike, appearance features did not improve tracking over motion alone in the two comparisons made on the same data. Few studies report identity errors or counts per class, and comparisons of mechanisms on the same data are rare. In oil palm, published work concentrates on ripeness classification and bunch detection in single images; cross-view association of bunches on a palm has not been evaluated. The review provides a design space that relates each mechanism to the acquisition conditions it requires and a minimum set of measurements for evaluating duplicate-aware, class-wise inventories.

1. Introduction

A grower who needs the number of ripe fruit on a block wants one record for each physical fruit, with its class. A camera does not supply that record. It supplies images, and in most field protocols the same fruit appears in several of them: in consecutive video frames, in photographs taken from both sides of a row, or in images taken while walking around a single tree. Detection finds fruit in each image. It does not say whether a fruit found in one image is the fruit found in another. The step that makes that decision determines whether a sum of detections is an inventory or an overcount.

The size of the problem is known from studies that measured it directly. In a mango orchard, one image of each side of 16 trees counted 54% of the fruit that were hand-counted, and one image of one side counted 27%; tracking every fruit through a multi-view sequence and triangulating it counted 101.4% (Stein et al., 2016). On 21 mango trees, video tracking recorded 62% of the harvest count and two images per tree recorded 40% (Wang et al., 2019). On a 192-fruit video, the same tracker produced 9.9% double counts and 7.3% missed fruit, which netted to a 2.6% overcount (Wang et al., 2019). The last figure shows why a total count can look correct when the underlying identity decisions are not: a duplicate and a miss cancel.

In oil palm the problem takes a specific form. Plantations estimate output with a bunch census in which staff count and classify bunches on each palm by the number of months until harvest. The SawitMVC dataset photographed 953 palms from four or eight sides and annotated 9,823 unique bunches in four census classes, with links that record which boxes in different images show the same bunch (Indriani et al., 2026). A census built from such photographs needs both the identity decision and a class label for each unique bunch.

From the perspective of counting unique fruit, earlier reviews leave three things open. First, they organize the literature by sensor (Gongal et al., 2015; Fu et al., 2020a), by detector family (Koirala et al., 2019; Huang et al., 2023), by yield-estimation route (Anderson et al., 2021b; He et al., 2022a), or, for oil palm, by ripeness-sensing method (Lai et al., 2023; Goh et al., 2025a); none takes the identity of a fruit across observations as the organizing variable, although several discuss occlusion and extrapolation from partial counts. Second, reviews of tracking, re-identification, and 3D reconstruction outside agriculture provide the mechanisms but not the agricultural evidence. Third, five of the eleven closest reviews do not state how their studies were found, and two more describe themselves as systematic without reporting databases or search strings (Table 6). As a result, a reader cannot tell which association mechanism fits a given acquisition protocol, or what evidence supports it.

To address these issues, this article presents a systematic mapping review of image-based fruit counting published

*Corresponding author. E-mail address: mz.muttaqin1@gmail.com (M.Z. Muttaqin).

between 2012 and 2026. Reporting follows PRISMA 2020 where its items apply to a mapping review. Scopus was the single database, searched on 28 September 2026, and 1,002 studies are included, of which 195 combine several observations of the same fruit.

This review makes three contributions. First, it provides a systematic map of the 1,002 studies, with the search strings reported in full and the screening decisions, the codes, and the log of changes made during verification provided as supplementary material. Second, it defines a design space that separates acquisition, observation, association, attribute assignment, and inventory, and classifies association into six mechanisms (no association, statistical correction, appearance matching, temporal tracking, geometric or 3D association, and learned association), each tied to the conditions it assumes. Third, it synthesizes the 195 multi-observation studies by mechanism, with the comparisons that were made on the same data reported in two tables, followed by the evidence on class attributes, depth, and oil palm.

Accordingly, the review addresses four questions:

- (1) Which mechanisms have been used to decide that observations in different images belong to the same fruit, and what acquisition conditions does each assume?
- (2) What evidence shows how well each mechanism controls duplicates and misses, and how was that evidence measured?
- (3) How are class attributes, mainly maturity, attached to a unique fruit rather than to each detection?
- (4) What does the oil-palm imaging literature cover, and what is missing for a bunch-level, class-wise census from images?

The remainder of this article is organized as follows. Section 2 describes the search, screening, and coding. Section 3 sets out the design space and reports how the multi-observation studies are distributed over it. Sections 4 to 6 follow its stages: acquisition (Section 4), association, mechanism by mechanism (Section 5), and class attributes on unique fruit (Section 6). Section 7 examines depth and other sensing modalities, and Section 8 the oil-palm case. Section 9 places the review against earlier reviews, Section 10 draws the gaps and a measurement agenda, Section 11 states the limitations, and Section 12 concludes.

2. Review method

The review is a systematic mapping review with a configurative synthesis (Petersen et al., 2015; Grant and Booth, 2009). It maps a broad body of work and builds a classification from it; it does not pool effect sizes, because the included studies use different crops, references, and metrics. Reporting follows the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA 2020) where the items apply to a mapping review (Page et al., 2021a,b), together with general guidance on reporting literature reviews

written for management and transport research (Kraus et al., 2022; Wee and Banister, 2016). The workflow comprised (i) defining the four questions and the scope, (ii) specifying inclusion and exclusion criteria, (iii) searching Scopus, (iv) screening records in two stages, (v) coding the included studies, and (vi) appraising and synthesizing the evidence.

2.1. Data source

Scopus was used as the single bibliographic database because it indexes the journals and proceedings in which agricultural engineering and computer vision work is published, including those of Elsevier, IEEE, Springer, MDPI, and Frontiers. The search was run on 28 September 2026 (UTC).

2.2. Search strategy

The search comprised 13 search strings in nine query sets (Table 1). Five sets target agricultural fruit perception: multi-observation counting, counting in titles, oil-palm imaging, class attributes with counting, and depth or 3D sensing. Two sets retrieve reviews: methods reviews on multi-object tracking (MOT), re-identification (re-ID), multi-view detection, and reconstruction, and agricultural reviews on fruit detection and yield. Two sets retrieve methods papers from outside agriculture; their results were sorted by citation count and only the 25 most cited records of each search were retained, because their role is to identify the transferable mechanisms, not to map those fields. All searches were limited to 2012–2026 and to subject areas that publish engineering or agricultural work. The complete search strings are given in Appendix B under the keys shown in Table 1.

2.3. Inclusion and exclusion criteria

Records published from 2012 to 2026 were included if they met at least one of the following: (i) an image-based method for fruit on the plant, or on the ground under the plant for oil-palm loose fruit, that evaluated counting, yield estimation, detection with a class attribute, localization, or sizing; (ii) a review of these topics; or (iii) a methods paper on tracking, re-identification, multi-view association, 3D reconstruction, or object counting outside agriculture. Records were excluded if: (i) the object was not fruit on the plant (for example trees, leaves, or flowers only); (ii) imaging was postharvest or laboratory-only, except oil-palm mill grading, which is part of the case; (iii) yield was modelled without fruit-level detection; (iv) the work addressed only picking or manipulation; (v) fruit were detected without counting or any evaluation beyond detection; (vi) the sensor was not an imaging sensor; or (vii) the record had no English title and abstract.

2.4. Study selection and screening

Records passed through two stages: title screening and eligibility assessment on the title and abstract. The criteria in Section 2.3 were applied at both stages, and the reason for every exclusion at the eligibility stage was recorded (Fig. 1).

Duplicates were removed by Scopus record identifier. Proceedings front matter, errata, notes, editorials, letters,

Table 1

Scopus query sets and number of records returned and retained.

Query set (key)	Search terms	Returned	Retained
Multi-observation counting (Q1)	Fruit or crop terms AND counting or yield AND multi-view, video, tracking, SfM, SLAM, duplicates	871	871
Counting in titles (Q2)	Fruit AND counting or load in the title	757	757
Oil-palm imaging (Q3)	Oil palm or FFB AND imaging, learning, ripeness, or counting	1,079	1,079
Class attributes with counting (Q4)	Fruit AND ripeness, grade, or class AND counting AND detection	361	361
Depth and 3D sensing (Q5)	Fruit AND RGB-D, stereo, LiDAR, or point cloud AND detection or counting	1,988	1,988
Reviews of association methods (Q6)	Reviews of MOT, re-ID, multi-view detection, SfM, SLAM	236	236
Reviews of fruit detection and yield (Q7)	Reviews of fruit detection, counting, ripeness, yield	1,049	1,049
Methods outside agriculture, five title searches (Q8a–Q8e)	MOT, multi-view, SfM/SLAM, object counting, re-ID in the title	23,532	125
Named foundational methods (Q9)	Titles of named methods (SORT, NeRF, SAM, ...)	1,082	25
Total			6,491

Note: Full strings are given in Appendix B under the same keys. For the last two sets only the 25 most cited records of each search were retained. FFB, fresh fruit bunch; SfM, structure from motion; SLAM, simultaneous localization and mapping; MOT, multi-object tracking; re-ID, re-identification; RGB-D, red-green-blue-depth; LiDAR, light detection and ranging.

and retracted items were removed by document type. Titles were then screened; for the three largest query sets (oil-palm imaging, depth and 3D sensing, and reviews of fruit detection and yield) titles were first sorted by keyword so that similar titles were read together. Abstracts were compiled from OpenAlex, Semantic Scholar, Crossref, and Europe PMC. For 254 records no abstract could be found at this stage; these were assessed from the title, the source, and, where available, the summary provided by Semantic Scholar.

Screening was carried out by one reviewer working with a large language model, which read the titles and abstracts and recorded a decision and a group for each record. To test the consistency of these decisions, the model was run a second time, in separate sessions that had no access to the first-pass decisions, on three sets of records: (i) all 510 records that the first pass had placed in the multi-observation group, placed in the oil-palm group, or excluded at the eligibility stage; (ii) a random sample of 300 records from the title stage; and (iii) a random sample of 100 records from the eligibility stage. For set (i) the second pass read

the full text where one had been obtained, searched for an abstract where none had been found, and also recoded the multi-observation and oil-palm studies.

The two passes assigned the same group, or the second pass accepted the first-pass group as an alternative, for 85% of the 510 records. The 232 records on which any code differed were adjudicated from the source in a third run, and a proposed change of group was applied only if a further run that was instructed to refute it could not do so. This procedure changed the group of 16 records, left 7 proposed changes unapplied, and flagged 10 records whose group cannot be settled without the full text; unapplied and flagged records keep their first-pass decision. In the samples, the two passes agreed on 85% of the title decisions and on the group of 83% of the eligibility decisions.

Every disagreement at the title stage was a first-pass exclusion that the second pass would have carried forward (44 records); when their abstracts were read, 11 met an inclusion criterion, among them one multi-observation study and one oil-palm study. The abstracts of all 1,325 title-stage exclusions retrieved by the multi-observation and oil-palm query sets were therefore read in a further pass, and each proposed inclusion was again put to a run that tried to refute it; 19 records were included (6 multi-observation and 6 oil-palm studies among them), and they are counted throughout this article. One further record that had been excluded at the title stage was included, in the depth and 3D sensing group, after the second author reviewed the disagreements in a blind sample of title decisions checked by the first author.

These steps measure the consistency of a model-assisted procedure. They are not an independent review by a second person, and their consequences are discussed in Section 11. Every changed decision and code is recorded, with its old value, new value, and reason, in a change log provided as supplementary material.

Two reports were handled outside the search. One review of citrus yield prediction, published online before the search date but assigned to a 2027 volume and therefore outside the year limit of the queries, was identified from a list of known papers and added to the earlier reviews (Liu and Ampatzidis, 2027). The reference lists of the five closest reviews were also checked for multi-observation studies that the search had missed; ten candidates were examined and none met the criteria within the date range.

2.5. Data extraction and coding

Each included study was assigned to one of seven groups (Table 2). Where a study met the definition of more than one group, the multi-observation group took precedence for any study that combines several observations of the same fruit. A stereo image pair was treated as a single observation: a study that detects, locates, or sizes fruit from one stereo pair was assigned to the depth and 3D sensing group, and to the multi-observation group only when it links fruit across frames or across camera positions. The map is broader than the four questions because each group has a role in answering them; Section 2.6 gives that role.

Table 2Groups of included studies ($n = 1,002$).

Group	Definition	Studies	How coded	Sections
Multi-observation studies	Combine several observations of the same fruit (video, several views, or repeated scans) and count, estimate, map, or link fruit across images	195	Individually, in two passes; from full text where available	3–6
Single-view counting studies	Count fruit or estimate yield from single images	238	Keyword rules, spot-checked	4, 5
Oil-palm studies	Image oil-palm fresh fruit bunches or loose fruit, including mill grading	176	Individually, in two passes	8
Single-image class-wise counting studies	Count fruit by class in single images	49	Keyword rules, spot-checked	6
Depth and 3D sensing studies	Detect, locate, or measure fruit with depth, 3D, or a non-RGB modality	135	Keyword rules, spot-checked	7
Earlier reviews	Review fruit detection, counting, yield estimation from images, or oil-palm imaging	121	Keyword rules; the closest reviews examined individually	9
Methods papers from outside agriculture	Tracking, re-identification, multi-view association, 3D reconstruction, or object counting	88	Keyword rules	3, 5

Each multi-observation study was coded for (i) association mechanism (one or more of the six defined in Section 3.3), (ii) acquisition design (video along a path, discrete views, 3D scan, revisits over time, or a single view), (iii) whether counts are reported per class, (iv) the main reported result, (v) the reference against which counts were checked, (vi) the level of the reported metric, and (vii), where counts are reported per class, how the class is attached to a unique fruit. Each oil-palm study was coded for (i) task, (ii) setting, (iii) modality, (iv) use of several views, and (v) whether class labels are attached to instances. The codes of the first pass were assigned from the abstract and, where open-access full text was obtained, from the paper; the second pass described in Section 2.4 recoded both groups. After adjudication, the codes of 68 of the 195 multi-observation studies rest on the full text, 117 on the abstract, and 10 on the title alone.

The following rules decided the codes. A study that uses several mechanisms was assigned each of them, so mechanism totals are occurrences, not exclusive study counts. Linking between consecutive frames by motion or overlap was coded as temporal tracking. Trackers that add an appearance descriptor to the motion model, such as DeepSORT and StrongSORT, were coded as appearance matching combined with temporal tracking. Tracking followed by 3D localization was coded as temporal tracking combined with geometric association, and a calibration or regression against reference counts on top of another mechanism adds statistical correction. Counts per class were coded only when a study reports counts, not only detections, for each class. Dataset papers without an association method were coded separately and are not included in the mechanism statistics.

The remaining groups were coded by keyword rules for crop, modality, platform, and class attribute, and the rule output was spot-checked. Metric types were extracted from abstracts by keyword and are reported only for studies with an abstract. Full text was obtained for the 330 included studies available in open access. The codes of all 195 multi-observation studies are listed in Appendix Table A1 and

underpin the counts in Section 3.4 and the synthesis in Sections 4 to 8.

2.6. Analytical framework

The review is organized by a five-stage design space and by six association mechanisms, both defined in Section 3. Table 3 links each question to the groups that carry its main evidence, the groups that support it, and the sections that answer it.

2.7. Evidence appraisal and synthesis


No formal quality score was assigned. Instead, the review records, for each comparison it reports, the reference against which counts were checked (hand count on the tree, harvest count, packhouse count, or annotated images), whether the comparison was made on the same trees or data, and whether the result is a total count, a per-tree count, or an identity metric. These three properties decide what a reported number can support.

The synthesis used three procedures. First, descriptive statistics summarize the coded variables; statistics on mechanisms refer to the multi-observation studies that propose or evaluate a method, and statistics on metric types refer to the studies with an available abstract. Second, within each mechanism a structured narrative synthesis compares studies by acquisition design, crop, reference, and metric level; comparisons made on the same data are collected in Tables 4 and 5. Third, as a supplementary perspective, a term co-occurrence map was computed from the titles and available abstracts of the 1,001 included studies identified through Scopus (776 have an abstract; the others contribute their title only). A fixed vocabulary of task, method, sensor, and crop terms was matched in each record; terms found in at least 20 studies were kept, two terms were linked when at least 12 studies contained both, and terms were grouped by modularity clustering on association strength. The map was used for orientation only and did not affect inclusion.

Table 3

Questions of the review, the groups of included studies that answer them, and the sections where they are answered.

Question or purpose	Main evidence	Supporting groups	Sections
(1) Mechanisms and the conditions each assumes	Multi-observation studies	Depth and 3D sensing studies; methods papers from outside agriculture	3–5, 7
(2) How well each mechanism works, and how that was measured	Multi-observation studies	Single-view counting studies, as a baseline	4, 5
(3) Classes on unique fruit	Multi-observation studies that report counts per class	Single-image class-wise counting studies	6
(4) The oil-palm case	Oil-palm studies	None	8
Positioning	Earlier reviews	None	9

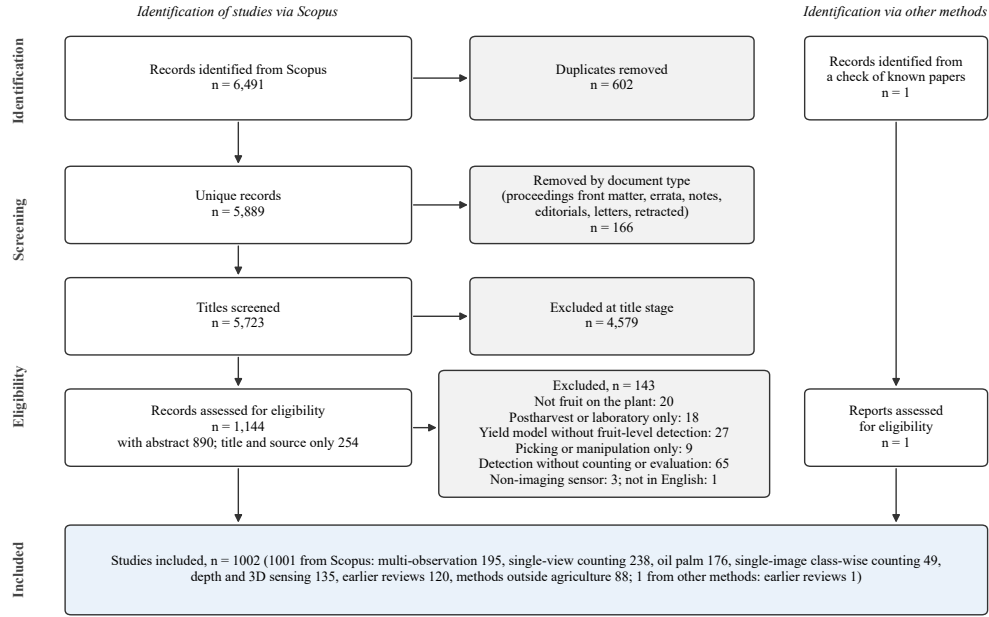**Fig. 1.** PRISMA 2020 flow diagram of record identification, screening, eligibility assessment, and inclusion.

2.8. Search results and included studies

The flow diagram (Fig. 1) summarizes the record counts at each stage. The searches returned 6,491 records, of which 5,889 were unique. After 166 were removed by document type, 5,723 titles were screened and 4,579 excluded. Of the 1,144 records assessed for eligibility, 143 were excluded, most often under exclusion criterion (v) (65 records). The map contains 1,002 studies: 1,001 identified through Scopus and 1 identified by another method (Section 2.4). Fig. 2 shows the growth of the Scopus records, from 9 in 2012 to 193 in 2025; multi-observation studies grew from at most 5 per year up to 2019 to 47 in 2025. Records for 2026 cover the period up to the search date.

Fig. 3 shows the term map: 43 terms and 311 links. Its three large clusters match the groups of the review: counting, yield estimation, video, and tracking sit together with the terms for identity (data association, re-identification, double counting, multi-view); depth, RGB-D, stereo, LiDAR, and point clouds sit with apple, orchard, occlusion, and localization; and ripeness, classification, and grading sit with oil palm. The identity terms are small and peripheral: each

occurs in 24 to 37 of the 1,001 studies, against 611 for detection and 424 for counting.

3. A design space for turning observations into records

This section (i) describes the five stages that lead from images to a class-wise inventory, (ii) names the ways in which a fruit is counted twice, (iii) defines the six association mechanisms by the condition each assumes, and (iv) reports how the 195 multi-observation studies are distributed over mechanisms, acquisition designs, crops, platforms, and sensors.

3.1. From images to an inventory

Fig. 4 shows the five stages of the pipeline that ends in a class-wise inventory. Acquisition fixes how many views of each plant exist, whether they are ordered in time, and whether pose, depth, or baseline are known. Observation produces detections or masks in each image; a fruit may produce several observations, and a detector may also split

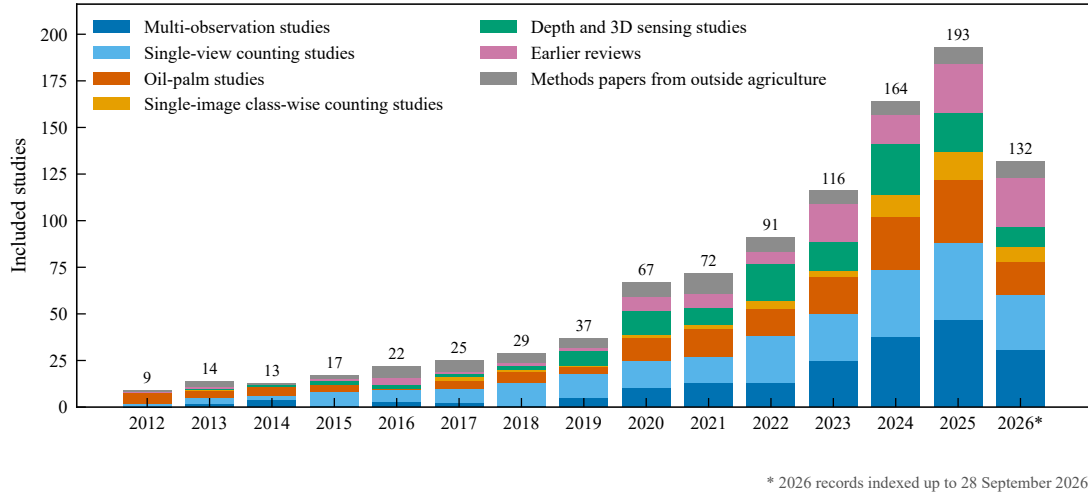


Fig. 2. Number of included studies per year by group ($n = 1,001$ studies identified through Scopus).

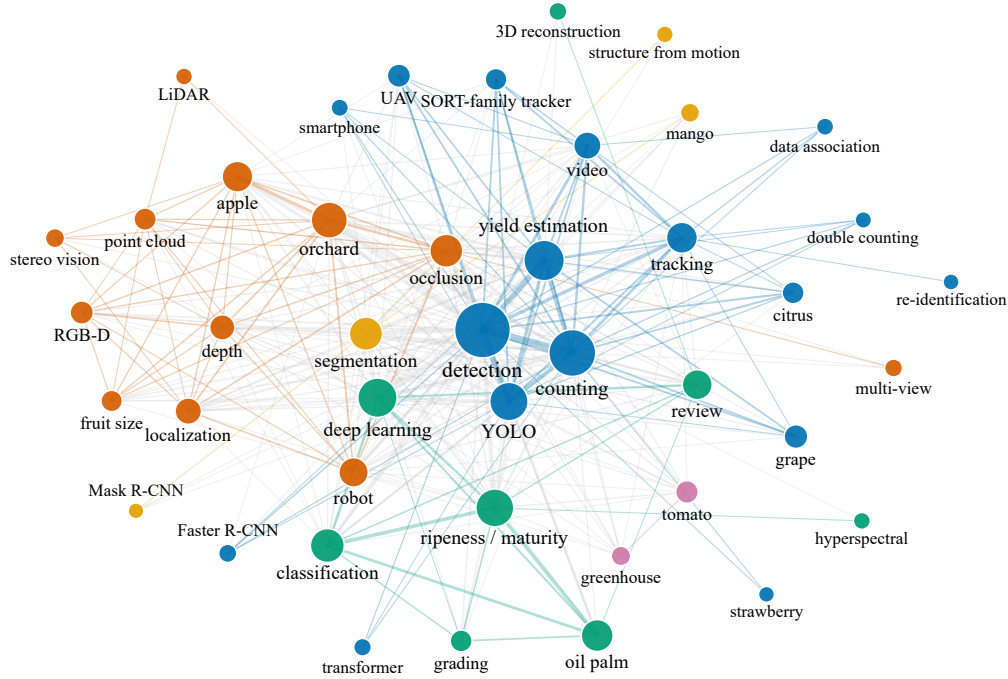


Fig. 3. Term co-occurrence map of the included studies, where node size, line width, and colour represent the number of studies containing the term in the title or abstract, the number of studies containing both terms, and the cluster, respectively.

one fruit or merge two. Association decides which observations belong to the same physical fruit. Attribute assignment gives the unique fruit a class, size, or mass. The inventory aggregates unique fruit by class and by tree, row, or block. Detection accuracy, which most papers report, describes the second stage. The count, which the user needs, depends on all five.

3.2. Three sources of double counting

Liu et al. (2019) named three ways in which a fruit is counted twice in a traversal: the same fruit detected in consecutive images, the same fruit tracked, lost, and picked up again as a new track, and the same fruit seen from the two sides of a tree. Wang et al. (2019) cited the same three sources when designing their mango tracker. Misses have two sources: fruit never visible from any camera position, and fruit visible but not detected. A mechanism controls

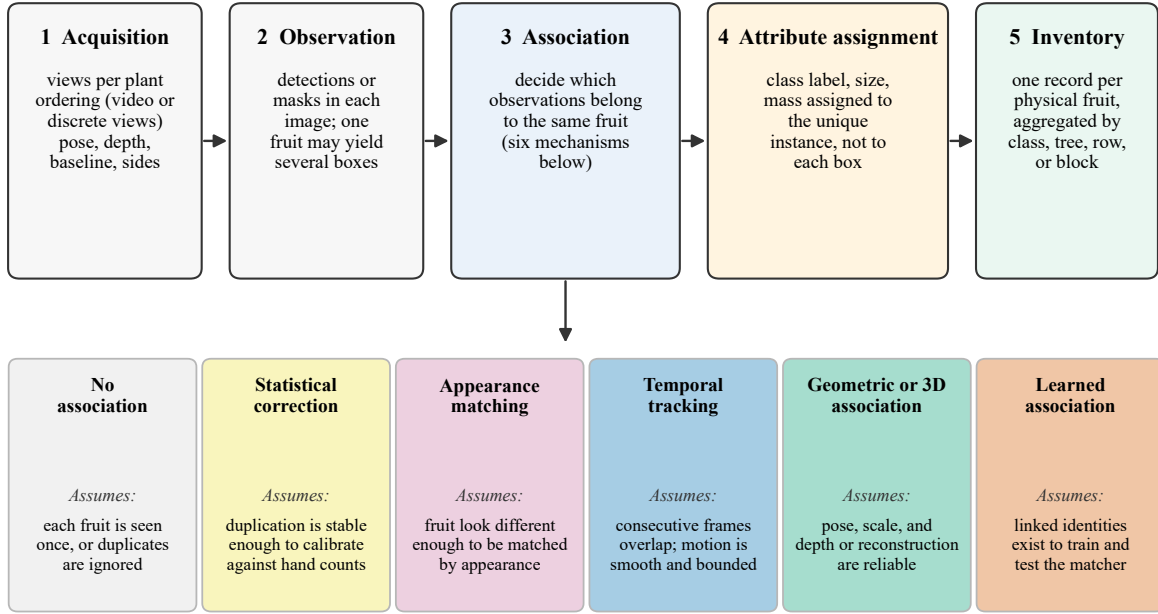


Fig. 4. Design space: five stages from acquisition to inventory, and the six association mechanisms with the condition each assumes.

some of these sources and not others, which is why the mechanisms below are described by what they assume, not only by how they compute.

3.3. Six association mechanisms and the conditions they assume

No association. Each image is counted separately. This is correct only if acquisition guarantees that no fruit appears twice, or if duplicates are accepted.

Statistical correction. Image counts are summed or averaged and then related to hand or harvest counts by a fitted factor or regression. No individual fruit is identified. It assumes that the ratio between observed and true counts is stable across the trees to which it is applied (Nuske et al., 2014a; Linker et al., 2015).

Appearance matching. Observations are linked when their appearance descriptors are similar, either hand-crafted or learned for re-identification. It assumes that fruit differ enough in appearance to be told apart.

Temporal tracking. Observations in consecutive frames are linked by predicted motion and overlap, usually with a Kalman filter and an assignment step (Bewley et al., 2016); a counting line or region then decides when a track is counted. It assumes that consecutive frames overlap and that motion between them is small and smooth.

Geometric or 3D association. Observations are linked through a common coordinate frame: triangulation with known camera poses, structure from motion (SfM), simultaneous localization and mapping (SLAM), registered point clouds, or an implicit 3D representation such as a neural radiance field. It assumes that poses, scale, and depth or

reconstruction are accurate enough that two different fruit are not placed at the same position.

Learned association. A network is trained to decide correspondence directly from linked examples. It assumes that training data with identity links exist and represent the conditions of use.

A study may combine mechanisms; 79 of the 191 multi-observation method studies do (Appendix Table A1). In tables and figures a plus sign joins the mechanisms that a study combines, for example appearance + tracking. A study that combines them should still show which one removes the duplicates, because each fails under different conditions.

3.4. Quantitative landscape of the multi-observation studies

To complement the synthesis in Sections 4 to 8, the coded records (Section 2.5) were summarized with descriptive statistics. Of the 195 multi-observation studies, 4 are dataset papers and 191 propose or evaluate a method; the statistics below refer to these 191.

(i) *Mechanisms and their change over time.* Fig. 5(a) shows the share of method studies that use each mechanism in each period; because a study may combine mechanisms, the values are occurrences rather than mutually exclusive study counts. Temporal tracking appears in 118 of the 191 studies (62%), geometric association in 78 (41%), appearance matching in 50 (26%), statistical correction in 18 (9%), learned association in 7, and no association in 4. The mix has shifted. Of the 12 studies published before 2018, 8 used geometric association, 5 statistical correction, and 1 temporal tracking; since 2023, temporal tracking has appeared in

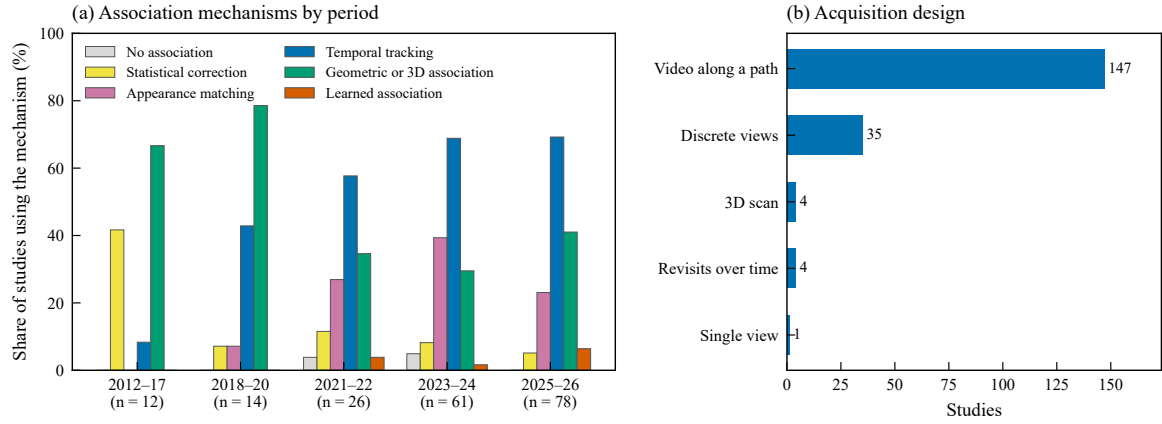


Fig. 5. Association mechanisms and acquisition design in the multi-observation method studies ($n = 191$): (a) share of studies using each mechanism by period; (b) acquisition design.

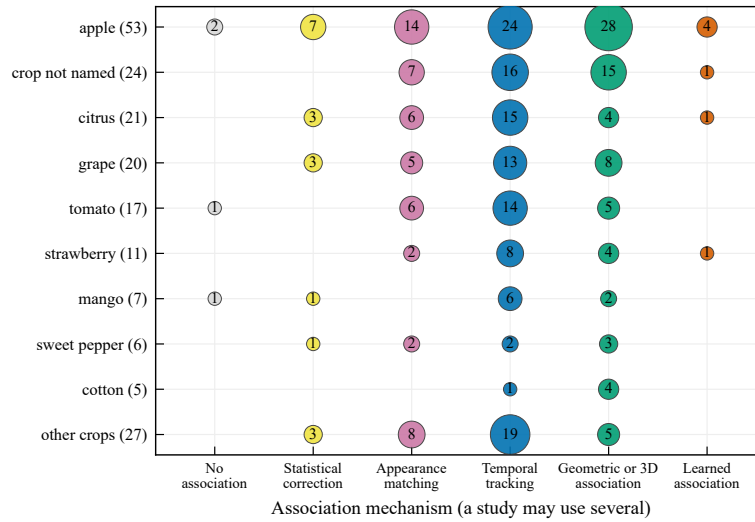


Fig. 6. Multi-observation method studies by crop and association mechanism ($n = 191$), where the number in each circle is the study count.

69% of the 139 new studies and appearance matching, mostly inside trackers that carry an appearance descriptor, in 30%.

(ii) *Acquisition design.* Fig. 5(b) shows that most studies acquire video along a path (147); 35 use discrete views, 4 use 3D scans, 4 revisit the same plants over time, and 1 is coded as a single view. The literature is therefore mainly a literature of video.

(iii) *Crops and class reporting.* Fig. 6 relates crop to mechanism. Apple accounts for 53 studies, citrus for 21, grape for 20, tomato for 17, strawberry for 11, and mango for 7. Only 19 of the 191 studies report counts per class, which Section 6 takes up.

(iv) *Combinations, from acquisition to crop.* Fig. 7 follows each of the 191 studies from acquisition to crop. Here a study is placed in one category, so combinations are separate: temporal tracking alone accounts for 49 studies, geometric association alone for 47, appearance matching combined with temporal tracking for 43, and temporal tracking combined with geometric association for 20. Video feeds

all four of these, whereas discrete views lead mainly to geometric association (25 of the 35 studies) and to statistical correction (8). Taken together, Fig. 5(a) counts every mechanism a study uses, whereas Fig. 7 places each study in one category; the first shows prevalence and the second shows which combinations occur.

(v) *Platforms and sensors.* Fig. 8 gives modality and platform by crop. The platform is the least reported property: 115 of the 191 abstracts do not state it, 39 name a ground vehicle or robot, 11 an unmanned aerial vehicle (UAV), 6 a handheld device or smartphone, and 18 name more than one platform; in Fig. 8(b) a study that names several platforms is counted under each. These counts describe what abstracts report, not what was used. An RGB camera is the sensor in 157 of the 191 studies; RGB-D cameras appear in 15, stereo cameras in 6, LiDAR in 7, and multispectral cameras in 4. Sensors that measure depth are concentrated in apple and strawberry.

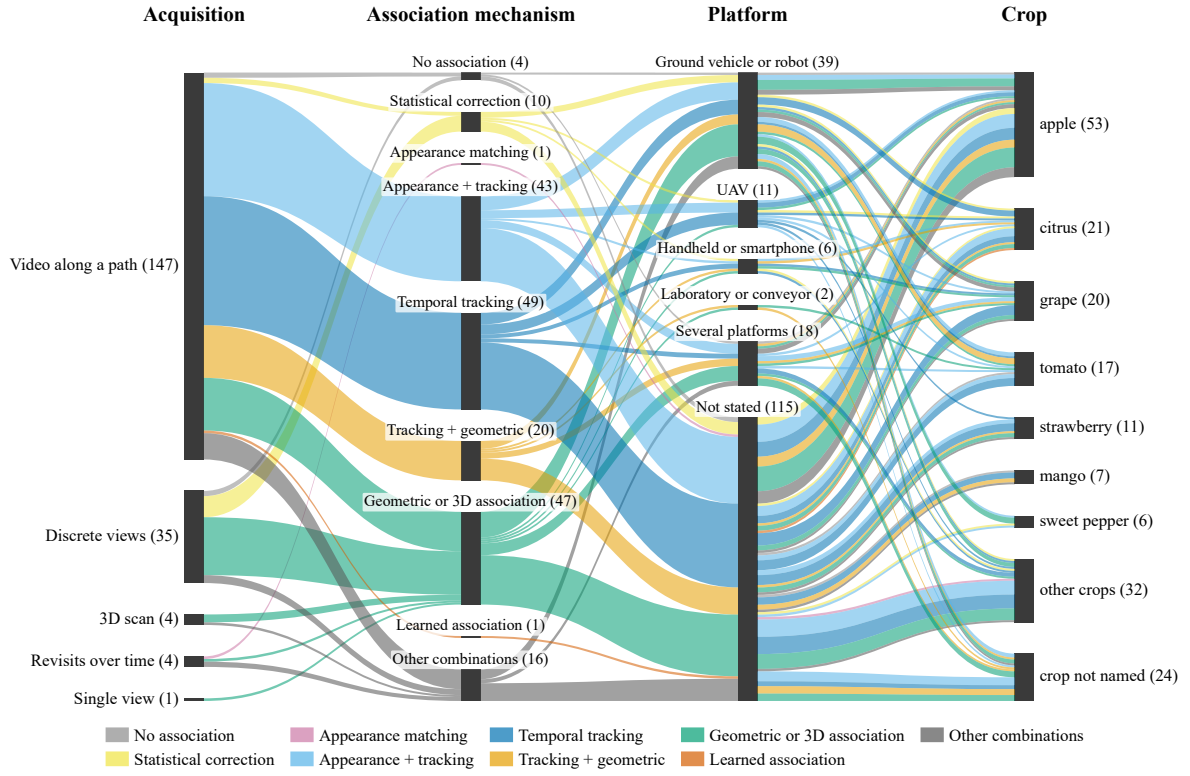


Fig. 7. Acquisition design, association mechanism, platform, and crop of the multi-observation method studies ($n = 191$), where band width and colour represent study count and mechanism, respectively.

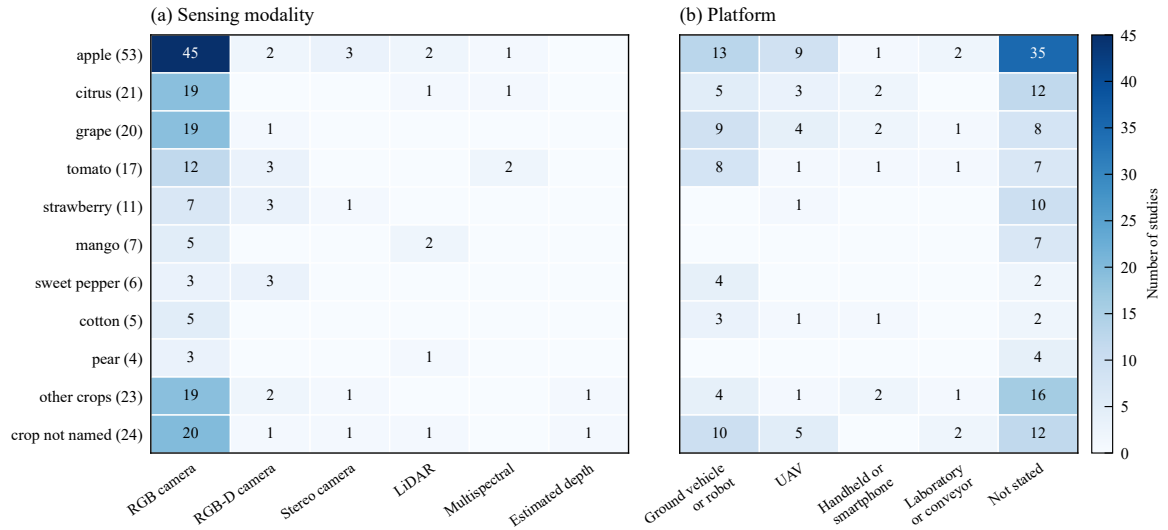


Fig. 8. Sensing modality and platform by crop in the multi-observation method studies ($n = 191$): (a) modality; (b) platform.

Sections 4 to 8 use this design space. Section 4 takes the acquisition stage, Section 5 the association stage one mechanism at a time, and Section 6 the attribute stage; Sections 7 and 8 then ask what depth sensing and the oil-palm case add.

4. Acquisition: how many views, and from where

This section covers the acquisition stage. Eight studies compared acquisition designs on the same plants (Table 4); their results show how much recall additional views add

Table 4Studies that compared acquisition designs on the same plants ($n = 8$).

Study	Crop, scale	Designs compared	Reported result	Count reference
Stein et al. (2016)	Mango, 16 trees	One image of one side; one image per side; multi-view tracking with triangulation (tracking + geometric)	Fruit counted: 27% (single, $R^2 = 0.81$), 54% (dual, $R^2 = 0.94$), 101.4% (multi-view, $R^2 = 0.90$)	Hand count on tree and at harvest
Wang et al. (2019)	Mango, 21 trees	One image per side; video tracking	40% of harvest (bias-corrected RMSE 21.7 fruit/tree) vs 62% (RMSE 18.0)	Harvest count
Gongal et al. (2016)	Apple, tall spindle	One side; both sides with 3D duplicate removal (geometric association)	Crop-load estimation accuracy 58% vs 82%; error in identifying duplicate apples 21.1%	Manual count
Qureshi et al. (2023)	Apple fruitlets	One-sided vs two-sided scans from an over-canopy robot	Counting accuracy 73.7% vs 81.17%	Manual count
Ariza-Sentís et al. (2025)	Grape, commercial vineyard	Single-view vs multiple-view UAV video with tracking	Tracked/ground-truth ratio 13–23% vs 27–74% across trials; multi-view tracking degraded by motion blur	Annotated video
Felip-Pomés et al. (2026)	Apple, 420 trees	Two RGB-D sensors, three distances, two dates, one or both sides	Best MAPE 6.91%, $R^2 = 0.733$ at 225 cm; both sides improved estimates per row stretch	Manual count
Vijayakumar et al. (2023)	Citrus, per tree	UAV features plus fruit counts from one or two sides	MAPE 23.45% (one side) vs 25.72% (two sides), both better than UAV only (35.59%)	Harvest per tree
Anderson et al. (2021a)	Mango, 20 orchards	Raw multi-view counts vs multi-view corrected with hand counts	Absolute percentage error on packhouse count 11% vs 17% (nine orchards with all methods, 2019–2020 season); trellised canopies overestimated by 25.2% against harvest counts	Packhouse count; harvest count (canopy trial)

Note: Values are as reported by the authors. Count references and metrics differ between rows, so values should be compared only within a row. MAPE, mean absolute percentage error; RMSE, root-mean-square error; UAV, unmanned aerial vehicle.

and when they do not help. Each row is one study; the values are as reported and should be compared only within a row, because references and metrics differ between studies (Section 5.6).

Three results are consistent across the eight comparisons.

(1) *A single image per side sees a minority of the fruit on a dense canopy.* Stein et al. (2016) counted 27% of the fruit from one side and 54% from two sides of mango trees, and Wang et al. (2019) counted 40% of the harvest with one image per side. In apple, Gongal et al. (2016) reached a crop-load estimation accuracy of 58% with single-side imaging against 82% with dual-side imaging.

(2) *Low recall does not prevent a precise estimate if it is calibrated.* In the study of Stein et al. (2016), the dual-view counts correlated with the true counts more tightly ($R^2 = 0.94$) than the multi-view counts ($R^2 = 0.90$), but they had to be scaled up by a factor near two. Precision and accuracy therefore answer different questions; a correlation with hand counts does not show that duplicates were removed.

(3) *Adding views does not always help.* Vijayakumar et al. (2023) found that counts from the second side did not reduce the per-tree yield error in citrus, whereas Ariza-Sentís et al. (2025) recovered more bunches with multiple-view flights over a vineyard but lost tracking quality to motion blur. Zhu et al. (2024) found that the best number of views per citrus tree (two, four, or six) depended on how heavily the tree had been pruned. More views therefore raise recall but do not guarantee a lower error per tree.

How acquisition constrains association. Acquisition also decides which association mechanisms are possible. Video along a row gives the frame-to-frame overlap that temporal tracking needs. Discrete views around a tree, as in SawitMVC (Indriani et al., 2026) or the eight direction frames that Nayak Nenavath and Perumal (2024) sampled at equal intervals from a 360-degree walk-around video of a mango tree, have wide baselines and no frame-to-frame continuity, so tracking does not apply and association must rely on appearance, geometry, or learning. Several groups have treated view selection itself as the problem: active view planning for apple clusters (Roy and Isler, 2017a), viewpoint planning with an octree of fruit regions (Zaenker et al., 2021), and graph-based view sequences for sweet pepper (Zaenker et al., 2023). These studies optimize coverage; they do not report counts against a reference.

Taken together, the eight comparisons show that acquisition limits how much of the fruit can be seen and decides which association mechanisms can be applied; Section 5 examines those mechanisms.

5. Evidence by association mechanism

This section addresses the first two questions for the association stage: which mechanism was used, and what evidence shows that it controls duplicates and misses. Temporal tracking appears in 118 of the 191 method studies and geometric association in 78 (Section 3.4), so these two subsections are the longest. The subsections run from the

Table 5Comparisons of association mechanisms on the same data ($n = 14$).

Study	Crop	Compared	Reported result	Metric level
Zhang et al. (2022a)	Citrus	OrangeSort (motion, counting region) vs SORT vs DeepSORT	Counting MAE 0.081 vs 0.45 vs 1.212	Count
Gené-Mola et al. (2023)	Apple	ByteTrack vs SORT vs DeepSORT (YOLOv5x)	HOTA 0.689, 0.680, 0.682; DeepSORT 128 ms per image vs about 15 ms; MAPE 7.47% one week before harvest	Identity and count
Piazolo et al. (2026)	Grape (UAV)	SORT vs SORT+ with extended matching cascade	Counting accuracy 33% to 96%; ID switches –62%; MOTA and IDF1 +5–6%	Identity and count
Ponce-Machete and Fajardo (2025)	Calamansi (UAV)	ByteTrack	ByteTrack best: MOTA 59.67%, HOTA 65.42%, IDF1 73.72%	Identity
Wei et al. (2025)	Apple (stereo)	OC-SORT vs ByteTrack with GPS and visual odometry	OC-SORT best (HOTA 0.59); total error 20 apples, RMSE 6.24%, $R^2 = 0.96$	Identity and count
Qi et al. (2025)	Tomato clusters	SORT, DeepSORT, ByteTrack, BoT-SORT at reduced frame rates	Public MOT dataset with 165,172 cluster instances	Identity
Liu et al. (2018)	Orange, apple	Tracking alone vs tracking plus SfM correction (tracking vs tracking + geometric)	SfM step rejected double-counted tracks and outliers; L1 count error fell from 593 to 203 (orange) and from 673 to 322 (apple)	Count
Häni et al. (2020)	Apple, three datasets	Summed counts of the two sides vs counts merged in a 3D reconstruction of both sides (no association vs geometric)	103.86–147.81% vs 95.56–97.83% of the harvested count	Count
Gené-Mola et al. (2020c)	Apple, 11 trees	2D detection vs detection projected into SfM (geometric)	F1 0.816 to 0.881 against 1,455 apples annotated in the 3D point cloud	Detection in 3D
Gené-Mola et al. (2020a)	Apple	LiDAR from one position vs multi-view, with and without forced air	6.5% (multi-view) and 6.7% (air flow) more fruit located	Detection in 3D
Lei et al. (2025)	Apple, 60 trees (association ground truth: five trees)	4D association (position, appearance, topology) vs position-only and histogram-descriptor baselines	Association precision +23.7% over the descriptor baseline; counting accuracy 96.9% (1,846 estimated vs 1,790 apples)	Identity and count
Hong et al. (2025)	Persimmon	3D Gaussian splatting vs NeRF-based counting	Counting accuracy 96%, reported as 16% above NeRF-based methods	Count
Xing et al. (2026)	Cherry tomato	Tracking with and without multi-view compensation	Counting error reduced by 95.6%	Count
Mollineda et al. (2025)	Orange	Regression from single frames vs video segments	Multi-frame segments better, tested with nonparametric statistics	Count

Note: Values are as reported by the authors and should be compared only within a row. Metric level: Count, agreement of the final count with a reference; Identity, tracking metrics such as multiple-object tracking accuracy (MOTA), the identification F1 score (IDF1), higher-order tracking accuracy (HOTA), or identity (ID) switches; Detection in 3D, detection F1 after projection. Metrics are given in the scale used by each paper (fraction or per cent). MAE, mean absolute error; MAPE, mean absolute percentage error; RMSE, root-mean-square error; SfM, structure from motion; NeRF, neural radiance field.

mechanisms that identify no individual fruit, to linking in the image by motion and by appearance, to linking in a common 3D frame, and to correspondence learned from linked examples. Table 5 collects the 14 comparisons that were made on the same data; the values are as reported by the authors and can be compared within a row but not between rows. All studies coded for each mechanism are listed in Appendix Table A1.

5.1. No association and statistical correction

Statistical correction is used in 18 of the 191 method studies (9%), and 4 apply no association (Section 3.4). The studies without association rely on acquisition to limit duplicates. Nayak Nenavath and Perumal (2024) summed the mangoes detected in eight direction frames of a tree and counted 133 fruit against a manual count of 130 on one tree, with a counting accuracy of 95.48% on 14 trees. Turečková

et al. (2022) avoided tracking by stitching a narrow vertical strip of every video frame into one panorama of a tomato row and counting once in that image; the detected count differed from the annotated count by 2.32%. Villacrés and Vougioukas (2024) reported that one camera perpendicular to an apple canopy detected up to 88.3% of the fruit detected by four cameras.

The earliest multi-image systems summed counts and calibrated them. Nuske et al. (2014a) registered images from a vehicle driving along vineyard rows and related berry counts to harvest yield; with calibration data from a prior harvest the estimate was within 4%, and within 3% with destructive samples taken at the time of imaging. Across four seasons their estimates captured up to 75% of the spatial variance in yield (Nuske et al., 2014b). Linker et al. (2015) photographed 42 apple trees from two sides at three heights,

summed the six counts per tree, and calibrated the sum against 14 trees; the orchard estimate was within 10% of the actual yield although single-tree errors were sometimes large. Song et al. (2014) aggregated repeated, incomplete observations of pepper fruit in over 28,000 images of more than 1,000 plants with a statistical clustering step and reached a correlation of 74.2% with manual counts without linear adjustment.

The strength of statistical correction is repeatability. Stein et al. (2016) found the dual-view counts more tightly correlated with true counts than any other design, and Anderson et al. (2021a) reported absolute errors of 2% or less in repeated night-time imaging of mango orchards. The weakness is transfer. The factor describes an average tree and cannot say which fruit was counted twice. It must be refitted when canopy, cultivar, or acquisition changes. Anderson et al. (2021a) found the error on trellised canopies (25.2%) to be several times that on hedge, single-leader, or conventional systems (3.4–8.2%), and in the 2019–2020 season, across the nine orchards with all methods, correcting multi-view counts with hand counts of a stratified sample increased the average error from 11% to 17%. Regression from partial views to total counts remains common in UAV work: Apolo-Apolo et al. (2020) related top-view apple counts to total counts per tree with $R^2 = 0.80$, and Li et al. (2023) used a regression across three views to account for blueberries seen more than once.

Collectively, these studies show that statistical correction gives repeatable block-level estimates but no record of which fruit was counted twice; it is the baseline against which the other mechanisms should be tested (Section 10).

5.2. Temporal tracking

Temporal tracking is the most common mechanism: it appears in 118 of the 191 method studies (62%) and in 69% of those published since 2023 (Fig. 5a). Most studies follow tracking by detection: a detector finds fruit in each frame, a Kalman filter predicts where each track should appear next, and an assignment step, usually the Hungarian algorithm on overlap or distance, links detections to tracks (Bewley et al., 2016; Wojke et al., 2017; Zhang et al., 2022c). Four issues recur in these studies.

(1) *The counting rule.* A counting rule decides when a track becomes a fruit. Two rules dominate: count each unique track identity, or count a track when it crosses a line or region. Parico and Ahamed (2021) found the unique-identity rule more reliable for pears (F1 87.85%), because detection flicker caused the line rule to miss fruit that were detected, whereas Zhang et al. (2022a) counted citrus only when a track entered a fixed region, and this rule gave the lowest error in Table 5.

(2) *Motion alone versus motion with appearance.* The main question within temporal tracking is whether appearance features help. In the two comparisons on the same apple and citrus data, DeepSORT, which adds a learned appearance descriptor to the motion model, did not outperform trackers that use motion alone (Table 5; Zhang et al., 2022a;

Gené-Mola et al., 2023). In the citrus study its counting error was higher than that of SORT (MAE 1.212 against 0.45) (Zhang et al., 2022a), and in the apple study it needed 128 ms per image against about 15 ms (Gené-Mola et al., 2023). Saraceni et al. (2024) designed AgriSORT to use motion only, arguing that fruit are static targets of similar appearance, and released a table-grape benchmark with strong self-similarity. Piazzolo et al. (2026) improved SORT with a matching cascade over Mahalanobis, intersection-over-union, and Euclidean distances and reached accuracy comparable to DeepSORT without identity training data. The same issue appears outside agriculture: DanceTrack was built because targets with uniform appearance and diverse motion defeat trackers that rely on appearance (Sun et al., 2022). Studies that reported good results with DeepSORT exist, for example banana bunches with RGB-D and three constraints (96.82% counting success) (Zhou et al., 2025), but they did not compare against a motion-only tracker on the same data.

(3) *Repairs for broken tracks.* The failure modes that tracking studies report are specific. Missed detections break tracks and create new identities; Zhang and Cao (2025) added trajectory prediction to bridge such gaps in blueberry video, and Zhou et al. (2024b) added a multiple-mapping step for occluded strawberries. Camera shake on a legged robot reduced tracking accuracy until camera-motion compensation added 2.9 points of MOTA (Zhang et al., 2024), and low frame rates from UAVs motivated motion-direction costs and feature-based compensation in PineSORT (Xie-Li and Fallas-Moya, 2025). Wang et al. (2019) measured the net effect in the most transparent way, by reporting double counts (9.9%) and misses (7.3%) separately instead of only their difference.

(4) *What tracking does not resolve.* A fruit seen from both sides of a row appears in two separate passes. Wang et al. (2019) listed it as a separate source of double counts, and Liu et al. (2019) used the depth of each fruit relative to its tree trunk to drop fruit that belong to the far side.

Taken together, these studies show that tracking links fruit across consecutive frames but cannot, by itself, resolve the third source of double counting (Section 3.2); the studies that address it use geometric association (Section 5.4).

5.3. Appearance matching

Appearance matching occurs in 50 of the 191 method studies (26%), almost always together with another mechanism: 43 studies combine it with temporal tracking through trackers that carry an appearance descriptor, such as DeepSORT, StrongSORT, or BoT-SORT with its re-identification module (Section 2.5). Kirk et al. (2021) added a re-identification head to a multi-object tracker to count soft fruit through occlusions and reported a count error (MAPE) of 3% against 21% for a baseline tracker. Xia et al. (2022) matched pairs of fruit patches between sequence images with a trained matching network and a one-to-one assignment, and reached F1 0.816 for apples and 0.864 for oranges in identifying

repeated fruit. Zheng et al. (2023a) combined image appearance and position in a learned distance (an improved FaceNet) and clustered strawberry fruit and flower detections from overlapping multi-view remote sensing images; the result recovered objects that the orthomosaic hid. The pattern across these studies is that appearance works when combined with motion or position and has not been shown to work as the only cue for look-alike fruit, which agrees with the tracker comparisons in Section 5.2 and with the person re-identification literature, where discriminative identity features are learned from large sets of labelled identities (Zheng et al., 2015; Ye et al., 2022).

5.4. Geometric or 3D association

Geometric association is used in 78 of the 191 method studies (41%); they are listed in Appendix Table A1 and shown by crop in Fig. 6. It is the route with the longest history of calibration-free counts. Five streams can be distinguished.

(1) *Triangulation with poses from navigation sensors or stereo.* Wang et al. (2013) used a stereo rig at night on an autonomous vehicle and registered sequential images; block-level errors were -3.2% for about 480 red-apple trees and 1.2% for about 670 green-apple trees. Stein et al. (2016) established pairwise correspondences between images from the trajectory of a navigation system, triangulated tracked fruit, and used LiDAR to assign each fruit to its tree; 522 trees and 71,609 mangoes were scanned and the error for individual trees was 1.36% .

(2) *Structure from motion from a single camera.* Liu et al. (2018) replaced the navigation and LiDAR suite with a monocular camera: fruit were tracked in 2D and localized in 3D by structure from motion, and double-counted tracks were detected by their proximity in 3D. The later version also tracked trunks, built semantic structure-from-motion landmarks, and projected them back into every image (Liu et al., 2019). Roy and Isler (2016) built a piecewise incremental SfM for apple rows because standard SfM failed under the constrained geometry of a row.

(3) *Merging the two sides of a row.* Roy et al. (2019) merged counts from both sides of the row on three validation datasets (6, 10, and 6 trees) with an accuracy of 91.98–94.81% against harvested counts. Hani et al. (2020) reused this pipeline with a learned counting network and compared it with a plain sum of the two sides: the sum gave 103.86–147.81% of the harvested count, and the merged reconstruction 95.56–97.83% (Table 5). Dong et al. (2020) addressed the same two-side problem by aligning the reconstructions of both sides with global and semantic features, since the two sides share little overlap. Gongal et al. (2016) used 3D positions to remove apples seen from both sides, but misidentified 21.1% of duplicates.

(4) *Counting in a 3D map.* Newer geometric systems move the whole count into 3D. Gené-Mola et al. (2020c) projected Mask R-CNN detections into an SfM point cloud and improved F1 from 0.816 to 0.881, at a processing cost

they judged unsuitable for real time. Matos et al. (2024) combined SfM with bipartite graph matching for apples filmed with unconstrained camera motion and low frame rates. Lee et al. (2026) fused YOLO detections with SLAM point clouds from LiDAR in a 6 m by 70 m pear plot and reached 96.2% counting accuracy. Nellithimaru and Kantor (2019) built object-level SLAM from stereo for grape counting (F1 0.977 against image counts). Rapado-Rincón et al. (2023) tracked partial point clouds of tomatoes in 3D and estimated the total count with a best-case counting error of 5.06%; they also showed that the final count of a tracker can hide false positives and false negatives that offset each other, and they introduced tracking metrics to expose them.

(5) *Implicit representations.* FruitNeRF trains a semantic neural radiance field from posed images and clusters the extracted fruit points (Meyer et al., 2024), and Gaussian splatting was reported to count persimmons with 96% accuracy, 16% above NeRF-based counting (Hong et al., 2025). These methods build on general reconstruction tools (Schonberger and Frahm, 2016; Mildenhall et al., 2020; Kerbl et al., 2023); their evaluations are still dominated by synthetic scenes and a few real trees.

Where geometry fails. Scale is undefined for monocular reconstruction unless another sensor fixes it. Pose drift, where it occurs, enlarges the region within which two observations are declared the same fruit, so dense clusters can merge; no included study quantified this effect. Foliage moves between views, which violates the static-scene assumption of standard SfM and SLAM; dynamic-scene methods exist (Bescos et al., 2021; Saputra et al., 2019), but no included fruit study measured how much foliage motion degrades counts. Assigning fruit to trees is a separate geometric problem; Zine-El-Abidine et al. (2021) solved it by aligning a harvest-time point cloud to a leaf-off winter cloud in which each tree's branches are visible (accuracy above 95%).

Overall, geometric association has produced counts close to the reference without a fitted factor when pose, scale, and depth are reliable; the evidence for implicit representations still rests on synthetic scenes and a few real trees.

5.5. Learned association

A learned component decides the correspondence in 7 of the 191 method studies (Section 3.4), in three ways. First, a network matches fruit between scans or images. Fusaro et al. (2026) segmented fruit in coloured point clouds (terrestrial laser scans of strawberries and photogrammetric reconstructions of apples), extracted a descriptor per fruit with a sparse convolutional network, and matched fruit between sessions with an attention-based network and a probabilistic assignment, the matching being evaluated on the strawberry data only. The matching network of Xia et al. (2022) and the learned distance of Zheng et al. (2023a), discussed under appearance matching (Section 5.3), belong to the same group. Second, a network learns identity inside a 3D representation. FruitNeRF++ lifts 2D instance masks

that are inconsistent between views into 3D through instance embeddings trained with a contrastive loss; on a real apple set it reached F1 0.765, below the 0.881 of the fruit-specific method of Gené-Mola et al. (2020c) (Meyer et al., 2025). Zhao et al. (2026b) combined cross-view contrastive learning with voting in a 3D Gaussian representation and reported F1 above 0.97 for plum and mango scenes with dense occlusion. Third, a network replaces the association step of a tracker or fuses the views directly. Santos (2026) used a learned point tracker for data association in orange video; on seven sequences the count was 978 against 879 annotated fruit (an error of 11.26%), which did not improve on the authors' earlier pipeline. Isobe et al. (2025) fused features from different angles of a 360-degree mandarin video in a transformer and regressed the count, without an explicit identity for each fruit.

Outside agriculture, learned association is established for tracking of people and vehicles, within a single camera on pedestrian benchmarks (Braso and Leal-Taixe, 2020) and across cameras, where datasets with identities across cameras exist (Ristani et al., 2016; Chavdarova et al., 2018; Tang et al., 2019). The obstacle in fruit is the same one these datasets removed: learned association needs identity labels across views, and in the included corpus only a handful of fruit datasets provide them, among them GrapeMOTS (Ariza-Sentís et al., 2024), the tomato MOT set of Qi et al. (2025), the 4D orchard set of Lei et al. (2025), and Saw-itMVC (Indriani et al., 2026). This limit is taken up in Section 10.

5.6. How the evidence was measured

Of the 145 multi-observation method studies with an abstract, 62 (43%) report agreement between estimated and reference counts, 57 (39%) report detection quality, 18 (12%) report an identity metric such as multiple-object tracking accuracy (MOTA), the identification F1 score (IDF1), higher-order tracking accuracy (HOTA), or identity (ID) switches, and 51 (35%) report no quantitative metric in the abstract (Fig. 9). Identity metrics were developed for this purpose: HOTA balances detection and association accuracy (Luiten et al., 2021), and IDF1 was designed for identities that persist across cameras (Ristani et al., 2016). A count error alone cannot separate a correct count from offsetting duplicates and misses (Rapado-Rincón et al., 2023; Wang et al., 2019).

The reference also varies. Hand counts on the tree measure what the camera could have seen, harvest and packhouse counts include fruit hidden from every view, and annotated images measure only what an annotator saw. In the coded records, the count reference is annotated images or video in 99 of the 191 method studies, a hand count on the plant in 43, a harvest count in 23, and a packhouse count in 1; 39 state no count reference in the source that was read (a study may use more than one). Results from different references are not comparable, which is why Tables 4 and 5 report the reference or metric level for every row.

In answer to the first two questions, the included studies use six mechanisms whose assumptions are met by different

acquisition designs (Section 4), and the evidence that a mechanism controls duplicates and misses rests mostly on count agreement: 14 comparisons were made on the same data (Table 5) and 18 of the 145 abstracts report an identity metric. Section 10 turns these observations into gaps.

6. Class attributes on unique fruit

This section covers the attribute-assignment stage and answers the third question: how class attributes, mainly maturity, are attached to a unique fruit rather than to each detection. Two bodies of evidence bear on this.

Classes counted in single images. The first is the 49 studies that detect and count fruit by class in single images. Most concern tomato (18) and blueberry (7), and 43 of the 49 use maturity as the class. MacEachern et al. (2023) detected green, red, and blue wild blueberries with YOLOv4 and predicted yield by regression from the counts, whereas Ni et al. (2020) counted blueberries with $R^2 = 0.886$ against ground truth. Deng et al. (2024) released 17,955 annotated ripe and unripe blueberries in canopy images, and Shimomoto et al. (2025) predicted sweet pepper yield from average counts at two ripeness stages. These studies count classes in the image, not classes of unique fruit.

Class assigned during tracking. The second is the 19 multi-observation studies that report counts per class. Where the source states how the class is attached, it is most often carried by the tracker (7 studies). Ogundele et al. (2025) used a class-aware ByteTrack for strawberries; counts correlated with ground truth at $R^2 = 0.914$ overall and at $R^2 = 0.950$ for ripe fruit. Zhou et al. (2024b) reported a relative counting error of 6.7%, with 8.7% for ripe and 9.9% for unripe strawberries. Wang et al. (2025a) counted tomatoes in a counting region with ByteTrack and obtained a mean counting error of 6.6% for all fruit but 12.3%, 16.9%, and 17.3% for the ripe, half-ripe, and unripe classes. Zheng et al. (2025) counted ripe tomatoes with an accuracy of 92.03–93.22% and unripe tomatoes with 89.74–92.55% against manual counts on three beds.

Class assigned after tracking or by a vote. One study classifies after tracking (Pai and Lin, 2024) and one resolves disagreement between frames explicitly: Lin et al. (2026) tracked tomatoes with StrongSORT and gave each tracked fruit the maturity class that received the most votes over its track. Pardo-Beainy et al. (2026) assigned each tracked strawberry to one of nine size–maturity categories from metric length and width derived from RGB-D point clouds and a colour-based ripeness percentage, and georeferenced the fruit with a global navigation satellite system for yield maps. Wu et al. (2025) reached an average counting accuracy of 72.49% across blue, purple, and green blueberries in video. Other studies classify each tracked fruit but report only a total count: Hassan et al. (2025) tracked oranges with ByteTrack and classified each tracked fruit as ripe or unripe with a separate network, and Viveros Escamilla et al. (2024) tracked sweet peppers of four colours with YOLOv5 and DeepSORT and reported 85.7% counting accuracy (MOTA

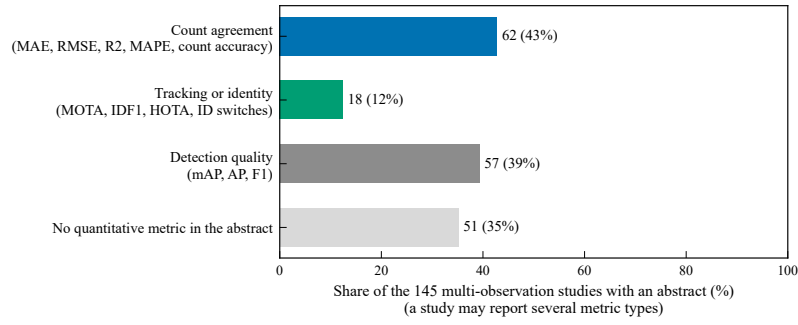


Fig. 9. Metric types reported in the abstracts of multi-observation method studies ($n = 145$).

0.88 and 0.87) in two simulated environments, each a video assembled from 70 still greenhouse images.

Two consequences. Two properties of class-wise counting follow from these results. First, class errors and identity errors interact. A fruit seen in ten frames can receive different labels in different frames, especially near class boundaries, and a class-aware tracker that splits the track when the label changes creates a duplicate. Only 1 of the 19 studies states a rule for choosing the label when frames disagree, 10 do not state how the class is attached, and none of their abstracts reports a class confusion matrix computed on unique fruit. Second, per-class errors differ from the overall error. In the strawberry study of Ogundele et al. (2025) the ripe class had the highest count R^2 (0.950) and the lowest MAE (2.65 fruit), though not the lowest MAPE (11.63% against 9.62% for unripe), and in the tomato study of Wang et al. (2025a) each class error was about twice the error for all fruit. In oil palm a video-based detector reached a mean average precision of 90.56% for a single class but 70.21% for several ripeness classes (Junior and Suharjito, 2023). An inventory that reports only a total hides both effects (Section 10).

7. Depth and other modalities

Depth is examined separately because it can serve two stages of the design space: observation (finding, locating, and sizing a fruit) and association (placing observations in a common frame). The 135 depth and 3D sensing studies use RGB-D cameras (77), stereo (20), LiDAR (13), or other non-RGB signals. Their main use is not association but detection, localization, and sizing of individual fruit, most often apples (47). Four uses recur.

(1) *Background removal.* Fu et al. (2020b) filtered objects farther than 1.2 m from a Kinect V2 in a dense fruiting-wall orchard before detection.

(2) *Fusion inside the detector.* Tu et al. (2020) trained separate colour and depth detectors for passion fruit and fused them late, raising F1 from 0.885 for a standard Faster R-CNN on RGB-D images to 0.946. Kaukab et al. (2024) filled depth holes before fusion because outdoor depth images are of low quality.

(3) *Metric size.* Wang et al. (2017) estimated on-tree mango dimensions from RGB-D with root-mean-square errors of about 4–5 mm but noted that the camera could not be used in direct intense sunshine. Neupane et al. (2021) compared eight depth cameras against a 20 mm bias-corrected error requirement for fruit localization and sizing.

(4) *Other active sensing.* LiDAR detected apples by reflectance with F1 0.858 (Gené-Mola et al., 2019), and LiDAR–camera fusion reduced localization error to one fifth of that of a RealSense D455 (Kang et al., 2022). Active thermal imaging with water mist separated immature citrus from leaves of similar colour and supported tracking-based counting in video (Gan et al., 2020).

Depth for association. For association, depth enters through geometric association (Section 5.4). Zheng et al. (2025) filtered detections by depth and fused robot odometry before inter-frame prediction for tomatoes, reaching MOTA 0.954 against YOLOv8 with DeepSORT. Abeyrathna et al. (2023) obtained 3D coordinates of each tracked apple from a RealSense D455 at three vehicle speeds and three camera angles. Felip-Pomés et al. (2026) found that the Azure Kinect gave more consistent results than the ZED 2 across dates in a 420-tree orchard. Liu et al. (2019) used depth relative to the trunk to resolve two-side duplicates. Monocular depth networks now offer depth without a depth sensor (Yang et al., 2024a; Ranftl et al., 2021), and one included study used such a network with amodal masks to measure apple diameter (Tan et al., 2025a), but none used predicted depth for cross-view association with a counted reference. The evidence therefore supports depth as an aid to separating neighbouring fruit and to placing fruit in a common frame when its error is small relative to fruit spacing, and it identifies the conditions (sunlight, range, registration) under which that error grows. Section 8 returns to these conditions for oil palm.

8. Oil palm

This section answers the fourth question: what the oil-palm imaging literature covers, and what is missing for a bunch-level, class-wise census from images. It covers ripeness classification, detection, counting, and what the case implies for the choice of mechanism. Fig. 10 shows that the 176 oil-palm studies concentrate on ripeness: 74 classify

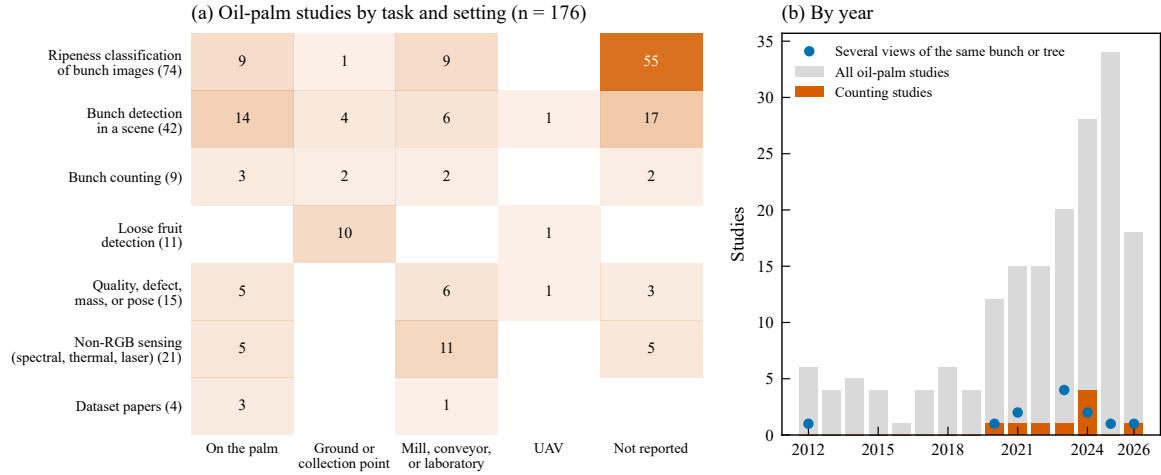


Fig. 10. Oil-palm studies ($n = 176$): (a) task by setting; (b) studies per year, with counting studies and studies that use several views marked.

the ripeness of images of single bunches, 42 detect bunches in a scene, 21 study non-RGB sensing of ripeness, 15 address quality, defects, mass, or pose, 11 detect loose fruit, 9 count bunches, and 4 are dataset papers. The setting is on the palm in 39 studies, at a mill, conveyor, or laboratory in 35, on the ground or at a collection point in 17, and from a UAV in 3; 82 sources do not state it. Class labels are attached to instances in 133 studies. Only 12 use more than one view of the same bunch or palm.

8.1. Ripeness classification and non-RGB sensing

Ripeness classification has a long record. Early work extracted colour features and classified them with neural networks or support vector machines (Fadilah et al., 2012; Sabri et al., 2018), followed by colour and texture features classified with a back-propagation neural network (Septiarini et al., 2021) and by convolutional networks deployed on mobile devices (Suharjito et al., 2021). The largest study in the corpus used 10,000 photographs from five Indonesian plantation sites in four classes and reported $94.66\% \pm 0.54\%$ accuracy in leave-site-out cross-validation on sites not seen in training (Usman et al., 2026). Reviews of this work agree that computer vision with deep learning is the most feasible field method (Lai et al., 2023) and that fusion with LiDAR may add localization (Goh et al., 2025a). Non-RGB sensing has been tested with thermal imaging (Zolfagharnassab et al., 2022), hyperspectral imaging (Bensaeed et al., 2014), laser-light backscattering (Mohd Ali et al., 2020), LiDAR (Husin et al., 2021), and radar with bunch mass (Resta et al., 2026), several of them on harvested bunches.

8.2. Detection on the palm and at the mill

Detection on the palm moved from single-class to multi-class ripeness detectors. Lai et al. (2022) trained YOLOv4 on images from a RealSense D435 with expert labels for ripe and unripe bunches, and Mansour et al. (2022) compared detectors on four ripeness classes. Junos et al. (2021) detected bunches, grabbers, and palms in plantation scenes, and the

same group detected loose fruit in UAV images (Junos et al., 2022). Zaman et al. (2025) addressed occlusion by fronds in UAV images. Goh et al. (2025b) released 400 plantation images with registered depth maps and point clouds from a RealSense D455f for ripeness classification and localization, the only oil-palm RGB-D dataset in the corpus. At the mill, Suharjito et al. (2023a) graded piles of bunches from smartphone video and released annotated datasets of piles (Suharjito et al., 2023b). Detection in oil palm therefore has field data, class labels, and one depth dataset, but each image is evaluated on its own.

8.3. Counting

Counting is the gap. The 9 counting studies count bunches in single images taken in the plantation (Grady Naftali et al., 2024; Hamdani et al., 2026; Rizky Hidayat et al., 2024; Prasetyo et al., 2020; Hutapea et al., 2024), count moving bunches on a laboratory conveyor with a colour-based detector and a centroid tracker (Shiddiq, 2023), count unstripped bunches in a mill with Faster R-CNN and a Euclidean-distance tracker (Aji et al., 2021), count bunches and loose fruit together for harvest management (Daud et al., 2022), or describe a counting system based on connected sensors (Narendran et al., 2024). Grady Naftali et al. (2024) built a plantation dataset of video frames with partial visibility, occlusion, small objects, low contrast, and blur, Hamdani et al. (2026) built a further plantation dataset, and Rizky Hidayat et al. (2024) proposed a standard procedure for capturing bunch images in the plantation.

None of the counting studies associates bunches across images of the same palm. Suharjito et al. (2025) recorded unharvested palms from multiple angles with a smartphone for a digital census and released 14,503 images in five maturity classes, but the annotations are per image. The only oil-palm dataset in the corpus with cross-view identity links is SawitMVC, whose technical validation reports statistical baselines only: a regression from per-view counts placed 96.81% of the per-class counts within one bunch

of the reference when it was given the annotated boxes and 75.35% when it was given detections (Indriani et al., 2026). Warni et al. (2026) combined stereo detection with Hungarian matching to localize loose fruit in 3D, which is an association step, but for a stereo pair, not for views around a palm. Tree-level counting from UAV images has addressed re-counting errors for palms themselves (Pragatheesh and Ramya, 2025; Kipli et al., 2023), not for bunches.

8.4. Implications for the choice of mechanism

The oil-palm case differs from the orchard cases in ways that matter for mechanism choice. Bunches of the same class on one palm look alike, which weakens appearance matching (Section 5.3). A census photographs a palm from a few discrete positions, which removes the frame-to-frame continuity that temporal tracking needs (Section 5.2). Fronds occlude bunches differently from each side, and the canopy is tall, which makes depth from consumer RGB-D cameras less reliable at the required range (Section 7). The census classes are defined by months to harvest, so neighbouring classes differ in subtle colour changes, and a class error on one view can split one bunch into two records of different classes (Section 6). These four properties define the missing experiment that Section 10 takes up.

9. Position relative to earlier reviews

With the evidence laid out, this section returns to the earlier reviews named in the Introduction and states what this review adds to each line of work. Table 6 lists the earlier reviews that are closest to this one. The column “Stated method” records what each review states about how its studies were found, from the abstract or, where it was read, from the full text. Three reviews are organized by sensor or sensing technique (Gongal et al., 2015; Fu et al., 2020a; Goh et al., 2025a), three by method, architecture, or model type (Koirala et al., 2019; Maheswari et al., 2021; Pu et al., 2025), three by estimation route, data source, or input feature (Anderson et al., 2021b; Rong et al., 2026; Liu and Ampatzidis, 2027), and two oil-palm reviews by task or classifier (Khan et al., 2021; Lai et al., 2023). Reviews of tracking and re-identification outside agriculture (Luo et al., 2021; Rakai et al., 2022; Ye et al., 2022) and of 3D reconstruction (Saputra et al., 2019; Zheng et al., 2026) provide the mechanisms but not the agricultural evidence.

None of these reviews organizes the evidence by identity across observations, although several discuss occlusion and extrapolation from partial counts; the gaps that follow from doing so are set out in Section 10.

10. Gaps and a measurement agenda

This section synthesizes Sections 4 to 8. Rather than repeating individual studies, it first traces how the choice of mechanism has shifted, then answers the four questions, and then states five gaps, each tied to the measurement that would close it.

10.1. How the choice of mechanism has shifted

Before 2018, geometric association and statistical correction accounted for almost all multi-observation studies; since 2023, temporal tracking has appeared in 69% of new studies (Fig. 5a). Within geometric association, implicit 3D representations are the latest variant, and 7 studies learn part of the association (Sections 5.4 and 5.5). The trajectory therefore runs from correcting a sum, to linking detections in video, to placing fruit in a 3D frame. Class-wise identity has not followed: only 19 of the 191 method studies report counts per class (Section 6). The term map agrees: each identity term occurs in 24 to 37 of the 1,001 studies (Fig. 3).

10.2. Answers to the four questions

Which mechanisms have been used, and what does each assume? Six mechanisms are in use (Section 3.3). Temporal tracking assumes overlapping, ordered frames and is therefore tied to video; geometric association assumes reliable pose, scale, and depth; appearance matching assumes fruit that can be told apart; statistical correction assumes a stable ratio between observed and true counts; and learned association assumes identity-labelled data (Sections 4 and 5).

How well does each mechanism control duplicates and misses, and how was that measured? The evidence is mostly count agreement against references that differ between studies (Section 5.6). The 14 comparisons on the same data show that motion-only trackers were not outperformed by trackers with appearance features on look-alike fruit, and that a geometric step removed duplicates that tracking or summation left (Table 5).

How are classes attached to unique fruit? In the 19 studies that report counts per class, the class is mostly carried by the tracker; one study states a voting rule for disagreeing frames (Section 6).

What does the oil-palm literature cover, and what is missing? It covers ripeness classification, detection, and counting in single images or on conveyors. No study associates bunches across views of a palm, and the one dataset with cross-view identity links has been evaluated with statistical baselines only (Section 8).

10.3. Five gaps

(i) *Identity is rarely measured.* Only 18 of the 145 multi-observation method studies with an abstract (12%) report an identity metric (Section 5.6, Fig. 9). A study that claims to remove duplicates should report, on annotated sequences or view sets, the numbers of duplicate records, missed fruit, false merges of two fruit into one, and identity switches, in addition to the count error. Wang et al. (2019) and Rapado-Rincón et al. (2023) show that this is feasible.

(ii) *Mechanisms are rarely compared on the same data.* Table 5 contains 14 such comparisons, most within temporal tracking. Comparisons across mechanisms, for example tracking against geometric association on the same trees, are rare, and comparisons against a calibrated statistical-correction baseline are rarer, although image counts can be corrected to total fruit load with an occlusion factor

Table 6Earlier reviews closest to this review ($n = 11$).

Review	Scope	Organizing variable	Stated method
Gongal et al. (2015)	Fruit detection and localization for harvesting and crop-load estimation in apples, pears, citrus	Sensor and system	Not stated
Koirala et al. (2019)	Deep learning for fruit detection and yield estimation; extrapolation of image counts for occluded fruit	Method and application	Not stated
Fu et al. (2020a)	Consumer RGB-D cameras for fruit detection and localization	Depth principle and sensor	Not stated
Anderson et al. (2021b)	Forecasting fruit load and harvest timing	Estimation route (sampling, vision, remote sensing, models)	Not stated
Maheswari et al. (2021)	Semantic segmentation for fruit yield estimation	Network architecture	Not stated
Khan et al. (2021)	Machine learning in oil palm, 2011–2020	Task (regression, classification)	Systematic, 61 papers
Lai et al. (2023)	Oil-palm fresh-fruit-bunch ripeness detection	Sensing modality and classifier	Systematic, 51 papers
Goh et al. (2025a)	Fresh-fruit-bunch ripeness classification	Sensing technique	Self-described systematic; no databases or search strings reported
Pu et al. (2025)	UAV counting of field crops	Agronomic target and model type	52 key studies
Rong et al. (2026)	Orchard yield estimation with multi-source sensing	Data source	PRISMA
Liu and Ampatzidis (2027)	Citrus yield prediction: input features, acquisition platforms and feature extraction, prediction models, and related estimation, monitoring, and measurement methods	Input feature, acquisition platform, and prediction model	Self-described systematic; search details not given in the abstract
This review	Turning repeated fruit observations into unique, class-labelled records; oil palm as the main case	Association mechanism and its assumptions	Systematic map, Scopus, 1,002 studies

Note: None of the earlier reviews uses identity across observations as its organizing variable. Not stated: the abstract does not state how studies were found. PRISMA, Preferred Reporting Items for Systematic Reviews and Meta-Analyses; UAV, unmanned aerial vehicle.

regressed against manual counts of a set of calibration trees in each orchard (Koirala et al., 2019; Anderson et al., 2021b). A new mechanism should be tested against a statistical correction fitted on separate trees.

(iii) *Class-wise identity is almost absent.* 19 multi-observation studies report counts per class, and one states how label disagreement between frames is resolved (Section 6). The required measurement is a per-class count error computed on unique fruit, together with a confusion matrix of classes on unique fruit.

(iv) *Discrete-view protocols lack mechanisms.* Most methods assume video (Fig. 5b and Fig. 7). Census protocols photograph a plant from a few fixed positions, as in oil palm (Indriani et al., 2026) or in multi-sided mango and citrus imaging (Nayak Nenavath and Perumal, 2024; Zhu et al., 2024). For such data, temporal tracking does not apply, and the evidence on appearance matching, geometric association, and learned association comes mostly from other acquisition designs (Section 4). Wide-baseline association with known or estimated pose is the missing experiment.

(v) *Oil palm has detection and ripeness evidence but no identity evidence.* A bunch-level census from images needs an evaluation on palms photographed from several sides, with identity links, class labels in census classes, and a per-class count reference (Section 8). One dataset now provides this (Indriani et al., 2026).

10.4. A minimum reporting set

At minimum, a study that claims a duplicate-aware, class-wise inventory should report: (a) the acquisition protocol (views per plant, ordering, pose source, depth source, baseline); (b) the mechanism and the component that removes duplicates; (c) the reference type (hand count on the tree, harvest, or annotated images); (d) the count error per plant and per class; (e) identity metrics on annotated data; and (f) a statistical-correction baseline fitted on separate plants.

11. Limitations of this review

Seven limitations apply. First, Scopus was the only database; work indexed only in Web of Science, IEEE Xplore, or preprint servers is missing unless Scopus also indexes it, and one known review that fell outside the year limit of the queries had to be added by hand. Second, abstracts were not available from the database export used and were retrieved from other bibliographic services; 254 records without an abstract were first decided from titles, sources, and machine-generated summaries.

Third, screening and coding were done by one reviewer working with a large language model. The second pass, the adjudication, and the challenge of each proposed change (Section 2.4) were also carried out by the model. They show how reproducible the decisions are, and they changed 16 group decisions, but they do not replace an independent second reviewer; a check of a random sample by a second person remains the first step needed to strengthen the map.

Fourth, the title stage was the least reliable step: in the sample of 300 titles, 11 records that the first pass had excluded met an inclusion criterion once their abstracts were read, and although the exclusions from the two core query sets were re-read from their abstracts, the map is likely to miss eligible studies among the remaining title exclusions, mainly in the supporting groups. Fifth, rule-based codes for crop, modality, platform, and metric types were spot-checked but not verified for every record, and metric types were read only from abstracts, so a study may report a metric in its full text that is not counted here. Open-access full text was available for about a third of the included studies (330 of 1,001), and the codes of 117 of the 195 multi-observation studies rest on the abstract alone.

Sixth, the set of methods papers from outside agriculture is purposive, limited to the most cited records of each search. Seventh, results were not pooled, and the numbers in Tables 4 and 5 should be compared only within a row.

12. Conclusions

This review mapped image-based fruit counting published between 2012 and 2026. Reporting followed PRISMA 2020 where its items apply. The review included 1,002 studies, and the 195 multi-observation studies were coded by association mechanism and acquisition design (Figs. 5–8; Appendix Table A1).

Overall, the literature shows that counting fruit from images is an identity problem as much as a detection problem. Statistical correction is repeatable but must be refitted and cannot name duplicates. Temporal tracking dominates recent work, and on look-alike fruit, motion-only trackers were not outperformed by trackers with appearance features in the two comparisons made on the same data. Geometric association gives calibration-free counts when pose, scale, and depth are reliable, at the cost of sensors or reconstruction time. Learned association is recent and limited by the lack of identity-labelled data. At the same time, the evidence is unbalanced: 18 of the 145 abstracts report an identity metric, 19 of the 191 method studies report counts per class, Table 5 holds 14 comparisons on the same data, and no oil-palm study associates bunches across views of a palm.

For video along a row, motion-based tracking is the tested default and needs a separate step for fruit seen from both sides. For a few discrete views around a plant, temporal tracking does not apply; association must rest on geometry, on appearance combined with position, or on learned correspondence, and this case is the least tested. For class-wise inventories, the class must be decided per unique fruit, and the rule for disagreeing views should be reported.

Looking forward, the synthesis supports five priorities: (i) measure identity errors, not only the count error; (ii) compare mechanisms on the same data, including a statistical-correction baseline fitted on separate plants; (iii) report per-class counts and class confusion on unique fruit; (iv) test wide-baseline association on discrete-view protocols; and

(v) evaluate bunch-level, class-wise counting on oil palms photographed from several sides.

Data availability

The search strings are listed in Appendix B. The screening decision for every record, the coded evidence matrix, the log of changes made during verification, and the analysis scripts that reproduce the numbers and figures are provided as supplementary material.

Declaration of generative AI and AI-assisted technologies in the writing process

During the preparation of this work the authors used a large language model (Claude, Anthropic) to read titles, abstracts, and available full texts during screening, to record screening decisions and codes in two separate passes, to check the statements of this article against the cited sources, to write the analysis scripts, and to draft the text. The authors reviewed and edited the content as needed and take full responsibility for the content of the published article.

References

- Abeyrathna, R.M.R.D., Nakaguchi, V.M., Minn, A., Ahamed, T., 2023. Recognition and counting of apples in a dynamic state using a 3d camera and deep learning algorithms for robotic harvesting systems. *Sensors* 23, 3810. doi:10.3390/s23083810.
- Ahmad, J., Gueaieb, W., Saddik, A.E., Masi, G.D., Karray, F., 2024. Enabling consumer UAVs for precision agriculture applications: A case study of yield estimation, in: 2024 IEEE International Conference on Consumer Electronics (ICCE), pp. 1–6. doi:10.1109/icce59016.2024.10444191.
- Ahmedt-Aristizabal, D., Smith, D., Khokher, M.R., Li, X., Smith, A.L., Petersson, L., Rolland, V., Edwards, E.J., 2024. An in-field dynamic vision-based analysis for vineyard yield estimation. *IEEE Access* 12, 102146–102166. doi:10.1109/access.2024.3431244.
- Aji, W.S., Hawari bin Ghazali, K., Akbar, S.A., 2021. Automatic oil palm unstripped bunch (USB) counting system based on faster RCNN and object tracking, in: 2021 International Conference on Computer Science and Engineering (IC2SE), pp. 1–5. doi:10.1109/ic2se52832.2021.9792068.
- Akella, A., Reddy, N.K., Mahesh, M., Veerapu, G., 2025. Deep learning-based coconut ripeness classification and yield estimation using YOLO and kalman filtering, in: 2025 International Conference on Sensors and Related Networks (SENNET) Special Focus on Digital Healthcare(64220), pp. 1–6. doi:10.1109/sennet64220.2025.11136053.
- An, Q., Cui, Y., Tong, W., Liu, Y., Zhao, B., Wei, L., 2024. StraTracker: A dynamic counting method for growing strawberries based on multi-target tracking. *Computers and Electronics in Agriculture* 227, 109564. doi:10.1016/j.compag.2024.109564.
- Anderson, N.T., Walsh, K.B., Koirala, A., Wang, Z., Amaral, M.H., Dickinson, G.R., Sinha, P., Robson, A.J., 2021a. Estimation of fruit load in australian mango orchards using machine vision. *Agronomy* 11, 1711. doi:10.3390/agronomy11091711.
- Anderson, N.T., Walsh, K.B., Wulfsohn, D., 2021b. Technologies for forecasting tree fruit load and harvest timing—from ground, sky and time. *Agronomy* 11, 1409. doi:10.3390/agronomy11071409.
- Apolo-Apolo, O.E., Pérez-Ruiz, M., Martínez-Guanter, J., Valente, J., 2020. A cloud-based environment for generating yield estimation maps from apple orchards using UAV imagery and a deep learning technique. *Frontiers in Plant Science* 11, 1086. doi:10.3389/fpls.2020.01086.

- Ariza-Sentís, M., Baja, H., Vélez, S., van Essen, R., Valente, J., 2025. Comparative analysis of single-view and multiple-view data collection strategies for detecting partially-occluded grape bunches: Field trials. *Journal of Agriculture and Food Research* 19, 101736. doi:[10.1016/j.jafr.2025.101736](https://doi.org/10.1016/j.jafr.2025.101736).
- Ariza-Sentís, M., Baja, H., Vélez, S., Valente, J., 2023a. Object detection and tracking on UAV RGB videos for early extraction of grape phenotypic traits. *Computers and Electronics in Agriculture* 211, 108051. doi:[10.1016/j.compag.2023.108051](https://doi.org/10.1016/j.compag.2023.108051).
- Ariza-Sentís, M., Vélez, S., Valente, J., 2023b. Dataset on UAV RGB videos acquired over a vineyard including bunch labels for object detection and tracking. *Data in Brief* 46, 108848. doi:[10.1016/j.dib.2022.108848](https://doi.org/10.1016/j.dib.2022.108848).
- Ariza-Sentís, M., Wang, K., Cao, Z., Vélez, S., Valente, J., 2024. GrapeMOTS: UAV vineyard dataset with MOTs grape bunch annotations recorded from multiple perspectives for enhanced object detection and tracking. *Data in Brief* 54, 110432. doi:[10.1016/j.dib.2024.110432](https://doi.org/10.1016/j.dib.2024.110432).
- Arlotta, A., Lippi, M., Gasparri, A., 2023. An EKF-Based multi-object tracking framework for a mobile robot in a precision agriculture scenario, in: 2023 European Conference on Mobile Robots (ECMR), pp. 1–6. doi:[10.1109/ecmr59166.2023.10256338](https://doi.org/10.1109/ecmr59166.2023.10256338).
- Ashokan, A., Akbar, N.A., 2024. Fruit yield estimation and forecasting for precision agriculture, in: AIP Conference Proceedings, p. 020036. doi:[10.1063/5.0196960](https://doi.org/10.1063/5.0196960).
- Awal, S.M.S., Sakurai, Y., Thanh Pham, D., Nomura, K., Kitano, M., Yasutake, D., Mitsuoka, M., Okayasu, T., 2026. Development of a plant sensing robot using virtual space and evaluation of its accuracy. *Smart Agricultural Technology* 15, 102429. doi:[10.1016/j.atech.2026.102429](https://doi.org/10.1016/j.atech.2026.102429).
- Bensaïed, O.M., Shariff, A.M., Mahmud, A.B., Shafri, H., Alfatni, M., 2014. Oil palm fruit grading using a hyperspectral device and machine learning algorithm, in: IOP Conference Series: Earth and Environmental Science, p. 012017. doi:[10.1088/1755-1315/20/1/012017](https://doi.org/10.1088/1755-1315/20/1/012017).
- Bescos, B., Campos, C., Tardos, J.D., Neira, J., 2021. DynaSLAM II: Tightly-coupled multi-object tracking and SLAM. *IEEE Robotics and Automation Letters* 6, 5191–5198. doi:[10.1109/lra.2021.3068640](https://doi.org/10.1109/lra.2021.3068640).
- Bewley, A., Ge, Z., Ott, L., Ramos, F., Upcroft, B., 2016. Simple online and realtime tracking, in: 2016 IEEE International Conference on Image Processing (ICIP), pp. 3464–3468. doi:[10.1109/icip.2016.7533003](https://doi.org/10.1109/icip.2016.7533003).
- Bharti, D., Faria, L.N.d., Koenigkan, L.V., Gebler, L., de Rossi, A., Santos, T.T., 2026. Geo-referenced factor-graph SLAM for orchard-scale 3d apple reconstruction and yield estimation. *Agriculture* 16, 764. doi:[10.3390/agriculture16070764](https://doi.org/10.3390/agriculture16070764).
- Blondet, D.A., Alvarez, F.G., Cubas, C.F.M., 2026. Counting avocados in orchard videos using a YOLO and BoT-SORT-Based architecture, in: Communications in Computer and Information Science. volume 2895 CCIS, pp. 522–533. doi:[10.1007/978-3-032-20322-9_36](https://doi.org/10.1007/978-3-032-20322-9_36).
- Braso, G., Leal-Taixe, L., 2020. Learning a neural solver for multiple object tracking, in: 2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp. 6246–6256. doi:[10.1109/cvpr42600.2020.00628](https://doi.org/10.1109/cvpr42600.2020.00628).
- Cao, D., Luo, W., Tang, R., Liu, Y., Zhao, J., Li, X., Yuan, L., 2025. Research on apple detection and tracking count in complex scenes based on the improved YOLOv7-Tiny-PDE. *Agriculture* 15, 483. doi:[10.3390/agriculture15050483](https://doi.org/10.3390/agriculture15050483).
- Chavdarova, T., Baque, P., Bouquet, S., Maksai, A., Jose, C., Bagautdinov, T., Lettry, L., Fua, P., Van Gool, L., Fleuret, F., 2018. WILDRACK: A multi-camera HD dataset for dense unsupervised pedestrian detection, in: 2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 5030–5039. doi:[10.1109/cvpr.2018.00528](https://doi.org/10.1109/cvpr.2018.00528).
- Cho, S., Sheppard, E., Castello, E., Spanellis, A., Pearce, D., Chappell, S., 2025. A case study on the integration of a snapshot hyperspectral field-portable imager solving fruit quality assessment, in: Photonic Instrumentation Engineering XII, p. 6. doi:[10.1117/12.3042114](https://doi.org/10.1117/12.3042114).
- Ciarfuglia, T.A., Motoi, I.M., Saraceni, L., Fawakherji, M., Sanfeliu, A., Nardi, D., 2023. Weakly and semi-supervised detection, segmentation and tracking of table grapes with limited and noisy data. *Computers and Electronics in Agriculture* 205, 107624. doi:[10.1016/j.compag.2023.107624](https://doi.org/10.1016/j.compag.2023.107624).
- Dai, G., Hu, L., Wang, P., Rong, J., 2022. Tracking and counting method for tomato fruits scouting robot in greenhouse, in: Lecture Notes in Computer Science. volume 13455 LNAI, pp. 60–68. doi:[10.1007/978-3-031-13844-7_6](https://doi.org/10.1007/978-3-031-13844-7_6).
- Daud, M.M., Kadim, Z., Woon, H.H., 2022. Loose fruitlet and fresh fruit bunch detection for palm oil harvest management, in: 2022 IEEE International Conference on Internet of Things and Intelligence Systems (IoTais), pp. 13–18. doi:[10.1109/iotais56727.2022.9975972](https://doi.org/10.1109/iotais56727.2022.9975972).
- Deng, B., Lu, Y., Li, Z., 2024. Detection, counting, and maturity assessment of blueberries in canopy images using YOLOv8 and YOLOv9. *Smart Agricultural Technology* 9, 100620. doi:[10.1016/j.atech.2024.100620](https://doi.org/10.1016/j.atech.2024.100620).
- Dong, W., Roy, P., Isler, V., 2020. Semantic mapping for orchard environments by merging two-sides reconstructions of tree rows. *Journal of Field Robotics* 37, 97–121. doi:[10.1002/rob.21876](https://doi.org/10.1002/rob.21876).
- Dong, Z., Long, W., Yang, F., Yu, C., Du, J., Wang, K., Lyu, L., 2025. Fruit detection and yield estimation in camellia oleifera based on improved YOLOv8 and ByteTrack algorithm. *Smart Agricultural Technology* 12, 101435. doi:[10.1016/j.atech.2025.101435](https://doi.org/10.1016/j.atech.2025.101435).
- Du, P., Chen, S., Li, X., Hu, W., Lan, N., Lei, X., Xiang, Y., 2024. Green pepper fruits counting based on improved DeepSort and optimized YOLOv5s. *Frontiers in Plant Science* 15, 1417682. doi:[10.3389/fpls.2024.1417682](https://doi.org/10.3389/fpls.2024.1417682).
- Egi, Y., Hajizadeh, M., Eyceyurt, E., 2022. Drone-computer communication based tomato generative organ counting model using YOLO V5 and deep-sort. *Agriculture* 12, 1290. doi:[10.3390/agriculture12091290](https://doi.org/10.3390/agriculture12091290).
- Fadilah, N., Saleh, J.M., Ibrahim, H., Halim, Z.A., 2012. Oil palm fresh fruit bunch ripeness classification using artificial neural network, in: 2012 4th International Conference on Intelligent and Advanced Systems (ICIAS2012), pp. 18–21. doi:[10.1109/icias.2012.6306151](https://doi.org/10.1109/icias.2012.6306151).
- Farhoud, S.A., Zaghloul, Y.A., Shehata, O.M., 2026. Instance segmentation and multi-object tracking for fruit quality grading and dynamic yield estimation in egyptian citrus orchards. *Smart Agricultural Technology* 15, 102529. doi:[10.1016/j.atech.2026.102529](https://doi.org/10.1016/j.atech.2026.102529).
- Felip-Pomés, M., Gené-Mola, J., Arnó, J., Lordan, J., Ruiz-Hidalgo, J., Morros, J.R., Arasanz-Malo, M., Net-Barnés, F., Gregorio, E., 2026. Video-based fruit detection and tracking: effects of scanning conditions on fruit load estimation. *Computers and Electronics in Agriculture* 255, 112330. doi:[10.1016/j.compag.2026.112330](https://doi.org/10.1016/j.compag.2026.112330).
- Feng, Q., et al., 2026. Greenhouse tomato fruit inspection and counting method based on improved YOLO v8n ByteTrack. *Nongye Jixie Xuebao Transactions of the Chinese Society for Agricultural Machinery* 57, 127–137. doi:[10.6041/j.issn.1000-1298.2026.05.011](https://doi.org/10.6041/j.issn.1000-1298.2026.05.011).
- Feng, Y., Ma, W., Tan, Y., Yan, H., Qian, J., Tian, Z., Gao, A., 2024. Approach of dynamic tracking and counting for obscured citrus in smart orchard based on machine vision. *Applied Sciences* 14, 1136. doi:[10.3390/app14031136](https://doi.org/10.3390/app14031136).
- Fu, L., Gao, F., Wu, J., Li, R., Karkee, M., Zhang, Q., 2020a. Application of consumer RGB-D cameras for fruit detection and localization in field: A critical review. *Computers and Electronics in Agriculture* 177, 105687. doi:[10.1016/j.compag.2020.105687](https://doi.org/10.1016/j.compag.2020.105687).
- Fu, L., Majeed, Y., Zhang, X., Karkee, M., Zhang, Q., 2020b. Faster r-CNN-based apple detection in dense-foliage fruiting-wall trees using RGB and depth features for robotic harvesting. *Biosystems Engineering* 197, 245–256. doi:[10.1016/j.biosystemseng.2020.07.007](https://doi.org/10.1016/j.biosystemseng.2020.07.007).
- Fusaro, D., Magistri, F., Behley, J., Pretto, A., Stachniss, C., 2026. Horticultural temporal fruit monitoring via 3d instance segmentation and re-identification using colored point clouds. *Computers and Electronics in Agriculture* 247, 111723. doi:[10.1016/j.compag.2026.111723](https://doi.org/10.1016/j.compag.2026.111723).
- Gan, H., Lee, W.S., Alchanatis, V., Abd-Elrahman, A., 2020. Active thermal imaging for immature citrus fruit detection. *Biosystems Engineering* 198, 291–303. doi:[10.1016/j.biosystemseng.2020.08.015](https://doi.org/10.1016/j.biosystemseng.2020.08.015).
- Gao, F., Fang, W., Sun, X., Wu, Z., Zhao, G., Li, G., Li, R., Fu, L., Zhang, Q., 2022. A novel apple fruit detection and counting methodology based on deep learning and trunk tracking in modern orchard. *Computers and Electronics in Agriculture* 197, 107000. doi:[10.1016/j.compag.2022.107000](https://doi.org/10.1016/j.compag.2022.107000).
- Gao, F., Yang, T., Fu, L., 2021a. Apple fruit detection and counting based on deep learning and trunk tracking, in: 2021 ASABE Annual International

- Virtual Meeting, July 12–16, 2021, pp. 611–624. doi:[10.13031/aim.202100193](https://doi.org/10.13031/aim.202100193).
- Gao, F., et al., 2021b. Apple detection and counting using real-time video based on deep learning and object tracking. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 37, 217–224. doi:[10.11975/j.issn.1002-6819.2021.21.025](https://doi.org/10.11975/j.issn.1002-6819.2021.21.025).
- Gao, Z., Wang, Y., Liu, K., Yang, W., Jia, C., Wong, K.H., 2026. Vision-based 3d fruit localization for robotic harvesting using recursive state estimation, in: 2026 7th International Conference on Artificial Intelligence and Electromechanical Automation (AIEA), pp. 523–528. doi:[10.1109/aiea70743.2026.11633088](https://doi.org/10.1109/aiea70743.2026.11633088).
- Garderes, R., Gutiérrez, F., Tanco, M.M., Tejera, G., 2024. Apple detection and counting using neural networks, in: 2024 L Latin American Computer Conference (CLEI), pp. 1–10. doi:[10.1109/clei64178.2024.10700174](https://doi.org/10.1109/clei64178.2024.10700174).
- Garg, K., Chandna, N., Aggarwal, S., Sehgal, C., Gupta, A., Rohilla, R., 2025. Autonomous UAV navigation and mapping for accurate fruit detection and counting in controlled environments: Simulation and real-world validation, in: 2025 International Conference on Unmanned Aircraft Systems (ICUAS), pp. 243–248. doi:[10.1109/icuas65942.2025.11007888](https://doi.org/10.1109/icuas65942.2025.11007888).
- Ge, Y., Lin, S., Zhang, Y., Li, Z., Cheng, H., Dong, J., Shao, S., Zhang, J., Qi, X., Wu, Z., 2022. Tracking and counting of tomato at different growth period using an improving YOLO-Deepsort network for inspection robot. *Machines* 10, 489. doi:[10.3390/machines10060489](https://doi.org/10.3390/machines10060489).
- Gené-Mola, J., Felip-Pomés, M., Net-Barnés, F., Morros, J.R., Miranda, J.C., Arnó, J., Asín, L., Lordan, J., Ruiz-Hidalgo, J., Gregorio, E., 2023. Video-based fruit detection and tracking for apple counting and mapping, in: 2023 IEEE International Workshop on Metrology for Agriculture and Forestry (MetroAgriFor), pp. 301–306. doi:[10.1109/metroagrifor58484.2023.10424135](https://doi.org/10.1109/metroagrifor58484.2023.10424135).
- Gené-Mola, J., Gregorio, E., Auat Cheein, F., Guevara, J., Llorens, J., Sanz-Cortiella, R., Escolà, A., Rosell-Polo, J.R., 2020a. Fruit detection, yield prediction and canopy geometric characterization using LiDAR with forced air flow. *Computers and Electronics in Agriculture* 168, 105121. doi:[10.1016/j.compag.2019.105121](https://doi.org/10.1016/j.compag.2019.105121).
- Gené-Mola, J., Gregorio, E., Auat Cheein, F., Guevara, J., Llorens, J., Sanz-Cortiella, R., Escolà, A., Rosell-Polo, J.R., 2020b. LFuji-air dataset: Annotated 3d LiDAR point clouds of fuji apple trees for fruit detection scanned under different forced air flow conditions. *Data in Brief* 29, 105248. doi:[10.1016/j.dib.2020.105248](https://doi.org/10.1016/j.dib.2020.105248).
- Gené-Mola, J., Gregorio, E., Guevara, J., Auat, F., Sanz-Cortiella, R., Escolà, A., Llorens, J., Morros, J.R., Ruiz-Hidalgo, J., Vilaplana, V., Rosell-Polo, J.R., 2019. Fruit detection in an apple orchard using a mobile terrestrial laser scanner. *Biosystems Engineering* 187, 171–184. doi:[10.1016/j.biosystemseng.2019.08.017](https://doi.org/10.1016/j.biosystemseng.2019.08.017).
- Gené-Mola, J., Sanz-Cortiella, R., Rosell-Polo, J.R., Morros, J.R., Ruiz-Hidalgo, J., Vilaplana, V., Gregorio, E., 2020c. Fruit detection and 3d location using instance segmentation neural networks and structure-from-motion photogrammetry. *Computers and Electronics in Agriculture* 169, 105165. doi:[10.1016/j.compag.2019.105165](https://doi.org/10.1016/j.compag.2019.105165).
- Gené-Mola, J., Sanz-Cortiella, R., Rosell-Polo, J.R., Morros, J.R., Ruiz-Hidalgo, J., Vilaplana, V., Gregorio, E., 2020d. Fuji-SfM dataset: A collection of annotated images and point clouds for fuji apple detection and location using structure-from-motion photogrammetry. *Data in Brief* 30, 105591. doi:[10.1016/j.dib.2020.105591](https://doi.org/10.1016/j.dib.2020.105591).
- Goh, J.Y., Md Yunos, Y., Mohamed Ali, M.S., 2025a. Fresh fruit bunch ripeness classification methods: A review. *Food and Bioprocess Technology* 18, 183–206. doi:[10.1007/s11947-024-03483-0](https://doi.org/10.1007/s11947-024-03483-0).
- Goh, J.Y., Mohamed Ali, M.S., Md Yunos, Y., Sheikh, U.U., Khan, M.S., 2025b. Outdoor RGB and point cloud depth dataset for palm oil fresh fruit bunch ripeness classification and localization. *Scientific Data* 12, 687. doi:[10.1038/s41597-025-04953-6](https://doi.org/10.1038/s41597-025-04953-6).
- Gongal, A., Amatya, S., Karkee, M., Zhang, Q., Lewis, K., 2015. Sensors and systems for fruit detection and localization: A review. *Computers and Electronics in Agriculture* 116, 8–19. doi:[10.1016/j.compag.2015.05.021](https://doi.org/10.1016/j.compag.2015.05.021).
- Gongal, A., Silwal, A., Amatya, S., Karkee, M., Zhang, Q., Lewis, K., 2016. Apple crop-load estimation with over-the-row machine vision system. *Computers and Electronics in Agriculture* 120, 26–35. doi:[10.1016/j.compag.2015.10.022](https://doi.org/10.1016/j.compag.2015.10.022).
- Gongal, A., et al., 2014. Identification of repetitive apples for improved crop-load estimation with dual-side imaging, in: American Society of Agricultural and Biological Engineers Annual International Meeting 2014 Asabe 2014, pp. 294–303.
- Grady Naftali, M., Hugo, G., Suhajito, 2024. Palm oil counter: State-of-the-art deep learning models for detection and counting in plantations. *IEEE Access* 12, 90395–90417. doi:[10.1109/access.2024.3419835](https://doi.org/10.1109/access.2024.3419835).
- Grant, M.J., Booth, A., 2009. A typology of reviews: an analysis of 14 review types and associated methodologies. *Health Information & Libraries Journal* 26, 91–108. doi:[10.1111/j.1471-1842.2009.00848.x](https://doi.org/10.1111/j.1471-1842.2009.00848.x).
- Gremes, M.F., Fermo, I.R., Krummenauer, R., Flores, F.C., Andrade, C.M.G., Lima, O.C.d.M., 2023. System of counting green oranges directly from trees using artificial intelligence. *AgriEngineering* 5, 1813–1831. doi:[10.3390/agriengineering5040111](https://doi.org/10.3390/agriengineering5040111).
- Guo, M., et al., 2023. Real-time production prediction of kiwifruit in orchard based on video tracking algorithm. *Nongye Jixie Xuebao Transactions of the Chinese Society for Agricultural Machinery* 54, 178–185. doi:[10.6041/j.issn.1000-1298.2023.06.018](https://doi.org/10.6041/j.issn.1000-1298.2023.06.018).
- Hamdani, H., Septiarini, A., Syaifudin, E.A., Nor Gading, F.R., Winarno, E., 2026. Automated oil palm fruit counting using deep learning for reliable yield estimation in natural background. *Smart Agricultural Technology* 14, 102376. doi:[10.1016/j.atech.2026.102376](https://doi.org/10.1016/j.atech.2026.102376).
- Häni, N., Roy, P., Isler, V., 2020. A comparative study of fruit detection and counting methods for yield mapping in apple orchards. *Journal of Field Robotics* 37, 263–282. doi:[10.1002/rob.21902](https://doi.org/10.1002/rob.21902).
- Hassan, A., Mumtaz, R., Palade, V., Amin, A., Mahmood, Z., Khan, N., Noman, M., Imran, M., Wicha, S., 2025. Orange yield estimation using object tracking and 3d reconstruction. *Smart Agricultural Technology* 12, 101088. doi:[10.1016/j.atech.2025.101088](https://doi.org/10.1016/j.atech.2025.101088).
- He, L., Fang, W., Zhao, G., Wu, Z., Fu, L., Li, R., Majeed, Y., Dhupia, J., 2022a. Fruit yield prediction and estimation in orchards: A state-of-the-art comprehensive review for both direct and indirect methods. *Computers and Electronics in Agriculture* 195, 106812. doi:[10.1016/j.compag.2022.106812](https://doi.org/10.1016/j.compag.2022.106812).
- He, L., Wu, F., Du, X., Zhang, G., 2022b. Cascade-SORT: A robust fruit counting approach using multiple features cascade matching. *Computers and Electronics in Agriculture* 200, 107223. doi:[10.1016/j.compag.2022.107223](https://doi.org/10.1016/j.compag.2022.107223).
- Hernandez, B., Medeiros, H., 2024. Multi-object tracking in agricultural applications using a vision transformer for spatial association. *Computers and Electronics in Agriculture* 226, 109379. doi:[10.1016/j.compag.2024.109379](https://doi.org/10.1016/j.compag.2024.109379).
- Hobart, M., Pflanz, M., Tsoulas, N., Weltzien, C., Kopetzky, M., Schirrmann, M., 2025. Fruit detection and yield mass estimation from a UAV based RGB dense cloud for an apple orchard. *Drones* 9, 60. doi:[10.3390/drones9010060](https://doi.org/10.3390/drones9010060).
- Hong, X., Qin, L., Shi, C., Wu, G., 2025. Fruitgaussian: 3d gaussian splatting for automated fruit counting in natural orchard, in: 2025 44th Chinese Control Conference (CCC), pp. 8004–8009. doi:[10.23919/ccc64809.2025.11179457](https://doi.org/10.23919/ccc64809.2025.11179457).
- Hu, J., Fan, C., Wang, Z., Ruan, J., Wu, S., 2023. Fruit detection and counting in apple orchards based on improved YOLOv7 and multi-object tracking methods. *Sensors* 23, 5903. doi:[10.3390/s23135903](https://doi.org/10.3390/s23135903).
- Hu, S., Sun, M., Zhao, C., Xiong, Y., 2026. Calibration-enhanced multi-view RGB-D vision for robust recognition and 3d localization of strawberries under occlusions. *Computers and Electronics in Agriculture* 241, 111221. doi:[10.1016/j.compag.2025.111221](https://doi.org/10.1016/j.compag.2025.111221).
- Huang, T., Guo, J., Yu, L., Chen, H., Su, Z., Xue, Y., 2024. An automatic tracking method for fruit abscission of litchi using convolutional networks. *Computers and Electronics in Agriculture* 224, 109213. doi:[10.1016/j.compag.2024.109213](https://doi.org/10.1016/j.compag.2024.109213).
- Huang, W., Li, Y., Tan, B., Bakarić, M.B., Zhu, Z., Zhang, X., 2026. MFFT: an improved method for stable ID tracking and counting of multi-class mango segmentation with multi-feature fusion in complex occlusion

- scenarios. *Computers and Electronics in Agriculture* 253, 112149. doi:10.1016/j.compag.2026.112149.
- Huang, Y., Qian, Y., Wei, H., Lu, Y., Ling, B., Qin, Y., 2023. A survey of deep learning-based object detection methods in crop counting. *Computers and Electronics in Agriculture* 215, 108425. doi:10.1016/j.compag.2023.108425.
- Huang, Y.H., Lin, T.T., 2019. High-throughput image analysis framework for fruit detection, localization and measurement from video streams, in: 2019 Boston, Massachusetts July 7- July 10, 2019. doi:10.13031/aim.201900487.
- Husin, H.S., Amar, N., Bakar Sajak, A.A., Sallehin Mohd Kassim, M., 2021. Distribution map of oil palm fresh fruit bunch using LiDAR, in: 2021 12th International Conference on Information and Communication Systems (ICICS), pp. 4–9. doi:10.1109/icics52457.2021.9464575.
- Hutapea, R.R., Purba, S.J., Tandion, W.F., Sihotang, E.F.A., Irwansyah, E., 2024. Palm fruit ripeness detection and counting using YOLOv8 algorithm in PTPN IV medan north sumatera indonesia, in: 2024 6th International Conference on Cybernetics and Intelligent System (ICORIS), pp. 1–6. doi:10.1109/icoris63540.2024.10903790.
- Indriani, F., Saputro, S.W., Muttaqin, M.Z., Rahmi, A., Saragih, T.H., Budianoor, R., Hartoni, Kartini, D., Said, N., 2026. SawitMVC: A multi-view oil palm fruit bunch dataset for detection and counting. *Data in Brief* 67, 112990. doi:10.1016/j.dib.2026.112990.
- Ishizuka, T., Sasaki, Y., Hamada, T., Shimazaki-Kishi, Y., Koshizuka, N., 2024. Eggplant detection and counting across the entire greenhouse using deep learning and motion parallax, in: 2024 IEEE International Smart Cities Conference (ISC2), pp. 1–6. doi:10.1109/isc260477.2024.11004199.
- Isobe, D., Buayai, P., Mao, X., 2025. Mandarin count estimation with 360-degree tree video and transformer-based deep learning. *Smart Agricultural Technology* 10, 100874. doi:10.1016/j.atech.2025.100874.
- Issad, H.A., Lakef, M., Boucherk, S., Chemoun, K., Oubabas, S., Aoudjit, R., 2025. Real-time fruit detection and counting, in: 2025 International Conference on Recent Advances in Mathematics and Informatics (ICRAMI), pp. 1–8. doi:10.1109/icrami64946.2025.11472714.
- Itakura, K., Narita, Y., Noaki, S., Hosoi, F., 2021. Automatic pear and apple detection by videos using deep learning and a kalman filter. *OSA Continuum* 4, 1688. doi:10.1364/osac.424583.
- Jiang, L., Chee, P.W., Li, C., Fu, L., 2026. Robot-assisted neural radiance fields for plot-level cotton crop 3d reconstruction and yield estimation. *Computers and Electronics in Agriculture* 252, 112063. doi:10.1016/j.compag.2026.112063.
- Jiang, L., Li, C., Chee, P.W., Fu, L., 2025. Neural radiance fields for plot-level cotton crop three-dimensional reconstruction and yield estimation, in: 2025 Toronto, Ontario, Canada July 13-16, 2025. doi:10.13031/aim.202500502.
- Junior, F.A., Suharjito, 2023. Video based oil palm ripeness detection model using deep learning. *Heliyon* 9, e13036. doi:10.1016/j.heliyon.2023.e13036.
- Junos, M.H., Mohd Khairuddin, A.S., Thannirmalai, S., Dahari, M., 2021. An optimized YOLO-based object detection model for crop harvesting system. *IET Image Processing* 15, 2112–2125. doi:10.1049/ipr2.12181.
- Junos, M.H., Mohd Khairuddin, A.S., Thannirmalai, S., Dahari, M., 2022. Automatic detection of oil palm fruits from UAV images using an improved YOLO model. *The Visual Computer* 38, 2341–2355. doi:10.1007/s00371-021-02116-3.
- Kang, H., Wang, X., Chen, C., 2022. Accurate fruit localisation using high resolution LiDAR-camera fusion and instance segmentation. *Computers and Electronics in Agriculture* 203, 107450. doi:10.1016/j.compag.2022.107450.
- Kang, R., Huang, J., Zhou, X., Ren, N., Sun, S., 2024. Toward real scenery: A lightweight tomato growth inspection algorithm for leaf disease detection and fruit counting. *Plant Phenomics* 6, 0174. doi:10.34133/plantphenomics.0174.
- Kaukab, S., Komal, Ghodki, B.M., Ray, H., Kalnar, Y.B., Narsaiah, K., Brar, J.S., 2024. Improving real-time apple fruit detection: Multi-modal data and depth fusion with non-targeted background removal. *Ecological Informatics* 82, 102691. doi:10.1016/j.ecoinf.2024.102691.
- Kemper, R.J.H., Manrique, P.A.Z., Rosas, D.D.H., Gardini, S.R.P., 2025. Performance evaluation of detection and tracking algorithms for automated grape cluster counting, in: 2025 IEEE Colombian Caribbean Conference (C3), pp. 1–6. doi:10.1109/c366505.2025.11340275.
- Kerbl, B., Kopanas, G., Leimkuehler, T., Drettakis, G., 2023. 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics* 42, 1–14. doi:10.1145/3592433.
- Khan, N., Kamaruddin, M.A., Sheikh, U.U., Yusup, Y., Bakht, M.P., 2021. Oil palm and machine learning: Reviewing one decade of ideas, innovations, applications, and gaps. *Agriculture* 11, 832. doi:10.3390/agriculture11090832.
- Kipli, K., Osman, S., Joseph, A., Zen, H., Awang Salleh, D.N.S.D., Lit, A., Chin, K.L., 2023. Deep learning applications for oil palm tree detection and counting. *Smart Agricultural Technology* 5, 100241. doi:10.1016/j.atech.2023.100241.
- Kirk, R., Mangan, M., Cielniak, G., 2021. Robust counting of soft fruit through occlusions with re-identification, in: *Lecture Notes in Computer Science*. volume 12899 LNCS, pp. 211–222. doi:10.1007/978-3-030-87156-7_17.
- Koirala, A., Walsh, K.B., Wang, Z., McCarthy, C., 2019. Deep learning – method overview and review of use for fruit detection and yield estimation. *Computers and Electronics in Agriculture* 162, 219–234. doi:10.1016/j.compag.2019.04.017.
- Kraus, S., Breier, M., Lim, W.M., Dabić, M., Kumar, S., Kanbach, D., Mukherjee, D., Corvello, V., Piñeiro-Chousa, J., Liguori, E., Palacios-Marqués, D., Schiavone, F., Ferraris, A., Fernandes, C., Ferreira, J.J., 2022. Literature reviews as independent studies: guidelines for academic practice. *Review of Managerial Science* 16, 2577–2595. doi:10.1007/s11846-022-00588-8.
- Kutyrev, A., Khort, D., Smirnov, I., Zubina, V., 2025. UAV-based sustainable orchard management: Deep learning for apple detection and yield estimation, in: *E3S Web of Conferences*, p. 03021. doi:10.1051/e3sconf/202561403021.
- Lai, J.W., Ramli, H.R., Ismail, L.I., Hasan, W.Z.W., 2022. Real-time detection of ripe oil palm fresh fruit bunch based on YOLOv4. *IEEE Access* 10, 95763–95770. doi:10.1109/access.2022.3204762.
- Lai, J.W., Ramli, H.R., Ismail, L.I., Wan Hasan, W.Z., 2023. Oil palm fresh fruit bunch ripeness detection methods: A systematic review. *Agriculture* 13, 156. doi:10.3390/agriculture13010156.
- Lawal, O.M., Zhu, S., Cheng, K., Liu, C., 2023. A simplified network topology for fruit detection, counting and mobile-phone deployment. *PLOS ONE* 18, e0292600. doi:10.1371/journal.pone.0292600.
- Lee, J., Ohata, M., Itoh, H., Morimoto, E., 2026. LiDAR-camera fusion for 3d fruit counting and density mapping in horizontal trellis orchards. *Journal of Robotics and Mechatronics* 38, 449–459. doi:10.20965/jrm.2026.p0449.
- Lei, J., Prabhu, A., Liu, X., Cladera, F., Mortazavi, M., Ehsani, R., Chaudhari, P., Kumar, V., 2025. Spatio-temporal metric-semantic mapping for persistent orchard monitoring: Method and dataset. *IEEE Robotics and Automation Letters* 10, 8610–8617. doi:10.1109/lra.2025.3588037.
- Li, Z., Li, C., Munoz, P., 2023. Blueberry yield estimation through multi-view imagery with YOLOv8 object detection, in: 2023 Omaha, Nebraska July 9-12, 2023. doi:10.13031/aim.202300883.
- Lin, H.Y., Pai, C.A., Chang, C.C., 2026. Tomato maturity classification and fruit counting based on RGB and multispectral images. *Applied Sciences* 16, 3227. doi:10.3390/app16073227.
- Lin, Y., Hu, W., Zheng, Z., Xiong, J., 2023. Citrus identification and counting algorithm based on improved YOLOv5s and DeepSort. *Agronomy* 13, 1674. doi:10.3390/agronomy13071674.
- Linker, R., Kelman, E., Cohen, O., 2015. Estimation of apple orchard yield using night time imaging, in: *Precision agriculture '15*, pp. 533–540. doi:10.3920/978-90-8686-814-8_66.
- Liu, S., Ampatzidis, Y., 2027. Shaping the future of citrus yield prediction with multimodal data fusion and machine learning: a systematic review. *Computers and Electronics in Agriculture* 256, 112418. doi:10.1016/j.compag.2026.112418.
- Liu, X., Chen, S.W., Aditya, S., Sivakumar, N., Dcunha, S., Qu, C., Taylor, C.J., Das, J., Kumar, V., 2018. Robust fruit counting: Combining

- deep learning, tracking, and structure from motion, in: 2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pp. 1045–1052. doi:[10.1109/iros.2018.8594239](https://doi.org/10.1109/iros.2018.8594239).
- Liu, X., Chen, S.W., Liu, C., Shivakumar, S.S., Das, J., Taylor, C.J., Underwood, J., Kumar, V., 2019. Monocular camera based fruit counting and mapping with semantic data association. *IEEE Robotics and Automation Letters* 4, 2296–2303. doi:[10.1109/lra.2019.2901987](https://doi.org/10.1109/lra.2019.2901987).
- Louis, F., Ooi, B.Y., Savita, K.S., 2025. Automated muskmelon counting in real farm environment using YOLOv11n, in: 2025 IEEE 11th International Conference on Smart Instrumentation, Measurement and Applications (ICSIMA), pp. 115–119. doi:[10.1109/icsima66552.2025.11233648](https://doi.org/10.1109/icsima66552.2025.11233648).
- Lu, J., Bao, G., Deng, X., Han, X., Lan, Y., Wu, H., 2025. IoT-Based precision litchi tracking and counting method using gated metrics. *IEEE Internet of Things Journal* 12, 49083–49096. doi:[10.1109/jiot.2025.3561130](https://doi.org/10.1109/jiot.2025.3561130).
- Luiten, J., Osep, A., Dendorfer, P., Torr, P., Geiger, A., Leal-Taixé, L., Leibe, B., 2021. HOTA: A higher order metric for evaluating multi-object tracking. *International Journal of Computer Vision* 129, 548–578. doi:[10.1007/s11263-020-01375-2](https://doi.org/10.1007/s11263-020-01375-2).
- Luo, W., Xing, J., Milan, A., Zhang, X., Liu, W., Kim, T.K., 2021. Multiple object tracking: A literature review. *Artificial Intelligence* 293, 103448. doi:[10.1016/j.artint.2020.103448](https://doi.org/10.1016/j.artint.2020.103448).
- Lyu, J., et al., 2023. Method for estimation of bagged grape yield using a self-correcting NMS-ByteTrack. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 39, 182–190. doi:[10.11975/j.issn.1002-6819.202304116](https://doi.org/10.11975/j.issn.1002-6819.202304116).
- Lyu, J., et al., 2025a. Counting bagging grape using improved YOLOv9s and adaptive kalman filter. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 41, 195–203. doi:[10.11975/j.issn.1002-6819.202412026](https://doi.org/10.11975/j.issn.1002-6819.202412026).
- Lyu, J., et al., 2025b. Real-time detecting and counting dual-association bagged grape clusters using EMO-YOLOv5s. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 41, 161–171. doi:[10.11975/j.issn.1002-6819.202412150](https://doi.org/10.11975/j.issn.1002-6819.202412150).
- MacEachern, C.B., Esau, T.J., Schumann, A.W., Hennessy, P.J., Zaman, Q.U., 2023. Detection of fruit maturity stage and yield estimation in wild blueberry using deep learning convolutional neural networks. *Smart Agricultural Technology* 3, 100099. doi:[10.1016/j.atech.2022.100099](https://doi.org/10.1016/j.atech.2022.100099).
- Magalhães, S.A.C., dos Santos, F.N., Moreira, A.P., Dias, J.M.M., 2024. MonoVisual3DFilter: 3d tomatoes' localisation with monocular cameras using histogram filters. *Robotica* 42, 2528–2547. doi:[10.1017/s0263574724000936](https://doi.org/10.1017/s0263574724000936).
- Maheswari, P., Raja, P., Apolo-Apolo, O.E., Pérez-Ruiz, M., 2021. Intelligent fruit yield estimation for orchards using deep learning based semantic segmentation techniques—a review. *Frontiers in Plant Science* 12, 684328. doi:[10.3389/fpls.2021.684328](https://doi.org/10.3389/fpls.2021.684328).
- Majdalawieh, M., Khan, S., 2025. Optimizing fruit harvesting through a high-performance deep learning framework for detection, tracking, and automated counting., in: 2025 IEEE International Conference on High Performance Computing and Communications (HPCC), pp. 888–895. doi:[10.1109/hpcc67675.2025.00132](https://doi.org/10.1109/hpcc67675.2025.00132).
- Mansour, M.Y.M.A., D. Dambul, K., Choo, K.Y., 2022. Object detection algorithms for ripeness classification of oil palm fresh fruit bunch. *International Journal of Technology* 13, 1326. doi:[10.14716/ijtech.v13i6.5932](https://doi.org/10.14716/ijtech.v13i6.5932).
- Marangoz, S., Zaenker, T., Menon, R., Bennewitz, M., 2022. Fruit mapping with shape completion for autonomous crop monitoring, in: 2022 IEEE 18th International Conference on Automation Science and Engineering (CASE), pp. 471–476. doi:[10.1109/case49997.2022.9926466](https://doi.org/10.1109/case49997.2022.9926466).
- Matos, G.P., Oliveira, T.G., Silva, F., Martinho, F., Leão, M., Fonseca, F., Silvestre, J., Costeira, J.P., Saldanha, R.L., Santiago, C., Morgado, E.M., 2025. An apple counting system robust to multiple intermittent occlusions, in: *Lecture Notes in Computer Science*. volume 14967 LNAI, pp. 181–192. doi:[10.1007/978-3-031-73497-7_15](https://doi.org/10.1007/978-3-031-73497-7_15).
- Matos, G.P., Santiago, C., Costeira, J.P., Saldanha, R.L., Morgado, E.M., 2024. Tracking and counting apples in orchards under intermittent occlusions and low frame rates, in: 2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW), pp. 5413–5421. doi:[10.1109/cvprw63382.2024.00550](https://doi.org/10.1109/cvprw63382.2024.00550).
- Mendez, E., Escobedo Cabello, J.A., Gómez-Espinosa, A., Cantoral-Ceballos, J.A., Ochoa, O., 2025. Capsicum counting algorithm using infrared imaging and YOLO11. *Agriculture* 15, 2574. doi:[10.3390/agriculture15242574](https://doi.org/10.3390/agriculture15242574).
- Meyer, L., Ardelean, A.T., Weyrich, T., Stamminger, M., 2025. FruitNeRF++: A generalized multi-fruit counting method utilizing contrastive learning and neural radiance fields, in: 2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pp. 1717–1724. doi:[10.1109/iros60139.2025.11247341](https://doi.org/10.1109/iros60139.2025.11247341).
- Meyer, L., Gilson, A., Schmid, U., Stamminger, M., 2024. FruitNeRF: A unified neural radiance field based fruit counting framework, in: 2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pp. 1–8. doi:[10.1109/iros58592.2024.10802065](https://doi.org/10.1109/iros58592.2024.10802065).
- Mildenhall, B., Srinivasan, P.P., Tancik, M., Barron, J.T., Ramamoorthi, R., Ng, R., 2020. NeRF: Representing scenes as neural radiance fields for view synthesis, in: *Lecture Notes in Computer Science*. volume 12346 LNCS, pp. 405–421. doi:[10.1007/978-3-030-58452-8_24](https://doi.org/10.1007/978-3-030-58452-8_24).
- Mohd Ali, M., Hashim, N., Abdul Hamid, A.S., 2020. Combination of laser-light backscattering imaging and computer vision for rapid determination of oil palm fresh fruit bunches maturity. *Computers and Electronics in Agriculture* 169, 105235. doi:[10.1016/j.compag.2020.105235](https://doi.org/10.1016/j.compag.2020.105235).
- Mollineda, R.A., Sandoval, J., Rodríguez, C.D., Heredia, J.A., 2025. Estimation of orange tree production by regression from video segments under uncontrolled conditions. *Neural Computing and Applications* 37, 3703–3717. doi:[10.1007/s00521-024-10772-4](https://doi.org/10.1007/s00521-024-10772-4).
- Muzaddid, M.A.A., Beksi, W.J., 2024. NTrack: A multiple-object tracker and dataset for infield cotton boll counting. *IEEE Transactions on Automation Science and Engineering* 21, 7452–7464. doi:[10.1109/tase.2023.3342791](https://doi.org/10.1109/tase.2023.3342791).
- Narendran, R., Thiruchelvam, V., Sivathanan, R., Ravinchandra, K., Loong, H.W., Sivanesan, S., Alexander, C.H.C., 2024. Palm fruit harvesting using IoT-based fruit counting system, in: *AIP Conference Proceedings*, p. 020162. doi:[10.1063/5.0229292](https://doi.org/10.1063/5.0229292).
- Nayak Nenavath, D., Perumal, B., 2024. On-tree mango fruit count using live video- split image dataset to predict better yield at pre-harvesting stage. *International journal of electrical and computer engineering systems* 15, 771–782. doi:[10.32985/ijeces.15.9.5](https://doi.org/10.32985/ijeces.15.9.5).
- Nellithimar, A.K., Kantor, G.A., 2019. ROLS : Robust object-level SLAM for grape counting, in: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW), pp. 2648–2656. doi:[10.1109/cvprw.2019.00321](https://doi.org/10.1109/cvprw.2019.00321).
- Neupane, C., Koirala, A., Wang, Z., Walsh, K.B., 2021. Evaluation of depth cameras for use in fruit localization and sizing: Finding a successor to kinect v2. *Agronomy* 11, 1780. doi:[10.3390/agronomy11091780](https://doi.org/10.3390/agronomy11091780).
- Nguyen, K., Patel, D.J., Nguyen, T., Tran, N., Riaz, A., Lauer, J.W., Bae, W.D., Alkobaisi, S., 2026. A modular UAV-Based framework for apple detection and yield extrapolation from 3d point clouds, in: *Proceedings of the 41st ACM/SIGAPP Symposium on Applied Computing*, pp. 788–797. doi:[10.1145/3748522.3779768](https://doi.org/10.1145/3748522.3779768).
- Ni, X., Li, C., Jiang, H., Takeda, F., 2020. Deep learning image segmentation and extraction of blueberry fruit traits associated with harvestability and yield. *Horticulture Research* 7, 110. doi:[10.1038/s41438-020-0323-3](https://doi.org/10.1038/s41438-020-0323-3).
- Nuske, S., Gupta, K., Narasimhan, S., Singh, S., 2014a. Modeling and calibrating visual yield estimates in vineyards, in: *Springer Tracts in Advanced Robotics*. volume 92, pp. 343–356. doi:[10.1007/978-3-642-40686-7_23](https://doi.org/10.1007/978-3-642-40686-7_23).
- Nuske, S., Wilshusen, K., Achar, S., Yoder, L., Narasimhan, S., Singh, S., 2014b. Automated visual yield estimation in vineyards. *Journal of Field Robotics* 31, 837–860. doi:[10.1002/rob.21541](https://doi.org/10.1002/rob.21541).
- Ogundele, O.M., Tamrakar, N., Kook, J.H., Kim, S.M., Choi, J.I., Karki, S., Akpenpuun, T.D., Kim, H.T., 2025. Real-time strawberry ripeness classification and counting: An optimized YOLOv8s framework with class-aware multi-object tracking. *Agriculture* 15, 1906. doi:[10.3390/agriculture15181906](https://doi.org/10.3390/agriculture15181906).
- Osman, Y., Dennis, R., Elgazzar, K., 2021a. Yield estimation and visualization solution for precision agriculture. *Sensors* 21, 6657. doi:[10.3390/s21066657](https://doi.org/10.3390/s21066657).

- s21196657.
- Osman, Y., Dennis, R., Elgazzar, K., 2021b. Yield estimation using deep learning for precision agriculture, in: 2021 IEEE 7th World Forum on Internet of Things (WF-IoT), pp. 542–550. doi:[10.1109/wf-iot51360.2021.9595143](https://doi.org/10.1109/wf-iot51360.2021.9595143).
- Page, M.J., McKenzie, J.E., Bossuyt, P.M., Boutron, I., Hoffmann, T.C., Mulrow, C.D., Shamseer, L., Tetzlaff, J.M., Akl, E.A., Brennan, S.E., Chou, R., Glanville, J., Grimshaw, J.M., Hróbjartsson, A., Lalu, M.M., Li, T., Loder, E.W., Mayo-Wilson, E., McDonald, S., McGuinness, L.A., Stewart, L.A., Thomas, J., Tricco, A.C., Welch, V.A., Whiting, P., Moher, D., 2021a. The PRISMA 2020 statement: an updated guideline for reporting systematic reviews. *BMJ* 372, n71. doi:[10.1136/bmj.n71](https://doi.org/10.1136/bmj.n71).
- Page, M.J., Moher, D., Bossuyt, P.M., Boutron, I., Hoffmann, T.C., Mulrow, C.D., Shamseer, L., Tetzlaff, J.M., Akl, E.A., Brennan, S.E., Chou, R., Glanville, J., Grimshaw, J.M., Hróbjartsson, A., Lalu, M.M., Li, T., Loder, E.W., Mayo-Wilson, E., McDonald, S., McGuinness, L.A., Stewart, L.A., Thomas, J., Tricco, A.C., Welch, V.A., Whiting, P., McKenzie, J.E., 2021b. PRISMA 2020 explanation and elaboration: updated guidance and exemplars for reporting systematic reviews. *BMJ* 372, n160. doi:[10.1136/bmj.n160](https://doi.org/10.1136/bmj.n160).
- Pai, C.A., Lin, H.Y., 2024. Maturity and yield estimation of tomatoes using RGB and multispectral images, in: 2024 IEEE International Conference on Industrial Technology (ICIT), pp. 1–6. doi:[10.1109/icit58233.2024.10540838](https://doi.org/10.1109/icit58233.2024.10540838).
- Pardo-Beainy, C., Parra, C., Solaque, L., 2026. Maturity and size estimation with yield mapping for hydroponic strawberries using machine vision. *Smart Agricultural Technology* 14, 102416. doi:[10.1016/j.atech.2026.102416](https://doi.org/10.1016/j.atech.2026.102416).
- Parico, A.I.B., Ahamed, T., 2021. Real time pear fruit detection and counting using YOLOv4 models and deep SORT. *Sensors* 21, 4803. doi:[10.3390/s21144803](https://doi.org/10.3390/s21144803).
- Parico, A.I.B., Ahamed, T., 2023. Real-time pear fruit detection and counting using YOLOv4 models and deep SORT, in: *IoT and AI in Agriculture*, pp. 179–218. doi:[10.1007/978-981-19-8113-5_11](https://doi.org/10.1007/978-981-19-8113-5_11).
- Park, D., Ko, K., Pyo, D., Kang, J., 2026. Incremental 3d crop model association for real-time counting in dense orchards. *IEEE Robotics and Automation Letters* 11, 3860–3866. doi:[10.1109/lra.2026.3662648](https://doi.org/10.1109/lra.2026.3662648).
- Petersen, K., Vakkalanka, S., Kuzniarz, L., 2015. Guidelines for conducting systematic mapping studies in software engineering: An update. *Information and Software Technology* 64, 1–18. doi:[10.1016/j.infsof.2015.03.007](https://doi.org/10.1016/j.infsof.2015.03.007).
- Piazolo, J., Fischer, B., Gruna, R., Beyerer, J., 2026. Enhanced grape tracking (using deep neural networks) with an extended matching algorithm for SORT and DeepSORT. *Computers and Electronics in Agriculture* 245, 111529. doi:[10.1016/j.compag.2026.111529](https://doi.org/10.1016/j.compag.2026.111529).
- Pichhika, H.C., Subudhi, P., Prasad Yerra, R.V., 2025. Enhanced YOLO-Based mango detection and centroid tracking for precise yield estimation. *Applied Fruit Science* 67, 164. doi:[10.1007/s10341-025-01385-9](https://doi.org/10.1007/s10341-025-01385-9).
- Ponce-Machete, R.A., Fajardo, A., 2025. Optimizing fruit yield prediction: Evaluating multiobject tracking algorithms for calamansi fruit detection using Yolov8m, in: 2025 17th International Conference on Computer and Automation Engineering (ICCAE), pp. 94–98. doi:[10.1109/iccae64891.2025.10980575](https://doi.org/10.1109/iccae64891.2025.10980575).
- Pragatheesh, L.G., Ramya, C., 2025. A deep learning application for accurate oil palm counting by eliminating re-counting errors in UAV imagery, in: 2025 International Conference on Robotics and Mechatronics (ICRM), pp. 1–5. doi:[10.1109/icrm66809.2025.11349040](https://doi.org/10.1109/icrm66809.2025.11349040).
- Prasetyo, N., et al., 2020. Automatic detection and calculation of palm oil fresh fruit bunches using faster r-CNN. *International Journal of Applied Science and Engineering* 17, 121–134. doi:[10.6703/ijase.202005_17\(2\).121](https://doi.org/10.6703/ijase.202005_17(2).121).
- Pu, X., Yang, D., Gong, C., Zhu, F., Zhou, R., 2025. Bridging lab and field: A review and roadmap for unmanned aerial vehicle-based field crop counting with deep learning. *Smart Agricultural Technology* 12, 101639. doi:[10.1016/j.atech.2025.101639](https://doi.org/10.1016/j.atech.2025.101639).
- Qi, Z., Zhang, T., Yuan, T., Zhou, W., Zhang, W., 2025. Assessment of the tomato cluster yield estimation algorithms via tracking-by-detection approaches. *Information Processing in Agriculture* 12, 445–455. doi:[10.1016/j.inpa.2025.02.005](https://doi.org/10.1016/j.inpa.2025.02.005).
- Qi, Z., Zhang, W., Yuan, T., Rong, J., Hua, W., Zhang, Z., Deng, X., Zhang, J., Li, W., 2024. An improved framework based on tracking-by-detection for simultaneous estimation of yield and maturity level in cherry tomatoes. *Measurement* 226, 114117. doi:[10.1016/j.measurement.2024.114117](https://doi.org/10.1016/j.measurement.2024.114117).
- Qian, J., et al., 2013. Yield estimation model of single tree of fuji apples based on bilateral image identification. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 29, 132–138. doi:[10.3969/j.issn.1002-6819.2013.11.017](https://doi.org/10.3969/j.issn.1002-6819.2013.11.017).
- Qureshi, A., Smith, D., Gee, T., Nejati, M., Shahabi, J., Lim, J., Ahn, H.S., McGuinness, B., Downes, C., Jangali, R., Black, K., Lim, H., Duke, M., MacDonald, B., Williams, H., 2023. Seeing the fruit for the leaves: Robotically mapping apple fruitlets in a commercial orchard, in: 2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pp. 3234–3239. doi:[10.1109/iros55552.2023.10341502](https://doi.org/10.1109/iros55552.2023.10341502).
- Rakai, L., Song, H., Sun, S., Zhang, W., Yang, Y., 2022. Data association in multiple object tracking: A survey of recent techniques. *Expert Systems with Applications* 192, 116300. doi:[10.1016/j.eswa.2021.116300](https://doi.org/10.1016/j.eswa.2021.116300).
- Ranftl, R., Bochkovskiy, A., Koltun, V., 2021. Vision transformers for dense prediction, in: 2021 IEEE/CVF International Conference on Computer Vision (ICCV), pp. 12159–12168. doi:[10.1109/iccv48922.2021.01196](https://doi.org/10.1109/iccv48922.2021.01196).
- Rapado-Rincón, D., van Henten, E.J., Kootstra, G., 2023. Development and evaluation of automated localisation and reconstruction of all fruits on tomato plants in a greenhouse based on multi-view perception and 3d multi-object tracking. *Biosystems Engineering* 231, 78–91. doi:[10.1016/j.biosystemseng.2023.06.003](https://doi.org/10.1016/j.biosystemseng.2023.06.003).
- Resta, F.S.A., Setiawan, R., Rivai, M., Arif, R.E., Natawijaya, A., Hadad, A.G.A., 2026. Multimodal radar-vision for oil palm fresh fruit bunch ripeness classification. *IEEE Access* 14, 42975–42991. doi:[10.1109/access.2026.3675310](https://doi.org/10.1109/access.2026.3675310).
- Ristani, E., Solera, F., Zou, R., Cucchiara, R., Tomasi, C., 2016. Performance measures and a data set for multi-target, multi-camera tracking, in: *Lecture Notes in Computer Science*, volume 9914 LNCS, pp. 17–35. doi:[10.1007/978-3-319-48881-3_2](https://doi.org/10.1007/978-3-319-48881-3_2).
- Rizky Hidayat, M., Azarya Sulisty, P., Oktario, H., Gunawan, A.A.S., Mimboro, P., 2024. Establishing a standard operating procedure (SOP) for palm oil plantation FFB image capture: Utilizing YOLOv8 for counting and ripeness classification, in: 2024 6th International Conference on Cybernetics and Intelligent System (ICORIS), pp. 01–06. doi:[10.1109/icoris63540.2024.10903724](https://doi.org/10.1109/icoris63540.2024.10903724).
- Rong, Z., Ru, Y., Zhang, X., Fang, S., Zhou, H., Jiang, X., 2026. Research progress on precision orchard yield estimation based on multi-source information perception sensors. *Frontiers in Plant Science* 17, 1759956. doi:[10.3389/fpls.2026.1759956](https://doi.org/10.3389/fpls.2026.1759956).
- Roy, P., Isler, V., 2016. Surveying apple orchards with a monocular vision system, in: 2016 IEEE International Conference on Automation Science and Engineering (CASE), pp. 916–921. doi:[10.1109/coase.2016.7743500](https://doi.org/10.1109/coase.2016.7743500).
- Roy, P., Isler, V., 2017a. Active view planning for counting apples in orchards, in: 2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pp. 6027–6032. doi:[10.1109/iros.2017.8206500](https://doi.org/10.1109/iros.2017.8206500).
- Roy, P., Isler, V., 2017b. Vision-based apple counting and yield estimation, in: *Springer Proceedings in Advanced Robotics*, pp. 478–487. doi:[10.1007/978-3-319-50115-4_42](https://doi.org/10.1007/978-3-319-50115-4_42).
- Roy, P., Kislay, A., Plonski, P.A., Luby, J., Isler, V., 2019. Vision-based preharvest yield mapping for apple orchards. *Computers and Electronics in Agriculture* 164, 104897. doi:[10.1016/j.compag.2019.104897](https://doi.org/10.1016/j.compag.2019.104897).
- Sabri, N., Ibrahim, Z., Isa, D., 2018. Evaluation of color models for palm oil fresh fruit bunch ripeness classification. *Indonesian Journal of Electrical Engineering and Computer Science* 11, 549. doi:[10.11591/ijeecs.v11.i2.pp549-557](https://doi.org/10.11591/ijeecs.v11.i2.pp549-557).
- Safre, A., Torres-Rua, A., Black, B., Schaffer, B., 2024. Advanced methods for yield mapping in tart cherries: tank change tracking and YOLO-DeepSort fruit counting, in: *Acta Horticulturae*, pp. 289–296. doi:[10.17660/actahortic.2024.1395.38](https://doi.org/10.17660/actahortic.2024.1395.38).

- Santos, T.T., 2026. Multi-fruit tracking and 3-d structure recovery via CoTracker. *Revista de Informática Teórica e Aplicada* 33, 81–88. doi:10.22456/2175-2745.150960.
- Santos, T.T., de Souza, K.X., Camargo Neto, J., Koenigkan, L.V., Moreira, A.S., Ternes, S., 2024. Multiple orange detection and tracking with 3-d fruit relocation and neural-net based yield regression in commercial sweet orange orchards. *Computers and Electronics in Agriculture* 224, 109199. doi:10.1016/j.compag.2024.109199.
- Santos, T.T., de Souza, L.L., dos Santos, A.A., Avila, S., 2020. Grape detection, segmentation, and tracking using deep neural networks and three-dimensional association. *Computers and Electronics in Agriculture* 170, 105247. doi:10.1016/j.compag.2020.105247.
- Saputra, M.R.U., Markham, A., Trigoni, N., 2019. Visual SLAM and structure from motion in dynamic environments. *ACM Computing Surveys* 51, 1–36. doi:10.1145/3177853.
- Saraceni, L., Motoi, I.M., Nardi, D., Ciarfuglia, T.A., 2024. AgriSORT: A simple online real-time tracking-by-detection framework for robotics in precision agriculture, in: 2024 IEEE International Conference on Robotics and Automation (ICRA), pp. 2675–2682. doi:10.1109/icra57147.2024.10610231.
- Sasse, A.M., Wieland, J.P.V.B., Pereira, A.G., Proença, L.R., Freitas, I.M.P., Rangel, P., de Farias, C.M., 2025. An object-tracking technique for counting grape clusters in brazilian northeast's pergola vineyards, in: 2025 28th International Conference on Information Fusion (FUSION), pp. 1–8. doi:10.23919/fusion65864.2025.11124157.
- Scalisi, A., McClymont, L., Peavey, M., Morton, P., Scheduling, S., Underwood, J., Goodwin, I., 2024. Detecting, mapping and digitising canopy geometry, fruit number and peel colour in pear trees with different architecture. *Scientia Horticulturae* 326, 112737. doi:10.1016/j.scienta.2023.112737.
- Scalisi, A., McClymont, L., Underwood, J., Morton, P., Scheduling, S., Goodwin, I., 2021. Reliability of a commercial platform for estimating flower cluster and fruit number, yield, tree geometry and light interception in apple trees under different rootstocks and row orientations. *Computers and Electronics in Agriculture* 191, 106519. doi:10.1016/j.compag.2021.106519.
- Schonberger, J.L., Frahm, J.M., 2016. Structure-from-motion revisited, in: 2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR), pp. 4104–4113. doi:10.1109/cvpr.2016.445.
- Sekharamanthy, P.K., Melgani, F., Malacarne, J., Ricci, R., de Almeida Silva, R., Marcato Junior, J., 2024. A seamless deep learning approach for apple detection, depth estimation, and tracking using YOLO models enhanced by multi-head attention mechanism. *Computers* 13, 83. doi:10.3390/computers1303083.
- Septiarni, A., Sunyoto, A., Hamdani, H., Kasim, A.A., Utaminigrum, F., Hatta, H.R., 2021. Machine vision for the maturity classification of oil palm fresh fruit bunches based on color and texture features. *Scientia Horticulturae* 286, 110245. doi:10.1016/j.scienta.2021.110245.
- Serafino, S.E., Cicerchia, L.B., Pérez, G., Adorno, S., Balmer, A., 2020. Detection and counting of lemons using artificial vision and tracking techniques for real time harvest estimation, in: 2020 XLVI Latin American Computing Conference (CLEI), pp. 496–502. doi:10.1109/clei52000.2020.00064.
- Shen, L., Su, J., He, R., Song, L., Huang, R., Fang, Y., Song, Y., Su, B., 2023. Real-time tracking and counting of grape clusters in the field based on channel pruning with YOLOv5s. *Computers and Electronics in Agriculture* 206, 107662. doi:10.1016/j.compag.2023.107662.
- Shiddiq, M., 2023. Counting of oil palm fresh fruit bunches using computer vision. *Journal of Oil Palm Research* 35, 111–120. doi:10.21894/jopr.2022.0029.
- Shimomoto, K., Shimazu, M., Matsuo, T., Kato, S., Naito, H., Kashino, M., Ohta, N., Yoshida, S., Fukatsu, T., 2025. Predicting sweet pepper yield based on fruit counts at multiple ripeness stages monitored by an AI-Based system mounted on a pipe-rail trolley. *Horticulturae* 11, 718. doi:10.3390/horticulturae11070718.
- Si, N., et al., 2026. Citrus yield estimation based on multi-object tracking in video streams using an improved YOLOv8n model. *Journal of Fruit Science* 43, 1283–1296. doi:10.13925/j.cnki.gsx.20250487.
- Singh, R., Gadade, A.M., Hussain, I., 2025. Robust real-time strawberry maturity detection using UAV-mounted deep learning for precision agriculture. *BMC Plant Biology* 25, 1367. doi:10.1186/s12870-025-07246-7.
- Song, Y., Glasbey, C., Horgan, G., Polder, G., Dieleman, J., van der Heijden, G., 2014. Automatic fruit recognition and counting from multiple images. *Biosystems Engineering* 118, 203–215. doi:10.1016/j.biosystemseng.2013.12.008.
- Stein, M., Bargoti, S., Underwood, J., 2016. Image based mango fruit detection, localisation and yield estimation using multiple view geometry. *Sensors* 16, 1915. doi:10.3390/s16111915.
- Suharjito, Asrol, M., Utama, D.N., Junior, F.A., Marimin, 2023a. Real-time oil palm fruit grading system using smartphone and modified YOLOv4. *IEEE Access* 11, 59758–59773. doi:10.1109/access.2023.3285537.
- Suharjito, Elwirehardja, G.N., Prayoga, J.S., 2021. Oil palm fresh fruit bunch ripeness classification on mobile devices using deep learning approaches. *Computers and Electronics in Agriculture* 188, 106359. doi:10.1016/j.compag.2021.106359.
- Suharjito, Junior, F.A., Koeswandy, Y.P., Debi, Nurhayati, P.W., Asrol, M., Marimin, 2023b. Annotated datasets of oil palm fruit bunch piles for ripeness grading using deep learning. *Scientific Data* 10, 72. doi:10.1038/s41597-023-01958-x.
- Suharjito, Naftali, M.G., Hugo, G., Priyadi, M.R.A., Asrol, M., Utama, D.N., 2025. Oil palm fruits dataset in plantations for harvest estimation using digital census and smartphone. *Scientific Data* 12, 972. doi:10.1038/s41597-025-05227-x.
- Sun, P., Cao, J., Jiang, Y., Yuan, Z., Bai, S., Kitani, K., Luo, P., 2022. DanceTrack: Multi-object tracking in uniform appearance and diverse motion, in: 2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp. 20961–20970. doi:10.1109/cvpr52688.2022.02032.
- Sun, S., Li, C., Chee, P.W., Paterson, A.H., Jiang, Y., Xu, R., Robertson, J.S., Adhikari, J., Shehzad, T., 2020. Three-dimensional photogrammetric mapping of cotton bolls in situ based on point cloud segmentation and clustering. *ISPRS Journal of Photogrammetry and Remote Sensing* 160, 195–207. doi:10.1016/j.isprsjprs.2019.12.011.
- Tan, D.G., Gitawardani, S., Hadiprawira, A., Lucky, H., 2025a. Apple diameter measurement from RGB images using ORCNN and calibrated monocular depth, in: 2025 International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS), pp. 278–283. doi:10.1109/icimcis68501.2025.11327435.
- Tan, S., Kuang, Z., Jin, B., 2025b. AppleYOLO: Apple yield estimation method using improved YOLOv8 based on deep OC-SORT. *Expert Systems with Applications* 272, 126764. doi:10.1016/j.eswa.2025.126764.
- Tang, Z., Naphade, M., Liu, M.Y., Yang, X., Birchfield, S., Wang, S., Kumar, R., Anastasiu, D., Hwang, J.N., 2019. CityFlow: A city-scale benchmark for multi-target multi-camera vehicle tracking and re-identification, in: 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp. 8789–8798. doi:10.1109/cvpr.2019.00900.
- Torres-Sánchez, J., Mesas-Carrascosa, F.J., Santesteban, L.G., Jiménez-Brenes, F.M., Oneka, O., Villa-Llop, A., Loidi, M., López-Granados, F., 2021. Grape cluster detection using UAV photogrammetric point clouds as a low-cost tool for yield forecasting in vineyards. *Sensors* 21, 3083. doi:10.3390/s21093083.
- Tu, S., Huang, Y., Huang, Q., Liu, H., Cai, Y., Lei, H., 2025. Estimation of passion fruit yield based on YOLOv8n + OC-SORT + CRCM algorithm. *Computers and Electronics in Agriculture* 229, 109727. doi:10.1016/j.compag.2024.109727.
- Tu, S., Huang, Y., Liang, Y., Liu, H., Cai, Y., Lei, H., 2024. A passion fruit counting method based on the lightweight YOLOv5s and improved DeepSORT. *Precision Agriculture* 25, 1731–1750. doi:10.1007/s11119-024-10132-1.
- Tu, S., Pang, J., Liu, H., Zhuang, N., Chen, Y., Zheng, C., Wan, H., Xue, Y., 2020. Passion fruit detection and counting based on multiple scale faster r-CNN using RGB-D images. *Precision Agriculture* 21, 1072–1091. doi:10.1007/s11119-020-09709-3.
- Tu, S., et al., 2026. Passion fruit counting method based on lightweight YOLO lln CLL and BoT SORT. *Nongye Jixie Xuebao Transactions of*

- the Chinese Society for Agricultural Machinery 57, 208–218. doi:10.6041/j.issn.1000-1298.2026.10.021.
- Turečková, A., Tureček, T., Janků, P., Vařacha, P., Šenkeřík, R., Jašek, R., Psota, V., Štěpánek, V., Komínková Oplatková, Z., 2022. Slicing aided large scale tomato fruit detection and counting in 360-degree video data from a greenhouse. *Measurement* 204, 111977. doi:10.1016/j.measurement.2022.111977.
- Usman, U., Arifin, F., Asnawi, R., 2026. Integration of hybrid GA-PSO-SA with self-adaptive dynamic attention for multi-objective CNN-based oil palm fruit ripeness classification. *International Journal of Intelligent Engineering and Systems* 19, 13–34. doi:10.22666/ijies2026.0228.02.
- Vaishnavi, M., Bharaniharan, A., Mohanapriya, S., Thanush, P., 2025. Fruit detection and yield estimation using path aggregation feature pyramid network and deep SORT algorithm: A case study on orange fruit, in: 2025 9th International Conference on Electronics, Communication and Aerospace Technology (ICECA), pp. 2191–2196. doi:10.1109/iceca66444.2025.11383116.
- Vijayakumar, V., Ampatzidis, Y., Costa, L., 2023. Tree-level citrus yield prediction utilizing ground and aerial machine vision and machine learning. *Smart Agricultural Technology* 3, 100077. doi:10.1016/j.atech.2022.100077.
- Villacrés, J., Viscaino, M., Delpiano, J., Vougioukas, S., Auat Cheein, F., 2023. Apple orchard production estimation using deep learning strategies: A comparison of tracking-by-detection algorithms. *Computers and Electronics in Agriculture* 204, 107513. doi:10.1016/j.compag.2022.107513.
- Villacrés, J., Vougioukas, S., 2024. Assessing a multi-camera system to enhance fruit visibility for robotic harvesting in a v-trellised apple orchard. *Computers and Electronics in Agriculture* 224, 109164. doi:10.1016/j.compag.2024.109164.
- Viveros Escamilla, L.D., Gómez-Espinosa, A., Escobedo Cabello, J.A., Cantoral-Ceballos, J.A., 2024. Maturity recognition and fruit counting for sweet peppers in greenhouses using deep learning neural networks. *Agriculture* 14, 331. doi:10.3390/agriculture14030331.
- Vulpi, F., Marani, R., Petitti, A., Reina, G., Milella, A., 2022. An RGB-D multi-view perspective for autonomous agricultural robots. *Computers and Electronics in Agriculture* 202, 107419. doi:10.1016/j.compag.2022.107419.
- Wang, A., Xu, Y., Hu, D., Zhang, L., Li, A., Zhu, Q., Liu, J., 2025a. Tomato yield estimation using an improved lightweight YOLO11n network and an optimized region tracking-counting method. *Agriculture* 15, 1353. doi:10.3390/agriculture15131353.
- Wang, H., Hong, X., Qin, L., Shi, C., Wu, G., 2024a. SLAM-PYE: Tightly coupled GNSS-binocular-inertial fusion for pitaya positioning, counting, and yield estimation. *Computers and Electronics in Agriculture* 224, 109177. doi:10.1016/j.compag.2024.109177.
- Wang, J., et al., 2024b. Camellia oleifera fruit static and dynamic detection counting based on improved COF-YOLO v8n. *Nongye Jixie Xuebao Transactions of the Chinese Society for Agricultural Machinery* 55, 193–203. doi:10.6041/j.issn.1000-1298.2024.04.019.
- Wang, K., Pan, Y., Magistri, F., Kooistra, L., Stachniss, C., Wang, W., Valente, J., 2026a. UAV-based monocular 3d panoptic mapping for fruit shape completion in orchard. *ISPRS Journal of Photogrammetry and Remote Sensing* 231, 608–621. doi:10.1016/j.isprsjprs.2025.11.013.
- Wang, P., He, Y., Zhang, J., Liu, J., Chen, R., Zhuang, X., 2025b. Phenotypic trait acquisition method for tomato plants based on RGB-D SLAM. *Agriculture* 15, 1574. doi:10.3390/agriculture15151574.
- Wang, Q., Nuske, S., Bergerman, M., Singh, S., 2013. Automated crop yield estimation for apple orchards, in: *Springer Tracts in Advanced Robotics*. volume 88 STAR, pp. 745–758. doi:10.1007/978-3-319-00065-7_50.
- Wang, S., Zhang, X., Shen, H., Tian, M., Li, M., 2022. Research on UAV online visual tracking algorithm based on YOLOv5 and FlowNet2 for apple yield inspection, in: 2022 WRC Symposium on Advanced Robotics and Automation (WRC SARA), pp. 280–285. doi:10.1109/wrcsara57040.2022.9903925.
- Wang, Y., Kang, B., Liu, J., Sun, C., 2026b. Semantic NeRF-Oriented 3-d object counting for industrial fruit harvesting. *IEEE Transactions on Automation Science and Engineering* 23, 11401–11415. doi:10.1109/tase.2026.3700861.
- Wang, Z., Walsh, K., Koirala, A., 2019. Mango fruit load estimation using a video based MangoYOLO—kalman filter—hungarian algorithm method. *Sensors* 19, 2742. doi:10.3390/s19122742.
- Wang, Z., Walsh, K., Verma, B., 2017. On-tree mango fruit size estimation using RGB-D images. *Sensors* 17, 2738. doi:10.3390/s17122738.
- Warni, E., Indrabayu, Achmad, A., Syarif, S., Rudi, Sadi, N.P., 2026. Stereo vision-based detection and 3d localization of loose oil palm fruits using YOLOv8 and hungarian matching. *Ingénierie des systèmes d'information* 31, 579–589. doi:10.18280/isi.310225.
- Wee, B.V., Banister, D., 2016. How to write a literature review paper? *Transport Reviews* 36, 278–288. doi:10.1080/01441647.2015.1065456.
- Wei, J., Kevric, E., Zach, J., Steldinger, P., Rose, H.W., 2025. Multi-object tracking for apple counting in orchards using stereo vision, in: 2025 IEEE International Workshop on Metrology for Agriculture and Forestry (MetroAgriFor), pp. 196–201. doi:10.1109/metroagrifor66923.2025.11512512.
- Weng, H., et al., 2026. Citrus tracking and counting using UAV remote sensing video imagery with improved YOLO11. *Nongye Gongcheng Xuebao Transactions of the Chinese Society of Agricultural Engineering* 42, 182–192. doi:10.11975/j.issn.1002-6819.202508166.
- Wojke, N., Bewley, A., Paulus, D., 2017. Simple online and realtime tracking with a deep association metric, in: 2017 IEEE International Conference on Image Processing (ICIP), pp. 3645–3649. doi:10.1109/icip.2017.8296962.
- Woo, Y.S., Yok-In, K., Buayai, P., Nishizaki, H., Kamarudin, L.M., Mao, X., 2026. Geometry-driven triangulation and differentiable semantic gaussian refinement for 3d grape bunch model reconstruction in the field, in: *Proceedings of the 2026 9th International Conference on Information and Computer Technologies*, pp. 168–175. doi:10.1145/3803291.3803356.
- Wu, N., Wu, J., Wang, Z., Zhao, Y., Xu, X., Wang, Y., Skobelev, P., Mi, Y., 2025. Maturity detection and counting of blueberries in real orchards using a novel STF-YOLO model integrated with ByteTrack algorithm. *Frontiers in Plant Science* 16, 1682024. doi:10.3389/fpls.2025.1682024.
- Wu, Z., Sun, X., Jiang, H., Gao, F., Li, R., Fu, L., Zhang, D., Fountas, S., 2023. Twice matched fruit counting system: An automatic fruit counting pipeline in modern apple orchard using mutual and secondary matches. *Biosystems Engineering* 234, 140–155. doi:10.1016/j.biosystemseng.2023.09.005.
- Xia, X., Chai, X., Zhang, N., Zhang, Z., Sun, Q., Sun, T., 2022. Culling double counting in sequence images for fruit yield estimation. *Agronomy* 12, 440. doi:10.3390/agronomy12020440.
- Xia, Y., Nguyen, M., Yan, W.Q., 2024. Kiwifruit counting using kiwidetector and kiwitrapper, in: *Lecture Notes in Networks and Systems*. volume 823 LNNS, pp. 629–640. doi:10.1007/978-3-031-47724-9_41.
- Xiao, S., Fei, S., Ye, Y., Xu, D., Xie, Z., Bi, K., Guo, Y., Li, B., Zhang, R., Ma, Y., 2024. 3d reconstruction and characterization of cotton bolls in situ based on UAV technology. *ISPRS Journal of Photogrammetry and Remote Sensing* 209, 101–116. doi:10.1016/j.isprsjprs.2024.01.027.
- Xie, F., Sun, N., Li, J., Feng, Q., Li, T., 2023. Fruit distribution acquisition with multi-vision for multi-arm harvesting robots, in: 2023 8th International Conference on Control, Robotics and Cybernetics (CRC), pp. 7–13. doi:10.1109/crc60659.2023.10488608.
- Xie-Li, D., Fallas-Moya, F., 2025. PineSORT: A simple online real-time tracking framework for drone videos in agriculture, in: 2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW), pp. 65–74. doi:10.1109/cvprw67362.2025.00012.
- Xing, X., Gao, J., Deng, X., Wang, S., Qi, P., Wang, F., Hou, X., Gao, J., 2026. A lightweight multi-view detection and counting method for real-time cherry tomato yield estimation using greenhouse inspection robots. *Smart Agricultural Technology* 14, 102260. doi:10.1016/j.atech.2026.102260.
- Xing, Y., Hu, H., Zhang, J., Han, Z., Han, J., 2025. CB-YOLO-DeepSORT: Real-time yield estimation for tomatoes in greenhouses, in: 2025 IEEE 15th International Conference on CYBER Technology in Automation, Control, and Intelligent Systems (CYBER), pp. 66–71. doi:10.1109/cyber67662.2025.11168194.

- Yan, Z., Wu, Y., Zhao, W., Zhang, S., Li, X., 2025. Research on an apple recognition and yield estimation model based on the fusion of improved YOLOv11 and DeepSORT. *Agriculture* 15, 765. doi:10.3390/agriculture15070765.
- Yang, L., et al., 2024a. Depth anything V2, in: *Advances in Neural Information Processing Systems*.
- Yang, R., Zhang, X., Chen, Y., Huang, X., Feng, S., 2026. A real-time semantic 3d vineyard mapping and fruit localization system for yield estimation in dynamic vineyards. *Smart Agricultural Technology* 13, 101784. doi:10.1016/j.atech.2026.101784.
- Yang, T., Ibrahimov, R., Mueller, M.W., 2025a. Towards safe and efficient through-the-canopy autonomous fruit counting with UAVs, in: *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 15560–15566. doi:10.1109/icra55743.2025.11127839.
- Yang, W., Liu, K., Tan, Z., Lo, L.Y., Wang, Y., Wong, K.H., Wen, C.Y., 2025b. Hierarchical 3-d scene-graph-based semantic-metric SLAM for plant inspection and fruit counting in intelligent hydroponics system. *IEEE Internet of Things Journal* 12, 49071–49082. doi:10.1109/jiot.2025.3600531.
- Yang, X., Gao, Y., Yin, M., Li, H., 2024b. Automatic apple detection and counting with AD-YOLO and MR-SORT. *Sensors* 24, 7012. doi:10.3390/s24217012.
- Ye, M., Shen, J., Lin, G., Xiang, T., Shao, L., Hoi, S.C.H., 2022. Deep learning for person re-identification: A survey and outlook. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 44, 2872–2893. doi:10.1109/tpami.2021.3054775.
- Yoshida, T., Teng, P., Ota, T., Murakami, N., 2026. Cross-day grape cluster tracking using branch-based 3d alignment in vineyards. *Journal of Robotics and Mechatronics* 38, 953–962. doi:10.20965/jrm.2026.p0953.
- Yuan, Q., Wang, P., Luo, W., Zhou, Y., Chen, H., Meng, Z., 2024. Simultaneous localization and mapping system for agricultural yield estimation based on improved VINS-RGBD: A case study of a strawberry field. *Agriculture* 14, 784. doi:10.3390/agriculture14050784.
- Zaenker, T., Rückin, J., Menon, R., Popović, M., Bennewitz, M., 2023. Graph-based view motion planning for fruit detection, in: *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 4219–4225. doi:10.1109/iros55552.2023.10342532.
- Zaenker, T., Smitt, C., McCool, C., Bennewitz, M., 2021. Viewpoint planning for fruit size and position estimation, in: *2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 3271–3277. doi:10.1109/iros51168.2021.9636701.
- Zaman, B., Indrabayu, Nurtanio, I., 2025. A hybrid approach for handling occlusion in UAV images of fresh oil palm fruit bunches based on computer vision, in: *2025 International Seminar on Intelligent Technology and Its Applications (ISITIA)*, pp. 1–6. doi:10.1109/isitia66279.2025.11137494.
- Zhai, Y., Zhang, L., Hu, X., Yang, F., Huang, Y., 2025. A dynamic kalman filtering method for multi-object fruit tracking and counting in complex orchards. *Sensors* 25, 4138. doi:10.3390/s25134138.
- Zhang, C., Zhang, K., Ge, L., Zou, K., Wang, S., Zhang, J., Li, W., 2021. A method for organs classification and fruit counting on pomegranate trees based on multi-features fusion and support vector machine by 3d point cloud. *Scientia Horticulturae* 278, 109791. doi:10.1016/j.scienta.2020.109791.
- Zhang, J., Jiang, L., He, L., Wu, Z., Li, R., Chen, J., Sun, X., Xue, Y., Grecheneva, A., Fountas, S., Fu, L., 2025. Row-based kiwifruit counting pipeline for smartphone-captured videos using fruit tracking and detection region adaptation guided by support-post. *Computers and Electronics in Agriculture* 237, 110476. doi:10.1016/j.compag.2025.110476.
- Zhang, N., Cao, J., 2025. Robust real-time blueberry counting in greenhouses using small-object detection and mamba-driven multi-step trajectory completion. *Smart Agricultural Technology* 12, 101402. doi:10.1016/j.atech.2025.101402.
- Zhang, W., Huang, A., Zheng, C., Jiang, K., Guo, W., 2024. StableSort-CMC: A tracking algorithm for robot dog based orchard fruit counting, in: *2024 China Automation Congress (CAC)*, pp. 1698–1703. doi:10.1109/cac63892.2024.10865478.
- Zhang, W., Wang, J., Liu, Y., Chen, K., Li, H., Duan, Y., Wu, W., Shi, Y., Guo, W., 2022a. Deep-learning-based in-field citrus fruit detection and tracking. *Horticulture Research* 9, uhac003. doi:10.1093/hr/uhac003.
- Zhang, X., Song, Z., Liang, Q., Gao, S., 2022b. Yield and maturity estimation of apples in orchards using a 3-step deep learning-based method. *Quality Assurance and Safety of Crops & Foods* 14, 101–111. doi:10.15586/qas.v14i2.1008.
- Zhang, Y., Sun, P., Jiang, Y., Yu, D., Weng, F., Yuan, Z., Luo, P., Liu, W., Wang, X., 2022c. ByteTrack: Multi-object tracking by associating every detection box, in: *Lecture Notes in Computer Science*, volume 13682 LNCS, pp. 1–21. doi:10.1007/978-3-031-20047-2_1.
- Zhao, J., Geipel, J., Kusnierek, K., Cui, X., 2026a. A two-stage fine-tuning strategy for 3d object segmentation from multi-view images. *Smart Agricultural Technology* 15, 102443. doi:10.1016/j.atech.2026.102443.
- Zhao, K., Kang, C., Rogiers, S., Ghannoum, O., Guo, Y., 2026b. Adapting SAM3 for 3d fruit counting with cross-view contrastive learning and hough voting. *Computers and Electronics in Agriculture* 255, 112325. doi:10.1016/j.compag.2026.112325.
- Zheng, C., Liu, T., Abd-Elrahman, A., Whitaker, V.M., Wilkinson, B., 2023a. Object-detection from multi-view remote sensing images: A case study of fruit and flower detection and counting on a central florida strawberry farm. *International Journal of Applied Earth Observation and Geoinformation* 123, 103457. doi:10.1016/j.jag.2023.103457.
- Zheng, L., Shen, L., Tian, L., Wang, S., Wang, J., Tian, Q., 2015. Scalable person re-identification: A benchmark, in: *2015 IEEE International Conference on Computer Vision (ICCV)*, pp. 1116–1124. doi:10.1109/icc.2015.133.
- Zheng, W., Dai, G., Hu, M., Wang, P., 2025. A robust tomato counting framework for greenhouse inspection robots using YOLOv8 and inter-frame prediction. *Agronomy* 15, 1135. doi:10.3390/agronomy15051135.
- Zheng, Z., Wu, M., Chen, L., Wang, C., Xiong, J., Wei, L., Huang, X., Wang, S., Huang, W., Du, D., 2024. A robust and efficient citrus counting approach for large-scale unstructured orchards. *Agricultural Systems* 215, 103867. doi:10.1016/j.agsy.2024.103867.
- Zheng, Z., Xiong, J., Wang, X., Li, Z., Huang, Q., Chen, H., Han, Y., 2023b. An efficient online citrus counting system for large-scale unstructured orchards based on the unmanned aerial vehicle. *Journal of Field Robotics* 40, 552–573. doi:10.1002/rob.22147.
- Zheng, Z., Yang, X., Yi, R., Ma, L., 2026. Feed-forward 3d reconstruction with point-cloud representations: From DUST3R to VGGT and beyond. *Virtual Reality & Intelligent Hardware* 8, 265–282. doi:10.1016/j.vrih.2026.03.005.
- Zhou, C., Xu, F., Huang, A., Wang, C., Zhang, W., 2024a. Utilizing NeRF-Based rays for spatial perception in fruit counting deduplication, in: *2024 International Symposium on Internet of Things and Smart Cities (ISITSC)*, pp. 35–40. doi:10.1109/isitsc64373.2024.00013.
- Zhou, L., Yang, Z., Fu, L., Duan, J., 2025. Yield estimation in banana orchards based on DeepSORT and RGB-Depth images. *Agronomy* 15, 1119. doi:10.3390/agronomy15051119.
- Zhou, X., Zhang, Y., Jiang, X., Riaz, K., Rosenbaum, P., Lefsrud, M., Sun, S., 2024b. Advancing tracking-by-detection with MultiMap: Towards occlusion-resilient online multiclass strawberry counting. *Expert Systems with Applications* 255, 124587. doi:10.1016/j.eswa.2024.124587.
- Zhou, X.X., Zhang, Y.Y., Sun, S.S.S., Rosenbaum, P.P., 2023. A dynamic object counting method for strawberry fruits using vision transformer networks and kalman filter tracking, in: *2023 Omaha, Nebraska July 9–12, 2023*. doi:10.13031/aim.202301450.
- Zhu, J., Bai, L., Liu, C., Nian, C., Zhang, K., Yang, S., 2026. Research on greenhouse eggplant fruit detection and tracking-based counting using an improved YOLOv5s-DeepSORT. *Agriculture* 16, 253. doi:10.3390/agriculture16020253.
- Zhu, Q., et al., 2022. Identification and counting method of potted kumquat fruits based on point cloud registration. *Nongye Jixie Xuebao Transactions of the Chinese Society for Agricultural Machinery* 53, 209–216. doi:10.6041/j.issn.1000-1298.2022.05.021.
- Zhu, Y., Liu, F., Zhao, Y., Gu, Q., Zhang, X., 2024. Citrus yield estimation for individual trees integrating pruning intensity and image views. *European Journal of Agronomy* 161, 127349. doi:10.1016/j.eja.2024.127349.

- Zine-El-Abidine, M., Dutagaci, H., Galopin, G., Rousseau, D., 2021. Assigning apples to individual trees in dense orchards using 3d colour point clouds. *Biosystems Engineering* 209, 30–52. doi:[10.1016/j.biosystemseng.2021.06.015](https://doi.org/10.1016/j.biosystemseng.2021.06.015).
- Zolfagharnassab, S., Shariff, A.R.B.M., Ehsani, R., Jaafar, H.Z., Aris, I.B., 2022. Classification of oil palm fresh fruit bunches based on their maturity using thermal imaging technique. *Agriculture* 12, 1779. doi:[10.3390/agriculture12111779](https://doi.org/10.3390/agriculture12111779).

A. Coding records of the multi-observation studies

Table A1 lists every multi-observation study included in the review, in order of publication year. The result reported by each study is given in the supplementary evidence matrix.

Table A1

Detailed coding records of the 195 multi-observation studies.

Study	Crop	Platform	Acquisition	Association mechanism	Per-class counts	Metrics in abstract	Coded from
Qian et al. (2013)	Apple	Not stated	Discrete views	Statistical correction	No	No abstract	Abstract
Wang et al. (2013)	Apple	Ground vehicle	Video	Geometric or 3D association	No	None	Abstract
Gongal et al. (2014)	Apple	Not stated	Discrete views	Geometric or 3D association	No	No abstract	Abstract
Nuske et al. (2014b)	Grape	Ground vehicle	Video	Statistical correction	No	None	Abstract
Nuske et al. (2014a)	Grape	Ground vehicle	Video	Statistical + geometric	No	None	Abstract
Song et al. (2014)	Pepper	Not stated	Discrete views	Statistical correction	No	None	Abstract
Linker et al. (2015)	Apple	Not stated	Discrete views	Statistical correction	No	None	Full text
Gongal et al. (2016)	Apple	Not stated	Discrete views	Geometric or 3D association	No	None	Abstract
Roy and Isler (2016)	Apple	Not stated	Discrete views	Geometric or 3D association	No	None	Abstract
Stein et al. (2016)	Mango	Not stated	Video	Tracking + geometric	No	Count, detection	Full text
Roy and Isler (2017a)	Apple	Ground vehicle	Discrete views	Geometric or 3D association	No	None	Abstract
Roy and Isler (2017b)	Apple	Not stated	Video	Geometric or 3D association	No	No abstract	Abstract
Liu et al. (2018)	Not stated	Not stated	Video	Tracking + geometric	No	Count	Abstract
Huang and Lin (2019)	Not stated	Ground vehicle	Video	Appearance + tracking	No	None	Abstract
Liu et al. (2019)	Mango	Not stated	Video	Tracking + geometric	No	Detection	Full text
Nellithimaru and Kantor (2019)	Apple	Not stated	Video	Geometric or 3D association	No	Detection	Abstract
Roy et al. (2019)	Apple	Not stated	Video	Tracking + geometric	No	None	Full text
Wang et al. (2019)	Mango	Not stated	Video	Temporal tracking	No	Count	Full text
Apolo-Apolo et al. (2020)	Apple	UAV, Ground vehicle	Video	Statistical + geometric	No	Count	Full text
Dong et al. (2020)	Not stated	Not stated	Video	Geometric or 3D association	No	None	Full text
Gené-Mola et al. (2020a)	Apple	Not stated	3D scan	Geometric or 3D association	No	Count	Abstract
Gené-Mola et al. (2020c)	Apple	Not stated	Discrete views	Geometric or 3D association	No	Detection	Abstract
Gené-Mola et al. (2020d)	Apple	Not stated	Discrete views	Dataset paper	No	None	Abstract
Gené-Mola et al. (2020b)	Apple	Not stated	3D scan	Dataset paper	No	None	Abstract
Häni et al. (2020)	Apple	Not stated	Video	Geometric or 3D association	No	None	Full text
Santos et al. (2020)	Grape	Not stated	Video	Geometric or 3D association	No	Detection	Full text
Serafino et al. (2020)	Citrus	Ground vehicle	Video	Temporal tracking	No	None	Abstract
Sun et al. (2020)	Cotton	Not stated	Discrete views	Geometric or 3D association	No	Count	Abstract
Anderson et al. (2021a)	Mango	Not stated	Video	Statistical + tracking	No	Count	Full text
Gao et al. (2021b)	Apple	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Gao et al. (2021a)	Apple	Not stated	Video	Temporal tracking	No	Detection	Abstract
Itakura et al. (2021)	Apple	Not stated	Video	Temporal tracking	No	Detection	Abstract
Kirk et al. (2021)	Not stated	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Osman et al. (2021a)	Apple	Ground vehicle	Video	Appearance + tracking	No	Detection	Full text
Osman et al. (2021b)	Apple	Not stated	Video	Appearance + tracking	No	Detection	Abstract
Parico and Ahamed (2021)	Pear	Not stated	Video	Appearance + tracking	No	Detection	Full text
Scalisi et al. (2021)	Apple	Not stated	Video	Statistical + geometric	No	No abstract	Abstract
Torres-Sánchez et al. (2021)	Grape	UAV, Ground vehicle	3D scan	Geometric or 3D association	No	Count	Full text
Zaenker et al. (2021)	Pepper	Ground vehicle	Discrete views	Geometric or 3D association	No	None	Full text
Zhang et al. (2021)	Pomegranate	Ground vehicle	Single view	Geometric or 3D association	No	None	Abstract

Study	Crop	Platform	Acquisition	Association mechanism	Per-class counts	Metrics in abstract	Coded from
Zine-El-Abidine et al. (2021)	Apple	Not stated	3D scan	Geometric or 3D association	No	None	Full text
Dai et al. (2022)	Tomato	Ground vehicle	Video	Tracking + geometric	No	No abstract	Abstract
Egi et al. (2022)	Tomato	UAV	Video	Appearance + tracking	Yes	Detection	Abstract
Gao et al. (2022)	Apple	Not stated	Video	Temporal tracking	No	No abstract	Title
Ge et al. (2022)	Tomato	Ground vehicle	Video	Appearance + tracking	No	Detection	Full text
He et al. (2022b)	Not stated	Not stated	Video	Temporal tracking	No	No abstract	Title
Marangoz et al. (2022)	Pepper	Ground vehicle	Discrete views	Geometric or 3D association	No	Detection	Full text
Turečková et al. (2022)	Tomato	Not stated	Video	No association	No	No abstract	Full text
Vulpi et al. (2022)	Not stated	Ground vehicle	Discrete views	Geometric or 3D association	No	No abstract	Title
Wang et al. (2022)	Apple	UAV	Video	Temporal tracking	No	None	Abstract
Xia et al. (2022)	Apple	Not stated	Video	Appearance + learned	No	Count, detection	Full text
Zhang et al. (2022a)	Citrus	Not stated	Video	Temporal tracking	No	Count, detection	Full text
Zhang et al. (2022b)	Apple	Not stated	Discrete views	Statistical correction	No	Count	Full text
Zhu et al. (2022)	Citrus	Not stated	Discrete views	Geometric or 3D association	No	No abstract	Abstract
Abeyrathna et al. (2023)	Apple	Ground vehicle	Video	Appearance + tracking	No	Count, detection	Full text
Ariza-Sentís et al. (2023b)	Grape	UAV, Ground vehicle	Video	Dataset paper	No	None	Full text
Ariza-Sentís et al. (2023a)	Grape	UAV, Ground vehicle	Video	Appearance + tracking	No	None	Abstract
Arlotta et al. (2023)	Grape	Ground vehicle, Laboratory	Video	Tracking + geometric	No	None	Abstract
Ciarfuglia et al. (2023)	Grape	Ground vehicle	Video	Appearance + tracking + geometric	No	None	Full text
Gené-Mola et al. (2023)	Apple	Not stated	Video	Appearance + tracking	No	Count, identity, detection	Abstract
Gremes et al. (2023)	Citrus	Ground vehicle	Video	Temporal tracking	No	Count, detection	Full text
Guo et al. (2023)	Kiwifruit	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Hu et al. (2023)	Apple	Not stated	Video	Appearance + tracking	No	Count, detection	Full text
Lawal et al. (2023)	Strawberry	Not stated	Video	Temporal tracking	No	Detection	Full text
Li et al. (2023)	Blueberry	Ground vehicle	Discrete views	Statistical correction	No	Count	Abstract
Lin et al. (2023)	Citrus	Not stated	Video	Appearance + tracking	No	Count	Full text
Lyu et al. (2023)	Grape	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Parico and Ahamed (2023)	Pear	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Qureshi et al. (2023)	Apple	Ground vehicle	Discrete views	Geometric or 3D association	No	Count, detection	Full text
Rapado-Rincón et al. (2023)	Tomato	Ground vehicle	Video	Tracking + geometric	No	None	Full text
Shen et al. (2023)	Grape	Not stated	Video	Temporal tracking	No	No abstract	Title
Vijayakumar et al. (2023)	Citrus	UAV	Discrete views	Statistical correction	No	Count	Abstract
Villacrés et al. (2023)	Apple	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Wu et al. (2023)	Apple	Not stated	Video	Temporal tracking	No	Count, identity, detection	Abstract
Xie et al. (2023)	Not stated	Ground vehicle	Discrete views	Geometric or 3D association	No	None	Abstract
Zaenker et al. (2023)	Pepper	Ground vehicle	Discrete views	Geometric or 3D association	No	None	Abstract
Zheng et al. (2023a)	Strawberry	Not stated	Discrete views	Geometric + learned	Yes	None	Abstract
Zheng et al. (2023b)	Citrus	UAV, Ground vehicle	Video	Appearance + tracking	No	Count, detection	Abstract
Zhou et al. (2023)	Strawberry	Not stated	Video	Appearance + tracking	No	Count	Abstract
Ahmad et al. (2024)	Apple	UAV, Ground vehicle, Handheld	Video	No association	No	None	Abstract
Ahmedt-Aristizabal et al. (2024)	Grape	Not stated	Video	Statistical + appearance + tracking	No	None	Abstract
An et al. (2024)	Strawberry	Not stated	Video	Temporal tracking	No	No abstract	Title
Ariza-Sentís et al. (2024)	Grape	UAV	Video	Dataset paper	No	None	Full text
Ashokan and Akbar (2024)	Not stated	Not stated	Video	Appearance + tracking	No	None	Abstract
Du et al. (2024)	Pepper	Not stated	Video	Appearance + tracking	No	Count, identity, detection	Full text
Feng et al. (2024)	Citrus	Not stated	Video	Appearance + tracking	No	Count	Full text

Study	Crop	Platform	Acquisition	Association mechanism	Per-class counts	Metrics in abstract	Coded from
Garderes et al. (2024)	Apple	Not stated	Video	Statistical + appearance + tracking	No	Identity, detection	Abstract
Hernandez and Medeiros (2024)	Not stated	Not stated	Video	Tracking + geometric	No	No abstract	Abstract
Huang et al. (2024)	Litchi	Not stated	Revisits	Appearance matching	No	No abstract	Abstract
Ishizuka et al. (2024)	Not stated	Not stated	Video	Tracking + geometric	No	None	Abstract
Kang et al. (2024)	Tomato	Ground vehicle, Handheld	Video	Appearance + tracking	No	Count, detection	Abstract
Magalhães et al. (2024)	Tomato	Laboratory	Discrete views	Geometric or 3D association	No	Count	Full text
Matos et al. (2024)	Apple	Ground vehicle	Video	Geometric or 3D association	No	None	Full text
Meyer et al. (2024)	Apple	Not stated	Discrete views	Geometric or 3D association	No	None	Abstract
Muzaddid and Beksi (2024)	Cotton	UAV, Ground vehicle	Video	Temporal tracking	No	None	Full text
Nayak Nenavath and Perumal (2024)	Mango	Not stated	Discrete views	No association	No	Count	Full text
Pai and Lin (2024)	Tomato	Not stated	Video	Temporal tracking	Yes	None	Abstract
Qi et al. (2024)	Tomato	Not stated	Video	Temporal tracking	Yes	No abstract	Title
Safre et al. (2024)	Cherry	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Santos et al. (2024)	Citrus	Not stated	Video	Tracking + geometric	No	No abstract	Abstract
Saraceni et al. (2024)	Grape	Ground vehicle	Video	Temporal tracking	No	None	Full text
Scalisi et al. (2024)	Pear	Not stated	Video	Geometric or 3D association	Yes	No abstract	Title
Sekharamantry et al. (2024)	Apple	UAV	Video	Temporal tracking	No	Count, detection	Full text
Tu et al. (2024)	Passion fruit	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Villacrés and Vougioukas (2024)	Apple	Ground vehicle	Discrete views	No association	No	No abstract	Abstract
Viveros Escamilla et al. (2024)	Citrus	Not stated	Video	Appearance + tracking	No	None	Full text
Wang et al. (2024a)	Pitaya	Not stated	Video	Geometric or 3D association	No	No abstract	Abstract
Wang et al. (2024b)	Camellia	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Xia et al. (2024)	Kiwifruit	Not stated	Video	Temporal tracking	No	No abstract	Full text
Xiao et al. (2024)	Cotton	Not stated	Discrete views	Geometric or 3D association	No	No abstract	Abstract
Yang et al. (2024b)	Apple	Not stated	Video	Appearance + tracking	No	Count, identity, detection	Full text
Yuan et al. (2024)	Strawberry	Not stated	Video	Geometric or 3D association	No	Count, detection	Full text
Zhang et al. (2024)	Peach	Ground vehicle	Video	Temporal tracking	No	Count, identity	Abstract
Zheng et al. (2024)	Citrus	Not stated	Video	Temporal tracking	No	No abstract	Title
Zhou et al. (2024a)	Citrus	Not stated	Discrete views	Geometric or 3D association	No	Count	Abstract
Zhou et al. (2024b)	Strawberry	Not stated	Video	Appearance + tracking	Yes	Count	Abstract
Zhu et al. (2024)	Citrus	Not stated	Discrete views	Statistical correction	No	None	Abstract
Akella et al. (2025)	Coconut	Not stated	Video	Temporal tracking	Yes	Detection	Abstract
Ariza-Sentís et al. (2025)	Grape	UAV	Video	Appearance + tracking	No	Count	Full text
Cao et al. (2025)	Apple	UAV	Video	Appearance + tracking	No	Count, identity, detection	Full text
Cho et al. (2025)	Not stated	Laboratory	Video	Tracking + geometric	No	Count	Abstract
Dong et al. (2025)	Camellia	Not stated	Video	Statistical + tracking	No	Detection	Abstract
Garg et al. (2025)	Not stated	UAV, Ground vehicle	Video	Geometric or 3D association	No	Count	Abstract
Hassan et al. (2025)	Citrus	Handheld	Video	Tracking + geometric	No	None	Full text
Hobart et al. (2025)	Apple	UAV	Video	Geometric or 3D association	No	None	Full text
Hong et al. (2025)	Persimmon	Not stated	Discrete views	Geometric or 3D association	No	Count	Abstract
Isobe et al. (2025)	Citrus	Not stated	Video	Learned association	No	None	Abstract
Issad et al. (2025)	Not stated	Not stated	Video	Temporal tracking	No	Detection	Abstract
Jiang et al. (2025)	Cotton	Ground vehicle, Handheld	Video	Geometric or 3D association	No	Count, detection	Abstract
Kemper et al. (2025)	Grape	Not stated	Video	Temporal tracking	No	Count	Abstract
Kutyrev et al. (2025)	Apple	UAV, Ground vehicle	Discrete views	Geometric or 3D association	No	Detection	Abstract
Lei et al. (2025)	Apple	Not stated	Revisits	Appearance + geometric	No	Count	Abstract
Louis et al. (2025)	Melon	Ground vehicle, Laboratory	Video	Temporal tracking	No	Count	Abstract

Study	Crop	Platform	Acquisition	Association mechanism	Per-class counts	Metrics in abstract	Coded from
Lu et al. (2025)	Litchi	Not stated	Video	Temporal tracking	No	Count	Abstract
Lyu et al. (2025a)	Grape	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Lyu et al. (2025b)	Grape	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Majdalawieh and Khan (2025)	Not stated	Not stated	Video	Appearance + tracking	No	Detection	Abstract
Matos et al. (2025)	Apple	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Mendez et al. (2025)	Pepper	Ground vehicle	Video	Appearance + tracking	No	Identity, detection	Full text
Meyer et al. (2025)	Apple	Not stated	Discrete views	Geometric + learned	No	None	Full text
Mollineda et al. (2025)	Citrus	Ground vehicle	Video	Statistical correction	No	None	Full text
Ogundele et al. (2025)	Strawberry	Not stated	Video	Temporal tracking	Yes	Count, detection	Full text
Pichhika et al. (2025)	Mango	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Ponce-Machete and Fajardo (2025)	Not stated	UAV	Video	Appearance + tracking	No	Identity, detection	Abstract
Qi et al. (2025)	Tomato	Not stated	Video	Appearance + tracking	No	Count, identity, detection	Abstract
Sasse et al. (2025)	Grape	Handheld	Video	Temporal tracking	No	Detection	Abstract
Singh et al. (2025)	Strawberry	UAV	Video	Temporal tracking	No	Detection	Full text
Tan et al. (2025b)	Apple	Not stated	Video	Appearance + tracking	No	No abstract	Abstract
Tu et al. (2025)	Passion fruit	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Vaishnavi et al. (2025)	Citrus	Not stated	Video	Appearance + tracking	Yes	Count	Abstract
Wang et al. (2025a)	Tomato	Not stated	Video	Temporal tracking	Yes	Count	Full text
Wang et al. (2025b)	Tomato	Ground vehicle	Video	Geometric or 3D association	No	Count, detection	Abstract
Wei et al. (2025)	Apple	Not stated	Video	Tracking + geometric	No	Count, identity	Abstract
Wu et al. (2025)	Strawberry	Not stated	Video	Temporal tracking	Yes	Count, detection	Full text
Xie-Li and Fallas-Moya (2025)	Pineapple	UAV	Video	Temporal tracking	No	Identity, detection	Full text
Xing et al. (2025)	Tomato	Ground vehicle	Video	Appearance + tracking	Yes	Identity, detection	Abstract
Yan et al. (2025)	Apple	Not stated	Video	Appearance + tracking	No	Detection	Full text
Yang et al. (2025a)	Not stated	UAV, Ground vehicle	Video	Tracking + geometric	No	None	Full text
Yang et al. (2025b)	Not stated	UAV, Ground vehicle, Laboratory	Video	Geometric or 3D association	No	None	Abstract
Zhai et al. (2025)	Not stated	Not stated	Video	Appearance + tracking	No	Count, identity	Full text
Zhang et al. (2025)	Kiwifruit	Handheld	Video	Temporal tracking	No	No abstract	Title
Zhang and Cao (2025)	Blueberry	Not stated	Video	Temporal tracking	No	Detection	Abstract
Zheng et al. (2025)	Tomato	Ground vehicle	Video	Tracking + geometric	Yes	Identity	Full text
Zhou et al. (2025)	Banana	Not stated	Video	Appearance + tracking	No	None	Full text
Awal et al. (2026)	Citrus	Ground vehicle	Video	Temporal tracking	Yes	Count, detection	Abstract
Bharti et al. (2026)	Apple	Not stated	Video	Tracking + geometric	No	Detection	Full text
Blondet et al. (2026)	Avocado	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Farhoud et al. (2026)	Citrus	Not stated	Video	Temporal tracking	Yes	Count, detection	Abstract
Felip-Pomés et al. (2026)	Apple	Not stated	Video	Tracking + geometric	No	Count, detection	Abstract
Feng et al. (2026)	Tomato	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Fusaro et al. (2026)	Apple	Ground vehicle	Revisits	Appearance + geometric + learned	No	None	Full text
Gao et al. (2026)	Not stated	Ground vehicle	Video	Tracking + geometric	No	None	Abstract
Hu et al. (2026)	Strawberry	Not stated	Discrete views	Geometric or 3D association	No	No abstract	Abstract
Huang et al. (2026)	Mango	Not stated	Video	Temporal tracking	Yes	No abstract	Title
Indriani et al. (2026)	Oil palm	Handheld	Discrete views	Statistical correction	Yes	None	Full text
Jiang et al. (2026)	Cotton	Ground vehicle	Video	Geometric or 3D association	No	No abstract	Abstract
Lee et al. (2026)	Pear	Not stated	Video	Geometric or 3D association	No	Count, detection	Full text
Lin et al. (2026)	Tomato	Not stated	Video	Appearance + tracking	Yes	None	Full text
Nguyen et al. (2026)	Apple	UAV, Ground vehicle, Laboratory	3D scan	Statistical + geometric	No	Count	Abstract
Pardo-Beainy et al. (2026)	Strawberry	Not stated	Video	Tracking + geometric	Yes	Count	Abstract
Park et al. (2026)	Not stated	Not stated	Video	Geometric or 3D association	No	No abstract	Abstract
Piazolo et al. (2026)	Grape	UAV, Ground vehicle	Video	Appearance + tracking	No	Count, identity	Abstract

Study	Crop	Platform	Acquisition	Association mechanism	Per-class counts	Metrics in abstract	Coded from
Santos (2026)	Not stated	Ground vehicle	Video	Tracking + geometric + learned	No	None	Full text
Si et al. (2026)	Citrus	Handheld	Video	Appearance + tracking	No	Count, identity, detection	Abstract
Tu et al. (2026)	Passion fruit	Not stated	Video	Temporal tracking	No	No abstract	Abstract
Wang et al. (2026a)	Apple	UAV, Laboratory	Video	Tracking + geometric	No	None	Full text
Wang et al. (2026b)	Not stated	UAV, Ground vehicle	Discrete views	Geometric or 3D association	No	Count	Abstract
Weng et al. (2026)	Citrus	UAV	Video	Temporal tracking	No	No abstract	Abstract
Woo et al. (2026)	Grape	Handheld	Video	Geometric or 3D association	No	Detection	Abstract
Xing et al. (2026)	Tomato	Ground vehicle	Video	Temporal tracking	No	Count	Abstract
Yang et al. (2026)	Grape	Not stated	Video	Geometric or 3D association	No	Count, detection	Abstract
Yoshida et al. (2026)	Grape	Ground vehicle	Revisits	Geometric or 3D association	No	None	Abstract
Zhao et al. (2026a)	Not stated	Not stated	Discrete views	Geometric or 3D association	No	None	Abstract
Zhao et al. (2026b)	Apple	Ground vehicle	Discrete views	Geometric + learned	No	Detection	Abstract
Zhu et al. (2026)	Not stated	Ground vehicle	Video	Appearance + tracking	No	Identity	Full text

Note: A plus sign joins the mechanisms that a study combines. Not stated, the property is not stated in the abstract. Metric types were read from abstracts only: Count, agreement between estimated and reference counts; Identity, a tracking metric such as MOTA, IDF1, HOTA, or ID switches; Detection, detection quality; No abstract, no abstract was available. Coded from: the most complete source that was read when the codes were assigned. UAV, unmanned aerial vehicle.

B. Scopus search strings

Each string was submitted to the Scopus advanced search on 28 September 2026 (UTC). The keys Q1 to Q9 are those of Table 1. The searches under Q8a–Q8e and Q9 were sorted by citation count.

Q1. Multi-observation counting (871 records)

TITLE-ABS-KEY((fruit* OR orchard* OR "tree crop*" OR "fresh fruit bunch*" OR "oil palm" OR "Elaeis guineensis" OR apple* OR citrus OR orange* OR mango* OR grape* OR vineyard* OR strawberry* OR tomato* OR kiwifruit* OR pear OR pears OR peach* OR cherry* OR blueberry* OR "sweet pepper*" OR capsicum OR banana* OR pineapple* OR "date palm*" OR coconut* OR pomegranate* OR avocado* OR lemon* OR plum OR plums OR almond* OR walnut* OR olive*) AND (count* OR "yield estimat*" OR "yield predict*" OR "yield forecast*" OR "load estimat*" OR "fruit load" OR "crop load" OR inventor* OR enumerat* OR "fruit number") AND ("multi-view" OR multiview OR "multiple view*" OR "multi-camera" OR "multiple camera*" OR video* OR "image sequence*" OR track* OR "structure from motion" OR "structure-from-motion" OR SfM OR SLAM OR "3D reconstruct*" OR "point cloud*" OR "double count*" OR duplicat* OR "re-identification" OR "data association" OR "cross-view" OR "both sides" OR "two sides") AND (image* OR camera* OR vision OR "deep learning" OR "neural network*" OR detect* OR segment* OR YOLO OR "R-CNN" OR photograph*) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DEC) OR SUBJAREA(BIOC)) AND NOT TITLE-ABS-KEY("fruit fl*" OR drosophila OR "blood count*")

Q2. Counting in titles (757 records)

TITLE((fruit* OR orchard* OR "tree crop*" OR "fresh fruit bunch*" OR "oil palm" OR "Elaeis guineensis" OR apple* OR citrus OR orange* OR mango* OR grape* OR vineyard* OR strawberry* OR tomato* OR kiwifruit* OR pear OR pears OR peach* OR cherry* OR blueberry* OR "sweet pepper*" OR capsicum OR banana* OR pineapple* OR "date palm*" OR coconut* OR pomegranate* OR avocado* OR lemon* OR plum OR plums OR almond* OR walnut* OR olive*) AND (count* OR "yield estimat*" OR "yield predict*" OR "load estimat*" OR "fruit load" OR "crop load" OR "fruit number")) AND TITLE-ABS-KEY((image* OR camera* OR vision OR "deep learning" OR "neural network*" OR detect* OR segment* OR YOLO OR "R-CNN" OR photograph*) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DEC) OR SUBJAREA(BIOC)) AND NOT TITLE-ABS-KEY("fruit fl*" OR drosophila OR "blood count*")

Q3. Oil-palm imaging (1,079 records)

TITLE-ABS-KEY(("oil palm" OR "Elaeis guineensis" OR "fresh fruit bunch*" OR "palm oil fruit*") AND (image* OR vision OR camera* OR "deep learning" OR "machine learning" OR detect* OR convolutional OR YOLO OR segment* OR classif* OR ripeness OR maturity OR count*) AND (bunch* OR fruit* OR ripeness OR maturity OR harvest*)) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DEC) OR SUBJAREA(BIOC))

Q4. Class attributes with counting (361 records)

TITLE-ABS-KEY((fruit* OR orchard* OR "tree crop*" OR "fresh fruit bunch*" OR "oil palm" OR "Elaeis guineensis" OR apple* OR citrus OR orange* OR mango* OR grape* OR vineyard* OR strawberry* OR tomato* OR kiwifruit* OR pear OR pears OR peach* OR cherry* OR blueberry* OR "sweet pepper*" OR capsicum OR banana* OR pineapple* OR "date palm*" OR coconut* OR pomegranate* OR avocado* OR lemon* OR plum OR plums OR almond* OR walnut* OR olive*) AND (ripeness OR maturity OR "ripening stage*" OR "maturity stage*" OR "size class*" OR grade* OR grading OR defect* OR "multi-class" OR "per class" OR "class-wise") AND (count* OR "yield estimat*" OR inventor* OR "load estimat*") AND (detect* OR track* OR segment*) AND (image* OR camera* OR video* OR vision)) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DEC) OR SUBJAREA(BIOC)) AND NOT TITLE-ABS-KEY("fruit fl*" OR drosophila OR "blood count*")

Q5. Depth and 3D sensing (1,988 records)

TITLE-ABS-KEY((fruit* OR orchard* OR "tree crop*" OR "fresh fruit bunch*" OR "oil palm" OR "Elaeis guineensis" OR apple* OR citrus OR orange* OR mango* OR grape* OR vineyard* OR strawberry* OR tomato* OR kiwifruit* OR pear OR pears OR peach* OR cherry* OR blueberry* OR "sweet pepper*" OR capsicum OR banana* OR pineapple* OR "date palm*" OR coconut* OR pomegranate* OR avocado* OR lemon* OR plum OR plums OR almond* OR walnut* OR olive*) AND ("RGB-D" OR RGBD OR "depth camera*" OR "depth image*" OR "depth maps*" OR "depth sensor*" OR "depth information" OR "stereo camera*" OR "stereo vision" OR binocular OR LiDAR OR "time-of-flight" OR "point cloud*" OR Kinect OR RealSense OR "3D camera*") AND (detect* OR count* OR locali* OR "yield estimat*" OR "size estimat*") AND (orchard* OR field* OR tree* OR canopy OR plant* OR

greenhouse* OR vineyard*)) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DECI) OR SUBJAREA(BIOC)) AND NOT TITLE-ABS-KEY("fruit fl*" OR drosophila OR "blood count*")

Q6. Reviews of association methods (236 records)

TITLE-ABS-KEY(("multi-object tracking" OR "multiple object tracking" OR "multi-target tracking" OR "multiple target tracking" OR "re-identification" OR "multi-camera tracking" OR "multi-camera multi-object" OR "multi-view detection" OR "multiview detection" OR "cross-view association" OR "multi-view association" OR "cross-camera association" OR "object counting" OR "structure from motion" OR "visual SLAM" OR "instance association")) AND (review OR survey OR benchmark)) AND DOCTYPE(re) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI))

Q7. Reviews of fruit detection and yield (1,049 records)

TITLE-ABS-KEY((fruit* OR orchard* OR "tree crop*" OR "fresh fruit bunch*" OR "oil palm" OR "Elaeis guineensis" OR apple* OR citrus OR orange* OR mango* OR grape* OR vineyard* OR strawberr* OR tomato* OR kiwifruit* OR pear OR pears OR peach* OR cherr* OR blueberr* OR "sweet pepper*" OR capsicum OR banana* OR pineapple* OR "date palm*" OR coconut* OR pomegranate* OR avocado* OR lemon* OR plum OR plums OR almond* OR walnut* OR olive*) AND (count* OR "yield estimat*" OR "yield predict*" OR "load estimat*" OR detect* OR ripeness OR maturity OR harvest* OR locali*) AND (image* OR vision OR camera* OR sensor* OR "deep learning" OR "machine learning")) AND DOCTYPE(re) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(AGRI) OR SUBJAREA(COMP) OR SUBJAREA(ENGI) OR SUBJAREA(MULT) OR SUBJAREA(PHYS) OR SUBJAREA(EART) OR SUBJAREA(ENVI) OR SUBJAREA(MATH) OR SUBJAREA(DECI) OR SUBJAREA(BIOC)) AND NOT TITLE-ABS-KEY("fruit fl*" OR drosophila OR "blood count*")

Q8a. Methods outside agriculture: multi-object tracking (3,604 records; the 25 most cited were retained)

TITLE("multi-object tracking" OR "multiple object tracking" OR "multi-target tracking" OR "tracking-by-detection" OR "tracking by detection") AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI)) AND (DOCTYPE(ar) OR DOCTYPE(cp))

Q8b. Methods outside agriculture: multi-view detection and association (2,243 records; the 25 most cited were retained)

TITLE("multi-view" OR multiview OR "multi-camera" OR "multiple cameras" OR "cross-view") AND TITLE(detection OR tracking OR association OR counting OR "re-identification") AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI)) AND (DOCTYPE(ar) OR DOCTYPE(cp))

Q8c. Methods outside agriculture: structure from motion and SLAM (9,696 records; the 25 most cited were retained)

TITLE("structure from motion" OR "structure-from-motion" OR SLAM OR "bundle adjustment" OR "multi-view stereo") AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI)) AND (DOCTYPE(ar) OR DOCTYPE(cp))

Q8d. Methods outside agriculture: object counting (1,554 records; the 25 most cited were retained)

TITLE("object counting" OR "crowd counting" OR "counting objects" OR "class-agnostic counting") AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI)) AND (DOCTYPE(ar) OR DOCTYPE(cp))

Q8e. Methods outside agriculture: re-identification (6,435 records; the 25 most cited were retained)

TITLE("re-identification" OR "reidentification") AND TITLE(object OR vehicle OR person OR instance) AND PUBYEAR > 2011 AND PUBYEAR < 2027 AND (SUBJAREA(COMP) OR SUBJAREA(ENGI)) AND (DOCTYPE(ar) OR DOCTYPE(cp))

Q9. Named foundational methods (1,082 records; the 25 most cited were retained)

(TITLE("simple online and realtime tracking") OR TITLE("deep association metric") OR TITLE("BoT-SORT") OR TITLE("StrongSORT") OR TITLE("multiview detection with feature perspective transformation") OR TITLE("representing scenes as neural radiance fields") OR TITLE("3D Gaussian splatting for real-time radiance field rendering") OR TITLE("depth anything") OR TITLE("segment anything") OR TITLE("vision transformers for dense prediction") OR TITLE("end-to-end object detection with transformers") OR TITLE("DETRs beat YOLOs")) AND PUBYEAR > 2011 AND PUBYEAR < 2027