```cpp
#include<iostream>
using namespace std;

int main()
{
char letter;
letter = 'A';
cout << letter <<'\n';
letter = 'B';
cout << letter <<'\n';
cin >> letter;
return 0;
}
```

Compile Result

A
B

5:21

Coding C++

Auto saved at 17:21:11

RUN MENU

```cpp
#include<iostream>
using namespace std;
int main()
{
char letter;
letter = 65;
cout << letter <<'\n';
letter = 66;
cout << letter <<'\n';
cin >> letter;
    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

A
B

```cpp
#include<iostream>
using namespace std;
int main()
{
int letter;
letter ='A';
cout << letter <<'\n';
letter ='B';
cout << letter <<'\n';
cin >> letter;
    return 0;
}

```

Tab {} “” ; = \ & ,

5:03

Compile Result

```
65
66
```

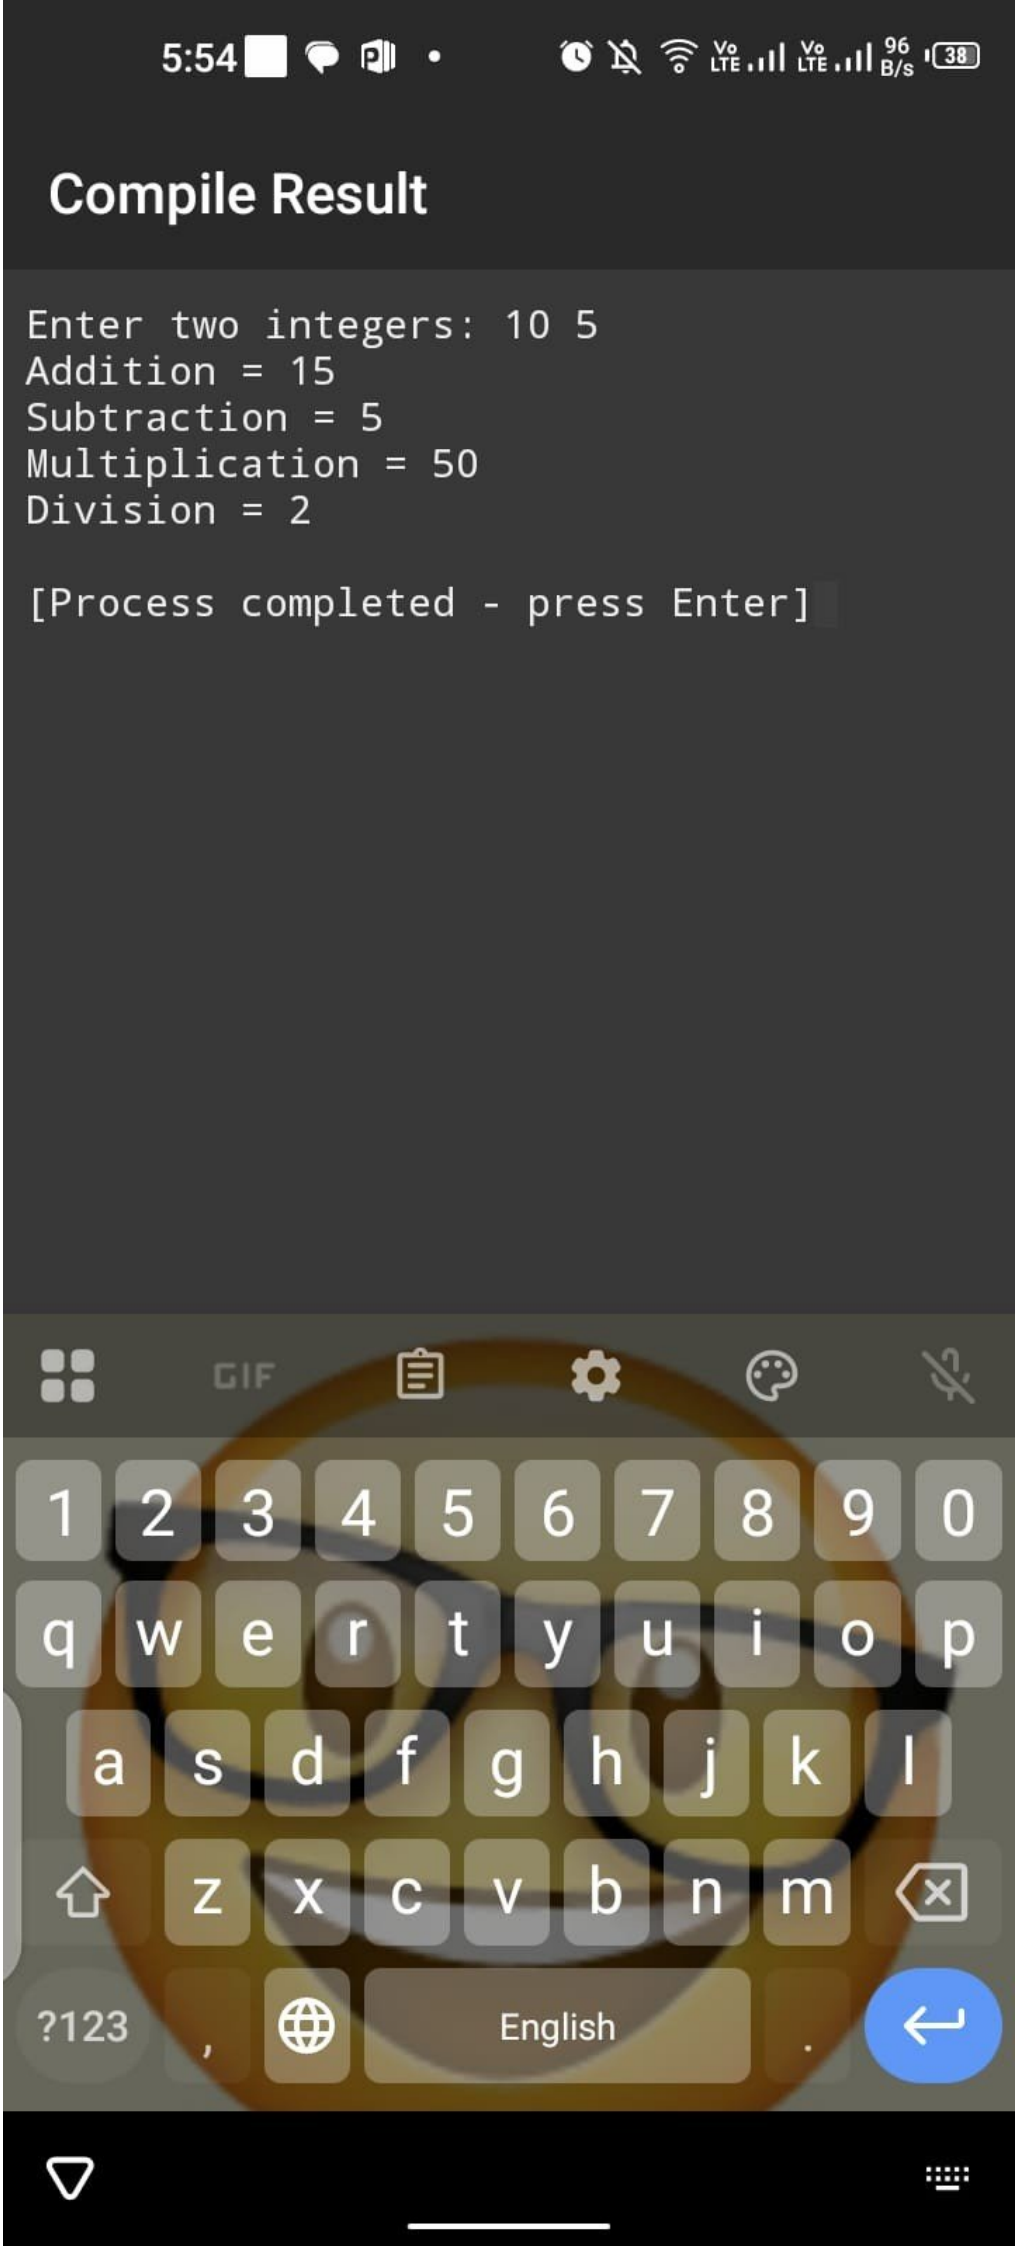
```cpp
#include <iostream>
using namespace std;

int main()
{
int a, b;

cout << "Enter two integers: ";
cin >> a >> b;
cout << "Addition = " << a + b <<'\n';
cout << "Subtraction = " << a - b <<'\n';
cout << "Multiplication = " << a * b <<'\n';
cout << "Division = " << a / b;
return 0;
}

```

Tab {} “” ; = \ & ,


5:54
Compile Result
Enter two integers: 10 5
Addition = 15
Subtraction = 5
Multiplication = 50
Division = 2
[Process completed - press Enter]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Coding C++

Auto saved at 18:46:46

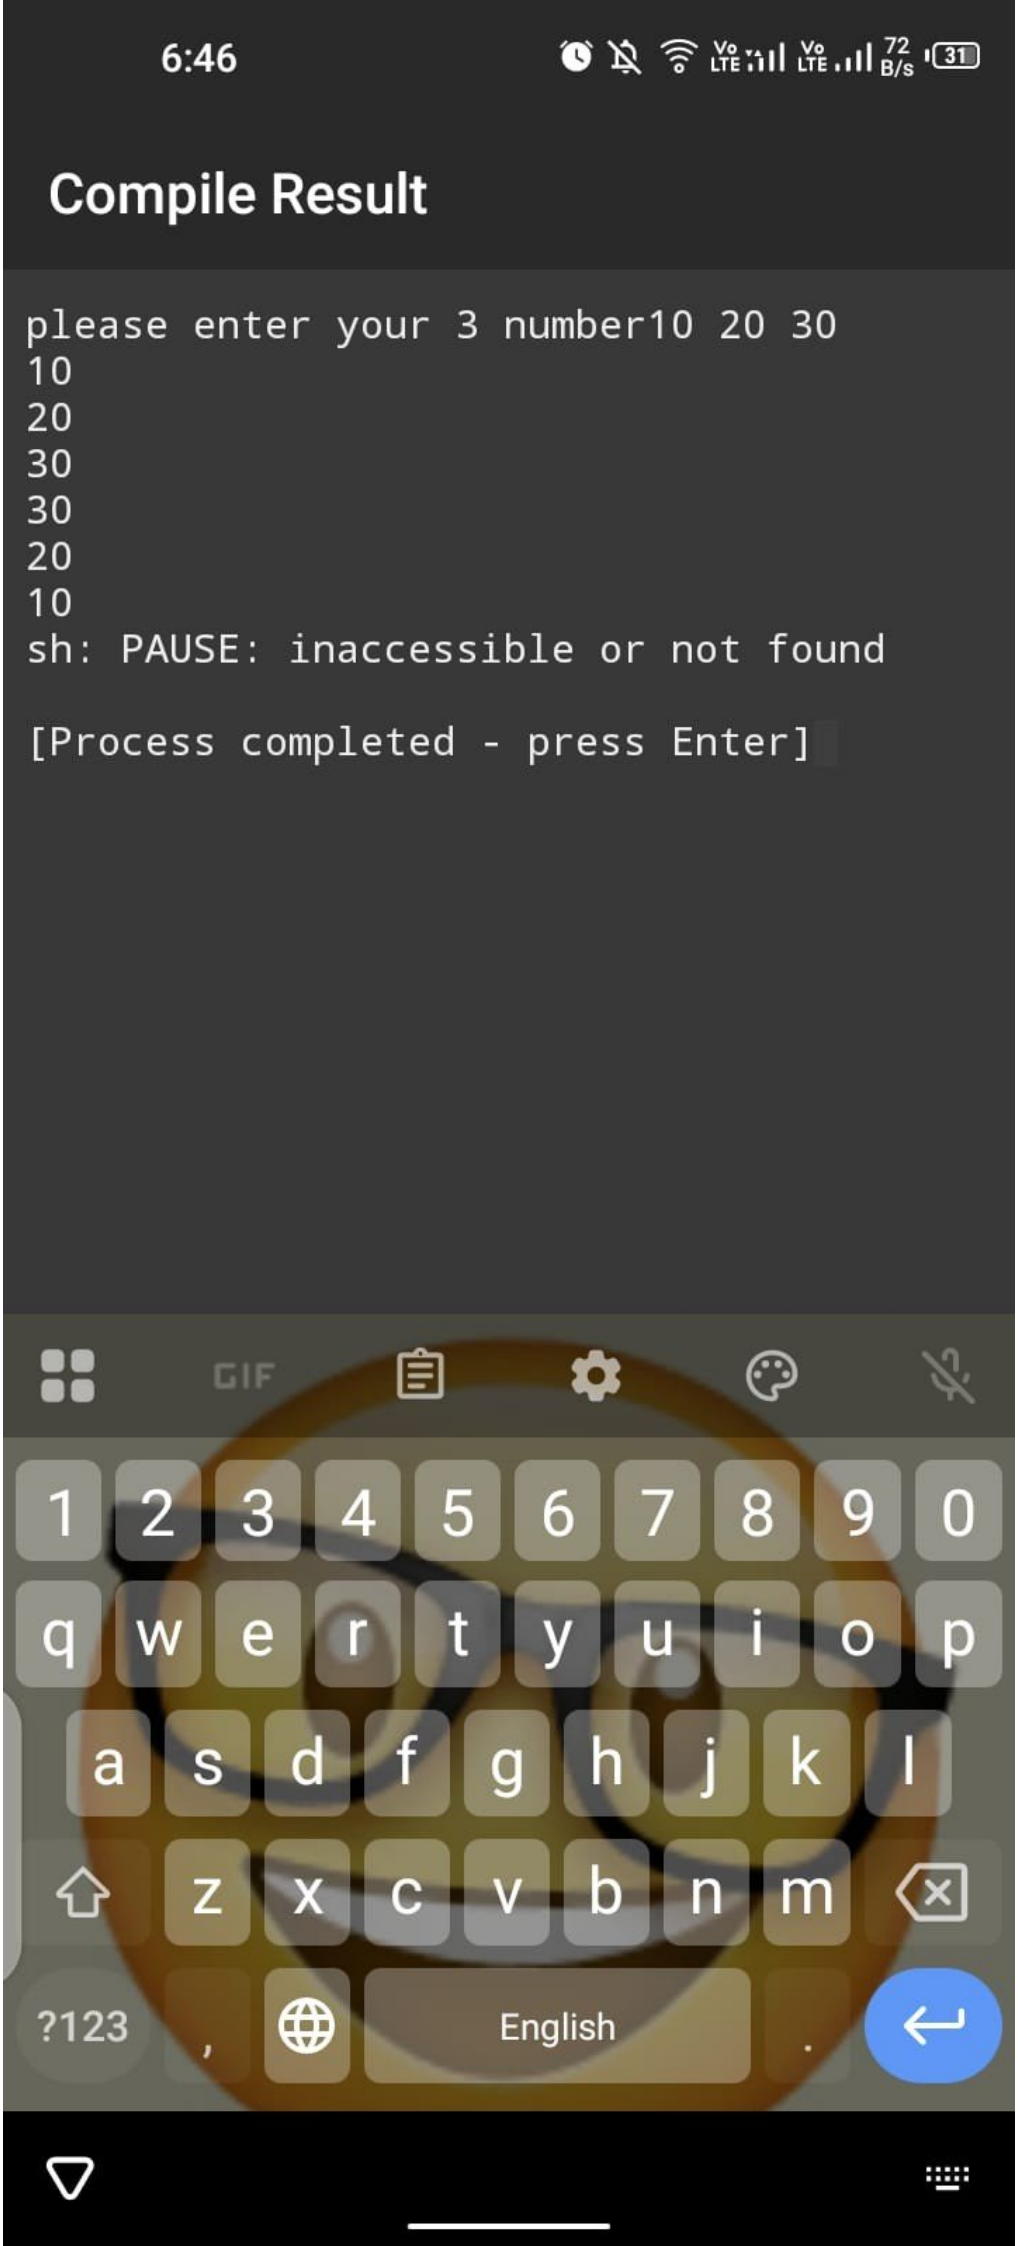
RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
int val1;
int val2;
int val3;
cout << "please enter your 3 number";
cin >> val1 >> val2 >> val3;
cout << val1 << "\n" << val2 << "\n" << val3 <<"\n";
cout << val3 <<"\n" << val2 << "\n" <<val1 <<"\n";
system("PAUSE");
    return 0;
}

```

Tab {} “” ; = \ & ,


6:46
Compile Result
please enter your 3 number10 20 30
10
20
30
30
20
10
sh: PAUSE: inaccessible or not found
[Process completed - press Enter]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

7:13

Coding C++
Auto saved at 19:12:05
RUN MENU

```cpp
#include<iostream>
#include<cmath>
using namespace std;

int main()
{
double x1,y1,x2,y2,d;
int val2;
int val3;
cout << " enter x1 and y1:";
cin >> x1 >> y1;
cout << "enter x2 and y2:";
cin >> x2 >> y2;
d=sqrt(pow(x2-x1,2)+pow(y2-y1,2));
cout << "Distance=" << d <<endl;
    return 0;
}

```

+ − ! $ [] ‘’ ()
| ^ . # % < >

7:13 135 B/s 26

Compile Result

```
 enter x1 and y1:1 2
enter x2 and y2:4 6
Distance=5

[Process completed - press Enter]
```

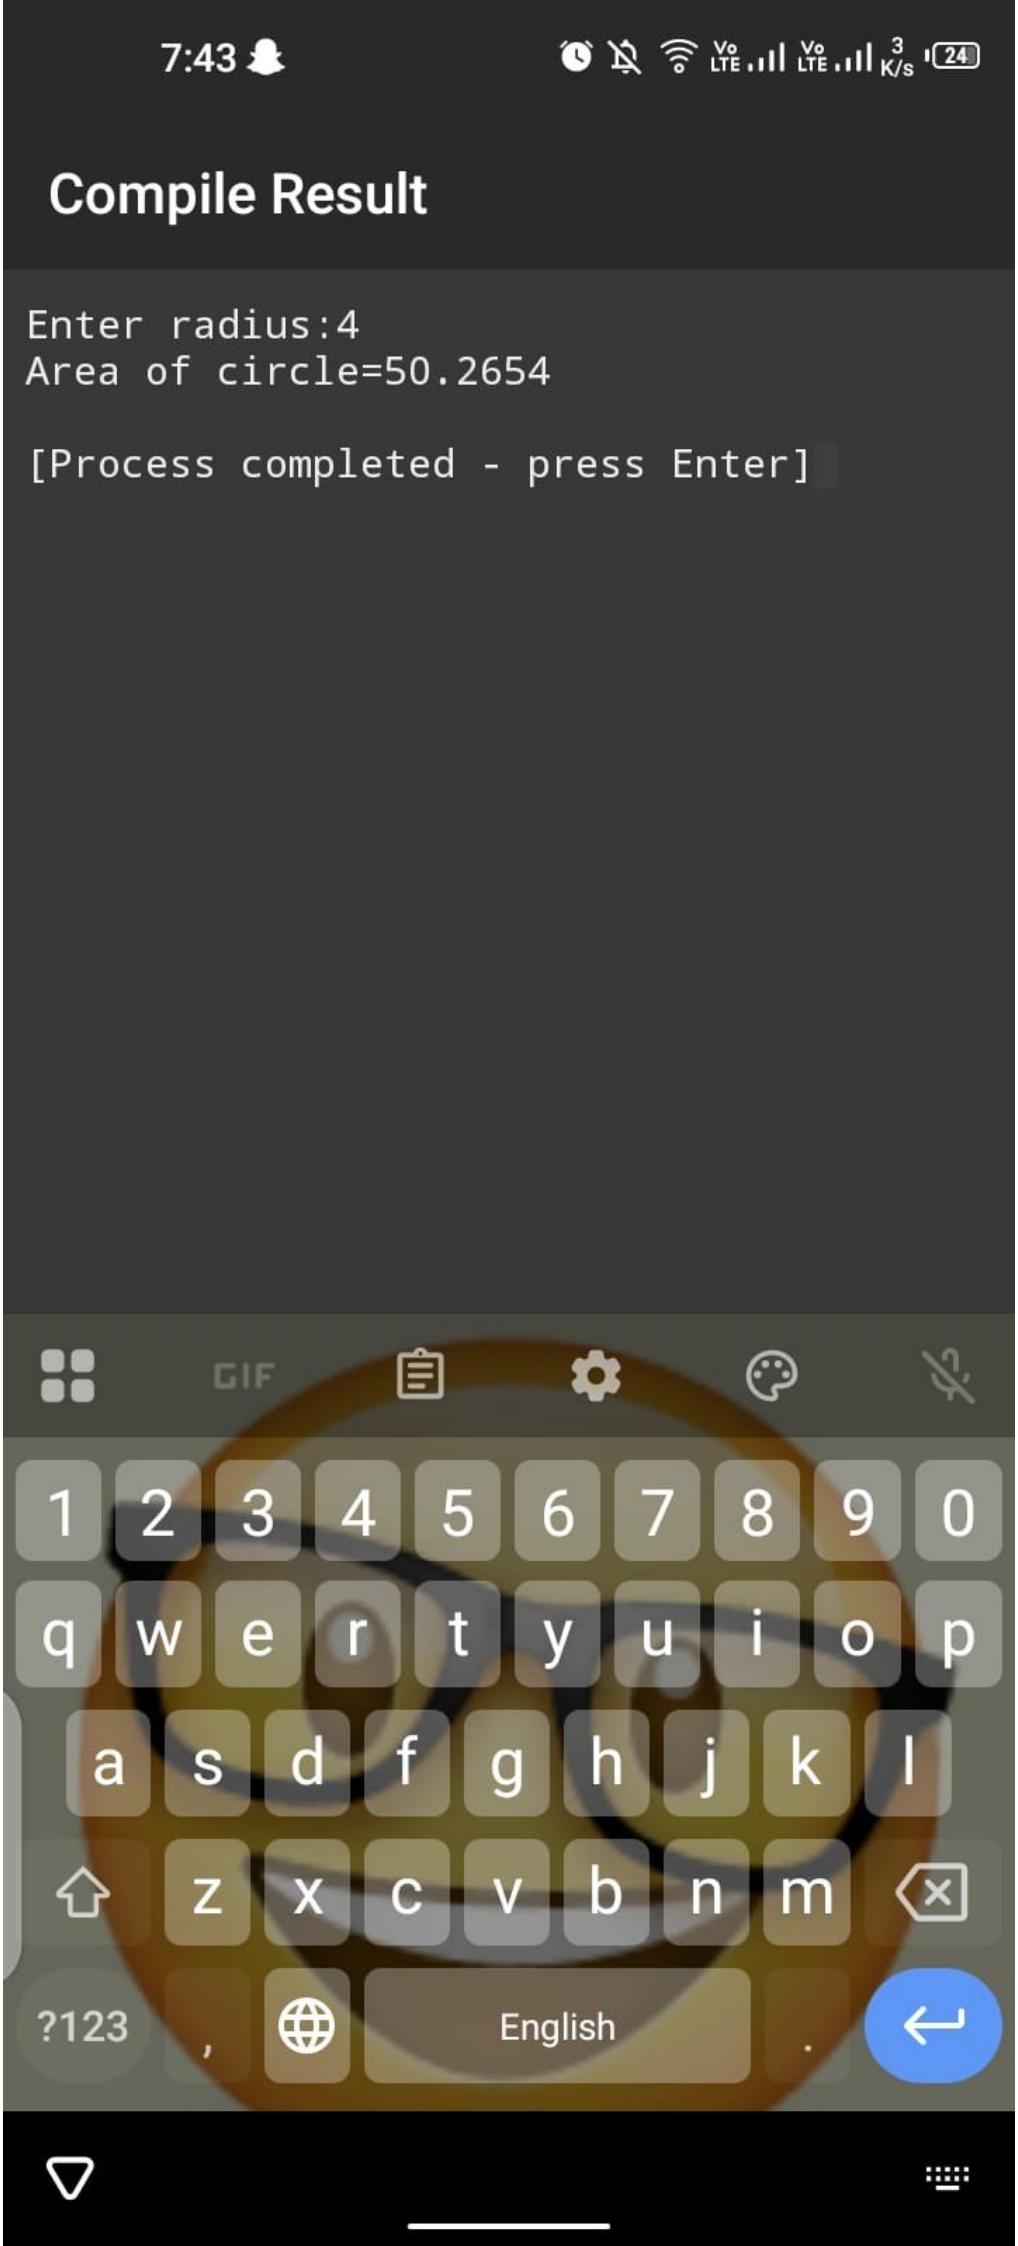
7:43

Coding C++
Auto saved at 19:43:00
RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
double r,area;
cout<<"Enter radius:";
cin >> r;
area=3.14159*r*r;
cout << "Area of circle=" <<area << endl;
    return 0;
}
```

+ − ! $ [] ‘’ ()
| ^ . # % < >


7:43
Compile Result
Enter radius:4
Area of circle=50.2654
[Process completed - press Enter]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

7:57

Coding C++

Auto saved at 19:57:04

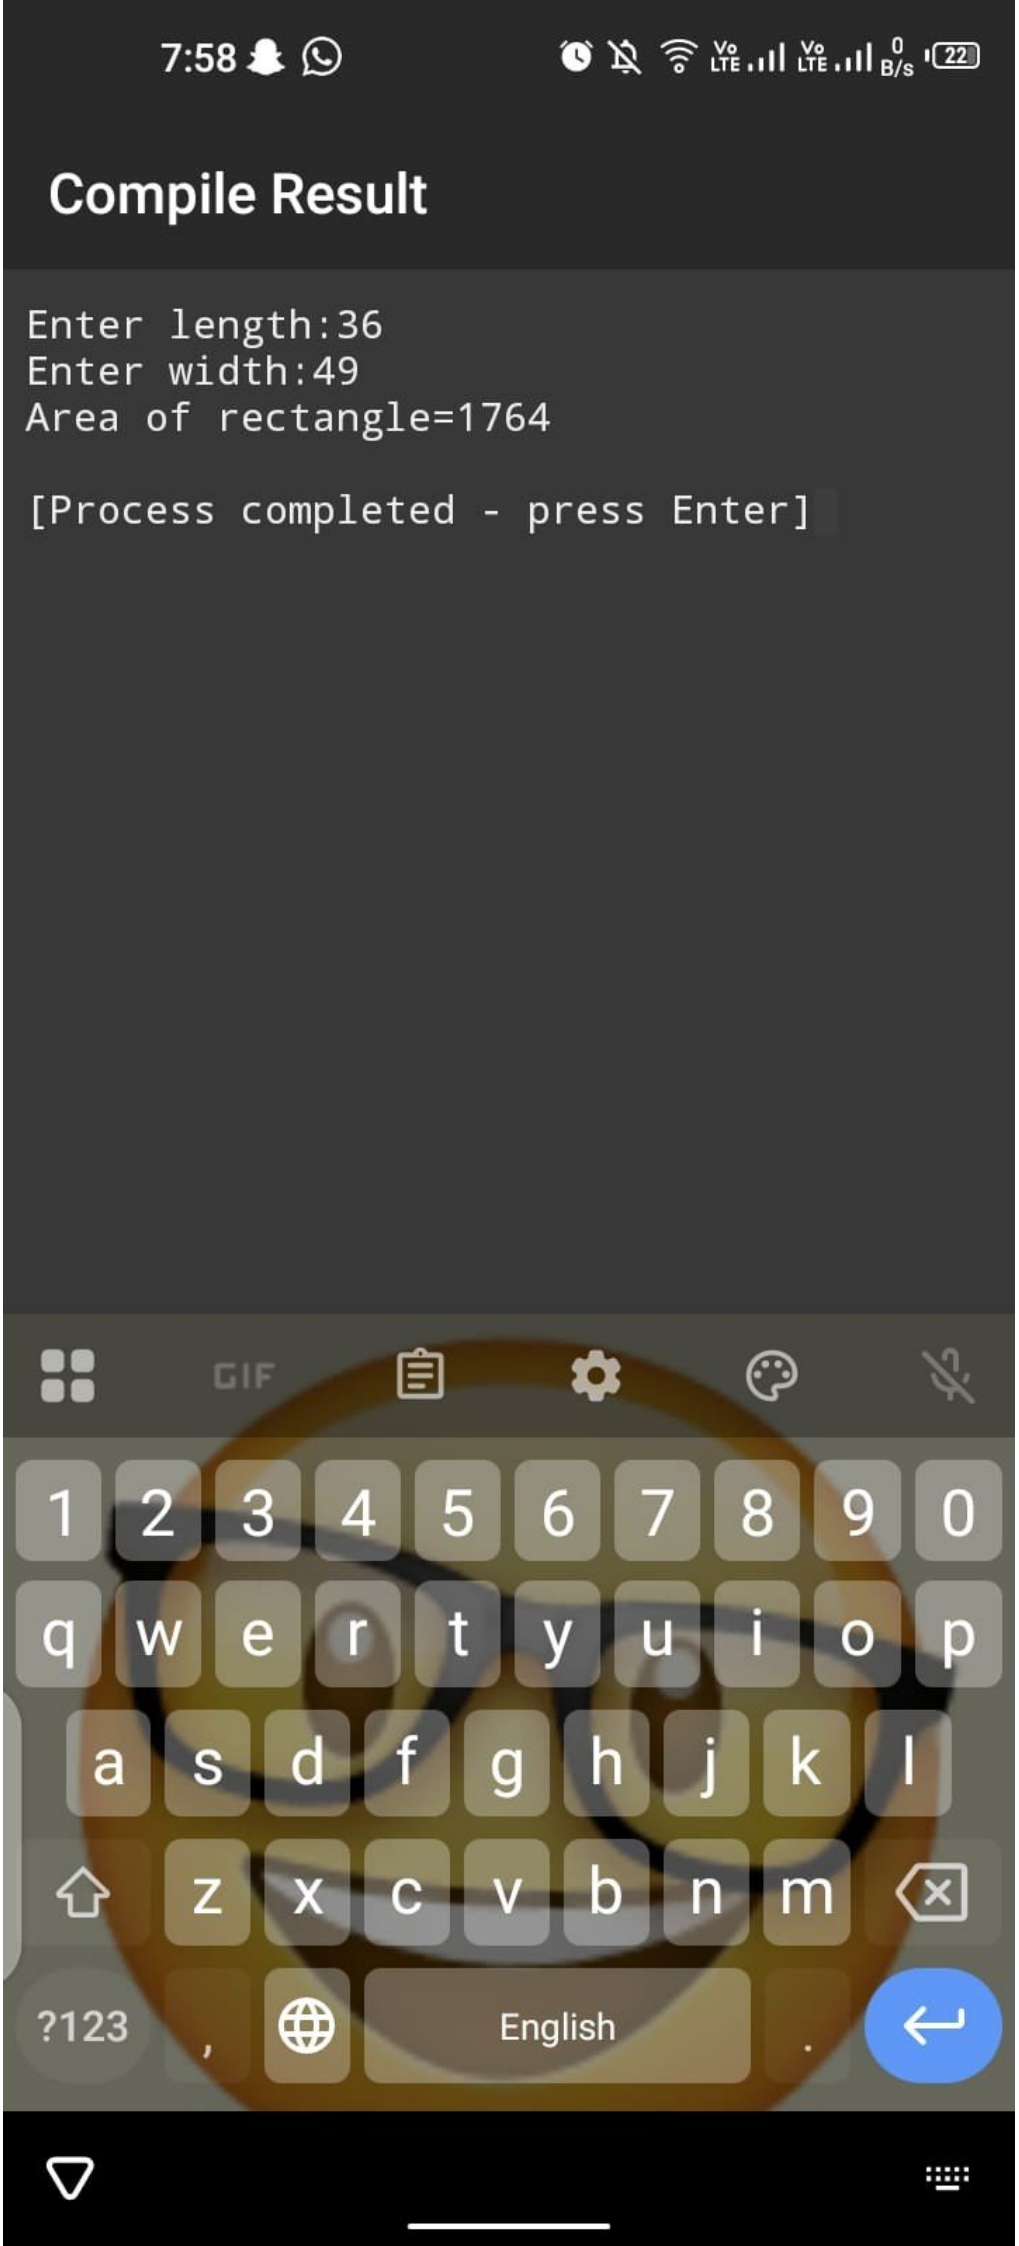
RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
double length,width,area;
cout<<"Enter length:";
cin >> length;
cout << "Enter width:";
cin >> width;
area=length*width;
cout << "Area of rectangle=" <<area << endl;
    return 0;
}

```

Tab {} “” ; = \ & ,


7:58
Compile Result
Enter length:36
Enter width:49
Area of rectangle=1764
[Process completed - press Enter]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

10:11 428 B/s

Coding C++

Nothing changed

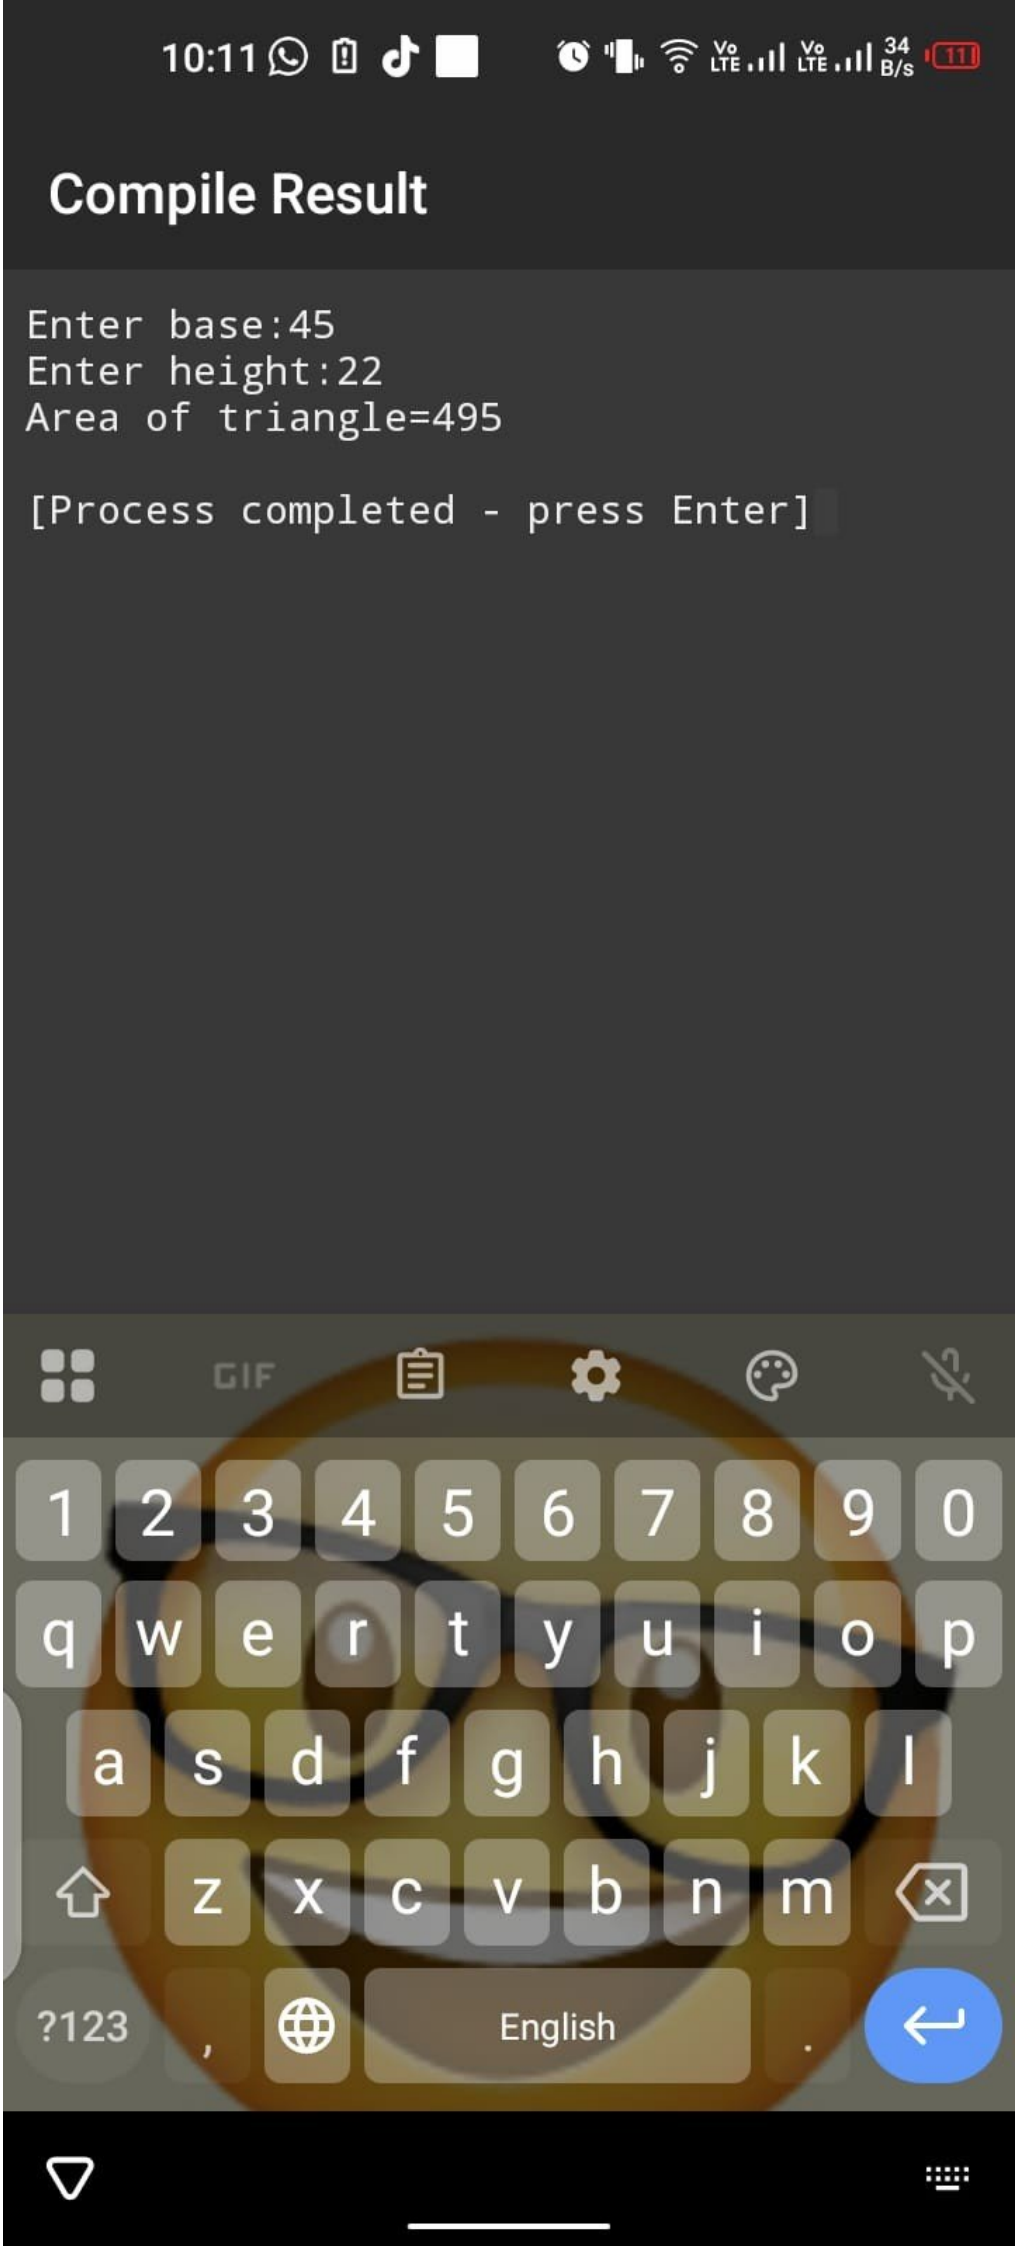
RUN MENU

```cpp
#include<iostream>
using namespace std;

int main()
{
double base,height,area;
cout<<"Enter base:";
cin >> base;
cout << "Enter height:";
cin >> height;
area=base*height*0.5;
cout << "Area of triangle=" <<area << endl;
    return 0;
}

```

Tab {} “” ; = \ & ,


10:11
Compile Result
Enter base:45
Enter height:22
Area of triangle=495
[Process completed - press Enter]
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Coding C++

Auto saved at 20:00:58

RUN MENU

```cpp
#include <iostream>
#include <iomanip>
using namespace std;

int main()
{
    double item1 = 12.95;
    double item2 = 24.95;
    double item3 = 6.95;
    double item4 = 14.95;
    double item5 = 3.95;

    double subtotal, tax, total;

    subtotal = item1 + item2 + item3 + item4 + item5;
    tax = subtotal * 0.06;
    total = subtotal + tax;

    cout << fixed << setprecision(2);

    cout << "Item 1: $" << item1 << endl;
    cout << "Item 2: $" << item2 << endl;
    cout << "Item 3: $" << item3 << endl;
    cout << "Item 4: $" << item4 << endl;
    cout << "Item 5: $" << item5 << endl;

    cout << "Subtotal: $" << subtotal << endl;
    cout << "Sales Tax: $" << tax << endl;
    cout << "Total: $" << total << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:03

Compile Result

```
Item 1: $12.95
Item 2: $24.95
Item 3: $6.95
Item 4: $14.95
Item 5: $3.95
Subtotal: $63.75
Sales Tax: $3.82
Total: $67.58

[Process completed - press Enter]
```

Coding C++

Auto saved at 20:16:44

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main()
{
    int num;

    cout << "Enter a five-digit number: ";
    cin >> num;

    cout << num / 10000 << "    ";
    num = num % 10000;

    cout << num / 1000 << "    ";
    num = num % 1000;

    cout << num / 100 << "    ";
    num = num % 100;

    cout << num / 10 << "    ";
    num = num % 10;

    cout << num << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:18

Compile Result

```
Enter a five-digit number: 12345
1   2   3   4   5

[Process completed - press Enter]
```

Coding C++

Auto saved at 20:23:34

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main()
{
    int var1, var2, temp;

    cout << "Enter value of var1: ";
    cin >> var1;

    cout << "Enter value of var2: ";
    cin >> var2;

    temp = var1;
    var1 = var2;
    var2 = temp;

    cout << "After swapping:" << endl;
    cout << "var1 = " << var1 << endl;
    cout << "var2 = " << var2 << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

8:25

Compile Result

```
Enter value of var1: 4
Enter value of var2: 6
After swapping:
var1 = 6
var2 = 4

[Process completed - press Enter]
```

```cpp
#include <iostream>
using namespace std;

int main()
{
    char ch;

    cout << "Enter a lowercase alphabet: ";
    cin >> ch;

    ch = ch - 32;

    cout << "Uppercase alphabet: " << ch << endl;

    return 0;
}
```

Tab {} “” ; = \ & ,

Compile Result

```
Enter a lowercase alphabet: a
Uppercase alphabet: A

[Process completed - press Enter]
```