PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	**Muhammad Adib Nazhif Bin Ahmad Suhimi**
Registration No	**10DIT25F1166**
Date	**2/3/2026**

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below.

HTML

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color: #333;
}

        section { background: white; padding: 25px; border-radius: 12px;
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; padding-
left: 10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }
```

```
        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }

        button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>

        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>
```

```
        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem; font-
weight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 4: Gate Access (Relational & Logical)</h2>

        <p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>

        Age: <input type="number" id="age" placeholder="Age">

        <label><input type="checkbox" id="parent"> With
Parent?</label><br><br>

        <button onclick="runTask4()" style="background:#27ae60;">Verify
Entry</button>

        <div id="outSecurity" class="output-box">Status: Waiting...</div>

        <div id="noteSecurity" class="short-note"></div>

    </section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. **Observe** the results and **explain** your understanding of the process.

1.

Screenshot of the output

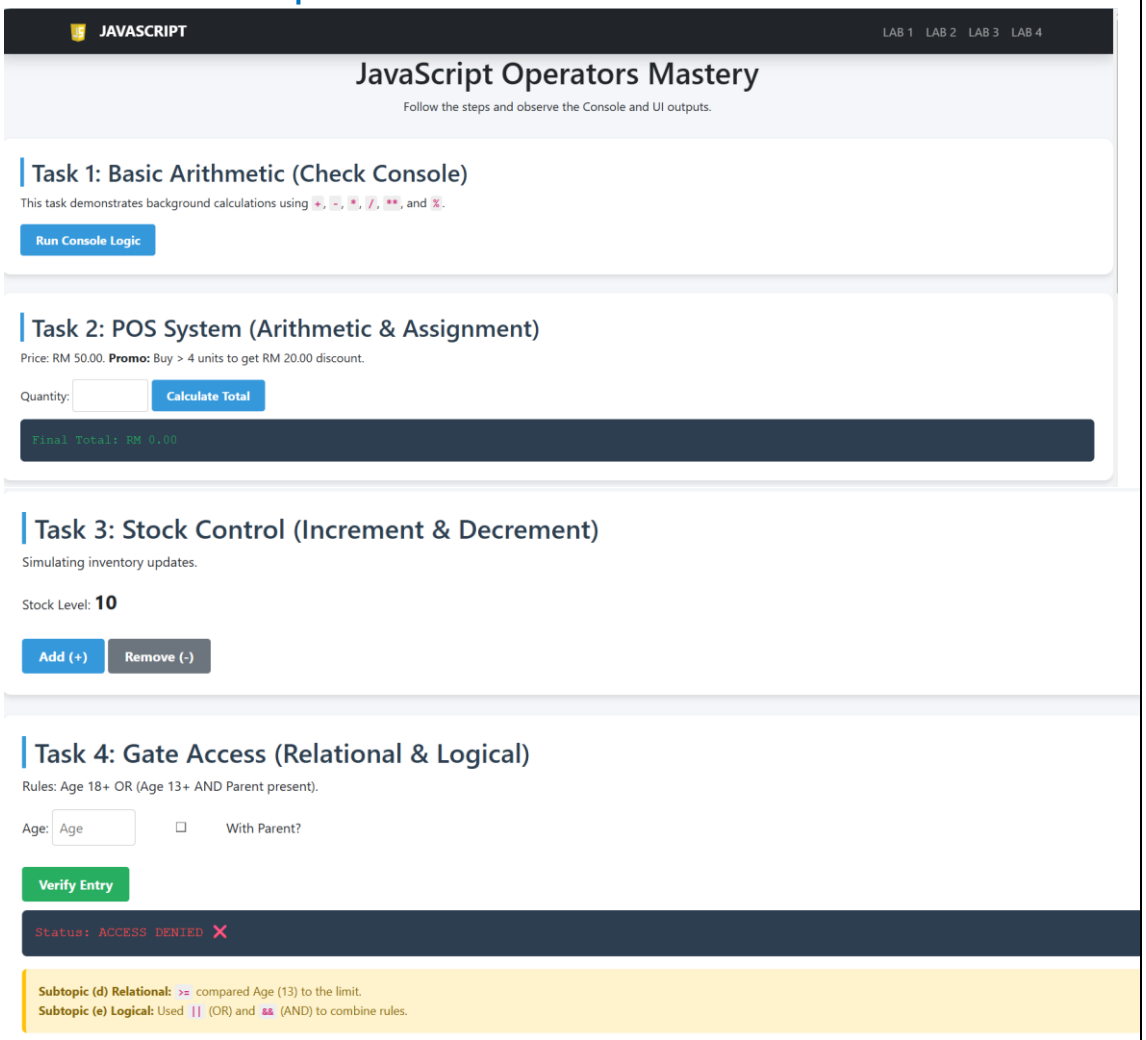

Explanation

This output shows a JavaScript Operators Mastery webpage that demonstrates how different JavaScript operators work through four small tasks:

1. **Task 1: Basic Arithmetic**
   This section uses arithmetic operators like + (add), − (subtract), × (multiply), ÷ (divide), and % (modulus) to perform calculations. The results can be seen in the browser console.
2. **Task 2: POS System (Arithmetic & Assignment)**
   This simulates a simple shop payment system. The user enters a quantity, and JavaScript calculates the total price and applies a promotion or discount using arithmetic and assignment operators.
3. **Task 3: Stock Control (Increment & Decrement)**
   This shows how stock quantity changes. The Add (+) button increases stock, and the Remove (−) button decreases stock using increment and decrement operators.

4. **Task 4: Gate Access (Relational & Logical)**
   This checks whether a person can enter based on rules:
   - **Age 18 or above, OR**
   - **Age 13+ with a parent present.**
     It uses relational operators (like >, <, >=) and logical operators (AND, OR) to decide if access is allowed or denied.

2.

Screenshot of the output

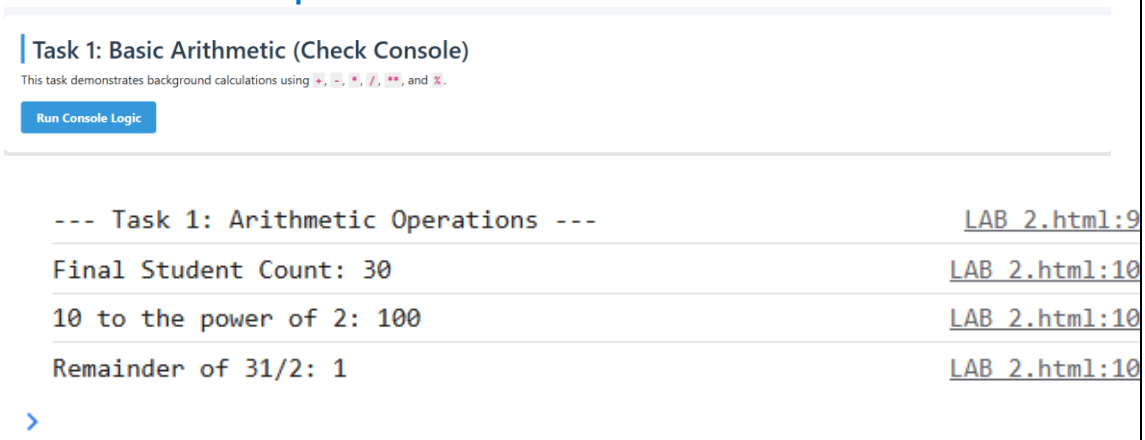

Explanation

Basic Arithmetic

This task performs basic mathematical calculations using JavaScript and displays the result in the console.

3.	**Screenshot of the output** 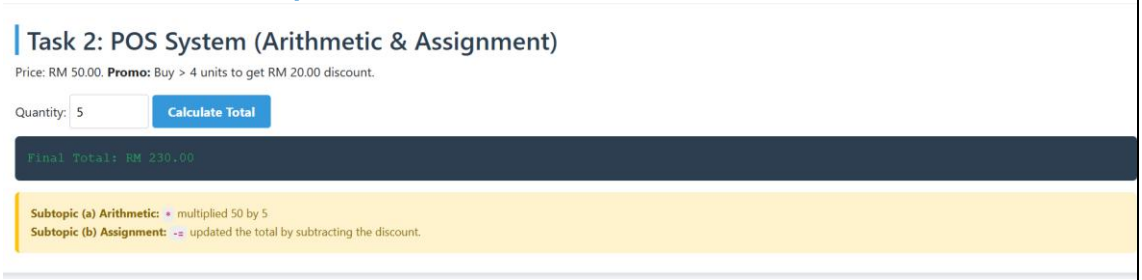
	Explanation **This task calculates the total price based on quantity and applies a discount when conditions are met.**

4.	**Screenshot of the output** 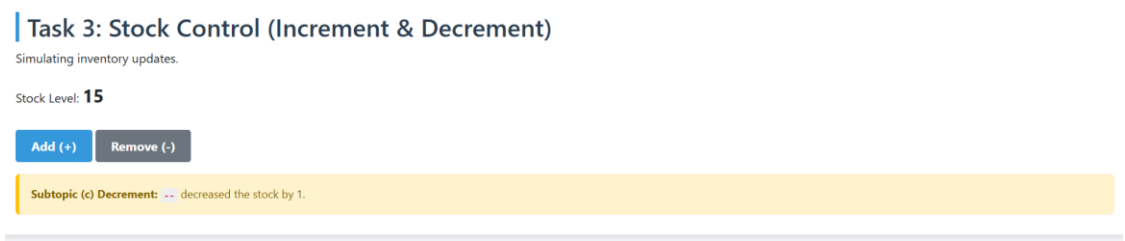
	Explanation **Stock Control (Increment & Decrement)** **This task increases or decreases the stock value using add and remove buttons.**

5.	**Screenshot of the output**
	Explanation **Gate Access (Relational & Logical)** **This task checks if a person is allowed to enter based on age and parent permission.**

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?

   Odd number

2. **Shorthand Power:** In Task 2, rewrite total -= 20 using the standard assignment method.

   This task calculates the total price based on the quantity entered. Each item costs RM50, and since 20 units are bought, a discount is applied. The final total after the discount is RM980.

3. **Logical Priority:** In Task 4, why did we put (age >= 13 && hasParent) in parentheses?

   We put **(age ≥ 13 && hasParent)** in parentheses to make sure this condition is checked **together first** before combining it with other logical conditions. It controls the order of evaluation and avoids wrong results.

4. **Time Calculation:** (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.

   Formula using Modulus operator:

   remainingMinutes = totalMinutes % 60;