


ICDT 88 - 2nd International Conference on Database Theory, Bruges, Belgium, August 31-September 2, 1988 : proceedings

Springer-Verlag - Database Theory

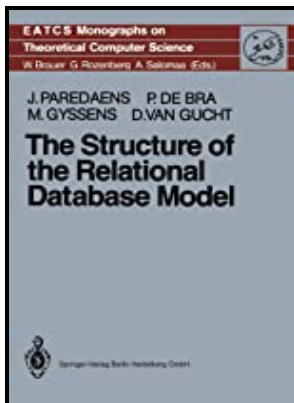

Description: -

- Database management -- Congresses. ICDT 88 - 2nd International Conference on Database Theory, Bruges, Belgium, August 31-September 2, 1988 : proceedings

- 326

Lecture notes in computer science ; ICDT 88 - 2nd International Conference on Database Theory, Bruges, Belgium, August 31-September 2, 1988 : proceedings

Notes: Includes bibliographies.

This edition was published in 1988



Filesize: 44.105 MB

Tags: #Database #Theory

ICDT '88: 2nd International Conference on Database Theory, Bruges, Belgium, August 31

The two techniques of using A directly or using its prefix sum array PS instead, constitute the extreme cases of minimal cost of updates and minimal cost of queries for one-dimensional data.

dblp: LNCS 300

The need for headers: an impossibility result for communication over unreliable channels. Then, in Section 6, we present a self-contained proof of locality of Laggr and thus of Algaggr.

dblp: LNCS 300

Similarly, consider the largest block of 0-entries in column $x+1$ starting at entry $hx+1, y_i$ and extending up.

dblp: LNCS 300

We call p_i the connection probability of i . Volume 25 2 : Local Government Local Government Act 1972 to London Local Authorities Act 1991. Based on the monotonicity principle, some itemsets are a priori excluded.

ICDT

If a history H can be run on a database D under the key-range locking protocol, then for any completion string γ for H , the completed history H_γ can be run on D under the key-range locking protocol.

Related Books

- [Madhusūdana kābtya granthābali.](#)
- [EVE - a CAD tool providing placement and pipelining assistance for high-speed FPGA circuit designs.](#)
- [The inner image](#)
- [Kobzar - vybrani poeziï dlia molodi](#)
- [Sigmund Freud - life and work](#)