

HTML REVISION

Categories of HTML Tags



- Basic Structure Tags
- Headings & Text Formatting
- Links & Media
- Lists
- Tables
- Forms & Input
- Semantic & Layout


Basic Structure Tags



- `<html>`
- `<head>`
- `<title>`
- `<body>`

- Tag : `<html>`
- Purpose: The `<html>` tag is the **root element** of every HTML document.

- Tag: `<head>`
- Purpose: The `<head>` tag contains **metadata** (information *about* the webpage), scripts, styles, etc — not the visible content.

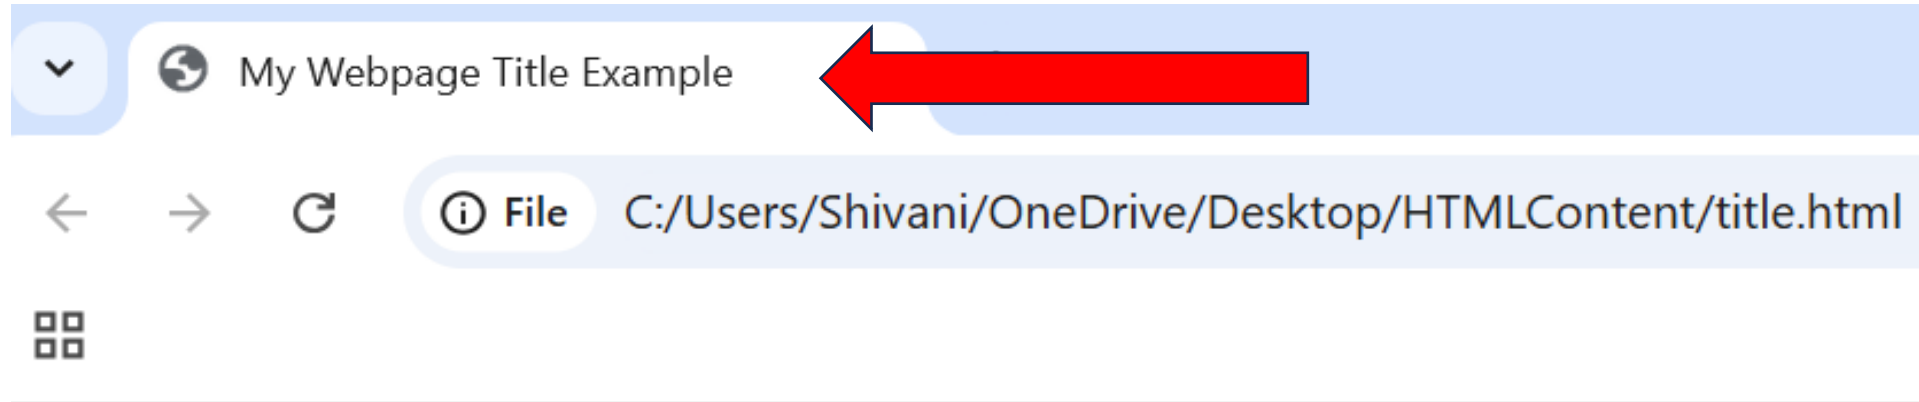

Title Tag Demonstration


Tag: <title>

Purpose:

- The <title> tag defines the **title of the HTML document**.
- It appears on the **browser tab**.
- It's used by **search engines** as the page title in search results.
- It's located **inside the <head>** section.

Code:

```
<head>  
  <title>My Webpage Title Example</title>  
</head>
```

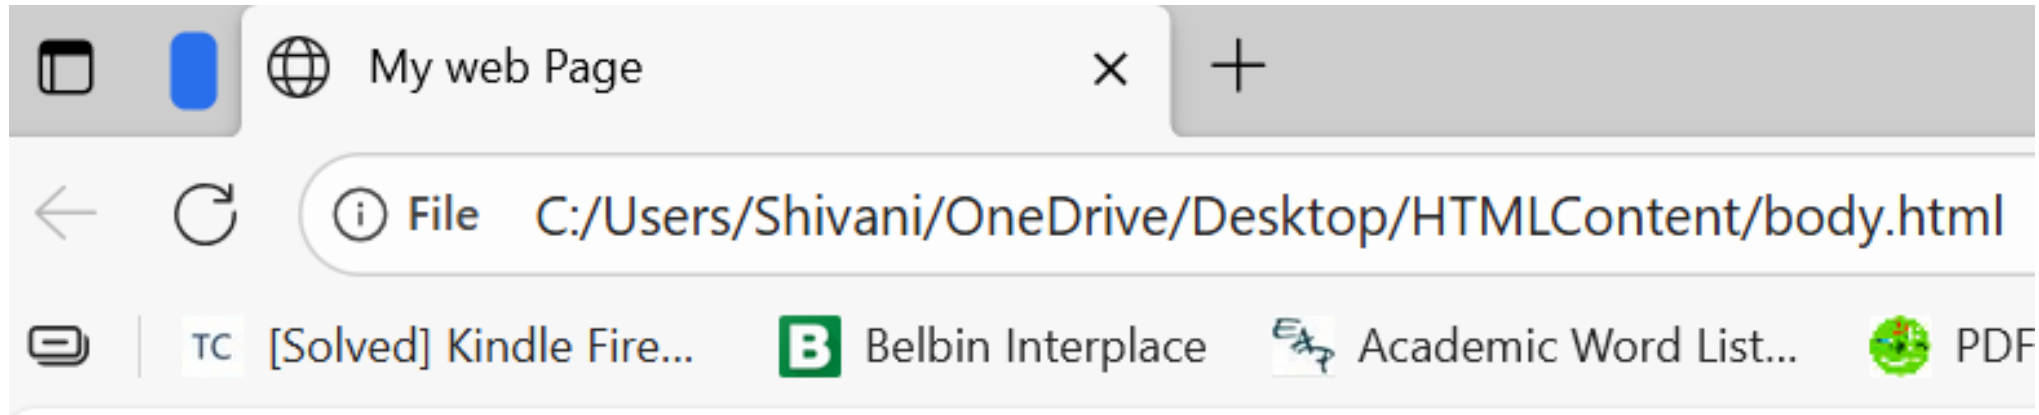This is the Body Section

All visible content of a webpage goes inside the body tag.

- Tag: `<body>`
- Purpose: The `<body>` tag contains **everything visible** on a webpage — such as text, images, links, tables, and more.

Code:

```
<body>  
  <h1>This is the Body Section</h1>  
  <p>All visible content of a webpage goes inside the body tag.</p>  
  
</body>
```

Headings & Text Formatting

- `<h1>` to `<h6>`
- `<p>`
- `<br>`
- `<hr>`
- `<b>` or `<strong>`
- `<i>` or `<em>`
- `<u>`
- `<mark>`
- `<small>`
- `<sup>`

- Tag: <h1> to <h6>
- Purpose: These tags define **HTML headings**, from the **largest and most important** (<h1>) to the **smallest** (<h6>).

Code:

```
<body>  
  <h1>This is Heading 1</h1>  
  <h2>This is Heading 2</h2>  
  <h3>This is Heading 3</h3>  
  <h4>This is Heading 4</h4>  
  <h5>This is Heading 5</h5>  
  <h6>This is Heading 6</h6>  
  
</body>
```

Heading Tags Example

File C:/Users/Shivani/OneDrive/Desktop/HTMLContent/heading.html

TC [Solved] Kindle Fire... Belbin Interplace Academic Word List... PDF search

This is Heading 1 ← `<h1>`

This is Heading 2 ← `<h2>`

This is Heading 3 ← `<h3>`


This is Heading 4 ← `<h4>`

This is Heading 5 ← `<h5>`

This is Heading 6 ← `<h6>`


- Tag : `<p>`
- Purpose: The `<p>` tag defines a **paragraph** of text.
- Code:

```
<p>This is a simple paragraph. It is used to write text content in HTML pages.</p>
```

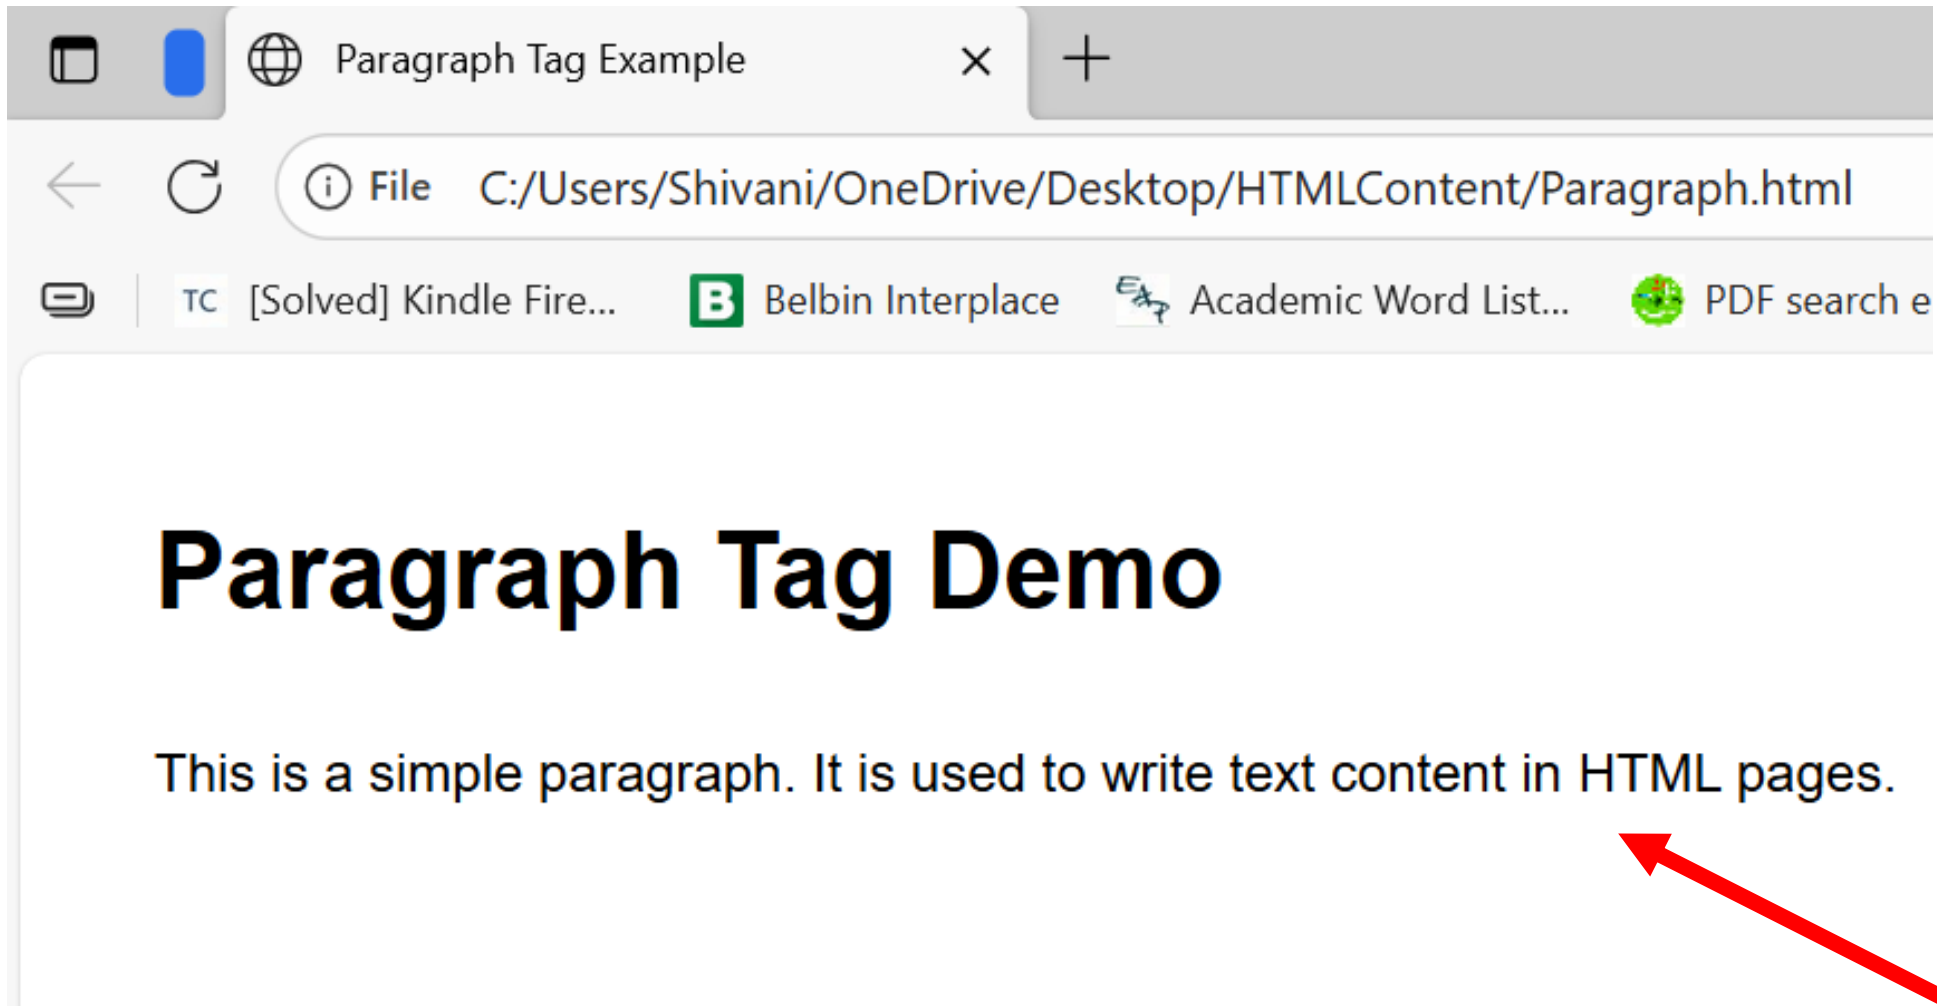

- Tag : `<br>`
- Purpose: The `<br>` tag inserts a **line break** — it moves the text to the **next line without starting a new paragraph.**
- Code:

```
<p>  
  This is a single paragraph,<br>  
  but the text is broken<br>  
  into multiple lines<br>  
  
</p>
```

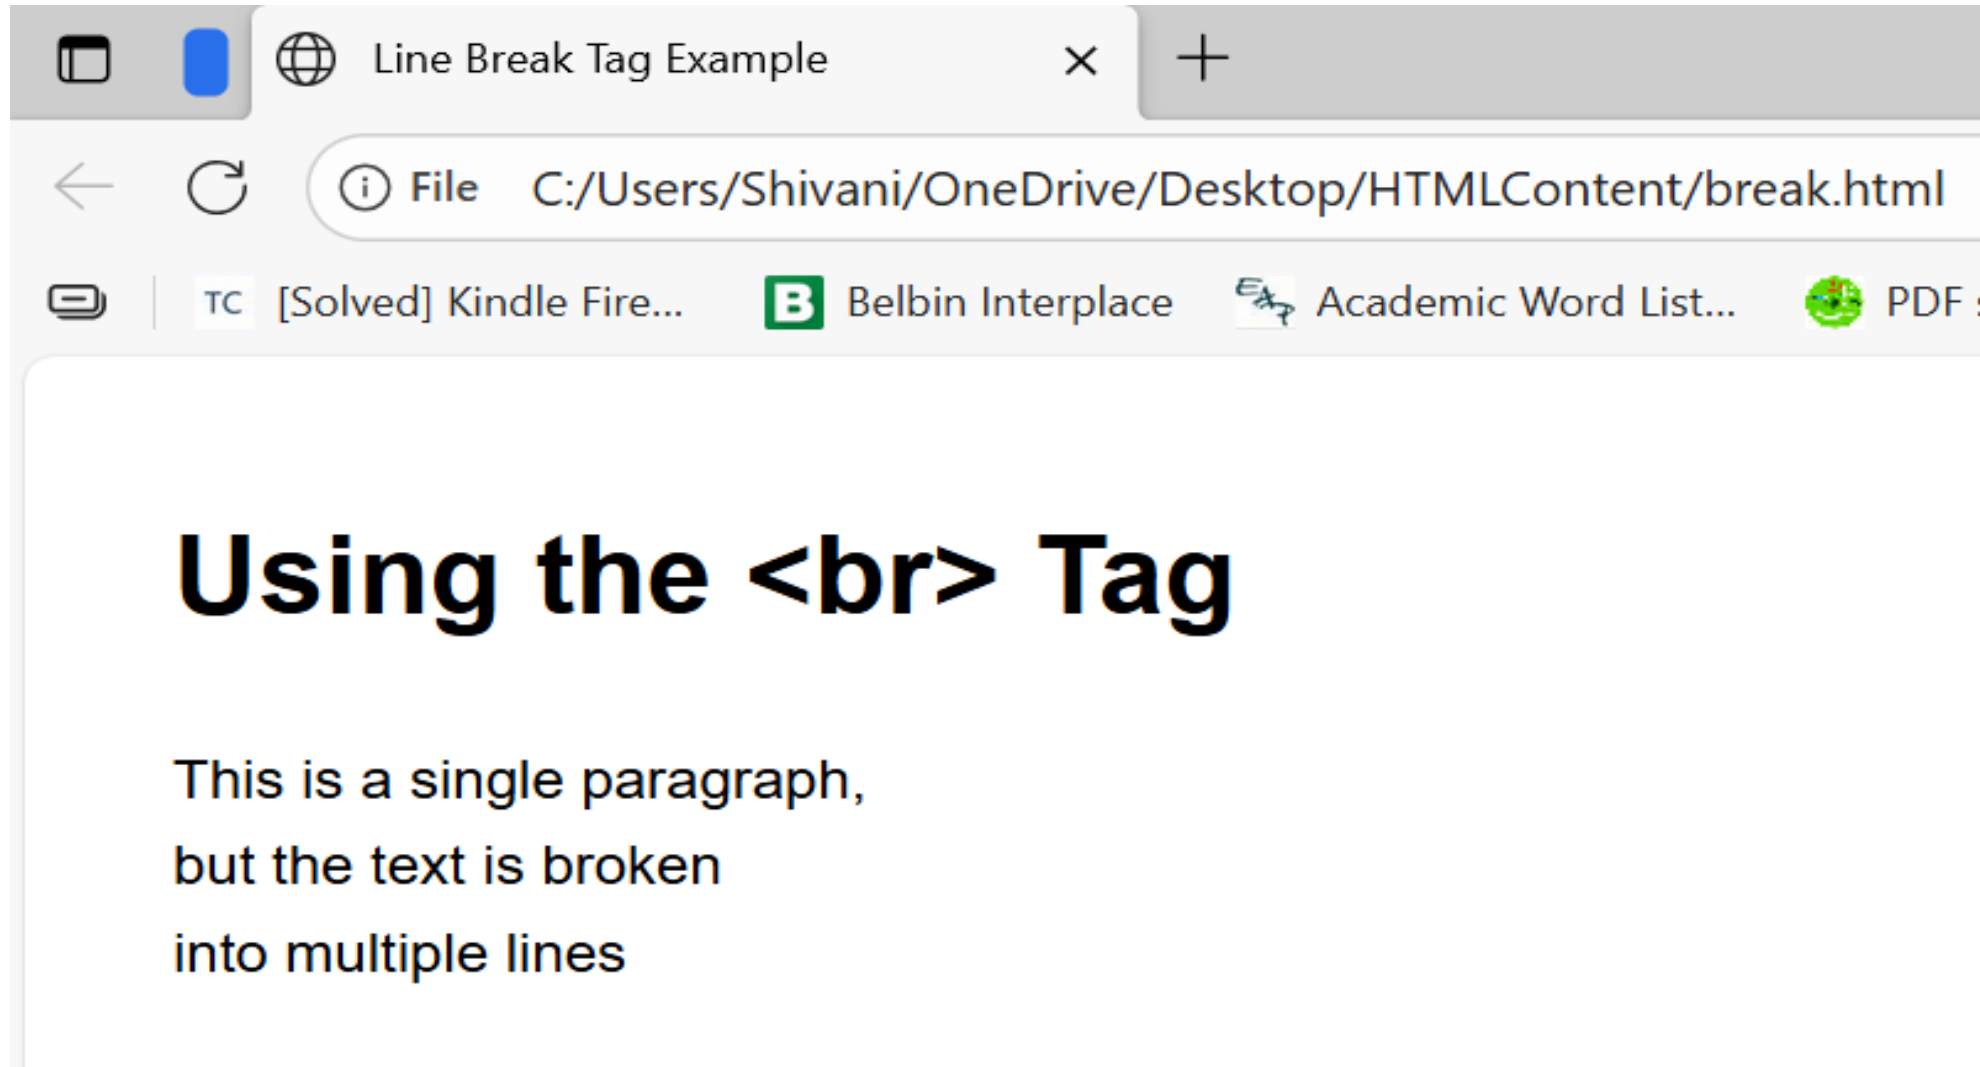Using the hr Tag

The hr tag creates a horizontal line to separate content.



Section 1

This is the first section of the webpage.



Section 2

This is the second section, separated by a horizontal rule.

- Tag : `<hr>`
- Purpose: The `<hr>` tag inserts a **horizontal line (rule)** across the page.
- Code:

```
<h1>Using the hr Tag</h1>
<p>The hr tag creates a horizontal line to separate content.</p>

<hr>

<h2>Section 1</h2>
<p>This is the first section of the webpage.</p>

<hr>

<h2>Section 2</h2>
<p>This is the second section, separated by a horizontal rule.</p>
```

Using bold and strong Tags

This is a normal paragraph with some **bold text using bold tag** for styling only.

This is another paragraph with **important text using strong tag** which indicates strong importance.


- Tag : `<b>` `<strong>`
- Purpose: `<b>` Makes text **bold** visually

`<strong>` Makes text **bold** AND indicates **strong importance**

- Code:

```
<p>This is a normal paragraph with some <b>bold text using bold tag </b> for styling only.</p>
```

```
<p>This is another paragraph with <strong>important text using strong tag</strong>  
which indicates strong importance.</p>
```

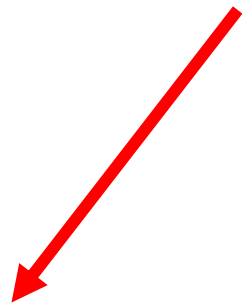

This is a normal paragraph with some *italic text using italic* for styling only.

- Tag : `<i>`
- Purpose: Makes text **italic** visually
- Code:

```
<p>This is a normal paragraph with some <i>italic text using italic</i> for styling only.</p>
```

Welcome to our website! ←

Learning HTML is fun and easy. ←

- Tag : `<u>`
- Purpose: The `<u>` tag is used to **underline text**.

Often used to **highlight names, keywords, or links**,

- Code:

```
<p>Welcome to our <u>website</u>!</p>
```

```
<p>Learning HTML is <u>fun and easy</u>.</p>
```

HTML makes learning web development easy and fun for beginners.

Please read instructions carefully before submitting the form.

- Tag : `<mark>`
- Purpose: The `<mark>` tag is used to **highlight text**, usually with a **yellow background** by default.
- Code:

```
<p>HTML makes learning web development <mark>easy and fun</mark> for beginners.</p>
```

```
<p>Please <mark>read instructions carefully</mark> before submitting the form.</p>
```

Website Terms and Conditions © 2025 Company Name. All rights reserved.

Disclaimer: Results may vary from person to person.

- Tag: <small>
- Purpose: The <small> tag is used to **reduce the size of text**.
 - Often used for **fine print, disclaimers, or legal text**
- Code:

```
<p>Website Terms and Conditions <small>© 2025 Company Name. All rights reserved.</small></p>
```

```
<p>Disclaimer: <small>Results may vary from person to person.</small></p>
```

```
.. .
```



Mathematics example: $5^2 = 25$



- Tag:<sup>
- Purpose:The <sup> tag is used to display text as **superscript**, which means the text appears **slightly above the normal line** and in a **smaller font size**.
- Code:

```
<p>Mathematics example: 5<sup>2</sup> = 25</p>
```

Chemistry example: H_2O (water) and CO_2 (carbon dioxide)



- Tag: `<sub>`
- Purpose: The `<sub>` tag is used to display text as **subscript**, which means the text appears **slightly below the normal line** and in a **smaller font size**.
- Code:

```
<p>Chemistry example: H<sub>2</sub>O (water) and CO<sub>2</sub> (carbon dioxide)</p>
```

Links & Media



- `<a>`
- `<img>`
- `<video>`
- `<audio>`
- `<iframe>`



Visit **Google** to search the web.

Go to the **next section** on this page.



- **Tag:** <a> - Anchor
- **Purpose:** The <a> tag is used to create **hyperlinks** in HTML.
- **Code:**

```
<p>Visit <a href="https://www.google.com" target="_blank"  
|title="Go to Google">Google</a> to search the web.</p>  
  
<p>Go to the <a href="#section2" >next section</a> on this page.</p>
```

Below is an image displayed using the `<img>` tag:



- **Tag:** `<img>`
- **Purpose:** Used to display **images** on a web page.
- **Code:**

```
<p>Below is an image displayed using the image tag:</p>
```

```

```

Click play to listen to the audio:



- **Tag:** <audio>
- **Purpose:** To embed sound or music in a webpage.
- **Code:**

```
<p>Click play to listen to the audio:</p>
```

```
<audio controls>
```

```
  <source src="https://www.w3schools.com/html/horse.mp3" type="audio/mpeg">
```

```
</audio>
```


Click play to watch the video:



- **Tag:** <video>
- **Purpose:** To embed videos directly in a webpage.
- **Code:**

```
<p>Click play to watch the video:</p>  
  
<video width="400" controls>  
  <source src="https://www.w3schools.com/html/mov_bbb.mp4" type="video/mp4">  
</video>
```

Below is a YouTube video embedded using the iframe tag:



- **Tag:** `<iframe>`
- **Purpose:** To embed another web page or external content (like YouTube, Google Maps, etc.) inside your page.
- **Code:**

```
<p>Below is a YouTube video embedded using the iframe tag:</p>  
  
<iframe width="560" height="315"  
  src="https://www.youtube.com/embed/tgbNymZ7vqY"  
  title="YouTube Video Player"  
  frameborder="0"  
  allowfullscreen>  
</iframe>
```

Lists

- `<ul>`

- `<ol>`

- `<li>`

- `<dl>`

- `<dt>`

- `<dd>`

Here is a list of my favorite fruits:

- Apple
- Banana
- Mango
- Orange
- Grapes

- Tag:
- Purpose: The tag creates an **unordered list**, which is a **bulleted list** of items.

- Code:

```
<p>Here is a list of my favorite fruits:</p>|
<ul>
  <li>Apple</li>
  <li>Banana</li>
  <li>Mango</li>
  <li>Orange</li>
  <li>Grapes</li>
</ul>
```

Steps to make a cup of tea:

1. Boil water.
2. Add tea leaves or tea bag.
3. Pour hot water into a cup.
4. Add sugar and milk as desired.
5. Stir and enjoy your tea!

- Tag:
- Purpose: The tag creates an **ordered list**, which is a **numbered list** of items.
- Code:

```
<p>Steps to make a cup of tea:</p>
<ol>
  <li>Boil water.</li>
  <li>Add tea leaves or tea bag.</li>
  <li>Pour hot water into a cup.</li>
  <li>Add sugar and milk as desired.</li>
  <li>Stir and enjoy your tea!</li>
</ol>
```

HTML

HyperText Markup Language, used to create web pages.

CSS

Cascading Style Sheets, used to style HTML content.

JavaScript

A programming language used to make web pages interactive.

URL

Uniform Resource Locator, the address of a web page.

- Tag: <dl> <dt> <dd>
- Purpose: The <dl> tag is used to create a **definition list**, which is a list of **terms and their descriptions**.
- <dl> → the container for the list
- <dt> → defines the **term**
- <dd> → defines the **description** of the term

- Code:

```
<dl>
  <dt>HTML</dt>
  <dd>HyperText Markup Language, used to create web pages.</dd>

  <dt>CSS</dt>
  <dd>Cascading Style Sheets, used to style HTML content.</dd>

  <dt>JavaScript</dt>
  <dd>A programming language used to make web pages interactive.</dd>

  <dt>URL</dt>
  <dd>Uniform Resource Locator, the address of a web page.</dd>
</dl>
```

Tables

- `<table>`

- `<tr>`

- `<td>`

- `<th>`

- `<thead>`

- `<tbody>`

- `<tfoot>`

- `<caption>`

Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92

- **Tag:** `<table>` `<tr>` `<th>` `<td>`
- **Purpose:** The `<table>` tag is used to create **tables** to display data in **rows and columns**.
- `<tr>` → Table Row
- `<th>` → Table Header (bold and centered by default)
- `<td>` → Table Data (cell content)

- Code:

```
<table>
  <tr>
    <th>Student Name</th>
    <th>Subject</th>
    <th>Marks</th>
  </tr>
  <tr>
    <td>SHIVANI</td>
    <td>Math</td>
    <td>95</td>
  </tr>
  <tr>
    <td>ESHA</td>
    <td>Science</td>
    <td>88</td>
  </tr>
  <tr>
    <td>ABHI</td>
    <td>English</td>
    <td>92</td>
  </tr>
</table>
```



Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92

<th>

<td>

<td>

<td>

Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92
Total Students		3

- **Tag:** <thead> <tbody> <tfoot>

- **Purpose:**

<thead> Groups the **header rows** of a table

<tbody> Groups the **main content/data rows** of the table.

<tfoot> Groups the **footer rows**, often for totals or summary.

```
<table>
  <thead>
    <tr>
      <th>Student Name</th>
      <th>Subject</th>
      <th>Marks</th>
    </tr>
  </thead>
```

```
<tbody>
  <tr>
    <td>SHIVANI</td>
    <td>Math</td>
    <td>95</td>
  </tr>
  <tr>
    <td>ESHA</td>
    <td>Science</td>
    <td>88</td>
  </tr>
  <tr>
    <td>ABHI</td>
    <td>English</td>
    <td>92</td>
  </tr>
</tbody>
```

```
<tfoot>
  <tr>
    <td colspan="2">Total Students</td>
    <td>3</td>
  </tr>
</tfoot>
</table>
```

<thead>

<tbody>

Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92
Total Students		3

<tfoot>

Student Marks Table

Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92
Total Students		3

- **Tag:** <caption>
- **Purpose:** The <caption> tag is used to provide a **title or description** for a table.
- **Code:**

```
<caption>Student Marks Table</caption>
```

Student Marks Table <caption>

Student Name	Subject	Marks
SHIVANI	Math	95
ESHA	Science	88
ABHI	English	92
Total Students		3

Forms & Input



- `<form>`
- `<input>`
- `<textarea>`
- `<button>`
- `<option>`
- `<select>`
- `<label>`
- `<fieldset>`
- `<legend>`

HTML Form Example



Name:

Email:

Gender:



Message:

- **Tag:** `<form>`
- **Purpose:** The `<form>` tag is used to **collect user input** on a web page.
- **Code:**

```
<form action="/submit" method="post">
```



```
</form>
```

- **Tag:** `<input>`
- **Purpose:** Used to create **single-line input fields** for text, email, password, numbers, checkboxes, radio buttons, etc.
- **Code:**
 - `<input type="text">`
 - `<input type="checkbox">`
 - `<input type="radio">`

- **Tag:** `<textarea>` - Multi line text
- **Purpose:** Used to create a **larger text area** for multi-line input, such as messages or comments.
- **Code:**

```
<textarea id="message" name="message" placeholder="Enter  
your message"></textarea>
```

- **Tag:** <button>
- **Purpose:** Creates a **clickable button** for submitting forms, resetting forms, or performing custom actions.
- **Code:**

```
<button type="submit">Submit</button>
```


- **Tag:** <select>
- **Purpose:** Creates a **dropdown list** allowing users to select one or more options.
- **Code:**

```
<select id="gender" name="gender">  
  <option value="">Select</option>  
  <option value="male">Male</option>  
  <option value="female">Female</option>  
  <option value="other">Other</option>  
</select>
```

- **Tag:** <label>
- **Purpose:** Provides a **text description** for an input field.
- **Code:**

```
<label for="name">Name:</label>  
<input type="text" id="name" name="name" placeholder="Enter your name">  
  
<label for="email">Email:</label>  
<input type="email" id="email" name="email" placeholder="Enter your email">  
  
<label for="gender">Gender:</label>
```

HTML Form Example

<label> →

Name:

Enter your name **<input>**

Email:

Enter your email

Gender:

Select **<select>**

Message:

Enter your message **<textarea>**

Submit **<button>**

Gender:

Select



Select

Male

Female

Other

- **Tag:** <option>
- **Purpose:** Represents **each choice inside a <select> dropdown.**
- **Code:**

```
<select id="gender" name="gender">  
  <option value="">Select</option>  
  <option value="male">Male</option>  
  <option value="female">Female</option>  
  <option value="other">Other</option>  
</select>
```

Gender:

Select

Select

Male

Female

Other

<option>



Personal Information

Name:

Email:



Account Details

Username:

Password:

- **Tag:**`<fieldset>` `<legend>`
- **Purpose:**
 - The `<fieldset>` tag is used to **group related form elements together**.
 - The `<legend>` tag is used to **provide a caption or title for a `<fieldset>`**.


```
<form>
  <fieldset>
    <legend>Personal Information</legend>
    <label for="name">Name:</label>
    <input type="text" id="name" name="name">

    <label for="email">Email:</label>
    <input type="email" id="email" name="email">
  </fieldset>

  <fieldset>
    <legend>Account Details</legend>
    <label for="username">Username:</label>
    <input type="text" id="username" name="username">

    <label for="password">Password:</label>
    <input type="password" id="password" name="password">
  </fieldset>
</form>
```

<fieldset>

Personal Information

Name:

Email:

<legend>

<fieldset>

Account Details

Username:

Password:

<legend>

Semantic & Layout



- `<header>`
- `<section>`
- `<footer>`
- `<article>`
- `<nav>`
- `<aside>`
- `<main>`
- `<div>`
- `<span>`

My Website

[Home](#)[About](#)[Contact](#)

Welcome to My Website

This is the main content area. You can put articles, images, or any information here.

© 2025 My Website. All rights reserved.



- **Tag:** <header>
- **Purpose:** Represents the **introductory content** or **top section** of a page/section. Typically contains a **logo, title, or navigation**.
- **Code:**

```
<header>  
  <h1>My Website</h1>  
</header>
```

- **Tag:** <nav>
- **Purpose:** Defines a **navigation section** with links to other pages or sections of the page.
- **Code:**

```
<nav>  
  <a href="#home">Home</a>  
  <a href="#about">About</a>  
  <a href="#contact">Contact</a>  
</nav>
```

- **Tag:** `<main>`
- **Purpose:** Represents the **main content of the page**.
- **Code:**

```
<main>  
  <h2>Welcome to My Website</h2>  
  <p>This is the main content area. You can put articles, images, or any information here.</p>  
</main>
```

- **Tag:** `<footer>`
- **Purpose:** Represents the **bottom section** of a page/section. Usually contains **copyright info, links, or contact info**.
- **Code:**

```
<footer>  
    <p>© 2025 My Website. All rights reserved.</p>  
</footer>
```


<header>

My Website

<Nav>

Home About Contact

Welcome to My Website

This is the main content area. You can put articles, images, or any information here.

<Main>

© 2025 My Website. All rights reserved.

<footer>





Play with the Code!

About Us

We are a team of passionate developers who love creating web applications.

Contact

Email us at: info@example.com

- **Tag:** `<section>`
- **Purpose:** The `<section>` tag in HTML is used to define a **thematic grouping of content** — typically with a heading.

It helps structure a webpage into meaningful sections like

Introduction, About Us, Services, Contact, etc. Code:

- **Code:**

```
<body>

  <section>
    <h2>About Us</h2>
    <p>We are a team of passionate developers who love creating web applications.</p>
  </section>

  <section>
    <h2>Contact</h2>
    <p>Email us at: <a href="mailto:info@example.com">info@example.com</a></p>
  </section>

</body>
```

How to Learn HTML

HTML is the backbone of every web page. Start by learning basic tags and build small projects to master it.

Why CSS Matters

CSS brings life to your HTML structure. It controls layout, colors, fonts, and the overall visual presentation of a website.

- **Tag:** `<article>`
- **Purpose:** The `<article>` tag is used to represent **independent, self-contained content** — like a blog post, news story, forum post, or product card.

Each `<article>` should make sense on its own, even if taken out of context.

- Code:

```
<body>

  <article>
    <h2>How to Learn HTML</h2>
    <p>HTML is the backbone of every web page. Start by learning basic
      tags and build small projects to master it.</p>
  </article>

  <article>
    <h2>Why CSS Matters</h2>
    <p>CSS brings life to your HTML structure. It controls layout, colors,
      fonts, and the overall visual presentation of a website.</p>
  </article>

</body>
```



Understanding HTML Structure

HTML provides the skeleton for every webpage. Knowing how to structure your content semantically improves SEO and accessibility.

Related Links

- [Learn About CSS](#)
- [HTML Tags Reference](#)
- [Web Accessibility Tips](#)

- **Tag:** `<aside>`
- **Purpose:** The `<aside>` tag is used for **content that's related to the main content**, but not part of it directly.

Typical examples include:

- Sidebars
- Author bios
- Advertisements
- Related links
- Notes or tips

- Code:



```
<body>
  <main>
    <article>
      <h2>Understanding HTML Structure</h2>
      <p>HTML provides the skeleton for every webpage. Knowing how to structure
        your content semantically improves SEO and accessibility.</p>
    </article>

    <aside>
      <h2>Related Links</h2>
      <ul>
        <li><a href="#">Learn About CSS</a></li>
        <li><a href="#">HTML Tags Reference</a></li>
        <li><a href="#">Web Accessibility Tips</a></li>
      </ul>
    </aside>
  </main>
</body>
```

HTML

The structure of every webpage.
Learn to use semantic tags for better markup.

CSS

The style layer that gives color, shape, and design to your web pages.

JavaScript

The scripting language that makes your web pages interactive and dynamic.

- **Tag:** `<div>`
- **Purpose:** The `<div>` tag (short for “**division**”) is a **generic container** used to group together HTML elements for styling or scripting.
It doesn’t carry any semantic meaning on its own — but it’s extremely useful for **layout, grouping, and applying CSS styles**.
- You’ll often use `<div>` to:
 - Group content (like cards, sections, or navigation items)
 - Create grid or flexbox layouts
 - Apply specific styles or JavaScript behavior to a set of elements

- Code:

```
<body>
  <div class="container">
    <div class="card">
      <h3>HTML</h3>
      <p>The structure of every webpage. Learn to use semantic tags for better markup.</p>
    </div>
    <div class="card">
      <h3>CSS</h3>
      <p>The style layer that gives color, shape, and design to your web pages.</p>
    </div>
    <div class="card">
      <h3>JavaScript</h3>
      <p>The scripting language that makes your web pages interactive and dynamic.</p>
    </div>
  </div>
</body>
```

Using the span Tag

The **HTML** language is the foundation of all web pages. It works together with CSS and **JavaScript** to create beautiful and interactive websites.



- **Tag:** `<span>`
- **Purpose:** The `<span>` tag is an **inline container** used to apply **styles or scripts to a specific part of text** or a small piece of content.

Unlike `<div>` (which is *block-level*), `<span>` doesn't start a new line — it stays inline with surrounding text.

- You typically use `<span>` when you want to:

Change the style of a few words in a sentence.

Add interactivity to a specific text segment.

Wrap inline text for JavaScript manipulation.

- Code:

```
<style>
  .highlight {
    background-color: yellow;
    font-weight: bold;
  }
  .important {
    color: red;
    text-decoration: underline;
  }
</style>
```

```
<body>

  <h2>Using the span Tag</h2>
  <p>
    The <span class="highlight">HTML</span> language is the foundation of all web pages.
    It works together with <span class="important">CSS</span> and <span class="highlight">JavaScript</span>
    to create beautiful and interactive websites.
  </p>

</body>
```


CSS

CSS



- Inline
- Internal
- External

INLINE

- Inline: **Inline CSS** means adding CSS styles **directly to an individual HTML element** using the **style** attribute inside the tag itself.
- Syntax: `<element style="property: value; property: value;">`
- Code:

```
<body>

  <h1 style= "color: blue; ">Welcome to My Website</h1>

  <p style= "background-color: aqua ;"color: maroon; font-size: 18px;">
    This text is styled using inline CSS.
  </p>

</body>
```

Welcome to My Website

This text is styled using inline CSS.

INTERNAL

- Internal: **Internal CSS** means writing CSS **inside the HTML document**, but **separately from the content**, within a `<style>` tag placed inside the `<head>` section.

- Syntax:

```
<head>
  <style>
    selector {
      property: value;
      property: value;
    }
  </style>
</head>
```

```
<html>
<head>
  <title>Internal CSS Example</title>

  <style>
    body {
      background-color: #f0f0f0;
      font-family: Arial, sans-serif;
    }

    h1 {
      color: blue;
      | }
  </style>
</head>
<body>
  <h1>Hello World!</h1>
</body>
</html>
```



```
p {  
  color: gray;  
  font-size: 18px;  
}  
  
button {  
  background-color: green;  
  color: white;  
  padding: 10px 20px;  
  border: none;  
  border-radius: 5px;  
}  
</style>  
</head>
```

```
<body>  
  <h1>Welcome to My Website</h1>  
  <p>This paragraph is styled using internal CSS.</p>  
  <button>Click Me</button>  
</body>  
</html>
```

Welcome to My Website

This paragraph is styled using internal CSS.

Click Me

EXTERNAL

- External: **External CSS** means writing all your CSS styles in a **separate .css file**, and linking that file to your HTML using the `<link>` tag inside the `<head>` section.
- Syntax to link: `<link rel="stylesheet" href="filename.css">`

HTML file:

```
<!DOCTYPE html>
<html>
<head>
  <title>External CSS Example</title>
  <!-- Linking the external CSS file -->
  <link rel="stylesheet" href="styles.css">
</head>
<body>
  <h1>Welcome to My Website</h1>
  <p>This paragraph is styled using external CSS.</p>
  <button>Click Me</button>
</body>
</html>
```

- Styles.css file

```
body {  
    background-color: #f9f9f9;  
    font-family: Arial, sans-serif;  
}  
  
h1 {  
    color: blue;  
}  
  
p {  
    color: gray;  
    font-size: 18px;  
}  
  
button {  
    background-color: green;  
    color: white;  
    padding: 10px 20px;  
    border: none;  
    border-radius: 5px;  
}
```

Welcome to My Website

This paragraph is styled using external CSS.

Click Me

CSS SELECTORS



- Class
- ID
- Type(element)
- Attribute
- Pseudo-classes
- Universal

Class Selector:

- Syntax: .classname
- Targets elements with that class



```
<head>
  <title>Class Selector Example</title>
  <style>
    .box {
      background-color: lightblue;
      padding: 20px;
      font-size: 18px;
      text-align: center;
    }
  </style>
</head>
<body>

  <div class="box">This is a Class selector (.box)</div>

</body>
```

```
<button class="button button1">Submit</button>  
<a href="#" class="button button2">Learn More</a>  
<div class="button button3">Custom Div Button</div>
```

```
<button>Click Me</button>  
<button>Submit</button>
```

This is a Class selector (.box)

ID Selector:

- Syntax: #idname
- Targets one unique element with that id

```
<head>
  <title>ID Selector Example</title>
  <style>
    #header {
      font-size: 24px;
      color: green;
      text-align: center;
      padding: 20px;
      border: 2px solid green;
    }
  </style>
</head>
<body>

  <div id="header">This is an ID selector (#header)</div>

</body>
```

This is an ID selector (#header)

Type(element):

- Syntax: element(like div, p, h1)
- Targets all elements of that type.

```
|  
<head>  
  <style>  
    p {  
      color: rgb(209, 35, 35);  
      font-style: italic;  
      font-size: 18px;  
      padding: 10px;  
    }  
  </style>  
</head>
```

```
<body>  
  
  <p>This is a Type selector (p) applied to all paragraphs.</p>  
  <p>Another paragraph showing the same styling.</p>  
  
</body>
```


This is a Type selector (p) applied to all paragraphs.

Another paragraph showing the same styling.

Attribute Selector:

- Targets elements based on attribute.



Play with the Code!

```
<style>
  input[type="text"] {
    border: 2px solid blue;
    padding: 10px;
    font-size: 16px;
    margin-bottom: 10px;
  }
</style>
</head>
<body>

  <input type="text" placeholder="Text input styled with attribute selector">
  <input type="password" placeholder="Password input (not styled)">

</body>
```

Text input styled with attribu

Password input (not styled)

Pseudo-classes Selector:

- Targets elements based on state or position.

```
<head>
  <title>Pseudo-Class Example</title>
  <style>
    a:hover {
      color: red;
      text-decoration: underline;
    }
    a {
      font-size: 18px;
      color: blue;
    }
  </style>
</head>
<body>

  <a href="#">Hover over this link to see the pseudo-class effect (a:hover)</a>

</body>
```

[Hover over this link to see the pseudo-class effect \(a:hover\).](#)

[Hover over this link to see the pseudo-class effect \(a:hover\).](#)

Universal Selector:

- It is used in CSS to select **all elements** on a webpage and apply the same style to them.

```
<html>
<head>

  <style>
    /* Universal selector */
    * {
      color: darkblue;
      font-family: Arial, sans-serif;
      padding: 10px;
    }
  </style>
</head>
```

```
<body>
```

```
  <h1>My website</h1>
```

```
  <p>Hello World</p>
```

```
  <button>Enter</button>
```

```
</body>
```

```
</html>
```

My website

Hello World

Enter