

Assignment No	12
Title	1) Counter Application 2) Login Application
Objective	To develop a page visit counter using session API Develop a Login Application
Roll No	MCA2511

1) Counter Application.

Code:

```
<%@ page language="java" session="true" %>
<!DOCTYPE html>
<html>
<body>
<%
    out.println("Session Id: "+session.getId()+"<br>");
    out.println("Is New: "+ session.isNew()+"<br>");


    //to set number of times page is visited
    if(session.getAttribute("cntr")==null)
    {
        //this is your first visit
        out.println("This is your First Visit");
        //set the counter
        session.setAttribute("cntr","1");
    }
    else
    {
        //fetch old value
        Integer cnt = Integer.parseInt(session.getAttribute("cntr").toString());
        //Integer cnt = (Integer)session.getAttribute("cntr");
        //update the old value
        int cnt1 = cnt + 1;
        //display the message
```

```
        out.println("This is your Visit: " + cnt1);
        //set the new value
        session.setAttribute("cntr",""+cnt1);
    }


    //invalidate the session

%>
</body>
</html>
```

Output:

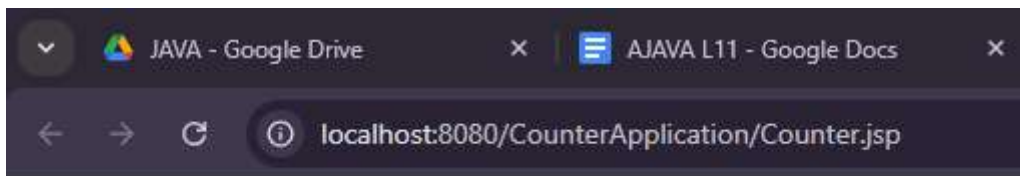

Session Id: 99E9B3EB0662679F8A111C81298C00EC
Is New: true
This is your First Visit

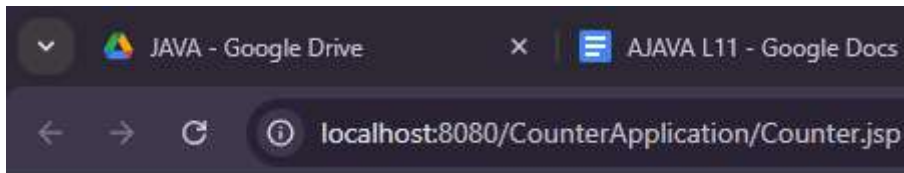

Session Id: 99E9B3EB0662679F8A111C81298C00EC
Is New: false
This is your Visit: 2

2) Login Application

Code:

LoginBean.java

```
package edu.met.p1;

public class LoginBean {
    String userName;
    String password;

    public LoginBean() {
        super();
        // TODO Auto-generated constructor stub
    }

    public String getUserName() {
        return userName;
    }

    public void setUserName(String userName) {
        this.userName = userName;
    }

    public String getPassword() {
        return password;
    }

    public void setPassword(String password) {
        this.password = password;
    }

    public boolean authenticate()
    {
        if(this.userName.equals("Mukund") &&
this.password.equals("mukund1234"))
        {
            return true;
        }
        else
        {
            return false;
        }
    }
}
```

}

}

Controller.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<body>

<%
    //get the username & password
    String un = request.getParameter("txtUn");
    String pwd = request.getParameter("txtPwd");
%>

<!-- use the LoginBean -->
<jsp:useBean id="login" class="edu.met.p1.LoginBean" scope="page">
    <jsp:setProperty property="userName" name="login" value="<%=un %%" />
    <jsp:setProperty property="password" name="login" value="<%=pwd %%" />
</jsp:useBean>

<%
    if(login.authenticate())
    {
%>
        <jsp:forward page="Success.jsp">
            <jsp:param value="<%=un %%" name="userName" />
        </jsp:forward>
<%
    }
    else
    {
%>
        <jsp:forward page="Failure.jsp" />
<%
    }
%>
</body>
</html>
```

Login.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<body>
    <form action="Controller.jsp">
        Enter Username: <input type="text" name="txtUn"><br><br>
        Enter Password: <input type="password" name="txtPwd"><br><br>
        <input type="submit" name="txtSub" value="Signin">
    </form>
</body>
</html>
```

Success.jsp


```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<head><title>Success Login</title></head>
<body>
<h1>Welcome: <%=request.getParameter("userName") %></h1>
</body>
</html>
```

Failure.jsp

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<!DOCTYPE html>
<html>
<head><title>Failure</title></head>
<body>


<h1>Invalid username or Password</h1>
<a href="Login.jsp">Try Again</a>
</body>
</html>
```

Output:

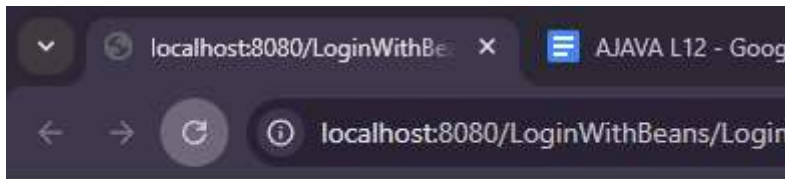


Enter Username:

Enter Password:

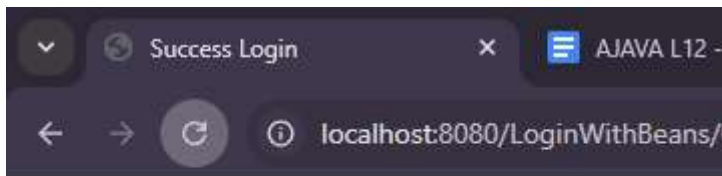

Welcome: Mukund

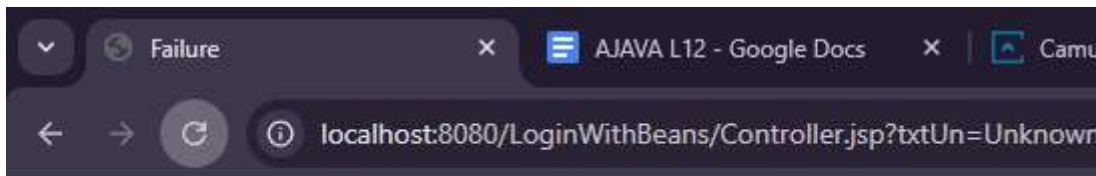

Invalid username or Password

[Try Again](#)