

|               |                                                 |
|---------------|-------------------------------------------------|
| Assignment No | 16                                              |
| Title         | Spring Boot                                     |
| Objective     | 1. Greeting Application<br>2. Hotel Application |
| Roll No       | MCA2511                                         |

## 1. Greeting Application

### GreetingApp.java

```
package com.example.demo;  
import org.springframework.web.bind.annotation.*;
```

```
@RestController
```

```
public class GreetingApp {
```

```
    @GetMapping
```

```
    public String mainPage()
```

```
    {
```

```
        return "<html><body>Welcome to MET</body></html>";
```

```
    }
```

```
    @GetMapping("/other")
```

```
    public String other()
```

```
    {
```

```
        return "<html><body>Welcome to MET-ICS</body></html>";
```

```
    }
```

```
}
```

### GreetingApplication.java

```
package com.example.demo;
```

```
import org.springframework.boot.SpringApplication;
```

```
import org.springframework.boot.autoconfigure.SpringBootApplication;
```


```
@SpringBootApplication
```

```
public class GreetingApplication {
```


```
    public static void main(String[] args) {
```

```
        SpringApplication.run(GreetingApplication.class, args);
```

```
}  
  
}
```

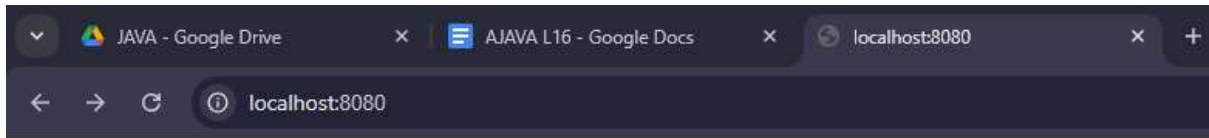

Welcome to MET

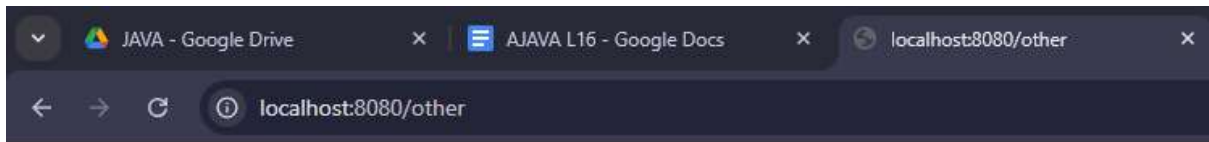


Welcome to MET-ICS

- ✓ GreetingApplication [boot] [devtools]
  - > Spring Elements
  - ✓ src/main/java
    - ✓ com.example.demo
      - > GreetingApp.java
      - > GreetingApplication.java
  - > src/main/resources
  - > src/test/java
  - > JRE System Library [JavaSE-17]
  - > Maven Dependencies
  - > src
  - > target
  - HELP.md
  - mvnw
  - mvnw.cmd
  - pom.xml

## 2. Hotel Application

Create New Starter Project & Add Dependencies

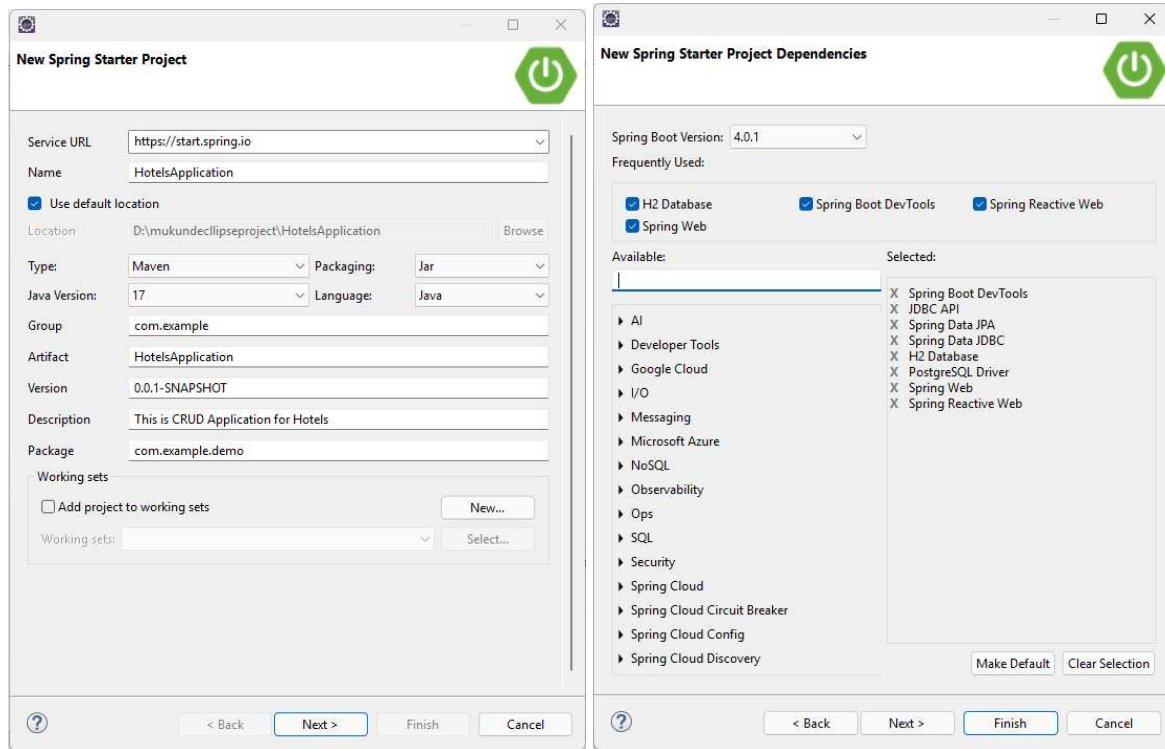

### Hotel.java

```
package com.example.demo;  
//this is Model
```

```
public class Hotel {  
    int hid;  
    String hname;  
    String hcity;  
    int price;  
  
    public Hotel() {  
        super();  
        // TODO Auto-generated constructor stub  
    }  
    public Hotel(int hid, String hname, String hcity, int price) {  
        super();  
        this.hid = hid;  
        this.hname = hname;  
        this.hcity = hcity;  
        this.price = price;  
    }  
    public int getHid() {
```

```
        return hid;
    }
    public void setHid(int hid) {
        this.hid = hid;
    }
    public String getHname() {
        return hname;
    }
    public void setHname(String hname) {
        this.hname = hname;
    }
    public String getHcity() {
        return hcity;
    }
    public void setHcity(String hcity) {
        this.hcity = hcity;
    }
    public int getPrice() {
        return price;
    }
    public void setPrice(int price) {
        this.price = price;
    }
}
```

#### HotelRowMapper.java

```
package com.example.demo;
```

```
import java.sql.ResultSet;
import java.sql.SQLException;
```

```
import org.springframework.jdbc.core.RowMapper;
```

```
public class HotelRowMapper implements RowMapper<Hotel> {
```

```
    @Override
```

```
    public Hotel mapRow(ResultSet rs, int rowNum) throws SQLException {
        // TODO Auto-generated method stub
        Hotel h1 = new Hotel();
        h1.setHid(rs.getInt(1));
        h1.setHname(rs.getString(2));
        h1.setHcity(rs.getString(3));
        h1.setPrice(rs.getInt(4));
        return h1;
    }
}
```

```
}  
}
```

#### HotelRepository.java

```
package com.example.demo;
```

```
import java.util.*;  
import org.springframework.beans.factory.annotation.Autowired;  
import org.springframework.jdbc.core.JdbcTemplate;  
import org.springframework.stereotype.Repository;
```

```
@Repository
```

```
public class HotelRepository {
```

```
    @Autowired
```

```
    JdbcTemplate jdbcT;
```

```
    //add a method to get all hotels
```

```
    public List<Hotel> getAll()  
    {
```

```
        String sql = "SELECT * FROM HOTELS";
```

```
        return jdbcT.query(sql, new HotelRowMapper());
```

```
    }
```

```
    public List<Hotel> getById(String hid)
```

```
    {
```

```
        String sql = "SELECT * FROM HOTELS WHERE
```

```
hid="+Integer.parseInt(hid);
```

```
        return jdbcT.query(sql, new HotelRowMapper());
```

```
    }
```

```
}
```

#### HomeController.java

```
package com.example.demo;
```

```
import java.util.*;
```

```
import org.springframework.beans.factory.annotation.Autowired;
```

```
import org.springframework.web.bind.annotation.*;
```

```
@RestController
```

```
public class HomeController {
```

```
    @Autowired
```

```
    HotelRepository hrep;
```

```
    //define a getMapping to display all hotels
```

```
@GetMapping("/getall")
public List<Hotel> getAll()
{
    return hrep.getAll();
}
@GetMapping("/gethotel/{hid}")
public List<Hotel> getIdById(@PathVariable("hid") String hid)
{
    return hrep.getIdById(hid);
}
}
```

application.properties

```
spring.application.name = HotelsApplication
spring.datasource.url = jdbc:postgresql://localhost:5432/postgres
spring.datasource.username = postgres
spring.datasource.password = password
```

## Output:

