

Assignment No	20
Title	Using Hooks
Objective	Create an application using useState hook in Functional Component (Calculator and ToDoList)
Roll No	MCA2511

Calculator.js

```
import React, { useState } from "react";
// import "../App.css";

function Calculator() {
  const [val, setVal] = useState("");
  return (
    <div className="calculator">
      <h1>Calculator</h1>
      <div>
        <input type="text" value={val} disabled/>
      </div>
      <button className="button" value="" onClick={ (e) =>
setVal("") }> AC </button>
      <button className="button" value="" onClick={ (e) =>
setVal("") }> C </button>



      <button className="button" value="%" onClick={ (e) =>
setVal(val + e.target.value) }> % </button>
      <button className="button" value="/" onClick={ (e) =>
setVal(val + e.target.value) }> / </button>
      <div>
        <button className="button" value="1" onClick={ (e) =>
setVal(val + e.target.value) }> 1 </button>
        <button className="button" value="2" onClick={ (e) =>
setVal(val + e.target.value) }> 2 </button>
        <button className="button" value="3" onClick={ (e) =>
setVal(val + e.target.value) }> 3 </button>
```

```
        <button className="button" value="x" onClick={ (e) =>
setVal (val + e.target.value) }> x </button>
    </div>
    <div>
        <button className="button" value="4" onClick={ (e) =>
setVal (val + e.target.value) }> 4 </button>
        <button className="button" value="5" onClick={ (e) =>
setVal (val + e.target.value) }> 5 </button>
        <button className="button" value="6" onClick={ (e) =>
setVal (val + e.target.value) }> 6 </button>
        <button className="button" value="-" onClick={ (e) =>
setVal (val + e.target.value) }> - </button>
    </div>
    <div>
        <button className="button" value="7" onClick={ (e) =>
setVal (val + e.target.value) }> 7 </button>
        <button className="button" value="8" onClick={ (e) =>
setVal (val + e.target.value) }> 8 </button>
        <button className="button" value="9" onClick={ (e) =>
setVal (val + e.target.value) }> 9 </button>
        <button className="button" value="+" onClick={ (e) =>
setVal (val + e.target.value) }> + </button>
    </div>
    <button className="button" value="0" onClick={ (e) =>
setVal (val + e.target.value) }> 0 </button>
    <button className="button" value="." onClick={ (e) =>
setVal (val + e.target.value) }> . </button>
    <button className="buttonsum" value="=" onClick={ (e) =>
setVal (String(eval(val))) }> = </button>

    </div>
);
}

export default Calculator;
```

Output:

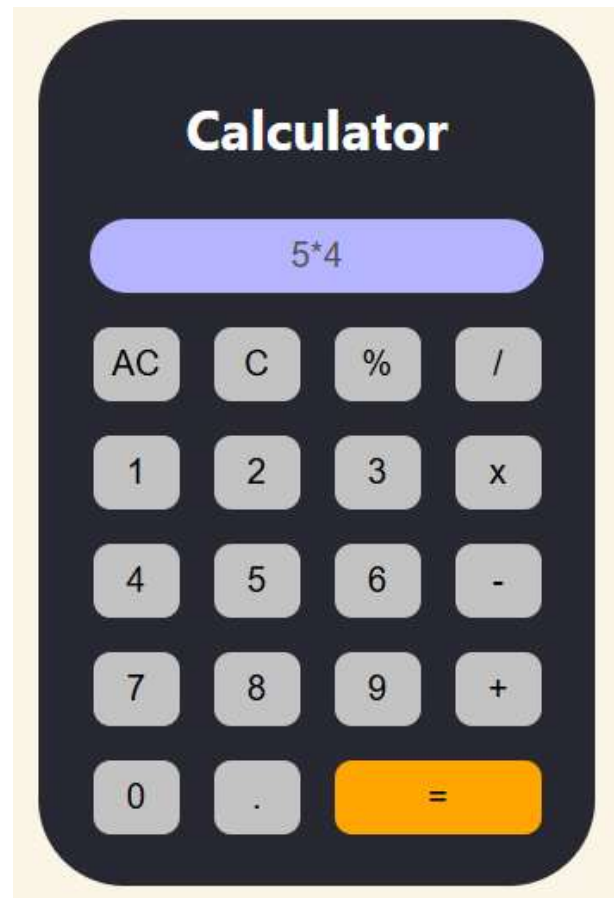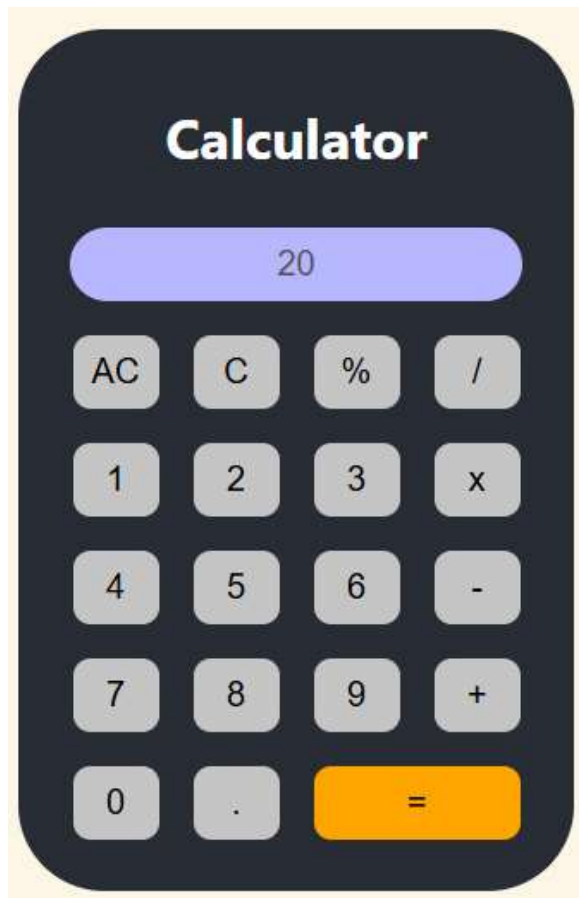



[ToDoList.js](#)

```
import React, {useState} from "react";
function ToDoList() {
  const [tasks, setTasks] = useState([]);
  const [input, setInput] = useState('');
  const addTask = () => {
    if(input.trim()) {
      setTasks([...tasks, {text:input,
completed:false}],setInput(''));
    }
  };
  const toggleTask = (index) => {
    const newTasks = tasks.map((tasks,i) =>
      i === index ? {...tasks,completed:tasks.completed} :
tasks);
    setTasks(newTasks);
  };
  const deleteTask = (index) => {
    const newTasks = tasks.filter((_,i) => i !== index);
    setTasks(newTasks);
  };

  return(
    <div className="app">
      <h1>To-Do-List</h1>
      <div className="input-container">
        <input type="text" value={input} onChange={ (e) =>
setInput(e.target.value)}></input>
        <button className="button"
onClick={ addTask}>+</button>
      </div>
      <ul className="task-list">
        {tasks.map((task,index) => (
          <li key={index} className={task.completed ? 'task
completed' : 'task'}>
            <span onClick={ () =>
toggleTask(index)}>{task.text}</span>
            <button onClick={ () =>
deleteTask(index)}>X</button>
          </li>
        )
      )
    }
  )
}
```

```
    )) }  
  </ul>  
</div>  
)  
}  
  
export default ToDoList;
```

Output:

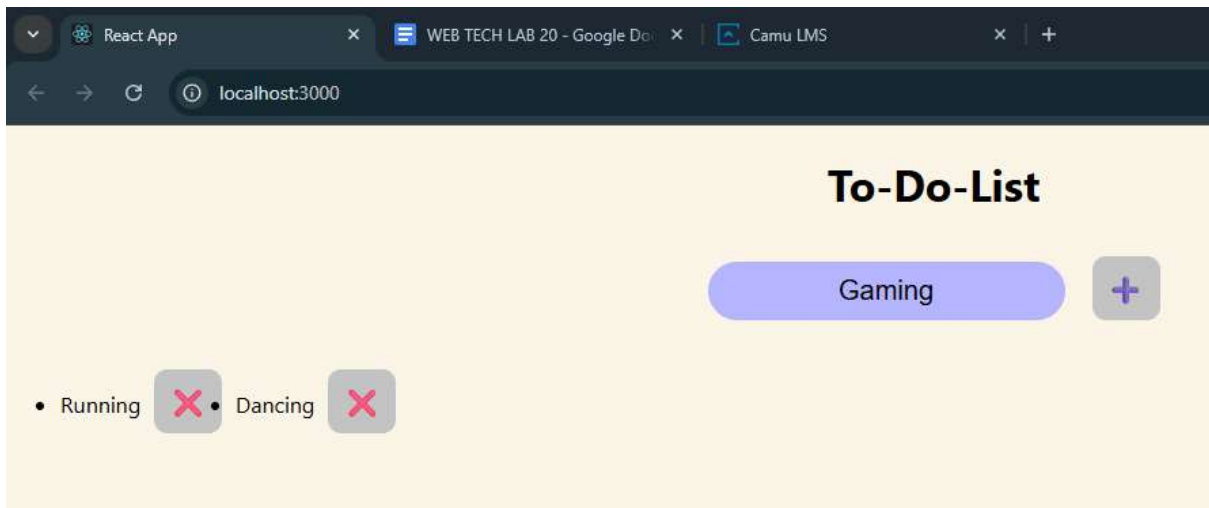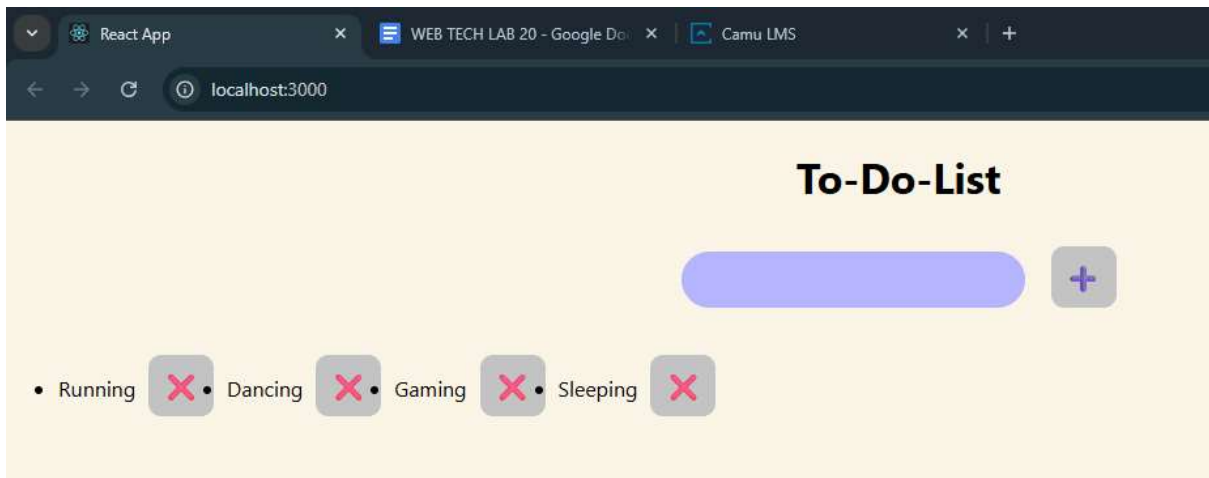

[index.js](#)

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import './index.css';
import App from './App';

import './App.css';
import Calculator from './Components/Calculator';
import ToDoList from './Components/ToDoList';

import reportWebVitals from './reportWebVitals';
const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <Calculator></Calculator>
    <ToDoList></ToDoList>
  </React.StrictMode>
);

// If you want to start measuring performance in your app, pass a
function
// to log results (for example: reportWebVitals(console.log))
// or send to an analytics endpoint. Learn more:
https://bit.ly/CRA-vitals
reportWebVitals();
```