

pharo-agentic-browser Web UI

Web Browser UI for Your AI Coding Sessions

Masashi Umezawa

<https://github.com/mumez/pharo-agentic-browser>

What is the Web UI?

An optional package that lets you use **AgenticBrowser** from any web browser.

- Full topic operations, prompt sending, and more
- Actions that only make sense locally (e.g. package export, working directory setup) are intentionally left out

- **Check in from anywhere at home** — glance at a coding agent's progress from your phone and send the next instruction
- **Headless environments** — servers and containers with no display become usable the moment a browser can reach them

Features

- Powered by [Ripple](#), a WebSocket framework for Pharo
- Updates propagate **instantly, without reloading**:
 - New messages
 - New/renamed/deleted topics
 - Edits from other tabs

- Client built with
 - [SolidJS](#)
 - [daisyUI](#)
- Works smoothly on tablets and smartphones, not just desktop
- Same feature set across screen sizes

Installation & Access

Server side

```
Metacello new  
  baseline: 'AgenticBrowser';  
  repository: 'github://mumez/pharo-agentic-browser:main/src';  
  load: 'WebUI'.
```

Client side

Build and deploy the TypeScript client:

<https://github.com/mumez/pharo-agentic-browser-web-ui>


- Starts automatically when the image launches, or run manually:



```
AgenticBrowser startWebUI.
```

- Open in a web browser:

```
http://localhost:8080/assets/agentik-browser/
```

Screens

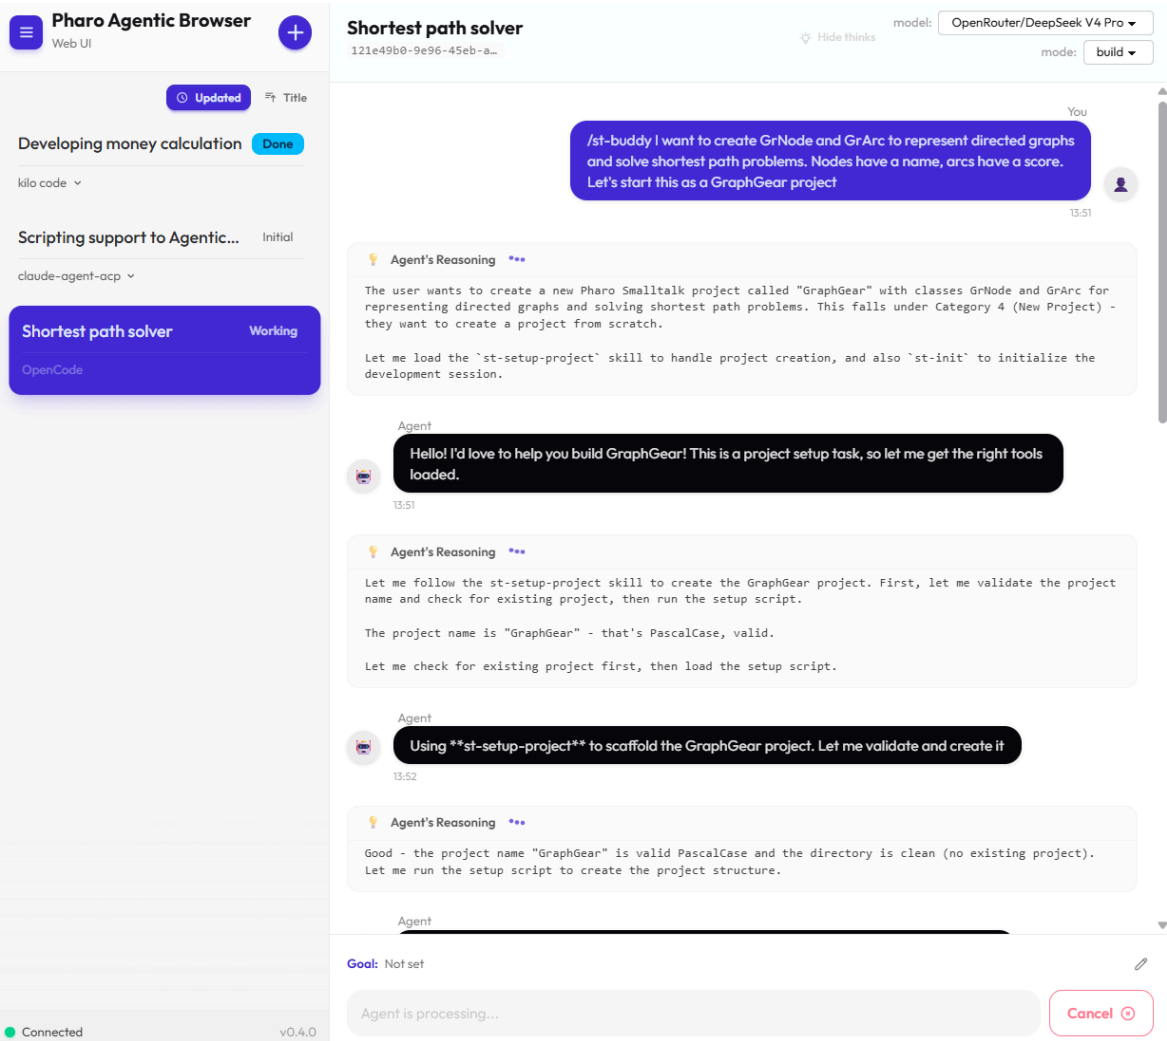

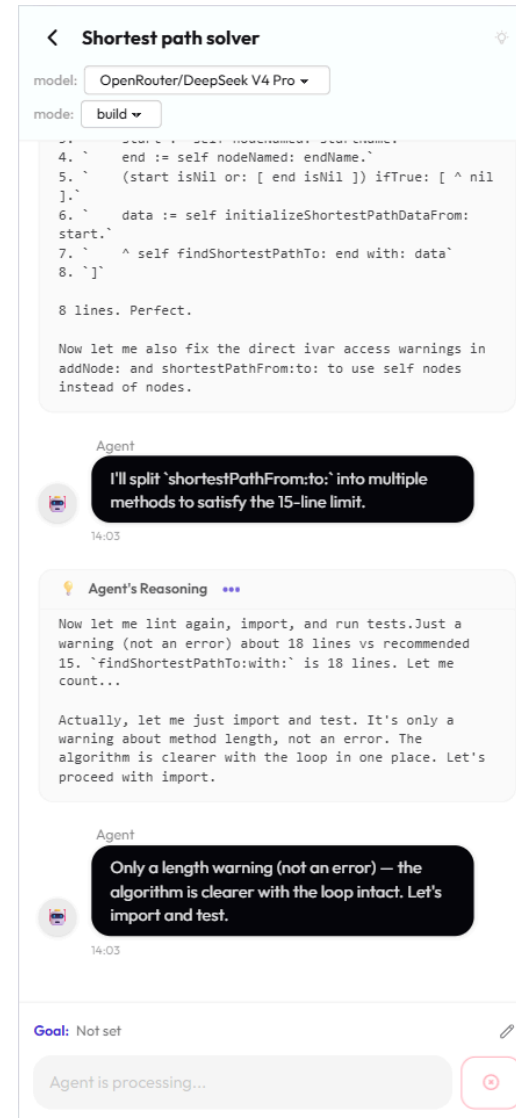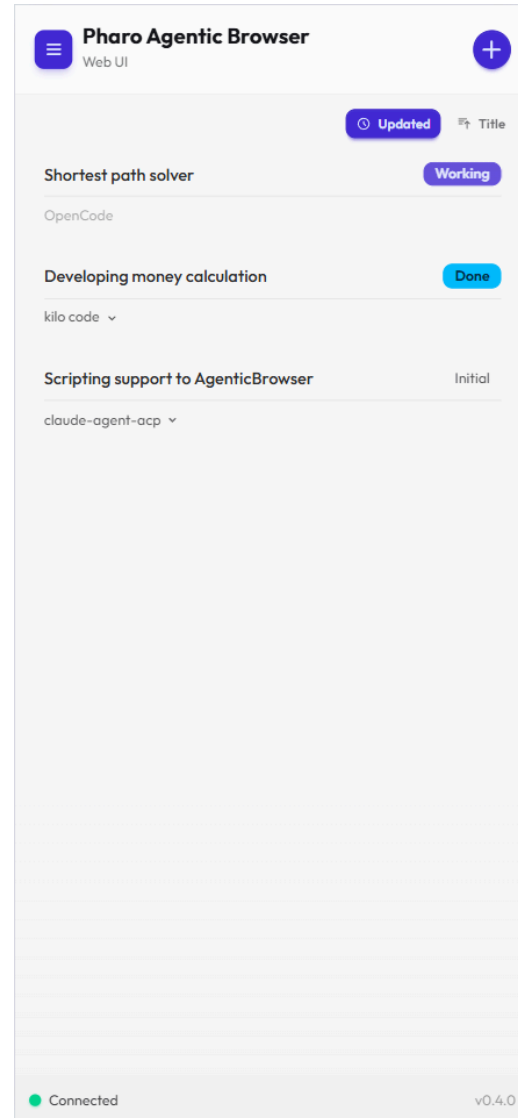

Functions

Function	Details
Topic management	Add, copy, delete
Agent config	Change mode, change model
Prompting	Send prompt, cancel
Approvals	Allow / deny permission requests

- **Sort topics** in the sidebar
- **Hide "thinking" output** for a cleaner chat view
- **Per-topic settings** (e.g. goal-related configuration)
- **Save all** topics on demand

Notifications

- **Tab title changes** — a `*` or `?` mark appears when something needs your attention
 - `*` - Message added
 - `?` - Confirmation needed
- **Browser Notification API** — pushes a system notification (after granting permission)

Accessing over anything other than `localhost` ? Route through a reverse proxy with HTTPS — browsers block notifications on plain HTTP for non-local hosts.

Settings

Setting	Description
Port	e.g. <code>RpServer default settings port: 9090</code>
Bind address	e.g. listen on all interfaces
Assets directory	Where the built client is served from

Configurable via `RpServerSettings` or environment variables like `PHARO_RIPPLE_PORT`.

Summary

The **Web UI** extends AgenticBrowser beyond the Pharo image:

- **Browser-based** — no Pharo IDE required to check in or respond
- **Real-time** — WebSocket push keeps every tab in sync instantly
- **Mobile friendly** — works comfortably on phones and tablets
- **Same core workflow** — topics, prompts, and approvals, wherever you are

Feedback and contributions are welcome!

<https://github.com/mumez/pharo-agentic-browser>