

pharo-agentic-browser Web UI

Web Browser UI for Your AI Coding Sessions

Masashi Umezawa

<https://github.com/mumez/pharo-agentic-browser>

What is the Web UI?

An optional package that lets you use **AgenticBrowser** from any web browser.

- Full topic operations, prompt sending, and more
- Actions that only make sense locally (e.g. package export, working directory setup) are intentionally left out

- **Check in from anywhere at home** — glance at a coding agent's progress from your phone and send the next instruction
- **Headless environments** — servers and containers with no display become usable the moment a browser can reach them

Features

- Powered by [Ripple](#), a WebSocket framework for Pharo
- Updates propagate **instantly, without reloading**:
 - New messages
 - New/renamed/deleted topics
 - Edits from other tabs

- Client built with
 - [SolidJS](#)
 - [daisyUI](#)
- Works smoothly on tablets and smartphones, not just desktop
- Same feature set across screen sizes

Installation & Access

Server side

```
Metacello new  
  baseline: 'AgenticBrowser';  
  repository: 'github://mumez/pharo-agentic-browser:main/src';  
  load: 'WebUI'.
```

Client side

Build and deploy the TypeScript client:

<https://github.com/mumez/pharo-agentic-browser-web-ui>

- Starts automatically when the image launches, or run manually:

```
AgenticBrowser startWebUI.
```

- Open in a web browser:

```
http://localhost:8080/assets/agentic-browser/
```

Screens

The screenshot displays the Pharo Agentic Browser interface, which is divided into a sidebar and a main chat area.



Sidebar (Left):

- Pharo Agentic Browser** (Web UI)
- Shortest path solver** (Working) - OpenCode
- Developing money calculation** (Done)
- Scripting support to Agentic...** (Initial)
- Shortest path solver** (Working) - OpenCode

Main Chat Area:

- Title:** Shortest path solver
- Model:** OpenRouter/DeepSeek V4 Pro
- Mode:** build
- User Message:** /st-buddy I want to create GrNode and GrArc to represent directed graphs and solve shortest path problems. Nodes have a name, arcs have a score. Let's start this as a GraphGear project
- Agent's Reasoning:** The user wants to create a new Pharo Smalltalk project called "GraphGear" with classes GrNode and GrArc for representing directed graphs and solving shortest path problems. This falls under Category 4 (New Project) - they want to create a project from scratch. Let me load the `st-setup-project` skill to handle project creation, and also `st-init` to initialize the development session.
- Agent Message:** Hello! I'd love to help you build GraphGear! This is a project setup task, so let me get the right tools loaded.
- Agent's Reasoning:** Let me follow the st-setup-project skill to create the GraphGear project. First, let me validate the project name and check for existing project, then run the setup script. The project name is "GraphGear" - that's PascalCase, valid. Let me check for existing project first, then load the setup script.
- Agent Message:** Using **st-setup-project** to scaffold the GraphGear project. Let me validate and create it
- Agent's Reasoning:** Good - the project name "GraphGear" is valid PascalCase and the directory is clean (no existing project). Let me run the setup script to create the project structure.
- Agent Message:** (Empty)
- Goal:** Not set
- Agent is processing...** (Status bar)
- Cancel** (Button)

Footer: Connected v0.4.0

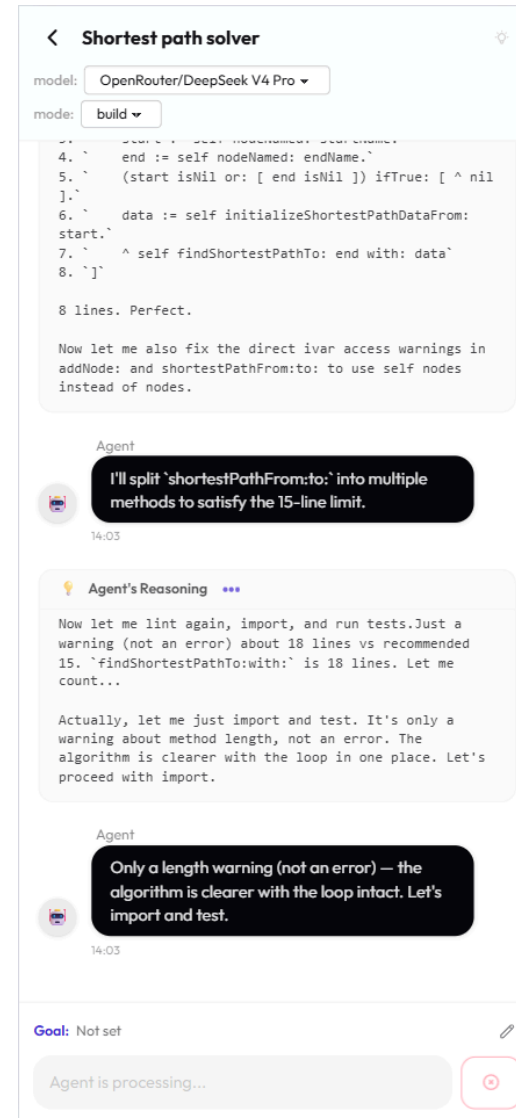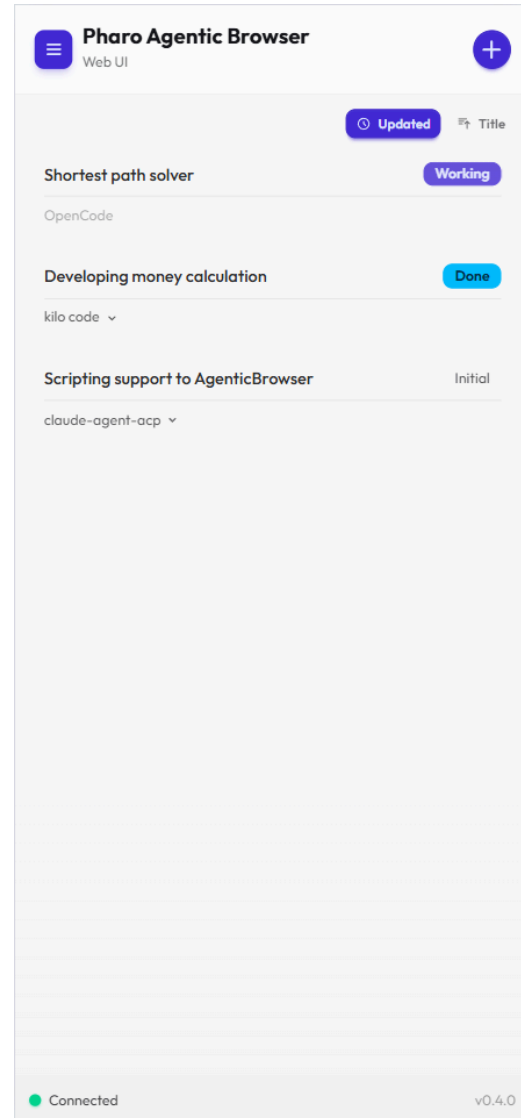

Functions

Function	Details
Topic management	Add, copy, delete
Agent config	Change mode, change model
Prompting	Send prompt, cancel
Approvals	Allow / deny permission requests

- **Sort topics** in the sidebar
- **Hide "thinking" output** for a cleaner chat view
- **Per-topic settings** (e.g. goal-related configuration)
- **Save all** topics on demand

Notifications

- **Tab title changes** — a `*` or `?` mark appears when something needs your attention
 - `*` - Message added
 - `?` - Confirmation needed
- **Browser Notification API** — pushes a system notification (after granting permission)

Accessing over anything other than `localhost` ? Route through a reverse proxy with HTTPS — browsers block notifications on plain HTTP for non-local hosts.

Settings

Setting	Description
Port	e.g. <code>RpServer default settings port: 9090</code>
Bind address	e.g. listen on all interfaces
Assets directory	Where the built client is served from

Configurable via `RpServerSettings` or environment variables like `PHARO_RIPPLE_PORT`.

Summary

The **Web UI** extends AgenticBrowser beyond the Pharo image:

- **Browser-based** — no Pharo IDE required to check in or respond
- **Real-time** — WebSocket push keeps every tab in sync instantly
- **Mobile friendly** — works comfortably on phones and tablets
- **Same core workflow** — topics, prompts, and approvals, wherever you are

Feedback and contributions are welcome!

<https://github.com/mumez/pharo-agentic-browser>