



Muneeb Ahmed

CSI-B1-358

**Topic : Advance Recon and Attack surface
mapping**

Executive Summary:

This Week 1 report documents a structured passive reconnaissance and attack surface mapping exercise conducted against a target domain (hackthissite.org) across four phases.

Phase 1 — Passive Recon & Subdomain Enumeration used three complementary CLI tools: Subfinder (fast, reliable), Assetfinder (lightweight), and Amass (deep infrastructure mapping), supplemented by web-based tools DNSDumpster and CRT.sh. Results from all tools were merged and deduplicated into a master subdomain list, with cross-tool frequency analysis used to validate findings. The key takeaway is that no single tool is sufficient — overlapping tool usage maximizes coverage.

Phase 2 — Infrastructure & Technology Profiling identified the target's tech stack using WhatWeb and Wappalyzer CLI for fingerprinting web servers, CMS, frameworks, CDNs, and programming languages. WHOIS and NSLookup were used to extract domain ownership, DNS records, name servers, and IP ranges — building a picture of the broader network infrastructure.

Phase 3 — GitHub/Google Dorking & Credential Leak Detection demonstrated how advanced search operators can expose accidentally published sensitive files, including API keys, passwords, AWS secrets, `.env` files, and configuration files in public repositories. Both Google dorks and GitHub-specific filename/extension filters were applied.

Phase 4 — Live Asset Filtering used Httpprobe and the more feature-rich Httpx to filter the master subdomain list down to only actively responding hosts, enriching each result with HTTP status codes, page titles, and server information.

Phase 01 : Passive Recon and Subdomain Enumeration


Tools/Websites used : Subfinder, Assetfinder , Amass, DNS dumpster, CRT.sh

1- Subfinder

subdomain enumeration command used in reconnaissance (the first phase of ethical hacking/penetration testing). discovers subdomains of a target website. Searches multiple public sources (DNS records, APIs, certificates, etc.) to find all subdomains. Saves the discovered subdomains into subhack.txt.

Why is this useful in Cybersecurity?

- Subdomains can reveal hidden or forgotten services (e.g., old admin panels, dev environments)
- These can be vulnerable entry points for attackers
- Security teams use this to know their own attack surface

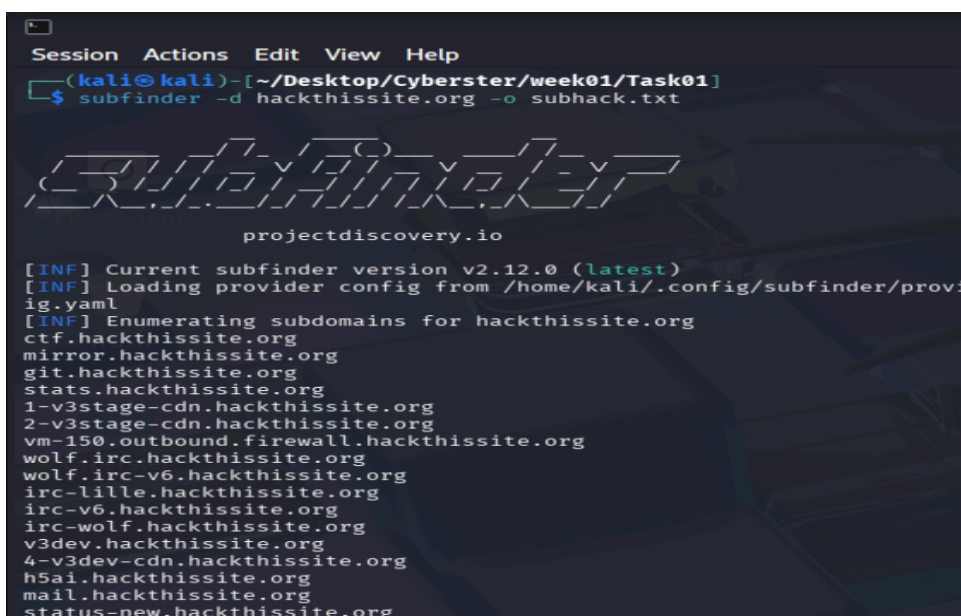

```
Session Actions Edit View Help
(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ subfinder -d hackthissite.org -o subhack.txt

projectdiscovery.io

[INF] Current subfinder version v2.12.0 (latest)
[INF] Loading provider config from /home/kali/.config/subfinder/providers.yaml
[INF] Enumerating subdomains for hackthissite.org
ctf.hackthissite.org
mirror.hackthissite.org
git.hackthissite.org
stats.hackthissite.org
1-v3stage-cdn.hackthissite.org
2-v3stage-cdn.hackthissite.org
vm-150.outbound.firewall.hackthissite.org
wolf.irc.hackthissite.org
wolf.irc-v6.hackthissite.org
irc-lille.hackthissite.org
irc-v6.hackthissite.org
irc-wolf.hackthissite.org
v3dev.hackthissite.org
4-v3dev-cdn.hackthissite.org
h5ai.hackthissite.org
mail.hackthissite.org
status-new.hackthissite.org
```

2- Assetfinder

This is another subdomain enumeration command — similar goal as subfinder but a different tool with a twist. Tool that finds subdomains and

related domains of a target. It searches public sources like DNS, certificate transparency logs, and APIs.

Why use both tools?

Different tools query different data sources, so running both gives you a more complete list of subdomains — maximizing your reconnaissance coverage.

This is common practice in professional penetration testing.

```
(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ assetfinder --subs-only hackthissite.org | tee hackasset.txt
api.hackthissite.org
ctf.hackthissite.org
email.hackthissite.org
forums.hackthissite.org
git.hackthissite.org
h5ai.hackthissite.org
hp.hackthissite.org
irc.hackthissite.org
irc-hub.hackthissite.org
irc-www.hackthissite.org
lille.irc.hackthissite.org
wolf.irc.hackthissite.org
www.irc.hackthissite.org
legal.hackthissite.org
mirror.hackthissite.org
psrp.hackthissite.org
qdb.hackthissite.org
stats.hackthissite.org
status.hackthissite.org
www.hackthissite.org
hackthissite.org
irc.hackthissite.org
irc-v6.hackthissite.org
lille.irc.hackthissite.org
lille.irc-v6.hackthissite.org
hackthissite.org
hackthissite.org
irc.hackthissite.org
irc-v6.hackthissite.org
wolf.irc.hackthissite.org
wolf.irc-v6.hackthissite.org
hackthissite.org
```

3- Amass

Amass is a free, open-source tool used to discover everything that belongs to a target organization on the internet — mainly subdomains, IP addresses, and network infrastructure.

Created by OWASP (Open Web Application Security Project) written in Go language.

```
(kali㉿kali)-[~/Desktop/Cyberster/week01/Task01]
$ amass enum -passive -d hackthissite.org -o amass.txt

hackthissite.org (FQDN) → mx_record → aspmx5.googlemail.com (FQDN)
hackthissite.org (FQDN) → mx_record → aspmx3.googlemail.com (FQDN)
hackthissite.org (FQDN) → mx_record → aspmx4.googlemail.com (FQDN)
hackthissite.org (FQDN) → mx_record → aspmx.l.google.com (FQDN)
hackthissite.org (FQDN) → mx_record → alt1.aspmx.l.google.com (FQDN)
hackthissite.org (FQDN) → mx_record → alt2.aspmx.l.google.com (FQDN)
hackthissite.org (FQDN) → mx_record → aspmx2.googlemail.com (FQDN)
hackthissite.org (FQDN) → ns_record → g.ns.buddyns.com (FQDN)
hackthissite.org (FQDN) → ns_record → h.ns.buddyns.com (FQDN)
hackthissite.org (FQDN) → ns_record → c.ns.buddyns.com (FQDN)
hackthissite.org (FQDN) → ns_record → j.ns.buddyns.com (FQDN)
hackthissite.org (FQDN) → ns_record → f.ns.buddyns.com (FQDN)
aspmx4.googlemail.com (FQDN) → a_record → 172.217.221.27 (IPAddress)
aspmx4.googlemail.com (FQDN) → aaaa_record → 2404:6800:400b:c017::1b (IPAddress)
forums.hackthissite.org (FQDN) → cname_record → hackthissite.org (FQDN)
qdb.hackthissite.org (FQDN) → cname_record → irc-www.hackthissite.org (FQDN)
irc-www.hackthissite.org (FQDN) → cname_record → www.irc.hackthissite.org (FQDN)
h5ai.hackthissite.org (FQDN) → cname_record → hackthissite.github.io (FQDN)
ctf.hackthissite.org (FQDN) → cname_record → hackthissite.github.io (FQDN)
psrp.hackthissite.org (FQDN) → cname_record → hackmail.org (FQDN)
email.hackthissite.org (FQDN) → cname_record → email.hackmail.org (FQDN)
forum.hackthissite.org (FQDN) → cname_record → hackthissite.org (FQDN)
hackthissite.org (FQDN) → a_record → 137.74.187.101 (IPAddress)
hackthissite.org (FQDN) → a_record → 137.74.187.103 (IPAddress)
hackthissite.org (FQDN) → a_record → 137.74.187.100 (IPAddress)
hackthissite.org (FQDN) → a_record → 137.74.187.104 (IPAddress)
hackthissite.org (FQDN) → a_record → 137.74.187.102 (IPAddress)
```

Subfinder vs Assetfinder vs Amass

Quick One-Line Summary

Tool	Best Description
Subfinder	Fast & reliable subdomain finder
Assetfinder	Quick & lightweight subdomain finder
Amass	Deep & powerful attack surface mapped

Merged all the findings using the above three tools into a single .txt file.

Can be used to count unique subdomains etc.

```
(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ cat subhack.txt hackasset.txt amass.txt | sort -u > master_subdomains.txt

(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ cat master_subdomains.txt
0-v3dev-cdn.hackthissite.org
0-v3stage-cdn.hackthissite.org
1-v3dev-cdn.hackthissite.org
1-v3stage-cdn.hackthissite.org
2-v3dev-cdn.hackthissite.org
2-v3stage-cdn.hackthissite.org
3-v3dev-cdn.hackthissite.org
3-v3stage-cdn.hackthissite.org
4-v3dev-cdn.hackthissite.org
4-v3stage-cdn.hackthissite.org
0.0.1.0.7.8.1.0.4.7.0.0.7.3.1.0.8.d.c.c.8.0.0.0.0.d.1.4.1.0.0.2.ip6.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
0 (ASN) → announces → 2406:d500:7::/48 (Netblock)
0 (ASN) → announces → 5.220.0.0/14 (Netblock)
0 (ASN) → announces → 89.106.200.0/21 (Netblock)
0 (ASN) → managed_by → Not routed (RIROrganization)
0-v3dev-cdn.hackthissite.org (FQDN) → cname_record → v3dev.hackthissite.org (FQDN)
0-v3stage-cdn.hackthissite.org (FQDN) → cname_record → v3stage-cdn.hackthissite.org (FQDN)
100.187.74.137.in-addr.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
1.0.1.0.7.8.1.0.4.7.0.0.7.3.1.0.8.d.c.c.8.0.0.0.0.d.1.4.1.0.0.2.ip6.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
101.187.74.137.in-addr.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
102.187.74.137.in-addr.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
103.187.74.137.in-addr.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
103.25.56.0/22 (Netblock) → contains → 103.25.56.55 (IPAddress)
104.187.74.137.in-addr.arpa (FQDN) → ptr_record → hackthissite.org (FQDN)
115.187.74.137.in-addr.arpa (FQDN) → ptr_record → api.hackthissite.org (FQDN)
116.187.74.137.in-addr.arpa (FQDN) → ptr_record → api.hackthissite.org (FQDN)
```

The below command evaluates subdomains from the 3 tools using - if multiple independent tools agree the same subdomain , the result is much more trustworthy

Helps in finding single-source.

```
(kali㉿kali)-[~/Desktop/Cyberster/week01/Task01]
$ sort subhack.txt hackasset.txt amass.txt | uniq -c | sort -nr | head
  9 irc.hackthissite.org
  8 wolf.irc.hackthissite.org
  6 new-irc.hackthissite.org
  6 lille.irc.hackthissite.org
  5 irc-wolf.hackthissite.org
  5 hackthissite.org
  3 www.hackthissite.org
  3 mail.hackthissite.org
  3 lille.irc-v6.hackthissite.org
  3 irc-v6.hackthissite.org
```

4- DNS Dumpster

DNSDumpster is a free DNS research tool that maps a domain's entire DNS infrastructure — subdomains, DNS records, MX records, and more.

A Records (subdomains from dataset)					
Host	IP	ASN	ASN Name	Open Services (from DB)	RevIP
api.hackthissite.org	137.74.187.115 api.hackthissite.org	ASN:16276 137.74.0.0/16	OVH, FR France		1
ctf.hackthissite.org	185.199.108.153	ASN:54113 185.199.108.0/24	FASTLY - Fastly, Inc. United States	http: GitHub.com title: Site not found tech: Varnish GitHub Pages https: GitHub.com title: Site not found on: .github.io tech: GitHub Pages Varnish	500491
email.hackthissite.org	172.239.57.117 k8s-avc-lander-namecheap- expired-01.us- east-1.elb.amazonaws.com	ASN:63949 172.239.32.0/19	AKAMAI-LINODE-AP Akamai Connected Cloud, SG United States		3831663
forums.hackthissite.org	137.74.187.100 hackthissite.org	ASN:16276 137.74.0.0/16	OVH, FR France	https: HackThisSite title: Hack This Site on: hackthisjogneh42n5o7gbzrewxee3vyu6ex37ukyvdw6 jme6npakiyd.onion tech: jQuery:1.8.1	4
git.hackthissite.org	137.74.187.145	ASN:16276 137.74.0.0/16	OVH, FR France		1
h5ai.hackthissite.org	185.199.111.153 cdn-185-199-111- 153.github.com	ASN:54113 185.199.111.0/24	FASTLY - Fastly, Inc. United States	http: GitHub.com title: Site not found tech: GitHub Pages Varnish https: GitHub.com title: Site not found on: .github.io tech: Varnish	458373

4- CRT.sh

CRT.sh is a Certificate Transparency Log search engine — it finds subdomains by searching SSL/TLS certificates issued for a domain.

How Does It Work?

Every website that uses HTTPS needs an SSL Certificate -> Certificate Authorities (like Let's Encrypt, DigiCert) keep PUBLIC LOGS of every certificate they issue -> CRT.sh searches these logs -> Reveals subdomains hidden in certificates

crt.sh

Identity Search

Group by Issuer

Criteria Type: Identity Match: ILIKE Search: 'hackthissite.org'


Certificates	crt.sh ID	Logged At	Not Before	Not After	Common Name	Matching Identities	Issuer Name
	24709094335	2026-03-01	2026-03-01	2026-05-30	lille.irc.hackthissite.org	irc.hackthissite.org irc-v6.hackthissite.org lille.irc.hackthissite.org lille.irc-v6.hackthissite.org	C=US, O=Let's Encrypt, CN=R12
	24709092495	2026-03-01	2026-03-01	2026-05-30	lille.irc.hackthissite.org	irc.hackthissite.org irc-v6.hackthissite.org lille.irc.hackthissite.org lille.irc-v6.hackthissite.org	C=US, O=Let's Encrypt, CN=R12
	24668715872	2026-02-27	2026-02-27	2026-05-28	ctf.hackthissite.org	ctf.hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24668693220	2026-02-27	2026-02-27	2026-05-28	ctf.hackthissite.org	ctf.hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24668110978	2026-02-27	2026-02-27	2026-05-28	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24668103264	2026-02-27	2026-02-27	2026-05-28	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24648823315	2026-02-26	2026-02-26	2026-05-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=E7
	24648822224	2026-02-26	2026-02-26	2026-05-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=E7
	24531059147	2026-02-20	2026-02-20	2026-05-21	h5ai.hackthissite.org	h5ai.hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24531035607	2026-02-20	2026-02-20	2026-05-21	h5ai.hackthissite.org	h5ai.hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24213665658	2026-02-06	2026-02-06	2026-05-07	wolf.irc.hackthissite.org	irc.hackthissite.org irc-v6.hackthissite.org wolf.irc.hackthissite.org wolf.irc-v6.hackthissite.org	C=US, O=Let's Encrypt, CN=R12
	24213650495	2026-02-06	2026-02-06	2026-05-07	wolf.irc.hackthissite.org	irc.hackthissite.org irc-v6.hackthissite.org wolf.irc.hackthissite.org wolf.irc-v6.hackthissite.org	C=US, O=Let's Encrypt, CN=R12
	24005083098	2026-01-27	2026-01-27	2026-04-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24005079444	2026-01-27	2026-01-27	2026-04-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=R13
	24005095901	2026-01-27	2026-01-27	2026-04-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=E7
	24005066738	2026-01-27	2026-01-27	2026-04-27	hackthissite.org	*hackthissite.org hackthissite.org	C=US, O=Let's Encrypt, CN=E7

Conclusion :

explored the complete Subdomain Enumeration & Reconnaissance phase of penetration testing using multiple tools and techniques.

Different tools discover different subdomains, so relying on only one may miss important results.

Using several tools together improves overall coverage and increases the chances of finding more subdomains.

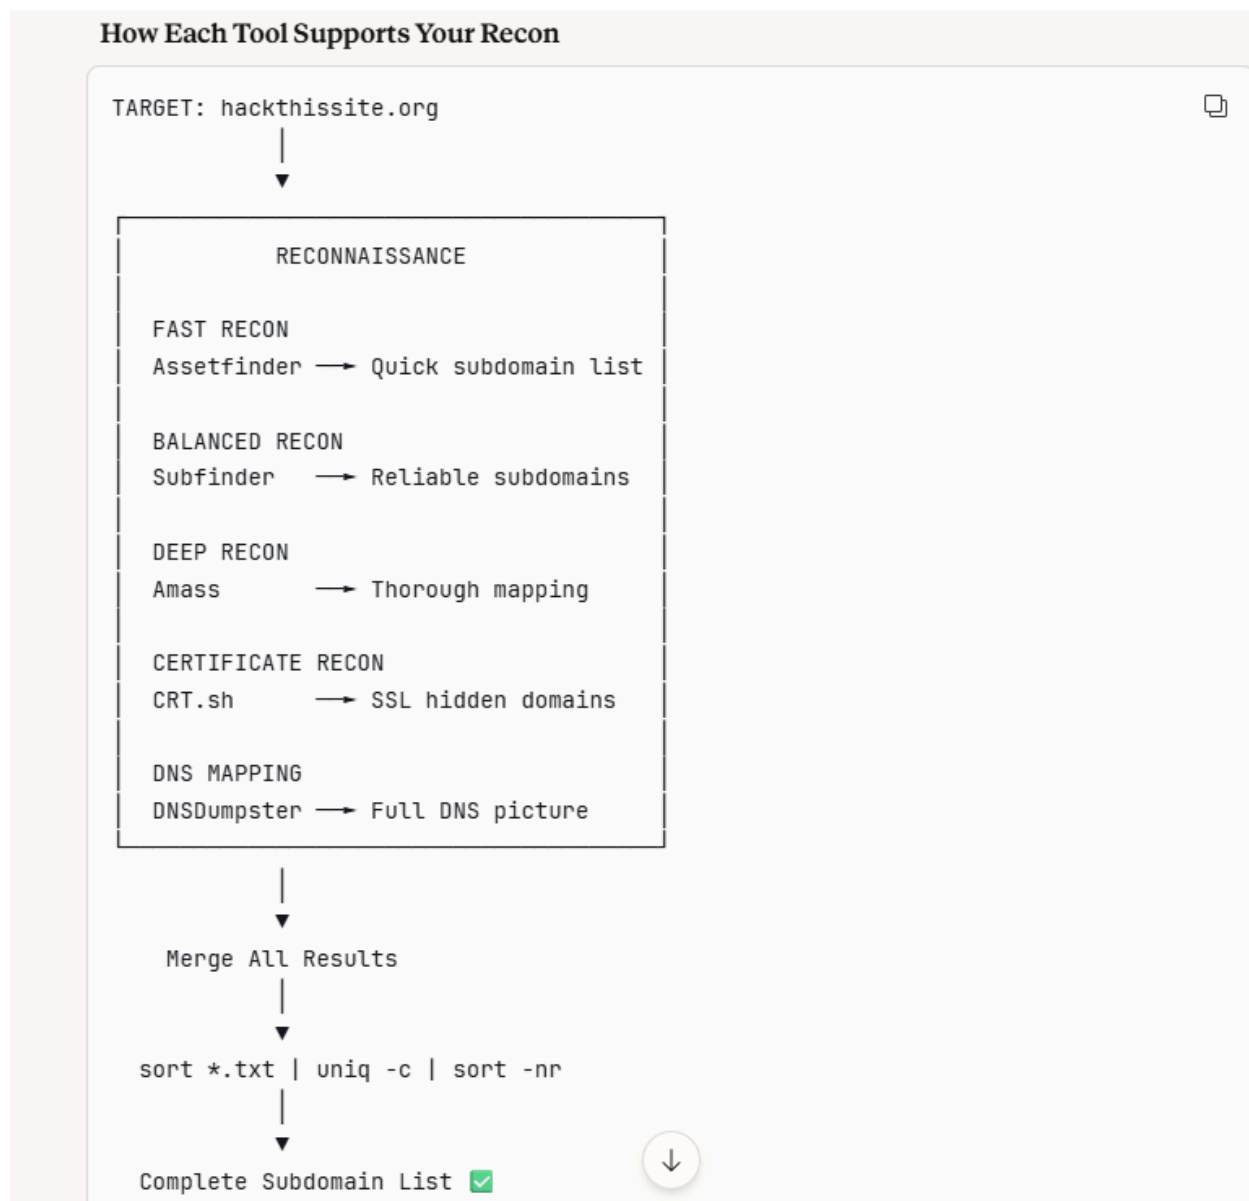

Phase 02 : Infrastructure and Tech profiling

What is Tech Profiling?

Tech Profiling means identifying what technologies, software, and infrastructure a target website is running — before attempting any vulnerability assessment.

Tools/Websites : WhatWeb, Wappalyzer CLI, WHOIS, NSlookup

1 - WhatWeb

WhatWeb is a web fingerprinting tool that identifies technologies used by a website by analyzing HTTP headers, HTML content, scripts, and cookies.

What WhatWeb Can Identify

Category	Examples
Web Server	Apache, Nginx, IIS
Content Management Systems (CMS)	WordPress, Drupal, Joomla
Frameworks	Laravel, Django, React
Analytics Tools	Google Analytics, Hotjar
Content Delivery Networks (CDN)	Cloudflare, Akamai, Fastly
Programming Languages	PHP, Python, Ruby
JavaScript Libraries	jQuery, Bootstrap

2 - Wappalyzer CLI

Wappalyzer is a **technology profiler** that identifies what a website is built with by analyzing multiple indicators simultaneously.

3 - WHOIS

WHOIS lookup helps security professionals gather publicly available information about a domain's ownership and infrastructure. This can assist in:

- Understanding the organization behind the target
- Identifying DNS infrastructure
- Discovering related IP ranges or networks
- Finding security or abuse reporting contacts

Information to Look For

Information Type	What It Reveals
Registrar	The company through which the domain is registered (e.g., GoDaddy, Namecheap).
Organization Name	The individual or organization that owns the domain (sometimes hidden due to privacy protection).
Name Servers	DNS servers responsible for resolving the domain. These can sometimes reveal related infrastructure.

**NetRange / CIDR
Blocks**

The IP address range allocated to the organization, which may help identify additional assets belonging to the same network.

Abuse Contacts

Email addresses or contact information used to report security incidents or abuse related to the domain.

```
(kali㉿kali)-[~/Desktop/Cyberster/week01/Task02]
$ whois hackthissite.org
Domain Name: hackthissite.org
Registry Domain ID: REDACTED
Registrar WHOIS Server: http://whois.porkbun.com
Registrar URL: https://porkbun.com
Updated Date: 2025-07-15T23:08:30Z
Creation Date: 2003-08-10T15:01:25Z
Registry Expiry Date: 2026-08-10T15:01:25Z
Registrar: Porkbun LLC
Registrar IANA ID: 1861
Registrar Abuse Contact Email: abuse@porkbun.com
Registrar Abuse Contact Phone: +1.8557675286
Domain Status: clientDeleteProhibited https://icann.org/epp#clientDeleteProhibited
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited
Name Server: c.ns.buddyns.com
Name Server: f.ns.buddyns.com
Name Server: g.ns.buddyns.com
Name Server: h.ns.buddyns.com
Name Server: j.ns.buddyns.com
DNSSEC: unsigned
URL of the ICANN Whois Inaccuracy Complaint Form: https://icann.org/wicf/
>>> Last update of WHOIS database: 2026-03-05T21:16:09Z <<<

For more information on Whois status codes, please visit https://icann.org/epp
```

3- NSLOOKUP

NSLookup (Name Server Lookup) is a command-line tool used to query the Domain Name System (DNS) to obtain information about domain names and IP addresses.

What NSLookup Does

NSLookup helps you find DNS-related information about a domain.

Function	Explanation
Resolve Domain to IP	Converts a domain name (example.com) into its IP address.
DNS Record Lookup	Retrieves DNS records such as A, MX, NS, or TXT records.
Troubleshoot DNS Issues	Helps identify DNS misconfigurations or resolution problems.
Infrastructure Insight	Shows which DNS servers are responsible for the domain.

```
(kali@kali)-[~/Desktop/Cyberster/week01/Task02]
$ nslookup hackthissite.org
Server:      192.168.0.1
Address:     192.168.0.1#53

Non-authoritative answer:
Name:   hackthissite.org
Address: 137.74.187.102
Name:   hackthissite.org
Address: 137.74.187.103
Name:   hackthissite.org
Address: 137.74.187.104
Name:   hackthissite.org
Address: 137.74.187.101
Name:   hackthissite.org
Address: 137.74.187.100
```

Conclusion:

We explored the Technology Profiling phase of reconnaissance by identifying the technologies used by a target website through various tools and methods. This process helps reveal important details such as the web server, frameworks, programming languages, CMS, analytics tools, and CDN services running behind the application.

Different technology-detection tools may identify different components of a website's technology stack, so relying on a single tool may lead to incomplete results. By combining multiple tools and approaches, security analysts can obtain a more accurate and comprehensive view of the target's technology environment, which helps in identifying potential vulnerabilities and planning further security testing

Phase 03 : Github/Google Dorking and Credential leaks

Dorking: is a search technique using advanced operators to find specific, often sensitive or hidden information on the internet. It is used by security professionals to identify vulnerabilities, such as exposed login portals or unsecured files.

Basic Organization-Based Search on Github

Search within a specific organization's repositories.

eg : "hackthissite.org" "API_KEY"

eg : "hackthissite.org" "Password"

eg : "hackthissite.org" "AWS_secret"

In reconnaissance (recon) during cybersecurity assessments, GitHub dorking is used to find sensitive information accidentally exposed in public repositories. The queries you mentioned help identify hardcoded credentials or secrets that developers might have committed to GitHub.

Advanced Google Dorking for Sensitive Files

Google can also reveal exposed files or directories indexed by search engines.

Finding phpinfo() Pages:

eg : site:hackthisiste.org inurl:phpinfo.php

eg: site:hackthissite.org intitle:"phpinfo()"

Finding .env Files

site:hackthissite.org filetype:env

site:hackthissite.org inurl:.env

Using Advanced Search Filters on GitHub

File-Specific Searches

filename:.env "target"

filename:config "DB_PASSWORD"

filename:settings.py "SECRET_KEY"

extension:json "apiKey"

Conclusion :

In this task, we explored GitHub Dorking and Google Dorking to identify potential credential leaks and exposed sensitive information during the reconnaissance phase. Public repositories and indexed web resources may

unintentionally contain API keys, passwords, database credentials, configuration files, or backup archives due to developer misconfigurations or poor security practices.

Searching organization repositories, public GitHub code, and indexed web pages allows security analysts to detect exposed secrets and sensitive files that could reveal parts of an organization's infrastructure. By combining GitHub search queries and advanced Google dorking techniques, analysts can identify security risks early and help organizations remediate exposed information before it can be exploited.

Phase 04 : Live Asset Filtering

1 - Httpprobe

Httpprobe takes a list of domains and checks which ones are actually responding over HTTP/HTTPS.

```

(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ cat master_subdomains.txt | httpprobe > live_subdomains.txt

(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ ls
amass_linux_amd64  amass_linux_amd64.zip  amass.txt  hackasset.txt  libpostal  live_subdomains.txt  master_subdomains.txt  subhack.txt

(kali@kali)-[~/Desktop/Cyberster/week01/Task01]
$ cat live_subdomains.txt
http://4-v3stage-cdn.hackthissite.org
http://1-v3stage-cdn.hackthissite.org
http://4-v3dev-cdn.hackthissite.org
http://1-v3dev-cdn.hackthissite.org
http://3-v3stage-cdn.hackthissite.org
http://0-v3dev-cdn.hackthissite.org
http://2-v3stage-cdn.hackthissite.org
http://3-v3dev-cdn.hackthissite.org
http://2-v3dev-cdn.hackthissite.org
http://0-v3stage-cdn.hackthissite.org
https://h5ai.hackthissite.org
https://ctf.hackthissite.org
https://forums.hackthissite.org
http://h5ai.hackthissite.org
http://ctf.hackthissite.org
https://hackthissite.org
https://hp.hackthissite.org
http://forums.hackthissite.org
http://hackthissite.org
https://irc-wolf.hackthissite.org
http://hp.hackthissite.org
https://irc-lille.hackthissite.org
https://irc-www.hackthissite.org
https://lille.irc.hackthissite.org
http://irc-wolf.hackthissite.org
http://irc-lille.hackthissite.org
http://lille.irc.hackthissite.org
http://irc-www.hackthissite.org
https://legal.hackthissite.org
https://qdb.hackthissite.org

```

2 - Httpx

Httpx is a faster, more feature-rich version of Httpprobe — it checks live assets AND gathers extra information about each one like status code, page titles, web servers.