


1. Split the entire paper into consecutive, non-overlapping chunks and scan for the relevant fields in each chunk. Keep a record of the relevant chunks and only extract from those later. (Currently used in question extraction)
 - a. Downsides - potentially long and cumbersome processing

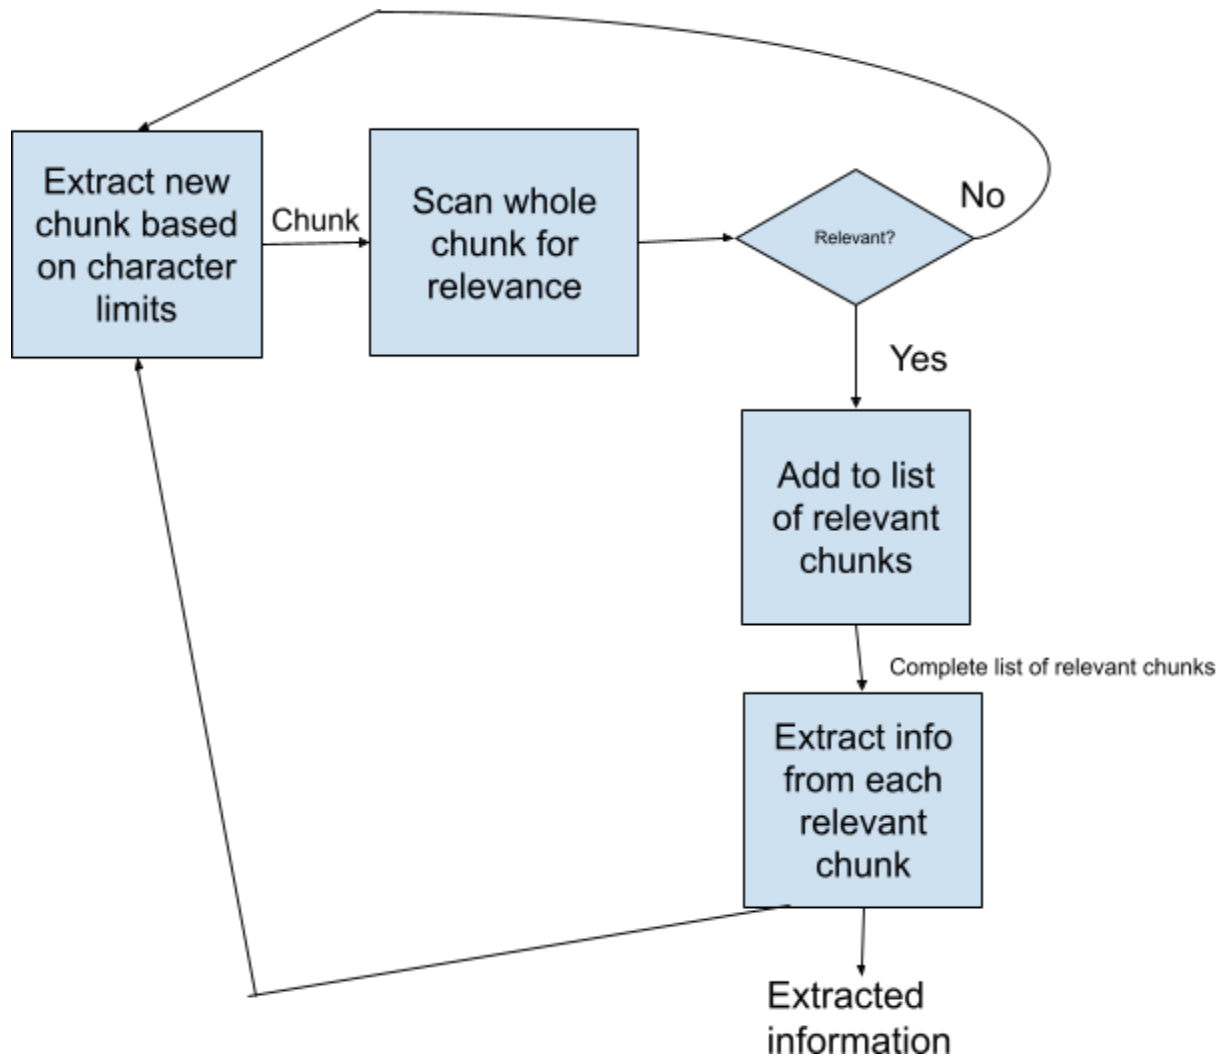

2. Only look for relevant fields in a predefined location in the paper. This may be more efficient for some variables, but the locations to look at would have to be well-defined and very specific, especially given that we are not looking at locations in the paper we predetermine as irrelevant.
 - a. Downsides - lack of general applicability
3. Split the entire paper into consecutive, non-overlapping chunks. Take one random line from each chunk and judge whether to look deeper into a chunk based on its preview.
 - a. Downsides - significant chance of getting false negatives