

Automated Detection of Diabetic Retinopathy(DR) Stages in Retinal Fundus photographs Using Deep Learning

by

Muniba Shaikh

CS 767 – Machine Learning


This project is an application of deep learning model that automatically screens retinal fundus images for diabetic retinopathy and provide information on how severe the condition is on a scale of 0 to 4:

- 0 - No DR - Healthy
- 1 - Mild
- 2 - Moderate
- 3 - Severe
- 4 - Proliferative DR

My research paper on [automated detection of diabetic retinopathy using deep learning](#)

Link to [Source Code](#)



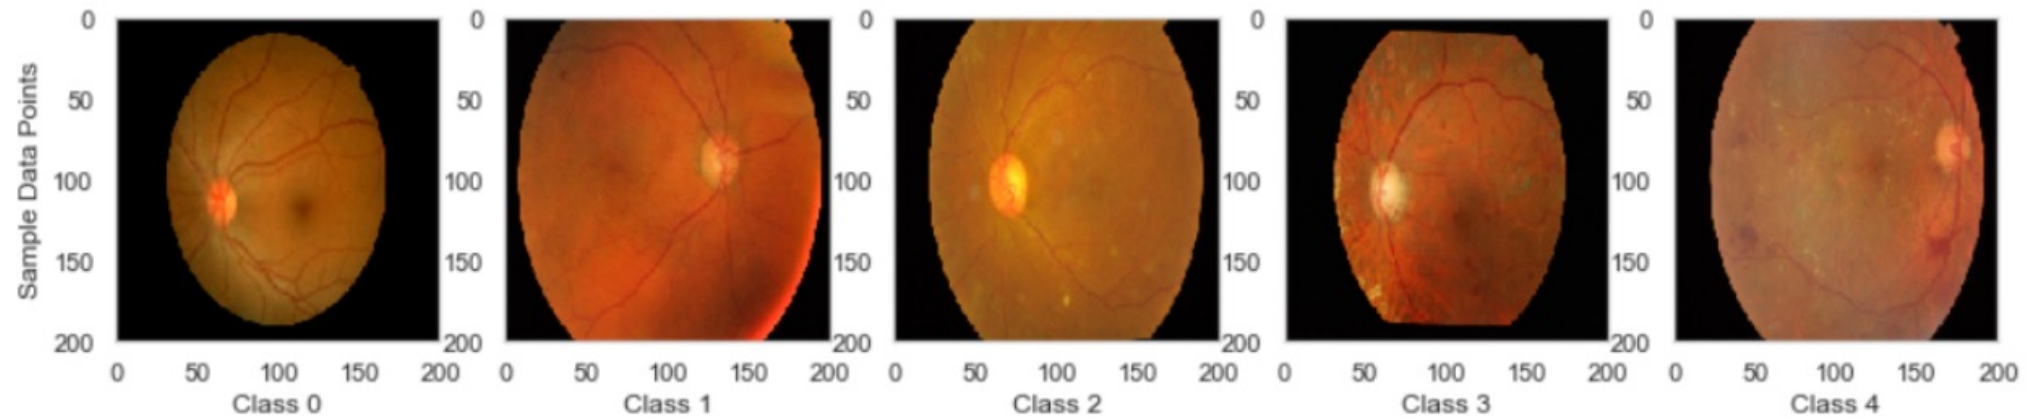


Eye images corresponding to each Blindness class severity (0–4)

APTOS2019 dataset

- The dataset used in this research was taken from Kaggle (<https://www.kaggle.com/competitions/aptos2019-blindness-detection/data>), collected by Aravind Eye Hospital from rural areas in India.
- The full dataset consists of 3662 retinal fundus photographs for left and right eyes, which are divided into 2747 training, 755 validation, and 160 testing images.

Class distribution in APTOS2019 dataset


- Class distribution in APTOS2019 training data is imbalanced with most images classified as 0 and least number of images in class 3 and 4.
- As different diabetic retinopathy datasets have a similar class distribution, it is considered as a fundamental property of this type of data.
- Like any real-world data set, this data set may have noise in both the images and labels.
- Images may be out of focus, underexposed, or overexposed. The images were gathered from multiple clinics using a variety of cameras.
- The images are labelled by clinicians based on the severity of diabetic retinopathy on a scale of 0 to 4, so possibility of human error while labelling the images.

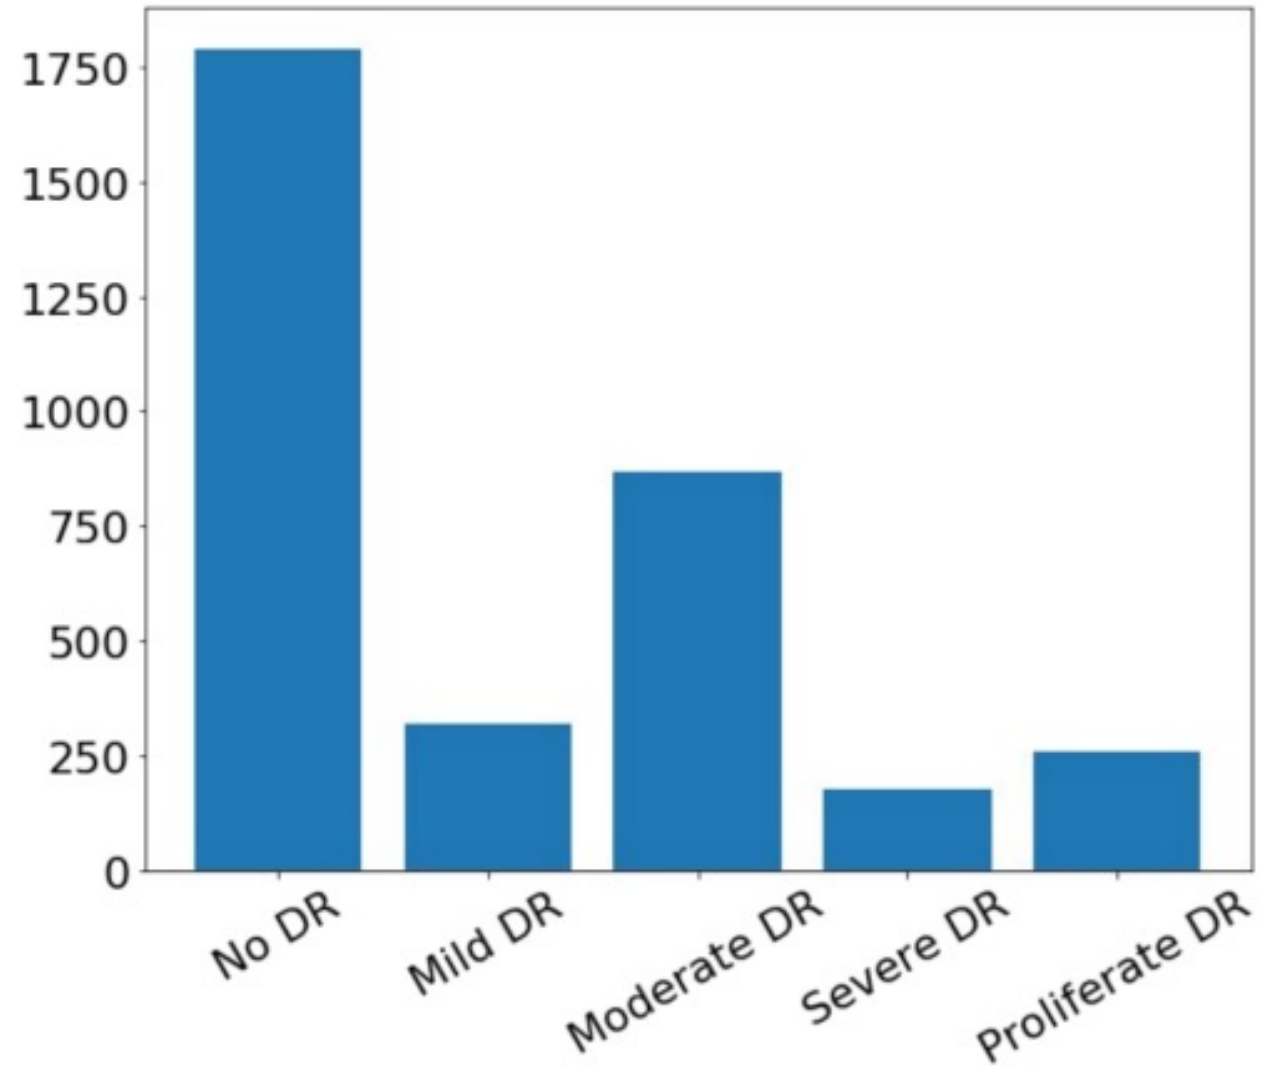


Deep learning

- Recently, deep learning has become one of the most common techniques that have achieved better performance in medical image analysis and classification. Convolutional neural networks are proven to be a highly effective deep learning method in medical image analysis.
- Convolutional neural network (CNN) applies to the classification problem of diabetic retinopathy in retinal fundus images as it can identify the intricate features involved in the classification task such as micro-aneurysms, exudate, and hemorrhages in the retina and consequently provide an automatic diagnosis.
- I used *Tensorflow-Keras API* for loading image data, splitting the data into training, validation, test sets, and creating and training a convolutional neural network model for DR classification.

ML System Design

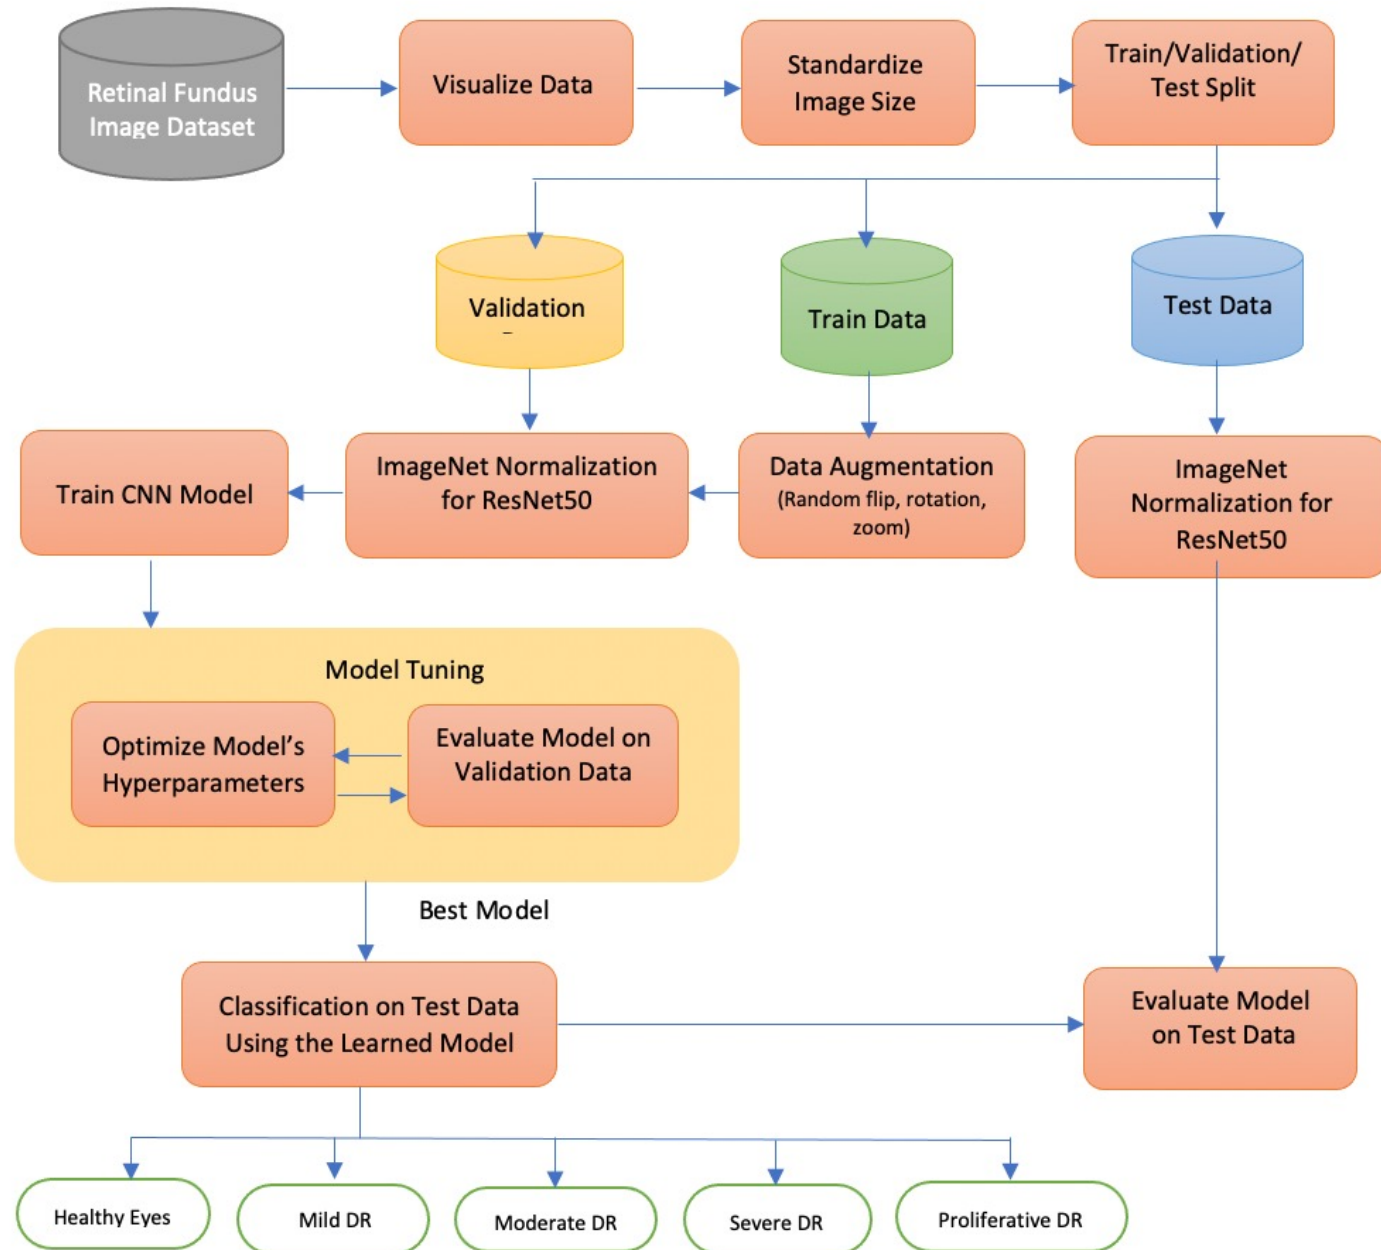


Data Augmentation

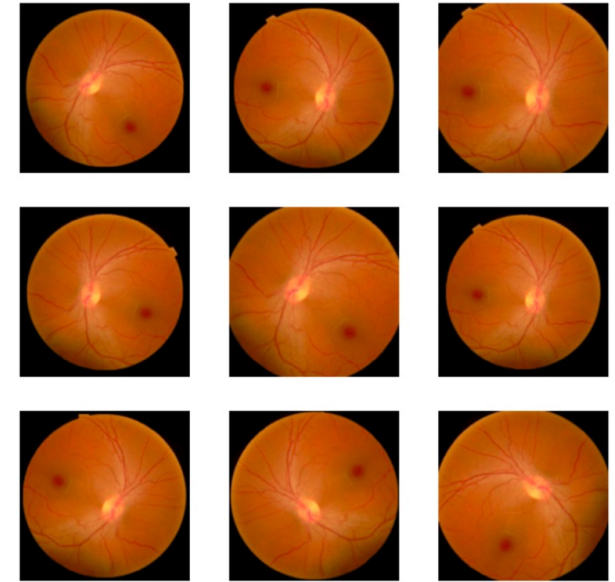

- Images are standardized to a fixed image size 224×224 pixels.
- Image data is split into train, and validation sets using 75/25 split. Then validation set is further split into validation and test sets using 80/20 split.
- Additional training data is generated from existing examples by augmenting them using random transformations such as horizontal flipping, random rotation (0.2), and random zoom (0.1). This helps expose the model to more aspects of the data and generalize better.

CNN Architecture

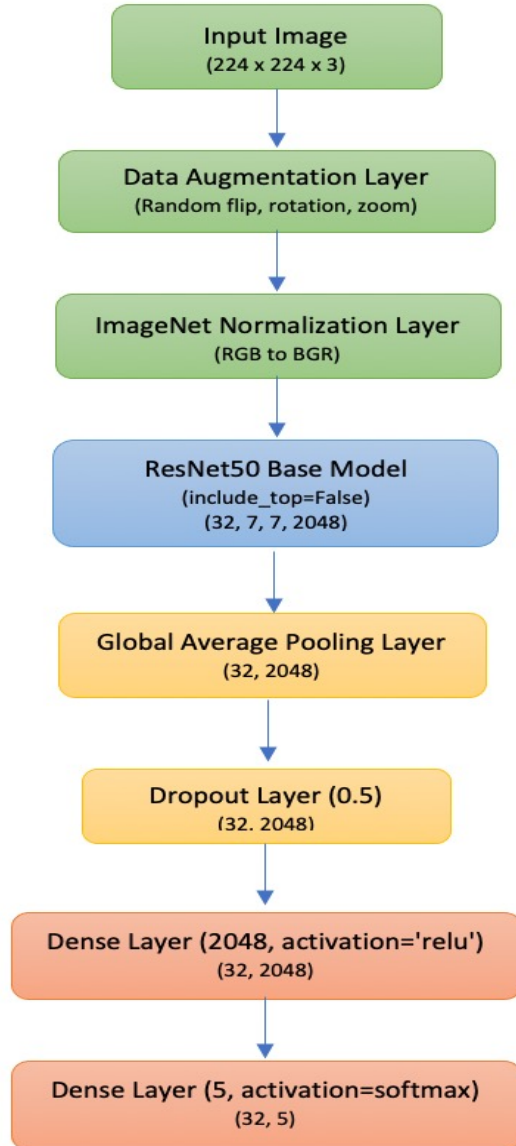

Convolutional Neural Network

- The custom CNN includes seven layers: one data augmentation layer, one ImageNet normalization layer, one base model (Resnet50), one max-pooling layer, one dropout layer and two FC layers.
- Since the dataset is small so I implemented transfer learning to take advantage of features learned by a pre-trained *ResNet50* on a much larger ImageNet dataset, as the base model to initialize the weights of my CNN models.
- A *Pooling layer* is used to down-sample feature maps from the previous convolutional layers to compress or generalize feature representations.
- *Dropout (0.5)* method is used to reduce overfitting.
- The *SoftMax* function is used as a classifier in the last FC layer.

Hyperparameters for Model Training


| Sr. No. | Hyperparameters | Value |
|---------|---------------------|--|
| 1. | Learning Rate | 0.001 |
| 2. | Batch Size | 32 |
| 3. | Epochs | 20 |
| 4. | Activation Function | ReLu |
| 5. | Optimizer | Adam |
| 6. | Metric | Accuracy |
| 7. | Loss Function | SparseCategoricalFocalLoss(gamma=2) SparseCategoricalCrossentropy |

Loss function for Imbalanced Data Classification


To address the issue of class imbalance, two models are trained with different loss functions to investigate and compare their performance on DR classification:

- **SparseCategoricalFocalLoss** function for multiclass classification with integer labels: *CNN Model_1* is based on the multi-class *SparseCategoricalFocalLoss*. It down-weights the loss assigned to well-classified examples. This loss function generalizes multiclass softmax cross-entropy by introducing a hyperparameter γ (gamma), called the *focusing parameter*, that allows hard-to-classify examples to be penalized more heavily relative to easy-to-classify examples. *CNN Model_1* predicted with 76.88% accuracy on test data.
- **SparseCategoricalCrossentropy** function for multiclass classification with integer labels: *CNN Model_2* is based on the multi-class *SparseCategoricalCrossentropy* loss function. Class weights are used in model training to address the imbalance of different classes for diabetic retinopathy classification. *CNN Model_2* predicted with 75.63% accuracy on test data.

CNN Model_1


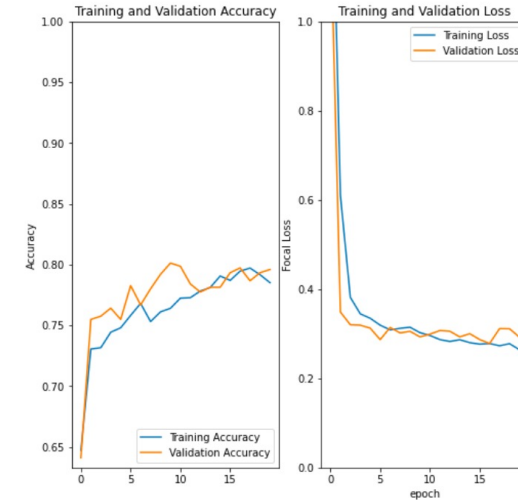


CNN Model_2

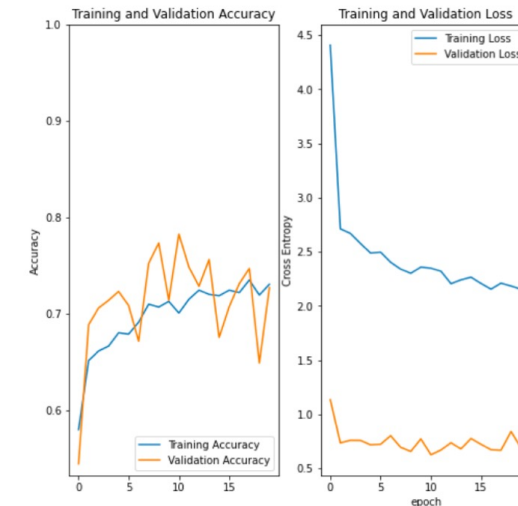

Performance Measures

- Performance measures of both models are almost similar.

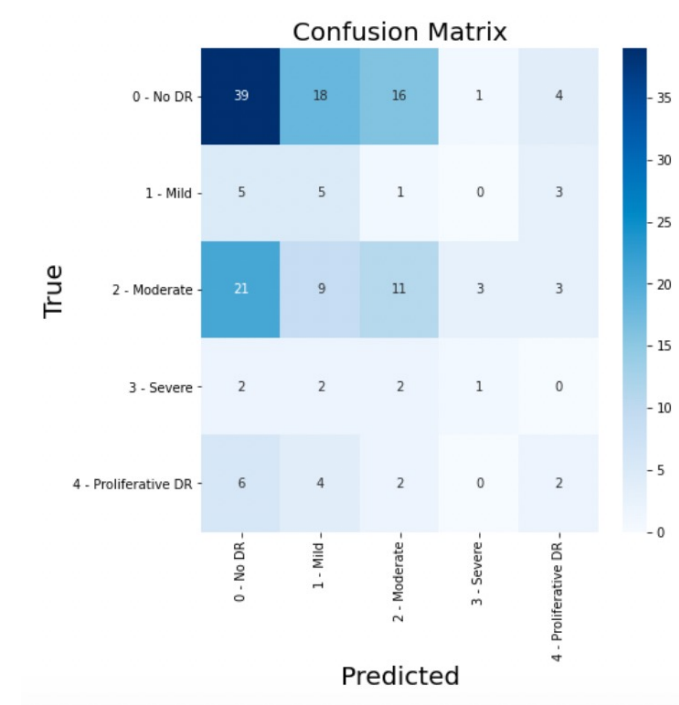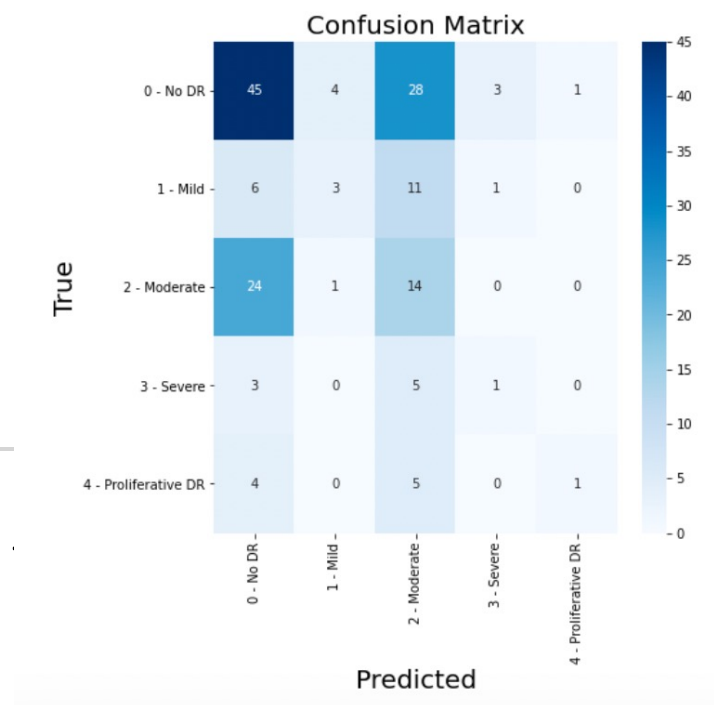

Classification report of CNN Model_1

| | precision | recall | f1-score | support |
|----------------------|-----------|--------|----------|---------|
| 0 - No DR | 0.55 | 0.56 | 0.55 | 81 |
| 1 - Mild | 0.38 | 0.14 | 0.21 | 21 |
| 2 - Moderate | 0.22 | 0.36 | 0.27 | 39 |
| 3 - Severe | 0.20 | 0.11 | 0.14 | 9 |
| 4 - Proliferative DR | 0.50 | 0.10 | 0.17 | 10 |

Classification report of CNN Model_2

| | precision | recall | f1-score | support |
|----------------------|-----------|--------|----------|---------|
| 0 - No DR | 0.53 | 0.50 | 0.52 | 78 |
| 1 - Mild | 0.13 | 0.36 | 0.19 | 14 |
| 2 - Moderate | 0.34 | 0.23 | 0.28 | 47 |
| 3 - Severe | 0.20 | 0.14 | 0.17 | 7 |
| 4 - Proliferative DR | 0.17 | 0.14 | 0.15 | 14 |

Conclusion

- Class imbalance of APTOS2019 dataset is addressed by using *multi-class focal loss* function and *SparseCategoricalCrossentropy* function along with class weighting . Both the models are predicting all 5 classes of diabetic retinopathy although not with high sensitivity for the minority classes but with the overall accuracy of 76.88% and 75.63% respectively.
- Besides class imbalance, the dataset was small and consisted of only 3662 images, so it could not predict class 1, 3 and 4 with high sensitivity.
- In future work, I propose to investigate the performance of CNN model using large scale data for better training which would hopefully result in better classification and prediction of the different stages of diabetic retinopathy.

References

- I. "Tf.keras.utils.image_dataset_from_directory : TensorFlow Core v2.9.1," *TensorFlow*. https://www.tensorflow.org/api_docs/python/tf/keras/utils/image_dataset_from_directory.
- II. Rubina Sarkis, Sandra Michalska, K. A. H. W. Y. Z. (2019). Convolutional neural networks for mild diabetic retinopathy detection: an experimental study. *bioRxiv*.
- III. "Image classification : Tensorflow Core," *TensorFlow*. <https://www.tensorflow.org/tutorials/images/classification>.
- IV. M. D. Abràmoff, Y. Lou, A. Erginay, W. Clarida, R. Amelon, J. C. Folk, and M. Niemeijer, "Improved automated detection of diabetic retinopathy on a publicly available dataset through integration of Deep Learning," *Investigative Ophthalmology & Visual Science*, 01-Oct-2016. <https://iovs.arvojournals.org/article.aspx?articleid=2565719>.
- V. W. L. Alyoubi, W. M. Shalash, and M. F. Abulkhair, "Diabetic retinopathy detection through Deep Learning Techniques: A Review," *Informatics in Medicine Unlocked*, 20-Jun-2020. <https://www.sciencedirect.com/science/article/pii/S2352914820302069#bib12>.
- VI. B. Tymchenko, P. Marchenko, and D. Spodarets, "Deep Learning Approach to diabeticretinopathy detection," *arXiv.org*, 03-Mar-2020. <https://arxiv.org/abs/2003.02261>.
- VII. M. K. Jabbar, J. Yan, H. Xu, Z. Ur Rehman, and A. Jabbar, "Transfer learning-based model for diabetic retinopathy diagnosis using retinal images," *MDPI*, 22-Apr-2022. <https://www.mdpi.com/2076-3425/12/5/535/htm>.