



Azure Data Factory Real Time Scenario Part 15

Copy Data From REST API to Azure Data Lake



Follow Me to Get Such
More Content



Praveen Patel
Azure Data Engineer

Suppose you are an Azure Data Engineer having responsibility to copy data from one data source to another data source.

A Product Manager comes to you to assign business requirement. In this specific business requirement he said you have to copy data from one data source to another data source you have use to one data source as REST API data from websites and another source as Azure Data Lake.


To carry out this business requirement REST API connector comes to work that allows us to copy any rest api data from source (websites) to sink(Azure Blob Storage, Azure Data Lake, Azure SQL Database).

Further you will get better clarity to learn about to copy data from REST API to azure data lake.

Steps to Demonstrate to Copy Data From REST API to Azure Data Lake

Step 1

Firstly, Open Azure Portal then go to ADLS Storage Account to create a new container restapidata to store rest api data from websites.

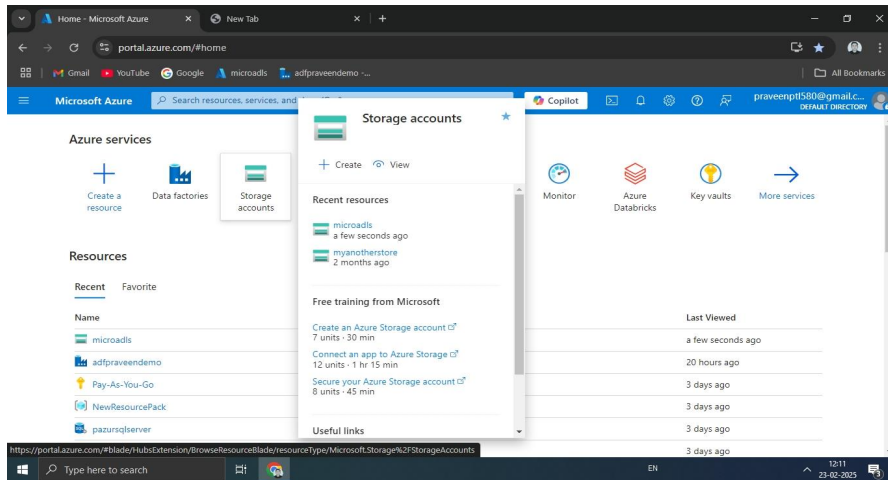

Step 2

Next go to containers given under data storage section then click on '+ Container' make a new container name as 'restapidata' make sure the name of the container should be in lowercase letters next click on create button.

The screenshot shows the Microsoft Azure portal interface. The left sidebar displays the navigation menu with 'Containers' selected under the 'Data storage' section. The main content area shows the 'Containers' page for the 'microadls' storage account. A 'New container' dialog is open on the right, with the following details:

- Name: restapidata
- Anonymous access level: Private (no anonymous access)
- Advanced options: expanded
- Create button: visible

The background shows a table of existing containers:

Name	Last modified	Anonymous access
\$logs	12/20/2024, 12:24:30 AM	Private
target	1/10/2025, 9:36:31 PM	Container

Step 3

Go to restapidata container keep remains it empty to store rest api data.

The screenshot shows the Microsoft Azure portal interface for the 'restapidata' container. The browser address bar displays the URL: `portal.azure.com/#view/Microsoft_Azure_Storage/ContainerMenuBlade/~/overview/storageAccountId/%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87...`. The page title is 'restapidata Container'. The left sidebar shows the navigation menu with 'Overview' selected. The main content area displays the container's overview, including the authentication method (Access key) and location (restapidata). A search bar for blobs is present, and a table below shows 'No blobs found.' The table headers are Name, Modified, Access tier, Archive status, Blob type, and SI. The bottom of the screen shows the Windows taskbar with the search bar, task view button, and system tray displaying the time as 17:02 on 04-03-2025.

Step 6

Go back to Azure Portal and Open Azure Factory.

The screenshot shows the Azure Portal interface. The browser address bar displays `portal.azure.com/#home`. The top navigation bar includes the Microsoft Azure logo, a search bar, and the user profile `praveenpt1580@gmail.com`. The main content area is divided into 'Azure services' and 'Resources' sections. In the 'Azure services' section, the 'Data factories' service card is highlighted, showing a '+ Create' button and a 'View' button. The 'Resources' section lists various resources, including 'microadls', 'adfpaveendemo', 'azursql', 'Pay-As-You-Go', 'NewResourcePack', 'pazursqlserver', and 'prafactory'. The 'prafactory' resource is highlighted, showing its details in a table.

Name	Description	Last Viewed
microadls		10 minutes ago
adfpaveendemo		a day ago
azursql	SQL database	a day ago
Pay-As-You-Go	Subscription	4 days ago
NewResourcePack	Resource group	4 days ago
pazursqlserver	SQL server	4 days ago
prafactory	Data factory (V2)	a week ago

Step 7


Once Azure Data Factory is opened go to Author Tab.

The screenshot shows the Azure Data Factory 'Author' tab for a workspace named 'adfpraveendemo'. The interface includes a left-hand navigation pane with icons for Home, Author, Monitor, and Settings. The main content area features a 'Data factory adfpraveendemo' header with a 'New' button. Below this are four functional cards: 'Ingest' (Copy data at scale), 'Orchestrate' (Code-free data pipelines), 'Transform data' (Transform your data using data flows), and 'Configure SSIS' (Manage & run your SSIS packages). A 'Recent resources' table is displayed at the bottom, listing various pipelines and datasets. The Windows taskbar at the bottom shows the search bar, task view, and system clock indicating 12:34 on 23-02-2025.

Name	Type	Last opened by you
pipeline3	Pipeline	Yesterday at 4:17 PM
AzureSqlTable1	Dataset	Yesterday at 4:15 PM
DelimitedText7	Dataset	Last Friday at 2:40 PM
DelimitedText8	Dataset	Last Friday at 2:39 PM
pipeline2	Pipeline	Last Thursday at 11:54 AM

Step 8

Click on '+' icon given near search bar to create a new pipeline.

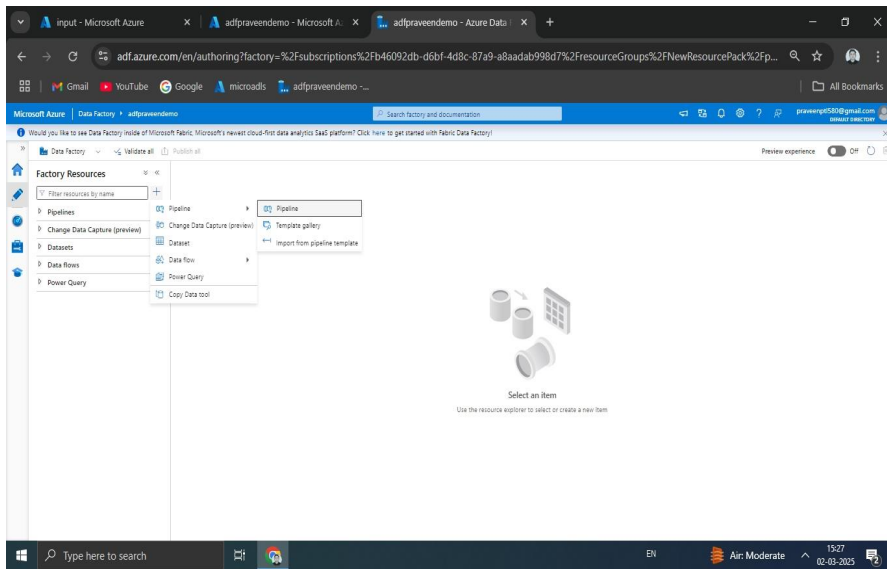

Step 9

In activity search bar search copy activity then drag and drop it.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser address bar shows the URL: `adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2FNew...`. The page title is "Microsoft Azure | Data Factory | adfpravedemo".

The interface is divided into several sections:

- Factory Resources:** A sidebar on the left showing a list of pipelines (GlobalPipeline, pipeline1, pipeline2, pipeline3, pipeline4, pipeline5, pipeline6, pipeline7) and other resources like zipfiles, Change Data Capture (preview), Datasets (18), Data flows (2), and Power Query (0).
- Activities:** A central panel showing a list of activities under the "Move and transform" category. The "Copy data" activity is highlighted.
- Copy Data Activity Configuration:** A dialog box titled "Copy data" is open, showing a preview of the activity configuration. Below this, the "General" tab is selected, displaying fields for Name (Copy data1), Description, Activity state (Activated/Deactivated), Timeout (3:12:00:00), Retry (3), and Retry interval (30).
- Properties:** A panel on the right showing the "General" tab with fields for Name (pipeline7) and Description.

The bottom of the screen shows the Windows taskbar with the search bar, task view icon, and system tray area displaying the language (EN), network status, and date/time (15:27, 02-03-2025).


Step 10

Go to copy activity source then click on '+ New ' to create a new source dataset.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser address bar shows the URL: adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2F6b092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2FNew.... The left sidebar shows the 'Factory Resources' tree with 'Pipelines' expanded, listing 'GlobalPipeline', 'pipeline1' through 'pipeline6', and 'pipeline7' (selected). Below this, 'Dataflows' and 'Power Query' are also listed. The main canvas shows the 'Copy data' activity selected in the 'Activities' pane. The activity is a blue box labeled 'Copy data' with a 'Copy data1' sub-label. The 'Source' tab is active, showing a 'Source dataset' dropdown menu with a 'Select...' button and a '+ New' button. The right sidebar shows the 'Properties' pane with 'General' and 'Related' tabs. The 'Name' field is set to 'pipeline7' and the 'Description' field is empty. The bottom status bar shows the Windows taskbar with a search bar, system icons, and the time '15:28' on '02-03-2025'.


Step 11

In new dataset search REST to use REST API connector select it then click on continue button.

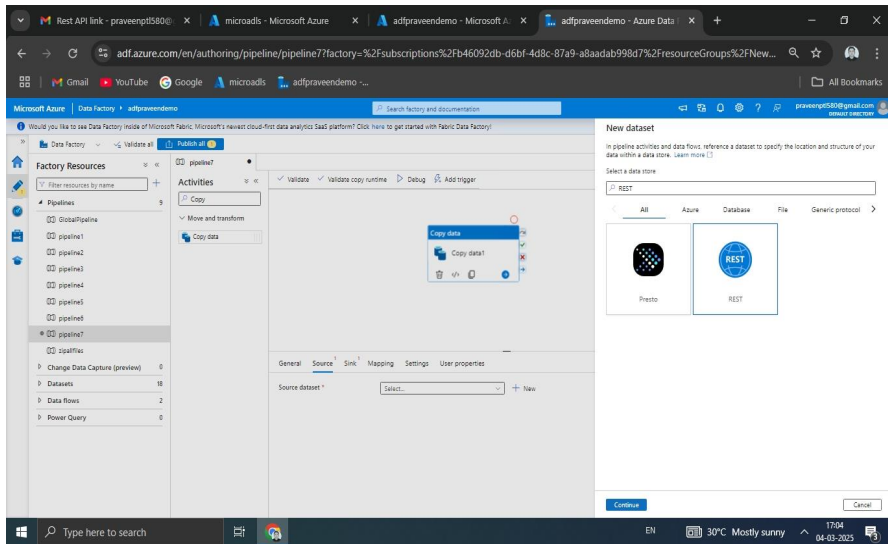


Step 12

In set properties make a new rest api connector name then create a new linked service for rest api connector.

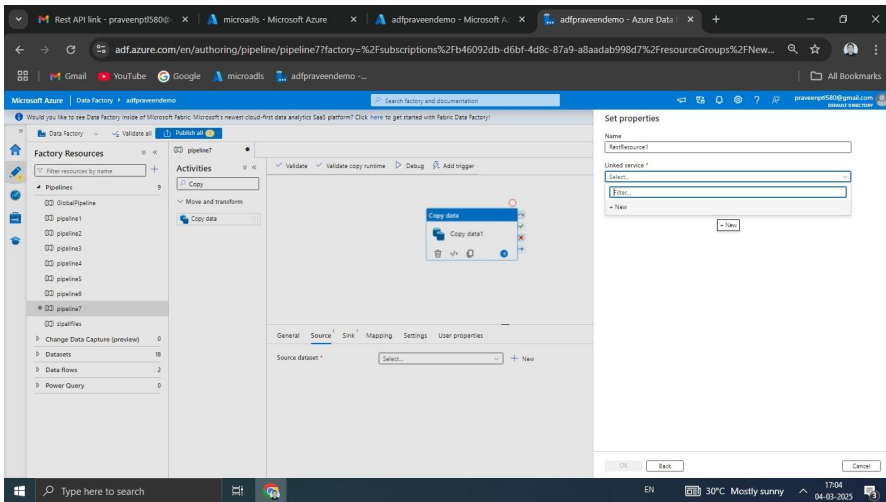


Step 13

I used REST API url 'https://reqres.in/api/users' to copy it's data to Azure Data Lake Storage. When opened it using new tab and enabled Pretty-print it contains the following data.

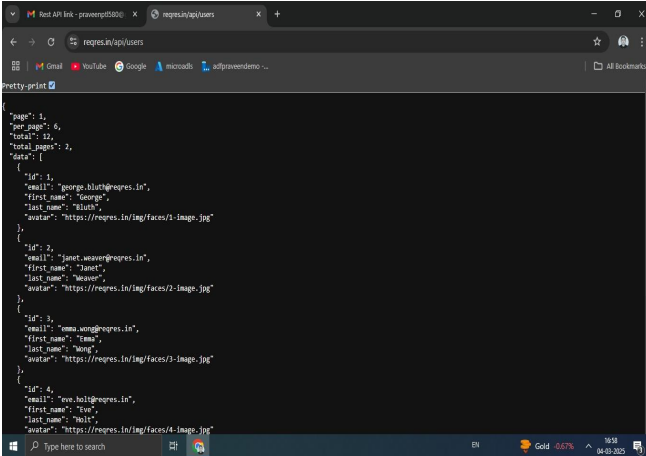

```
{
  "page": 1,
  "per_page": 6,
  "total": 12,
  "total_pages": 2,
  "data": [
    {
      "id": 1,
      "email": "george.bluth@reqres.in",
      "first_name": "George",
      "last_name": "Bluth",
      "avatar": "https://reqres.in/img/faces/1-image.jpg"
    },
    {
      "id": 2,
      "email": "janet.weaver@reqres.in",
      "first_name": "Janet",
      "last_name": "Weaver",
      "avatar": "https://reqres.in/img/faces/2-image.jpg"
    },
    {
      "id": 3,
      "email": "emma.wong@reqres.in",
      "first_name": "Emma",
      "last_name": "Wong",
      "avatar": "https://reqres.in/img/faces/3-image.jpg"
    },
    {
      "id": 4,
      "email": "eve.holt@reqres.in",
      "first_name": "Eve",
      "last_name": "Holt",
      "avatar": "https://reqres.in/img/faces/4-image.jpg"
    }
  ]
}
```

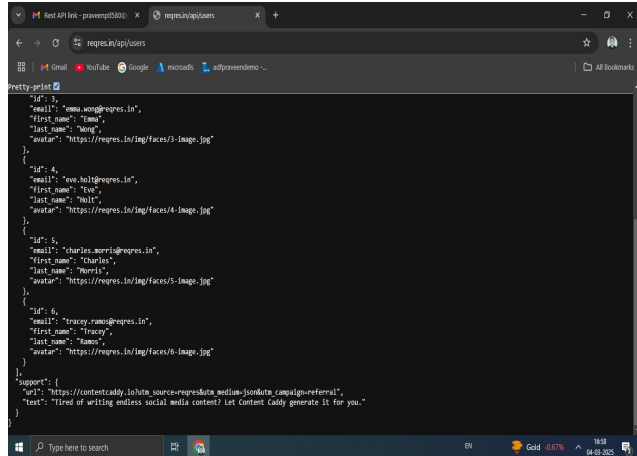

```
{
  "id": 3,
  "email": "emma.wong@reqres.in",
  "first_name": "Emma",
  "last_name": "Wong",
  "avatar": "https://reqres.in/img/faces/3-image.jpg"
},
{
  "id": 4,
  "email": "eve.holt@reqres.in",
  "first_name": "Eve",
  "last_name": "Holt",
  "avatar": "https://reqres.in/img/faces/4-image.jpg"
},
{
  "id": 5,
  "email": "charles.morris@reqres.in",
  "first_name": "Charles",
  "last_name": "Morris",
  "avatar": "https://reqres.in/img/faces/5-image.jpg"
},
{
  "id": 6,
  "email": "tracey.ramos@reqres.in",
  "first_name": "Tracey",
  "last_name": "Ramos",
  "avatar": "https://reqres.in/img/faces/6-image.jpg"
}
},
"support": {
  "url": "https://contentcaddy.io?utm_source=reqres&utm_medium=json&utm_campaign=referral",
  "text": "Tired of writing endless social media content? Let Content Caddy generate it for you."
}
```

Step 14

Make a new REST API connector linked service name keep integration as auto resolve as it is. Enter rest api url select authentication type as anonymous make sure prior to proceed further must test connection to ensure correctness and completeness.

The screenshot displays the Microsoft Azure Data Factory portal interface. On the left, the 'Factory Resources' pane shows a list of pipelines, with 'pipeline7' selected. The main canvas shows the 'Copy data' activity within 'pipeline7'. On the right, the 'New linked service' configuration pane is open, showing the following details:

- Name:** RestService1
- Description:** (Empty text box)
- Connect via integration runtime:** AutoResolveIntegrationRuntime
- Base URL:** https://mgapi.azure.com
- Authentication type:** Anonymous
- Server certificate validation:** Enable (selected), Disable (radio button)
- Auth headers:** (Empty text box with a warning message: "If you specify the auth headers in plain text, they will be encrypted and may not be visible here once saved.")
- Annotations:** (Empty text box)
- Parameters:** (Empty text box)

At the bottom of the configuration pane, there are 'Create' and 'Cancel' buttons, and a 'Test connection' link.

Step 15

Keep source setting as it is click on data preview you will be able to see following rest api data.

The screenshot shows the Microsoft Azure Data Factory portal. The browser address bar displays the URL: `adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2F...`. The portal interface includes a top navigation bar with the Microsoft Azure logo and the text "Data Factory | adfpravedemo". Below the navigation bar, there is a search bar and a "Publish all" button. The main content area is divided into three sections: "Factory Resources" on the left, "Activities" in the middle, and "Preview data" on the right. The "Factory Resources" section shows a list of pipelines, including "pipeline1" through "pipeline7". The "Activities" section shows a list of activities, including "Copy data". The "Preview data" section displays a JSON array of three user objects, each with fields like "id", "email", "first_name", "last_name", and "avatar". The "Properties" section on the right shows the "Name" property set to "pipeline7".

Preview data

Linked service: RestService1

Object:

```
{
  "page": 1,
  "per_page": 6,
  "total": 12,
  "total_pages": 2,
  "data": [
    {
      "id": 1,
      "email": "george.bluth@reqres.in",
      "first_name": "George",
      "last_name": "Bluth",
      "avatar": "https://reqres.in/img/faces/1-image.jpg"
    },
    {
      "id": 2,
      "email": "janet.weaver@reqres.in",
      "first_name": "Janet",
      "last_name": "Weaver",
      "avatar": "https://reqres.in/img/faces/2-image.jpg"
    },
    {
      "id": 3,
      "email": "emma.wong@reqres.in",
      "first_name": "Emma",
      "last_name": "Wong",
      "avatar": "https://reqres.in/img/faces/3-image.jpg"
    }
  ]
}
```

Additional headers

Pagination rules

Properties

General

Name *

pipeline7

Description

Annotations

+ New

Step 16

Now go to copy activity sink and create a new sink dataset.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser address bar shows the URL: `adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2FNew...`. The page title is "Data Factory - adfpraveendemo".

The interface is divided into several sections:

- Factory Resources:** A sidebar on the left showing a tree view of resources. Under "Pipelines", "pipeline7" is selected.
- Activities:** A central pane showing the "Copy Data" activity. A tooltip for "Copy data" is visible, showing a "Copy data1" icon.
- Properties:** A right-hand pane showing the "Sink" tab. The "Sink dataset" dropdown is set to "Select...", and a "+ New" button is visible.
- General:** The "General" tab is active, showing fields for "Name" (set to "pipeline7") and "Description".

The bottom of the screen shows the Windows taskbar with the search bar, task view button, and several open applications, including "Ibiza's Aerial Splendo...". The system clock indicates 15:29 on 02-03-2023.


Step 17

Create a new sink dataset for ADLS storage gen2 next click on continue.

The screenshot shows the Microsoft Azure Data Factory portal interface. On the left, the 'Factory Resources' pane lists various pipelines, with 'pipeline7' selected. The 'Activities' pane shows a 'Copy Data' activity. The main workspace displays a 'Copy data' activity card. On the right, the 'New dataset' wizard is open, showing the 'Select a data store' step. The 'Azure Data Lake' tab is active, and 'Azure Data Lake Storage Gen2' is selected. The 'Sink dataset' field is set to 'Select...'. The 'Continue' button is visible at the bottom of the wizard.

Step 18

Select a new sink dataset format as **Delimited Text** next click on continue.

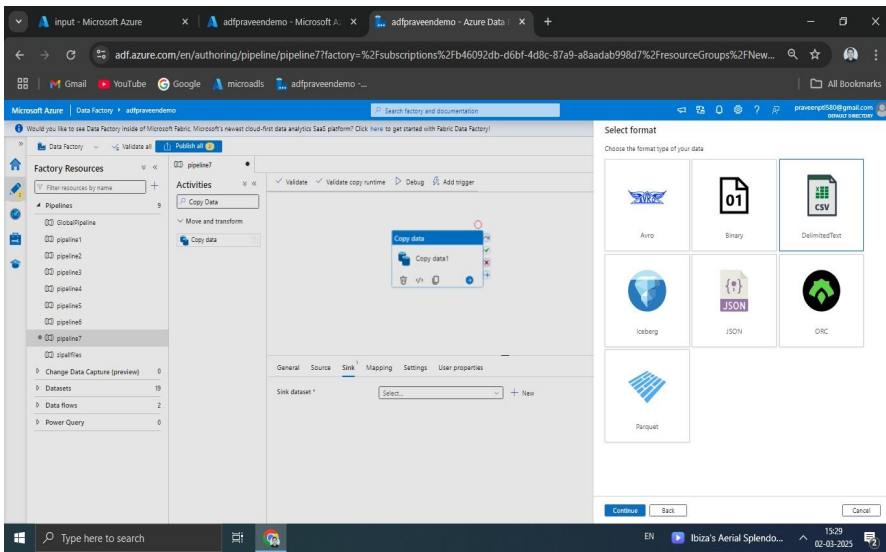


Step 19

In set properties select linked service as ADLS Gen2 click on browse button to browse restapidata container to copy rest api data

The screenshot displays the Microsoft Azure Data Factory interface. On the left, the 'Factory Resources' pane shows a list of pipelines, with 'pipeline7' selected. The main canvas shows a 'Copy data' activity named 'Copy data1'. On the right, the 'Set properties' dialog is open, showing the 'Sink' tab. The 'Sink dataset' is set to 'Select...'. The 'File path' section shows 'File system' selected, with 'Directory' and 'File name' fields. A 'Browse' button is visible next to the 'File name' field. The 'First row as header' checkbox is checked. The 'Import schema' section has 'From connection/store' selected. The background shows the Data Factory canvas with a 'Copy data' activity named 'Copy data1'.


Step 20

Select and go to restapidata container next click on ok button.

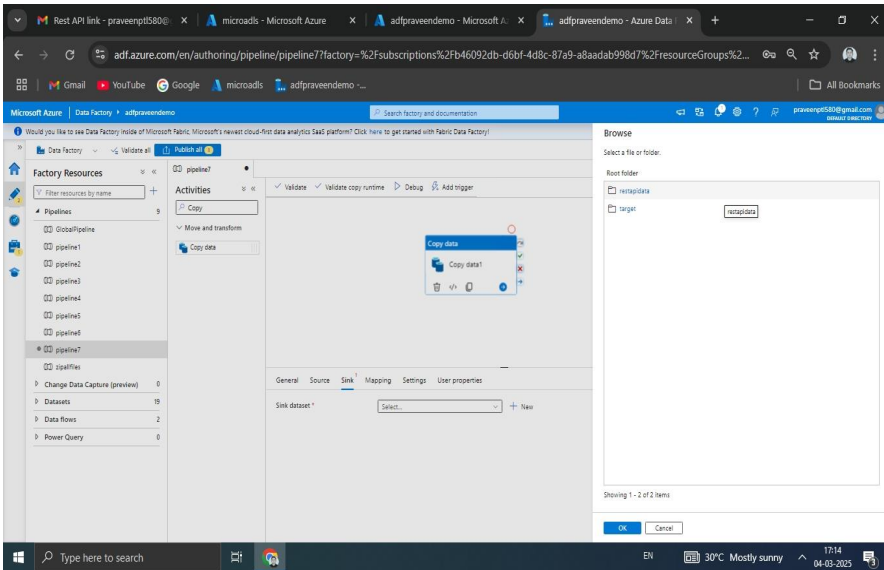

Step 21

After restapidata container is browsed successfully. In file path make a new filename user.csv to contain rest api data then select import schema as none finally click on button

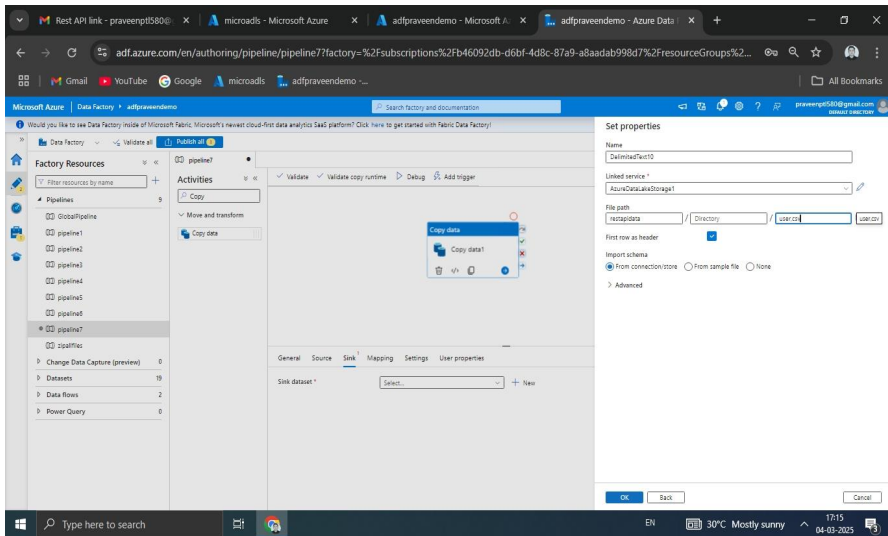

Step 22

Go to copy activity mapping click on import schema you see schema has imported with the first index of rest api all the column names if you keep it as it is it copies only the first row to the restapidata container because here all the column first index has given only.

The screenshot displays the Microsoft Azure Data Factory portal interface. The left sidebar shows the 'Factory Resources' tree with 'pipeline7' selected. The main workspace shows the 'Copy data' activity configuration for 'pipeline7'. The 'Mapping' tab is active, showing a table with source and sink columns. The source columns are 'Id', 'email', 'first_name', 'last_name', and 'avatar', all with a type of 'any'. The sink columns are 'Id', 'email', 'first_name', 'last_name', and 'avatar', with types 'Select type', 'Select type', 'Select type', 'Select type', and 'Select type' respectively. The 'Import schemas' button is visible in the top right of the mapping table.

Name	Type	Collection reference	Map complex values to string	Type
\$(data[0].id)	any	Id		Select type
\$(data[0].email)	any	email		Select type
\$(data[0].first_name)	any	first_name		Select type
\$(data[0].last_name)	any	last_name		Select type
\$(data[0].avatar)	any	avatar		Select type

Step 23

We want to copy all the data given in rest api to the restapidata container for that first delete all the column given with the first index select 'data []' array in the collection reference next click on import schema.

The screenshot displays the Microsoft Azure Data Factory portal interface. The left sidebar shows the 'Factory Resources' tree with 'pipeline7' selected. The main workspace shows the 'Copy data' activity configuration for 'pipeline7'. The 'Import schemas' tab is active, showing a table of column mappings. The 'Source' is set to 'Import schemas' and the 'Sink' is set to 'Copy data1'. The 'Mapping' tab shows the following configuration:

Name	Type	Collection reference	Column name	Type
[data][0]email	any	any	email	Select type
[data][0]first_name	any	any	first_name	Select type
[data][0]last_name	any	any	last_name	Select type
[data][0]avatar	any	any	avatar	Select type

The 'Properties' panel on the right shows the activity name 'pipeline7' and a description field. The bottom status bar indicates the system time as 17:27 on 04-03-2025.

Step 24

After all the columns with the first index are deleted and schema are imported you will be able to see all the column given in rest api data in this following way delete those columns that you don't want to copy to restapidata container.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser tabs at the top include 'Rest API link - praveent580@...', 'restapidata - Microsoft Azure', 'adpraveendemo - Microsoft Azure', and 'adpraveendemo - Azure Data Factory'. The main interface shows the 'Data Factory' view for 'adpraveendemo'. On the left, the 'Factory Resources' pane lists various pipelines, with 'pipeline7' selected. The 'Activities' pane shows a 'Copy' activity. The main workspace displays the 'Mapping' tab for the 'Copy' activity, showing a table of source and sink columns. The source columns are 'first_name', 'last_name', 'avatar', 'per_page', 'total', 'total_pages', and a 'support' object containing 'url' and 'text'. The sink columns are 'first_name', 'last_name', 'per_page', 'total', 'total_pages', 'url', and 'text'. Each column has a 'Select type' dropdown menu. The 'Properties' pane on the right shows the 'General' tab with fields for 'Name' (set to 'pipeline7') and 'Description'.

General	Source	Sink	Mapping	Settings	User properties
	first_name	String	first_name	Select type	
	last_name	String	last_name	Select type	
	avatar	String	avatar	Select type	
	per_page	Int32	per_page	Select type	
	total	Int32	total	Select type	
	total_pages	Int32	total_pages	Select type	
	support	Object			
	url	String	url	Select type	
	text	String	text	Select type	

Step 25

I deleted rest columns and took only the following column to copy to the restapidata container.

The screenshot displays the Microsoft Azure Data Factory portal interface. The left sidebar shows the 'Factory Resources' tree with 'pipeline7' selected. The main workspace shows the 'Activities' tab for 'pipeline7', where a 'Copy' activity is configured. A tooltip indicates: 'Trigger test run of the current pipeline without publishing your changes to the service.' The 'Copy' activity is set to 'Copy data1'. Below the activity, the 'Mapping' tab is active, showing a table with columns for 'General', 'Source', 'Sink', 'Mapping', 'Settings', 'User properties', 'type', 'reference', 'Column name', and 'type'. The table lists columns: 'id' (Int64), 'email' (String), 'first_name' (String), 'last_name' (String), and 'avatar' (String). The 'Properties' panel on the right shows the 'General' tab with 'Name' set to 'pipeline7' and a description field. The bottom status bar shows the Windows taskbar with the search bar, system clock (17:30, 04-03-2025), and weather (30°C Mostly sunny).

General	Source	Sink	Mapping	Settings	User properties	type	reference	Column name	type
data					[] Array				
						Int64		id	Select type
						String		email	Select type
						String		first_name	Select type
						String		last_name	Select type
						String		avatar	Select type

Step 26

Now execute pipeline using debug mode and wait for one to two minutes until pipeline executes successfully.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser address bar shows the URL: `adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2F...`. The left sidebar shows the 'Factory Resources' tree with 'pipeline7' selected under the 'Pipelines' folder. The main canvas displays the 'Activities' section for 'pipeline7', showing a 'Copy data' activity. The 'Pipeline status' section indicates the pipeline is 'In progress' with a 'Pipeline run ID' of `d12f6a7b-edff-4a9b-b76d-1ba43a7503df`. Below this, a table shows the activity status:

Activity name	Activity st...	Activi...	Run start	Duration	Integration runtime
Copy data1	Queued	Copy data	4/3/2025 5:30:24 pm	4s	

The bottom of the screen shows the Windows taskbar with the search bar, system clock (17:30 on 04-03-2025), and weather (30°C Mostly sunny).

When pipeline executes successfully it shows Pipeline status as succeeded.

The screenshot displays the Microsoft Azure Data Factory portal interface. The browser address bar shows the URL: `adf.azure.com/en/authoring/pipeline/pipeline7?factory=%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aadab998d7%2FresourceGroups%2F...`. The left sidebar shows the 'Factory Resources' tree with 'pipelines' expanded, listing 'GlobalPipeline', 'pipeline1' through 'pipeline6', and 'pipeline7' (selected). The main canvas shows the 'Activities' tab for 'pipeline7', displaying a 'Copy data' activity. Below the canvas, the 'Pipeline run ID: d2f6da70-edf4-4b9b-876d-3a043a750304' is shown with a 'Succeeded' status. A table lists the activity details:

Activity name	Activity status	Activity type	Run start	Duration	Integration runtime
Copy data1	Succeeded	Copy data	4/3/2025, 5:30:24 pm	30s	AutoResolveIntegrationRuntime (East US)

The right sidebar shows the 'Properties' tab for the selected pipeline, with fields for 'Name' (pipeline7) and 'Description'. The bottom status bar shows the system clock as 17:30 on 04-03-2025.

Step 28


Now go back to ADLS storage account then go to restapidata containers click on refresh you get a new .csv file users.csv.

The screenshot shows the Microsoft Azure portal interface. The browser address bar displays the URL: `portal.azure.com/#view/Microsoft_Azure_Storage/ContainerMenuBlade/~/overview/storageAccountId/%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87...`. The page title is 'restapidata - Microsoft Azure'. The left sidebar shows the navigation menu with 'Overview' selected. The main content area shows the 'restapidata' container overview. The 'Authentication method' is 'Access key (Switch to Microsoft Entra user account)'. The 'Location' is 'restapidata'. The 'Search blobs by prefix (case-sensitive)' field is empty. The 'Show deleted objects' toggle is turned off. The blob list table shows one file: 'user.csv'.

Name	Modified	Access tier	Archive status	Blob type	Size
 user.csv	3/4/2025, 5:30:41 PM	Hot (Inferred)		Block blob	512 KB

Step 29

Now go to user.csv file open it by edit you see the following data that copied from rest api.

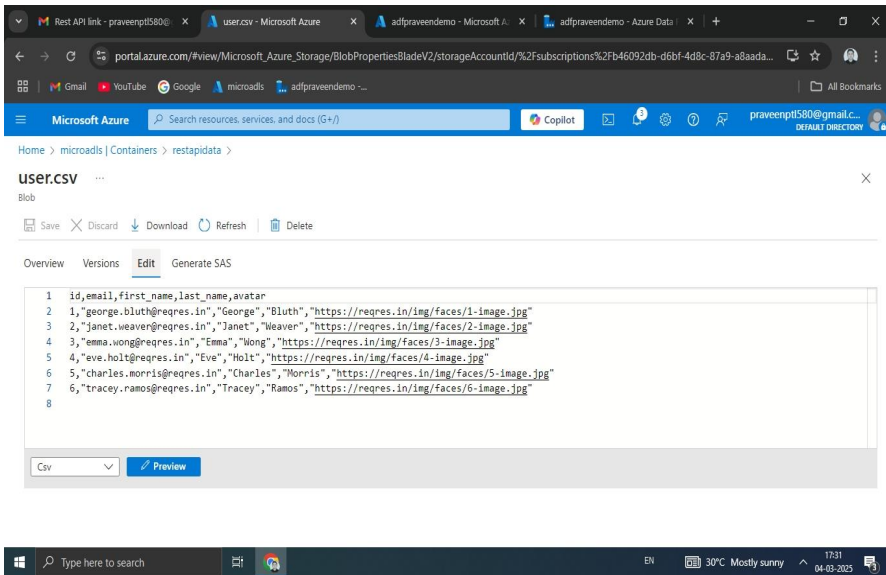

The screenshot shows the Microsoft Azure portal interface. The browser address bar displays the URL: `portal.azure.com/#view/Microsoft_Azure_Storage/BlobPropertiesBladeV2/storageAccountId/%2Fsubscriptions%2Fb46092db-d6bf-4d8c-87a9-a8aada...`. The page title is "user.csv". Below the title, there are tabs for "Overview", "Versions", "Edit", and "Generate SAS". The "Edit" tab is active, showing a CSV table with 6 rows of data. The table has columns: id, email, first_name, last_name, and avatar. The data is copied from a REST API.

id	email	first_name	last_name	avatar
1	george.bluth@reqres.in	George	Bluth	https://reqres.in/img/faces/1-image.jpg
2	janet.weaver@reqres.in	Janet	Weaver	https://reqres.in/img/faces/2-image.jpg
3	emma.wong@reqres.in	Emma	Wong	https://reqres.in/img/faces/3-image.jpg
4	eve.holt@reqres.in	Eve	Holt	https://reqres.in/img/faces/4-image.jpg
5	charles.morris@reqres.in	Charles	Morris	https://reqres.in/img/faces/5-image.jpg
6	tracey.amos@reqres.in	Tracey	Ramos	https://reqres.in/img/faces/6-image.jpg

At the bottom of the screen, there is a Windows taskbar with the search bar, task view button, and system tray showing the date and time (17:31, 04-03-2025).



Praveen Patel
Azure Data Engineer

**Follow Me to Get Such
More Content Like This**