

Assignment 1

Se-2536

Task A — Anatomy of a Real Page

1. Selected Website

For this task, our team selected the Rilak Floral Astana website.

Website: <https://rilak.kz/astana/>

Rilak Floral is a real flower shop in Astana. We selected this website because its topic is similar to our project, Sweet Flowers. The website contains information about flowers, bouquets, prices, delivery, contacts and ordering services.

We studied the source code of this website to understand how a real commercial website is structured.

2. HTML Document Information

- Doctype

The website uses HTML5:

This tells the browser that the document uses the HTML5 standard.

- Language

The language of the website is Russian:

```
1 <!DOCTYPE html>
2 <html lang="ru">
3 <head>
```

- Character Set

The website uses UTF-8:

- Viewport

The website contains the following viewport meta tag:

This allows the page to adapt its layout to the width of the user's device.

- Title

The title of the website is:

```
<meta charset="UTF-8">
<meta name="keywords" content="">
<meta name="description" content="Доставка цветов в Астане - заказать бу
<title>Цветы в Астане - купить букеты с доставкой на заказ</title>
<meta name="HandheldFriendly" content="true">
<meta http-equiv="x-ua-compatible" content="ie=edge">
<meta http-equiv="x-dns-prefetch-control" content="off">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

Three Meta Tags

We identified several meta tags in the source code.

The first one is the keywords meta tag:

```
<meta name="keywords" content="">
```

The second one is the description meta tag:

```
<meta name="description" content="Доставка цветов в Астане –
заказать букет в цветочном магазине Rilak Floral ✨💎 Фотоотчет
✔ Цветы высокого качества ✨💎 Доставка от 90 минут">
```

The third one is:

```
<meta name="HandheldFriendly" content="true">
```

The description meta tag provides a description of the website, while the other meta tags provide additional information for browsers and devices.

3. Semantic HTML Elements

We analyzed the structure of the Rilak Floral website and looked at the HTML elements used to organize its content.

The website contains structural elements for navigation, content and other parts of the page. Semantic HTML elements are useful because they describe the purpose of the content.

The main semantic elements we looked for were:

- header — for the header area;
- nav — for navigation;
- main — for the main page content;
- section — for groups of related content;
- article — for independent content;
- aside — for additional information;
- footer — for the bottom part of the website.

The website also uses div elements. A div is a generic container and does not describe the meaning of the content by itself. It can be useful for grouping elements and for styling, but semantic elements are preferable when they accurately describe the content.

In our Sweet Flowers website, we tried to use semantic elements whenever they were appropriate instead of using div for the whole page structure.

4. Forms

The Rilak Floral website contains forms for interacting with customers and placing orders.

Forms are used to collect information from visitors. A flower shop may need information such as a customer's name and phone number to process an order.

We used this website as a reference when creating our own form.

In our Sweet Flowers website, the form is located on flowers.html.

Our form uses:

- text input for the customer's name;
- email input;
- telephone input;
- number input;
- date input;
- radio buttons;
- checkbox;
- select menu;
- textarea;
- submit button;
- reset button.

The form also uses labels connected to inputs through the for and id attributes.

The form currently does not send information to a real server because our project does not have a backend yet.

5. Tables

We also studied how structured information can be presented using tables.

In our Sweet Flowers website, we created a table on flowers.html to display bouquet information.

The table contains:

- a caption;
- a thead;


- a tbody;
- column headings using th;
- row headings using th scope="row";
- data cells using td.

We used a table because bouquet names, flower types, sizes and prices can be compared using rows and columns.

Bouquet	Flowers	Size	Price
"Wow-factor" premium bouquet	Peonies, Peony-flowered spray roses, Hydrangeas, Eustomas	Medium	56.000
Pink Delight – Premium Bouquet	spray roses, peony-style spray roses, lush hydrangeas	Large	106.000

This makes the information easier to understand and compare.

Structural sketch

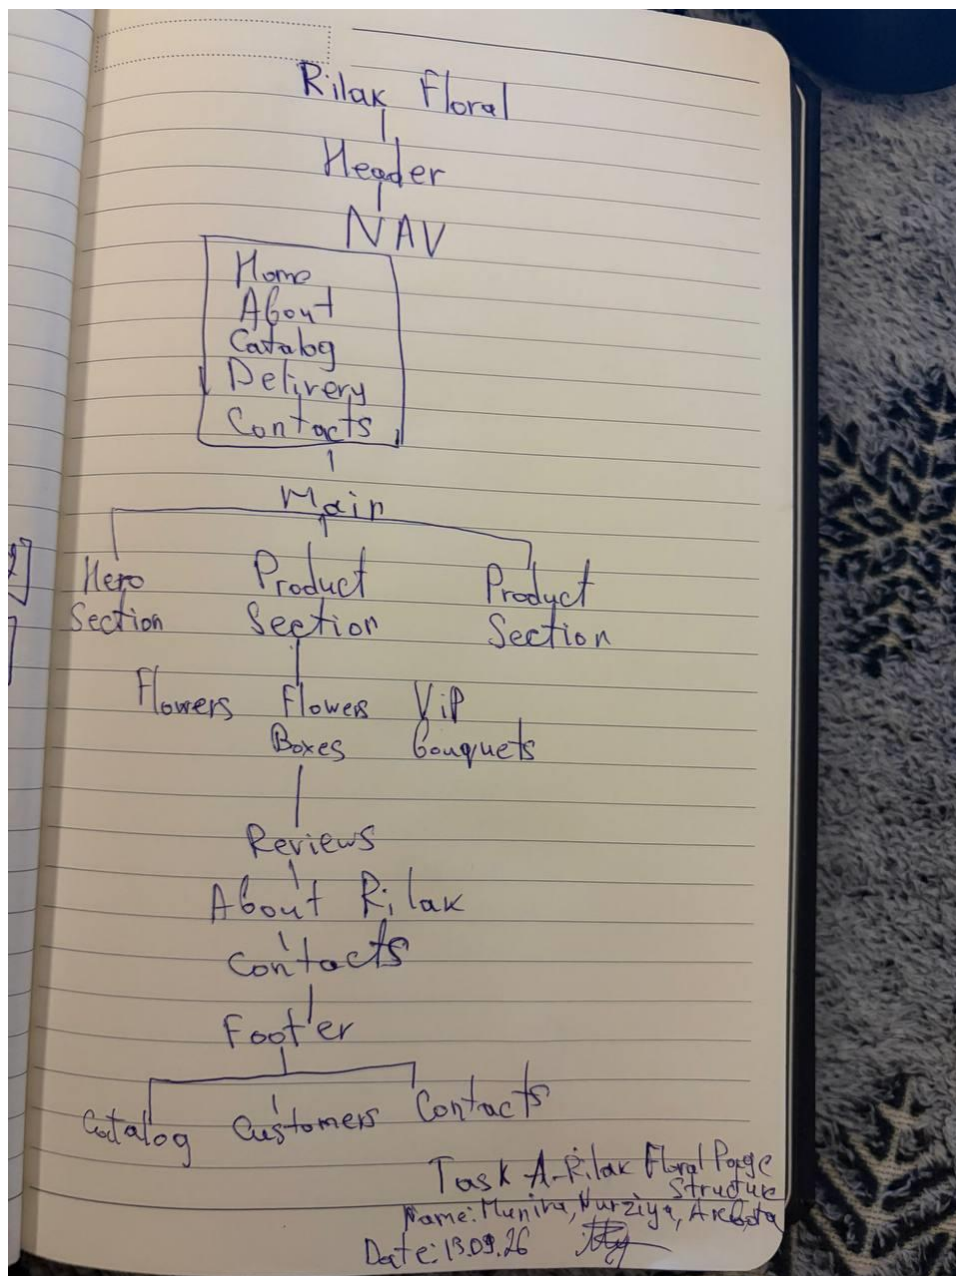

6. Three Structural Problems and How We Avoided Them

Problem 1 Overly complex source structure

The Rilak Floral website is a real commercial website, so its source code contains many technical elements and external resources. The head section includes several stylesheets, external fonts, analytics scripts and other technical elements.

For a basic HTML assignment, such a structure would make the source code unnecessarily difficult to understand.

How we avoided it

In Sweet Flowers, we kept our HTML structure simple and focused on the requirements of the assignment. We did not add unnecessary external libraries, analytics systems or JavaScript.

Problem 2 Too many technical resources in the page source

The Rilak Floral source contains Google Tag Manager, Yandex Metrika, Google Fonts, several CSS files and other external resources.

These resources are useful for a real commercial website, but they are not necessary for demonstrating basic HTML structure.

How we avoided it

Our Sweet Flowers pages currently contain only the HTML needed for the assignment. We use the required metadata, semantic elements, navigation, forms, tables and other HTML elements without adding unnecessary external services.

Problem 3 Dependence on styling and interactive functionality

Rilak Floral is a finished commercial website, so its visual appearance and some functionality depend on CSS and JavaScript.

At the current stage of our assignment, the main goal is to create a correct HTML structure before adding styling

How we avoided it

We intentionally created Sweet Flowers without CSS and JavaScript. This allows us to check the HTML structure separately and make sure that the website remains understandable even without visual styling.

We will add styling at the appropriate stage of the course

Task B Written Part

A web page is a document written mainly with HTML that contains text, images, links, forms and other elements. HTML creates the structure of the page, while a browser reads the HTML code and builds a document structure called the DOM. The browser then displays this structure on the screen. At this stage of our project, we use HTML without CSS and JavaScript, so we can focus on the structure of our website.

In our index.html, we chose the semantic header element instead of a div because it represents the introductory part of the page. We used the nav element for our navigation menu because it contains links to the different Sweet Flowers pages. We also used the article element for the “Our Flower Shop” content because it represents an independent part of information about our shop.

Our flowers.html page contains a bouquet request form. When a visitor presses the Submit button, the browser validates the required fields and then tries to submit the form using the POST method. However, our form currently has no backend server and uses action="#", so no real order is sent to the flower shop or stored in a database. The form is only used to demonstrate the required HTML form structure at this stage.

```
<header>  
  <h1>Sweet Flowers</h1>
```

```
  <nav>
```

```
    <ul>
```

```
      <li><a href="inde
```

```
<form method="post" action="#">
```

```
</li></ul>
```

```
<button type="submit">Submit request</button>
```

```
<button type="reset">Reset</button>
```