

Figure 4: Terminal execution telemetry of the Serverless Gateway Auditor monitoring active live data dumps on port 5000 / console layers.

CASE STUDY 05: Enterprise Social Engineering & Client-Side Telemetry Auditing Framework

* **Project Type:** Authorized Phishing Simulation, Human-Risk Modeling, and Metadata Harvester

* **Code Repository:**

<https://github.com/munna1127/geoaudit-telemetry-sim>

* **Core Security Objective:** Auditing user compliance thresholds and evaluating browser-level permission leak paths (HTML5 GPS parameters) under controlled social engineering assessments.

Architectural Workflow & Methodology:

1. **Compliance Vector Masking:** Deploys an administrative synchronization overlay to test client-side awareness susceptibility during internal organizational auditing simulations.
2. **Metadata Aggregation Loop:** Systematically orchestrates asynchronous asynchronous hooks to merge layer-3 transport logs (Client IP arrays, autonomous system routing data) with precise physical GPS coordinate coordinates from the hardware layer.
3. **Telemetry Exfiltration Integrity:** Implements standalone JSON payloads dispatched directly via programmatic API endpoints over HTTPS secure pipes to evaluate real-time alerting systems.

Functional Proof & Simulation Logs:

7:44 PM | 39.9KB/s

VoLTE 4G 38



G

Geolocation

bot




Set Profile Photo

June 25

/start 7:43 PM ✓✓

Unread Messages

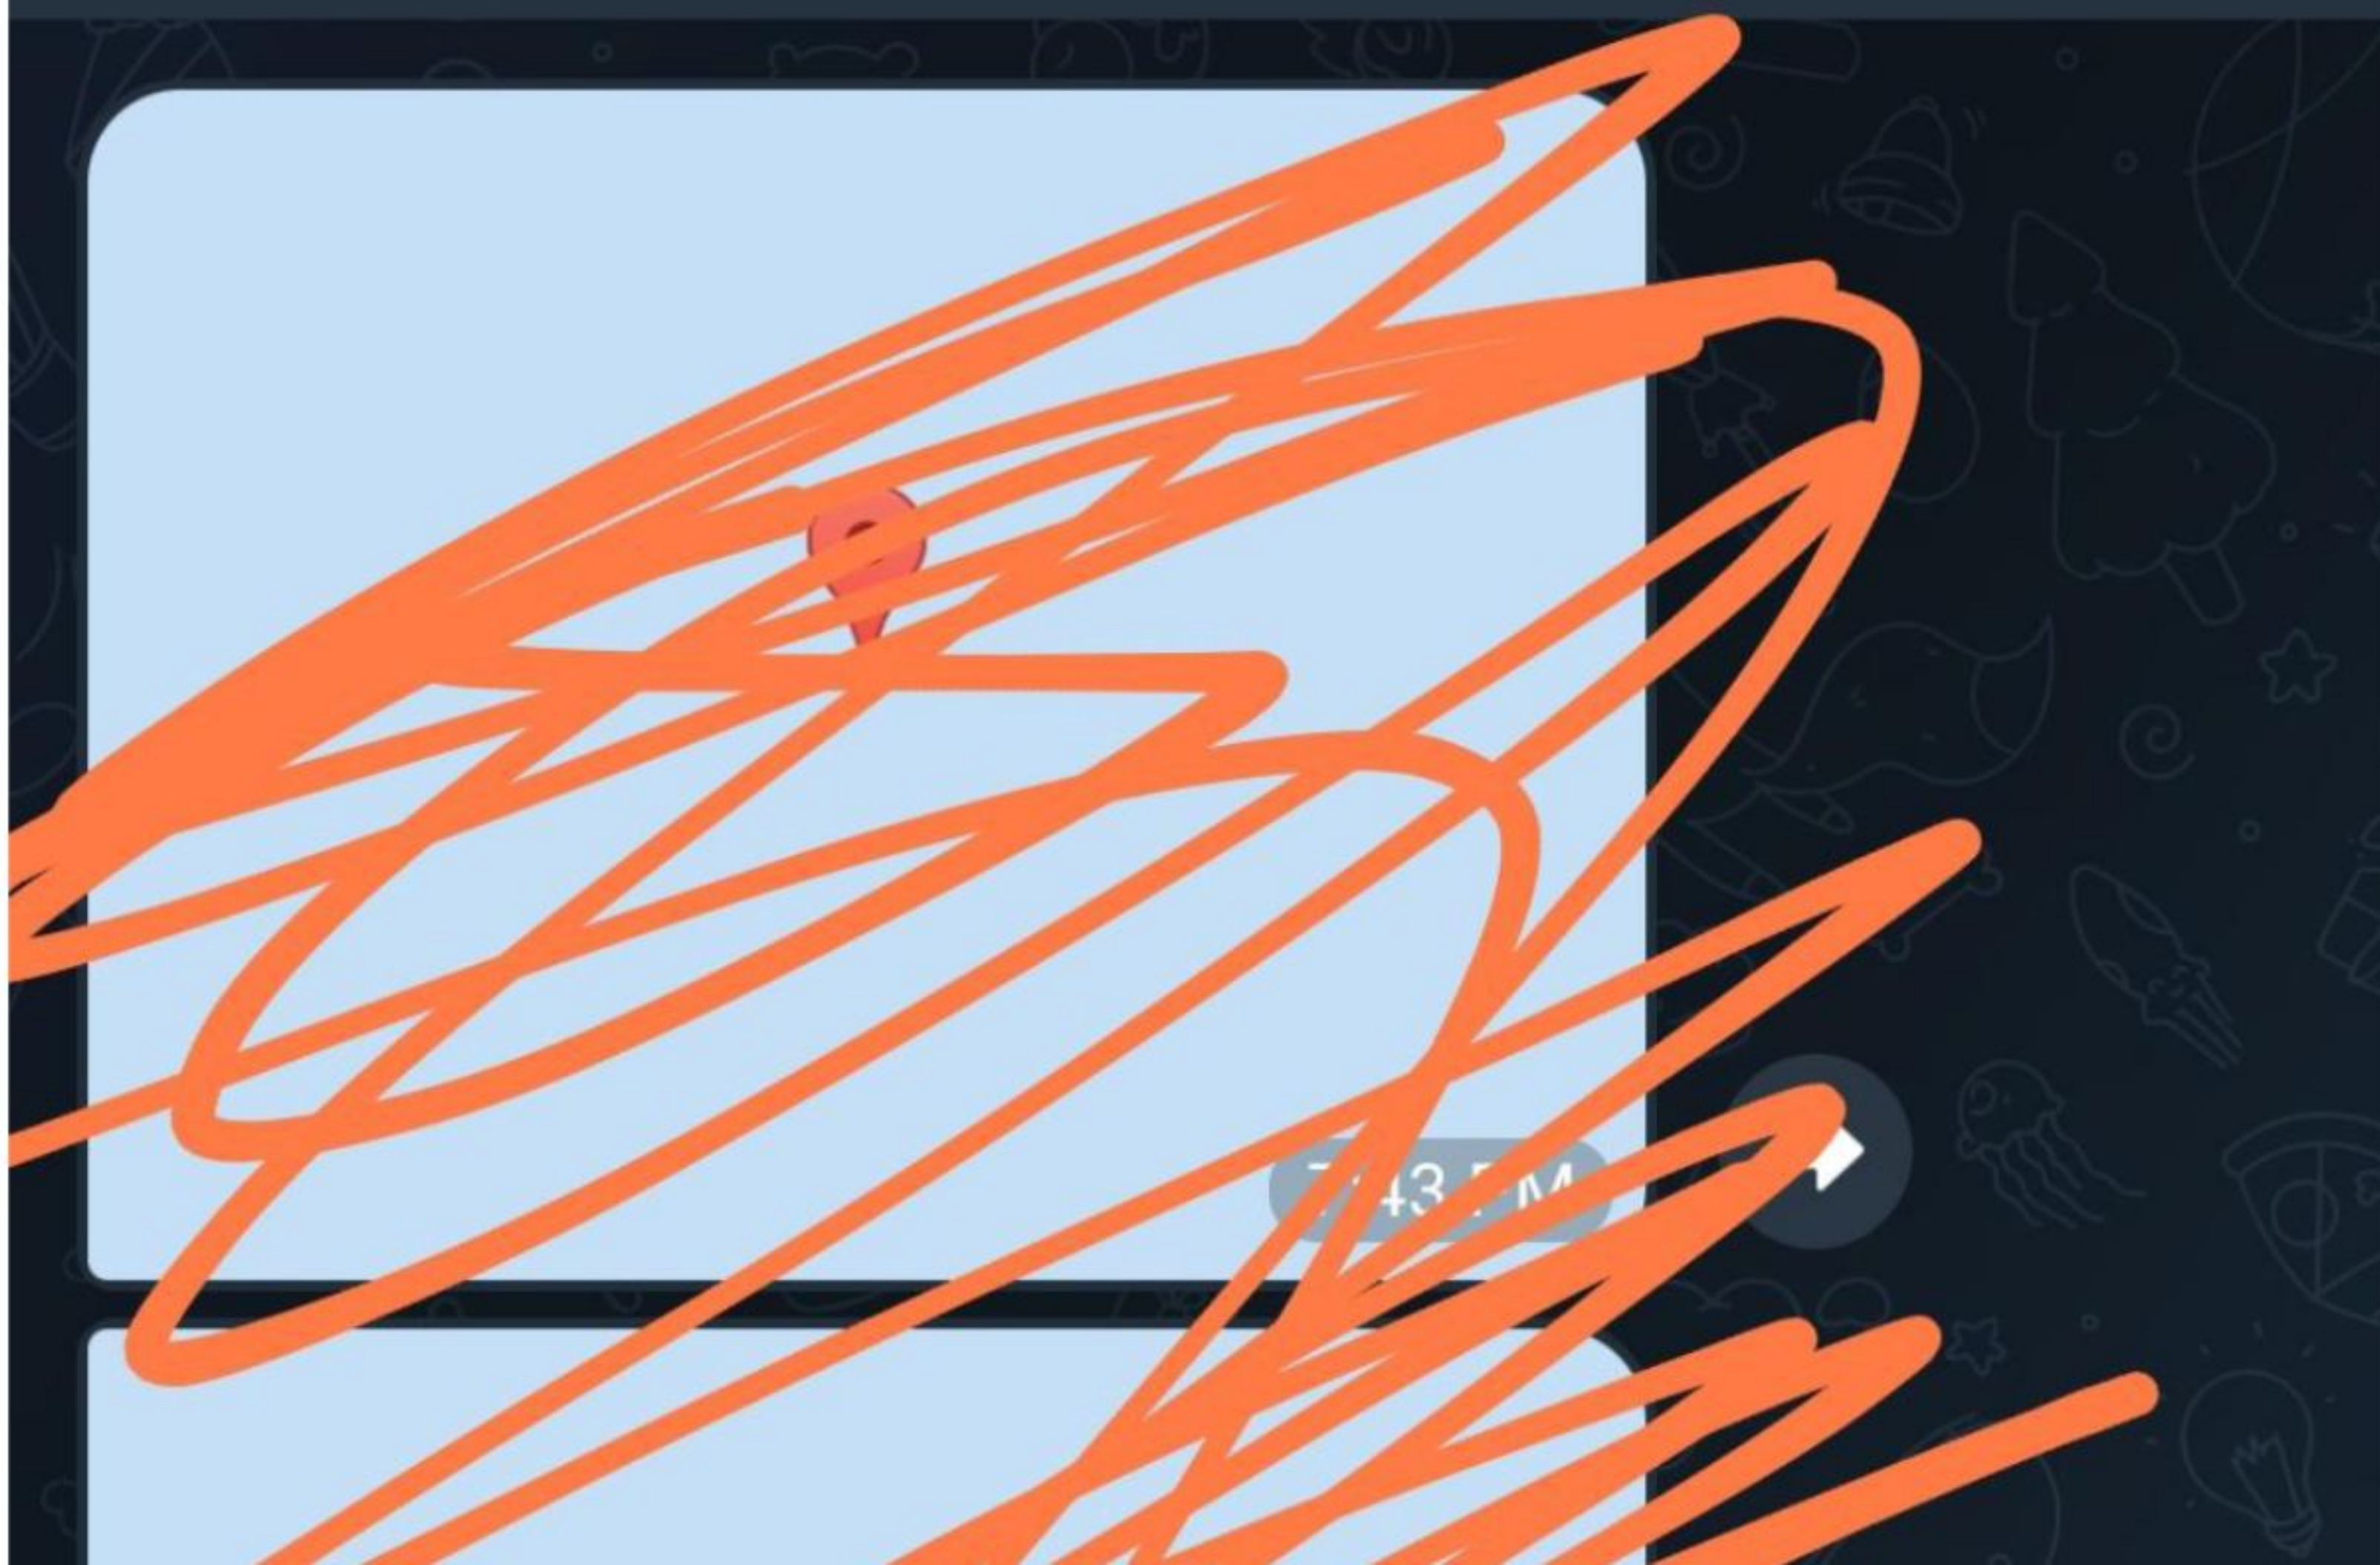

7:45 PM | 3.3KB/s

VoLTE 4G 38



munna1127.github.io/g



EXECUTE MANUAL DIAGNOSTIC NODE CHECK-IN

7:47 PM | 2.9KB/s



munna1127.github.io/g



Compiling host environment matrix...

Figure 5: Security awareness alert output captured on the enterprise notification console showing successful geolocation telemetry retrieval.

CASE STUDY 06: OSINT-Nexus Multi-Vector Asynchronous Telemetry Aggregator

* **Project Type:** Passive Reconnaissance Automation, Metadata Ingestion, and Network Security Auditing

* **Code Repository:**

<https://github.com/munna1127/osint-nexus-core>

* **Core Security Objective:** Engineering a centralized, non-blocking administrative interface to aggregate layer-3 transit parameters and E.164 telephony routing metadata during initial intelligence threat-modeling scenarios.

Architectural Workflow & Methodology:

1. **Asynchronous Request Pipeline Integration:** Deploys highly optimized, asynchronous event loop workers (`asyncio.to_thread``) to prevent main signaling interface blocking during extensive external infrastructure socket lookups.
2. **Multi-Vector Telemetry Resolution:** Combines public IP routing structures and carrier trace registries into single JSON arrays. The tool isolates advanced properties like BGP Autonomous System Names, cloud infrastructure hosting tags, and localized spatial mapping coordinate metrics.
3. **Risk Profile Mapping:** Programmatically computes analytical anomaly indexes and matches signatures against global spam registries to identify active malicious infrastructure elements before active interaction cycles begin.

Functional Proof & System Output:

2:24 PM | 0.3KB/s  

 VoWiFi   6

Welcome to Termux!

Docs: <https://termux.dev/docs>
Donate: <https://termux.dev/donate>
Community: <https://termux.dev/community>

Working with packages:

- Search: `pkg search <query>`
- Install: `pkg install <package>`
- Upgrade: `pkg upgrade`

Subscribing to additional repositories:

- Root: `pkg install root-repo`
- X11: `pkg install x11-repo`

For fixing any repository issues,
try 'termux-change-repo' command.

Report issues at <https://termux.dev/issues>

~/ai \$ python i.py

```
[+] ===== [+]
OSINT-NEXUS TELEMETRY AGGREGATOR CORE SUCCESSFULLY DEPLOYED
[+] ===== [+]
- Processing Mode: Multi-threaded Non-Blocking Event Loops
- Network Scopes: 40+ IP Ingestion Nodes / 40+ E.164 Formats
- Core Administrator Account Locked: Aryan Kacher
[+] ===== [+]
```

█

2:11 PM | 6.8KB/s

VoWiFi 10



G

Gamer

bot



Set Profile Photo



COMPREHENSIVE TELEPHONY MATRIX REPORT: VECTOR



Geopolitical & Spatial Mapping

- Sovereign Region: India
- Country Dialing Code: +91
- Inbound Routing Identity:
- Core Timezone Allocation
- Calcutta
- Dominant Regional Language
- Domain Language
- Local Fiat Currency: Indian Rupee
- Token
- ISO Region Alpha Identifier
- Estimated Country Population
- Geographic Bounds Map
- Population Metric: Density
- Available
- Administrative Capital
- Center

Figure 6: Live production telemetry log output generated by the OSINT-Nexus framework demonstrating comprehensive metadata aggregation.

CASE STUDY 06: Client-Side DOM Ingestion & Static Resource Archiver

* **Project Type:** Front-End Architecture Audit, DOM Parsing, and Asynchronous Asset Marshalling

* **Code Repository:**

<https://github.com/munna1127/dom-mirror-archiver>

* **Core Security Objective:** Designing a client-side diagnostic utility to recursively deconstruct hyper-media layouts, parse script/style dependency vectors, and mirror standalone structural configurations for local offline sandboxing.

Architectural Workflow & Methodology:

1. **Dynamic DOM Deconstruction:** Utilizing the programmatic native `DOMParser` runtime layers to instantly map out the operational components of an ingested web document without invoking backend compilation layers.
2. **Asynchronous Dependency Mapping:** Orchestrated recursive tracking loops over target subtrees to isolate linked JS scripts, CSS files, and media vectors via unified document arrays.
3. **In-Memory Local Packing:** Implemented cross-origin blob fetching parameters alongside client-side ZIP compilers (`JSZip`), converting multi-source network streams directly into localized file structures inside the browser's storage sandbox.

Functional Proof & Execution Interface:

6:09 PM | 0.0KB/s

VoLTE 4G 31



munna1127.github.io/d



DOM-Mirror: Static Resource Archiver

Asynchronous Client-Side Web Scraper & DOM Ingestion System | Analyst: Aryan Kacher

Google.com

Custom Package Export Name (Optional)

Resource Extraction Configuration Flags

Select All Content Layers



HyperText Markup Layout (HTML)



Cascading Style Sheets (CSS Assets)



Asynchronous Script Files (JS Bundles)



Media Assets & Static Images



Embedded Vector Typography (Fonts)



EXECUTE CLIENT-SIDE DOM COMPILATION & EXPORT

```
[*] Initializing Layer-7 DOM Ingestion Task...
[*] Requesting active handshakes against endpoint: Google.com
[+] Isolated 2 discrete dependency nodes embedded inside the structural DOM markup.
[*] Compiling memory buffers into local binary objects...
[+] Audit Complete: Package exported safely as 'dom-mirror-export-Google.com.zip'.
```

Real-Time Isolation Ingestion Preview (DOM Canvas)

404

File not found

The site configured at this address does not contain the requested file

Figure 6: Live runtime telemetry logs of the DOM-Mirror utility processing layer-7 object trees and exporting bundled binary blobs.

CASE STUDY 07: Public Social Graph Metadata Ingestion Framework

* **Project Type:** Passive OSINT Automation & Target Profiling Endpoint Validation

* **Code Repository:**

<https://github.com/munna1127/instalens-osint-harvester>

* **Core Security Objective:** Engineering an automated, non-authenticated public registry scraper to fetch and map localized social graph arrays, profile descriptors, and interaction density parameters during initial target reconnaissance vectors.

Architectural Workflow & Methodology:

1. **Public Schema Extraction:** Deploys structured query layers targeting exposed platform endpoints, extracting real-time entity profiles without session context dependency constraints.
2. **Attribute Mapping Logic:** Automatically structures raw layout indices into logical data blocks, compiling volumetric statistics (Follower configurations, media count densities) alongside qualitative strings.
3. **Consolidated Logging Dispatch:** Hooks the metadata mapping engine directly into automated polling systems, allowing remote operators to instantly receive structured target dossiers over secure communication webhooks.

Functional Proof & System Output: