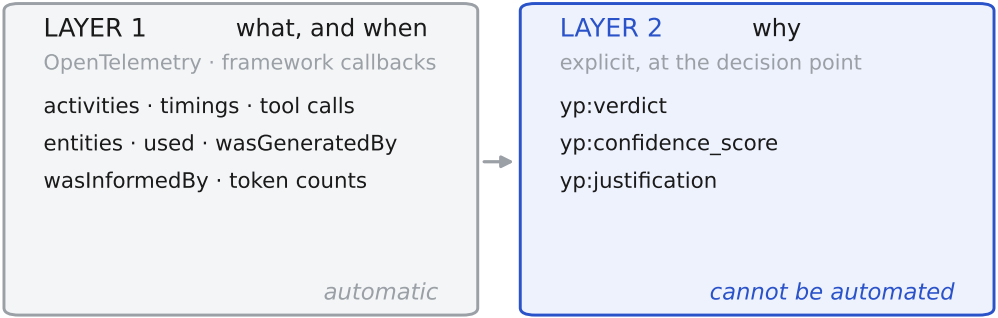

The rationale for a decision is a local variable at the moment of decision.

A callback fires after the function returns; a span wraps it; a query reads the store afterwards. None can retrieve what was never captured.

both layers → W3C PROV + the yp: vocabulary → PROV-JSON