

Murano Developers Guide

Murano Developers Guide

v0.2

Publication date 2013-09-09

Abstract

This document is intended for individuals who wish to use our product or intend to contribute.

Table of Contents

1. Overview	1
Intended Audience	1
Document Change History	1
2. Installation Guide	2
Pre-Requisites	2
Murano API Service	3
Install	3
Configure	4
Run	5
Conductor Service	6
Install	6
Configure	7
Run	8
Murano Dashboard	9
Install	9
Configure	10
Run	10
Installing with virtual environment	10
SSL configuration	12
HTTPS for Murano API	12
SSL for RabbitMQ	13
3. Architecture	15
Architecture	15
REST API	15
Object Model	15
Orchestration Engine	15
Releases	16
Integration with Heat	16
Windows on OpenStack	16
4. API Specification	17
Introduction	17
Return codes and errors	18
Response of POSTs and PUTs	18
Authentication	18
Workflow	18
Hostname assignment	18
API	19
Environment API	19
Environment Configuration API	23
Services API	26
Example Calls using Web Server as example	28
Shared Attributes	30
Active Directory Specs	31
Web Server Specs	32
ASP.NET Application Specs	33
Web Server Farm Specs	33
ASP.NET Application Farm Specs	34
MS SQL Server Specs	35
5. Workflows XML DSL	37
XML DSL	37
DSL functions	38

Workflows	39
Accessing Object Model	40
Function context	41
Workflow rules	42
Workflow actions	43
Workflow control	44
Execution Plans	44
6. Known Issues	46
7. How To Participate	47
8. Appendix	48

List of Figures

3.1. Architecture	15
4.1. Sample Workflow	18

List of Tables

4.1. Environment Object	19
4.2. GET /environments Call	19
4.3. Environment Object	20
4.4. POST /environments Call	20
4.5. Environment Object	21
4.6. PUT /environments/<id> Call	21
4.7. Error Response Codes	21
4.8. GET /environments/<id> Call	22
4.9. Error Response Codes	22
4.10. DELETE /environments/<id> Call	23
4.11. Error Response Codes	23
4.12. Configuration Session Object	23
4.13. POST /environments/<id>/configure Call	24
4.14. Error Response Codes	24
4.15. POST /environments/<id>/sessions/<sessionId>/deploy Call	24
4.16. Error Response Codes	24
4.17. GET /environments/<id>/sessions/<sessionId> Call	25
4.18. Error Response Codes	25
4.19. DELETE /environments/<id>/sessions/<sessionId> Call	25
4.20. Error Response Codes	26
4.21. GET /environments/<id>/services Call	26
4.22. Headers	26
4.23. PUT /environments/<id>/services Call	27
4.24. Headers	27
4.25. POST /environments/<id>/services Call	27
4.26. Headers	27
4.27. DELETE /environments/<id>/services Call	27
4.28. Headers	28
4.29. GET /environments/<id>/services Call	28
4.30. Headers	28
4.31. POST /environments/<id>/services Call	29
4.32. Headers	29
4.33. DELETE /environments/<id>/services/<service_id> Call	30
4.34. Headers	30
4.35. Service Object Specs	30
4.36. Service Object Specs	31
4.37. Active Directory Object	31
4.38. Active Directory Unit Object	31
4.39. Active Directory Object	31
4.40. Active Directory Unit Object	32
4.41. Web Server Object	32
4.42. Web Server Unit Object	32
4.43. Web Server Object	32
4.44. Web Server Unit Object	32
4.45. ASP.NET Application Object	33
4.46. ASP.NET Application Unit Object	33
4.47. ASP.NET Application Object	33
4.48. ASP.NET Application Unit Object	33
4.49. Web Server Farm Object	34
4.50. Web Server Farm Unit Object	34
4.51. Web Server Farm Object	34

4.52. Web Server Farm Unit Object	34
4.53. ASP.NET Application Farm Object	34
4.54. ASP.NET Application Farm Unit Object	35
4.55. ASP.NET Application Farm Object	35
4.56. ASP.NET Application Farm Unit Object	35
4.57. MS SQL Server Object	35
4.58. SQL Server Unit object	36
4.59. SQL Server Unit object	36
4.60. MS SQL Server Unit Object	36

Chapter 1. Overview

Welcome to Murano Project. Full information about Murano in openstack wiki page. [<https://wiki.openstack.org/wiki/Murano>]

Murano is intended to get opportunity for non-experienced users to deploy reliable Windows-based environments with 1-Click. Key goal is to provide UI and API which allows to deploy and operate Windows environments on the "Windows Services" abstraction level. The Service should be able to orchestrate complex circular dependent cases in order to setup complete Windows environments with many dependant services.

Intended Audience

This guide is intended to individuals who want to contribute to our project.

Document Change History

This version of the Murano Manual replaces and obsoletes all previous versions. The most recent changes are described in the table below:

Revision Date	Summary of Changes
April. 4, 2013	• Initial document creation.
September. 4, 2013	• update for Release-0.2

Chapter 2. Installation Guide

This chapter describes manual installation and configuration of Murano services.

Note that all Murano modules can be downloaded from our page [<https://launchpad.net/murano/>] on launchpad.

Automatic installation

Murano can be installed in automatic way. Script will install all necessary packages to your system. Find out more about this in Getting Started Guide [<http://murano-docs.github.io/0.2/getting-started/content/ch04s02.html>]

Pre-Requisites

Murano supports the following operating systems:

1. Ubuntu 12.04
2. RHEL/CentOS 6.4

These system packages are required for Murano:

Ubuntu

1. gcc
2. python-pip
3. python-dev
4. libxml2-dev
5. libxslt-dev
6. libffi-dev

CentOS

1. gcc
2. python-pip
3. python-devel
4. libxml2-devel
5. libxslt-devel
6. libffi-devel

All these packages will be installed in murano-installation scripts. In addition to these packages some repositories are required. Please follow the instructions in the appendix to prepare your environment for murano installation.

Murano API Service

Murano API provides access to the Murano orchestration engine via API.

This chapter describes the procedure of installation and configuration of Murano API.

Install

- Superuser privileges is required to install and configure system packages. Let's switch to root account:

```
sudo su -
```

- Make sure that additional linux repositories are installed. See the appendix for information about preparing a virtual machine for murano installation.
- Clone Murano API git repository:

```
git clone https://github.com/stackforge/murano-api
```

Stable version one of our releases can be checked by tag:

```
git checkout 0.2
```

- Switch to just created directory and then perform installation

Ubuntu

```
sh murano-api/setup.sh install
```

CentOS

```
sh murano-api/setup-centos.sh install
```

- Successful installation ends with message like this:

```
Successfully installed muranoapi
```

```
Cleaning up...
LOG:> Making sample configuration files at "/etc/murano-api"
LOG:> Reloading initctl
LOG:> Please, make proper configuration, located at "/etc/murano-api", before start
```

Configure

- First configure rabbitMQ by adding vhost and user with administrator rights:

```
rabbitmqctl add_user muranouser murano
rabbitmqctl set_user_tags muranouser administrator
rabbitmqctl add_vhost muranovhost
rabbitmqctl set_permissions -p muranovhost muranouser ".*" ".*" ".*"
```

- Copy and edit configuration files:

```
cd /etc/murano-api
cp murano-api.conf.sample murano-api.conf
cp murano-api-paste.ini.sample murano-api-paste.ini

vi murano-api.conf
```

- Configure it according to your environment:
 - *[DEFAULT]* section sets up logging.
 - *[reports]* section allows you to set up names for new rabbitMQ queues.
 - In *[rabbitmq]* section you can set up host configuration where rabbitMQ with just created user and vhost is running.

For more information how to configure SSL take a look at [SSL configuration chapter](#)

- Configure keystone auth_token in murano-api-paste.ini file. For more information see [Auth-Token Middleware with Username and Password \[http://docs.openstack.org/developer/keystone/configuringservices.html\]](http://docs.openstack.org/developer/keystone/configuringservices.html)

```
vim murano-api-paste.ini

[pipeline:muranoapi]
pipeline = authtoken context apivlapp

[app:apivlapp]
paste.app_factory = muranoapi.api.v1.router:API.factory

[filter:context]
```

```
paste.filter_factory = muranoapi.api.middleware.context:ContextMiddleware.factory

#For more information see Auth-Token Middleware with Username and Password
#http://docs.openstack.org/developer/keystone/configuring_services.html
[filter:authtoken]
paste.filter_factory = keystoneclient.middleware.auth_token:filter_factory
auth_host = localhost
auth_port = 35357
auth_protocol = http
admin_tenant_name = admin
admin_user = admin
admin_password = password
```

-

Register murano-api service in Openstack.

Note: you need to be authorized in Openstack to run this commands. To do this, you can run something like (having changed variables to appropriate values)

```
source $(YOUR_OPENSTACK_DIR)/openrc $(LOGIN) $(PASSWORD)
```

```
keystone service-create --name muranoapi --type murano --description "Murano-API"
```

```
keystone endpoint-create
```

```
--region RegionOne
--service-id The ID field returned by the keystone service-create
--publicurl http://x.x.x.x:8082 (where x.x.x.x - host ip where murano-api installed)
--internalurl the same as publicurl
--adminurl the same as publicurl
```

Run

- Run Murano API service:

Ubuntu

```
service murano-api start
```

CentOS

```
initctl start murano-api
```

Conductor Service

Conductor is a Murano orchestration engine that transforms object model sent by REST API service into a series of Heat and Murano-Agent commands.

This chapter describes Conductor for contributors of the project.

Install

- Murano Conductor uses OpenStack Heat for new virtual machines creation, therefore Heat should be installed and configured. Some services require the Internet access for virtual machines to successful deployment.

The detailed information about Heat configuration is described here. [http://docs.openstack.org/developer/heat/getting_started/index.html]

- OpenStack Heat requires a Key Pair for Load Balancer instances. Murano Conductor uses LoadBalancer for IIS Farms and ASP.NET Farms. The default name for Key Pair is "murano-lb-key", you can change this parameter in file `/etc/murano-conductor/data/templates/cf/Windows.template`
- Superuser privileges are required to install and configure system packages. Let's switch to root account:

```
sudo su -
```

- Make sure that additional repositories are installed. See the appendix for information about preparing a virtual machine for murano installation.
- Clone Murano Conductor repository from the github.

```
git clone https://github.com/stackforge/murano-conductor
```

Stable version one of our releases can be checked out by tag:

```
git checkout 0.2
```

- Switch to just created directory and then perform installation

Ubuntu

```
sh murano-conductor/setup.sh install
```

CentOS

```
sh murano-conductor/setup-centos.sh install
```

Configure

- Edit configuration file and take a look at inline comments:

```
cd /etc/murano-conductor
cp conductor.conf.sample conductor.conf
```

- Change configuration file according to your environment.

```
vi conductor.conf
```

- *[DEFAULT]*section is responsible for logging.
- *[heat]*points where heat is running.
- *[rabbitmq]*section points where your rabbitMQ installed and configured.

```
[DEFAULT]

# Path where log will be written
log_file = /var/log/murano-conductor.log
# Log verbosity
debug=True
verbose=True
data_dir = /etc/murano-conductor
# Maximum number of environments that can be processed simultaneously
max_environments = 20

[keystone]
auth_url = http://localhost:5000/v2.0
ca_file =
cert_file =
key_file =
insecure = False
```

```
[heat]
# Heat SSL parameters
# Optional CA cert file to use in SSL connections
ca_file =
# Optional PEM-formatted certificate chain file
cert_file =
# Optional PEM-formatted file that contains the private key
key_file =
# If set then the server's certificate will not be verified
insecure = False
# Valid endpoint types: publicURL (default), internalURL, adminURL
endpoint_type = publicURL

[rabbitmq]
# Connection parameters to RabbitMQ service
# Hostname or IP address where RabbitMQ is located.
# !!! Change localhost to your real IP or hostname as this address must be reachable
host = localhost
# RabbitMQ port (5672 is a default)
port = 5672
# Use SSL for RabbitMQ connections (True or False)
ssl = False
# Path to SSL CA certificate or empty to allow self signed server certificate
ca_certs =
# RabbitMQ credentials. Fresh RabbitMQ installation has "guest" account with "guest" password
# It is recommended to create dedicated user account for Murano using RabbitMQ web console
login = muranouser
password = murano
# RabbitMQ virtual host (vhost). Fresh RabbitMQ installation has "/" vhost preconfigured
# It is recommended to create dedicated vhost for Murano using RabbitMQ web console
virtual_host = muranovhost
```

Run

- Run Murano Conductor service:

Ubuntu

```
service murano-conductor start
```

CentOS

```
initctl start murano-conductor
```

Murano Dashboard

Murano Dashboard provides Web UI for Murano Project.

Warning

This installation is not capable with Horizon installed by devstack

Install

- Superuser privileges is required to install and configure system packages. Let's switch to root account:

```
sudo su -
```

- Make sure that additional repositories are installed. See the appendix for information about preparing a virtual machine for murano installation.
- If there is no openstack dashboard package in your environment install it now with all dependencies. Deleting an Ubuntu theme is an optional step but recommended.

Note

Horizon installed by devstack is not capable for a murano installation.

CentOS

```
yum install -y make gcc memcached python-memcached \
    mod_wsgi openstack-dashboard python-netaddr.noarch
```

Ubuntu

```
apt-get install -y memcached libapache2-mod-wsgi openstack-dashboard
dpkg --purge openstack-dashboard-ubuntu-theme
```

- Clone Murano Dashboard repository from the github:

```
git clone https://github.com/stackforge/murano-dashboard
```

- Stable version one of our releases can be checked out by tag:

```
git checkout 0.2
```


- Switch to just created directory and run installation script

Ubuntu

```
sh murano-dashboard/setup.sh install
```

CentOS

```
sh murano-dashboard/setup-centos.sh install
```

Configure

- Murano installation script makes all needed changes in horizon (openstack dashboard) configs. All you have to do is to configure horizon in appropriate way. Set `OPENSTACK_HOST` in your horizon local settings. For more information visit official horizon documentation. [<http://docs.openstack.org/developer/horizon/>]

Run

Since all required settings are made Apache service need to be restarted to apply all changes.

- *CentOS*

```
# service httpd restart
```

- *Ubuntu*

```
# service apache2 restart
```

- Check that "Environments" panel appears at the horizon "Project" tab. To see how to operate with Murano dashboard plugin check out Murano User Guide. [<http://murano-docs.github.io/latest/user-guide/content/ch01.html>]

Installing with virtual environment

For local development, all Murano components can be installed in a virtual environment.

- Install `virtualenv` package if you don't have one:

```
sudo pip install virtualenv
```

- Check out git repository with murano component:

- ```
git clone https://github.com/stackforge/murano-api
```
- ```
git clone https://github.com/stackforge/murano-conductor
```
- ```
git clone https://github.com/stackforge/murano-dashboard
```

- Make sure that required system packages are installed. Check list from prerequisites page
- Execute a script in the `tools` directory to create virtual environment automatically:

```
$ python tools/install_venv.py
```

- For **Murano Dashboard** additional installation need to be done:

- Openstack dashboard (horizon):

```
./tools/with_venv.sh pip install https://github.com/openstack/horizon/archive/ma
```

- Install openstack-dashboard dependency:

- *Ubuntu*

```
apt-get install nodejs
```

- *CentOS*

```
yum install nodejs
```

- Customized Djblets package to support datagrid element (installation by pip is not supported):

```
./tools/with_venv.sh easy_install https://github.com/tsufiev/djblets/archive/ma
```

- Config files for the development infrastructure of murano-api and murano-conductor can be found at `etc` under folder with component repository. Follow the links to see how config files should be configured: Murano API and Murano Conductor. To configure Murano Dashboard copy

```
cp muranodashboard/local/local_settings.py.example muranodashboard/local/local_
```

set the actual IP address of the OpenStack end-point. If you haven't register murano-api service in the keystone catalog you can set MURANO\_API\_URL in the same settings file. Note that local murano-api service will be using by default.

- Run Murano API:

```
./tools/with_venv.sh python api/cmd/api.py --config-file=./etc/murano-api.conf
```

- Run Murano Conductor:

```
./tools/with_venv.sh python muranoconductor/cmd/run.py --config-file=./etc/conductor.conf
```

- *Run Murano Dashboard:* To start the Murano development server use the Django manage.py utility with the context of the virtual environment:

```
./tools/with_venv.sh ./manage.py runserver 0.0.0.0:8080
```

## SSL configuration

Murano components are able to work with SSL. This chapter will help your to make proper settings with SSL configuration.

### HTTPS for Murano API

SSL for Murano API service can be configured in *ssl* section in */etc/murano-api/murano-api.conf*. Just point to a valid SSL certificate. See the example below:

```
[ssl]
cert_file = PATH
key_file = PATH
ca_file = PATH
```

- *cert\_file=PATH:* Path to the certificate file the server should use when binding to an SSL-wrapped socket.
- *key\_file=PATH:* Path to the private key file the server should use when binding to an SSL-wrapped socket.
- *ca\_file=PATH:* Path to the CA certificate file the server should use to validate client certificates provided during an SSL handshake. This is ignored if *cert\_file* and "key\_file" are not set.

The use of SSL is automatically started after point to HTTPS protocol instead of HTTP during registration Murano API service in endpoints (Change publicurl argument to start with https://). See here how to register Murano API in Openstack Keystone.

SSL for Murano API is implemented like in any other Openstack component. This realization is based on ssl python module so more information about it can be found [here](http://docs.python.org/2/library/ssl.html). [http://docs.python.org/2/library/ssl.html]

## SSL for RabbitMQ

All Murano components communicate with each other by RabbitMQ. This interaction can be encrypted with SSL. By default all messages in Rabbit MQ are not encrypted. Each RabbitMQ Exchange should be configured separately.

### Murano API -> Rabbit MQ exchange

Edit *rabbitmq* section in */etc/murano-api/murano-api.conf* and set ssl option to True to enable SSL. Specify the path to the SSL CA certificate in regular format: */path/to/file* without quotes or leave it empty to allow self-signed certificates.

```
[rabbitmq]

Use SSL for RabbitMQ connections (True or False)
ssl = True

Path to SSL CA certificate or empty to allow self signed server certificate
ca_certs =
```

### Rabbit MQ -> Murano Conductor exchange

Open */etc/murano-conductor/conductor.conf* and configure *rabbitmq* section in the same way: enable ssl option to True and set CA certificate path or leave it empty to allow self-signed certificates.

```
[rabbitmq]

Use SSL for RabbitMQ connections (True or False)
ssl = True

Path to SSL CA certificate or empty to allow self signed server certificate
ca_certs = /home/user/certificates/example.crt
```

### Murano Agent -> Rabbit MQ exchange

By default all Murano Conductor configuration settings apply to Murano Agent. If you want to configure Murano Agent in a different way change the default template. It can be found here: */etc/murano-conductor/data/templates/agent-config/Default.template*. Take a look at appSettings section:

```
<appSettings>
```

```
<add key="rabbitmq.host" value="%RABBITMQ_HOST%"/>
<add key="rabbitmq.port" value="%RABBITMQ_PORT%"/>
<add key="rabbitmq.user" value="%RABBITMQ_USER%"/>
<add key="rabbitmq.password"
 value="%RABBITMQ_PASSWORD%"/>
<add key="rabbitmq.vhost" value="%RABBITMQ_VHOST%"/>
<add key="rabbitmq.inputQueue"
 value="%RABBITMQ_INPUT_QUEUE%"/>
<add key="rabbitmq.resultExchange" value=""/>
<add key="rabbitmq.resultRoutingKey"
 value="%RESULT_QUEUE%"/>
<add key="rabbitmq.durableMessages" value="true"/>

<add key="rabbitmq.ssl" value="%RABBITMQ_SSL%"/>
<add key="rabbitmq.allowInvalidCA" value="true"/>
<add key="rabbitmq.sslServerName" value=""/>
</appSettings>
```

Desired parameter should be set directly to the value of the key that you want to change. Quotes are need to be kept. Thus you can change "rabbitmq.ssl" and "rabbitmq.port" values to make Rabbit MQ work with this exchange in a different from Murano-Conductor way.

---


# Chapter 3. Architecture

## Architecture

The Murano Service communicates with the following OpenStack components:

- Horizon - provides a GUI with ability to use all Murano features;
- Keystone - authenticates users and provides the security token that is used to work with OpenStack, hence limiting the user abilities in Murano based on OpenStack privileges;
- Heat - is used to provision VMs and other OpenStack resources for Windows Environments;
- Glance - stores Windows Server VM images, with each image containing an installed OS and a set of scripts
- Quantum - provides the network configuration API
- Agent - provides agent functionality to communicate with the Orchestration Engine and executes tasks on VMs

**Figure 3.1. Architecture**

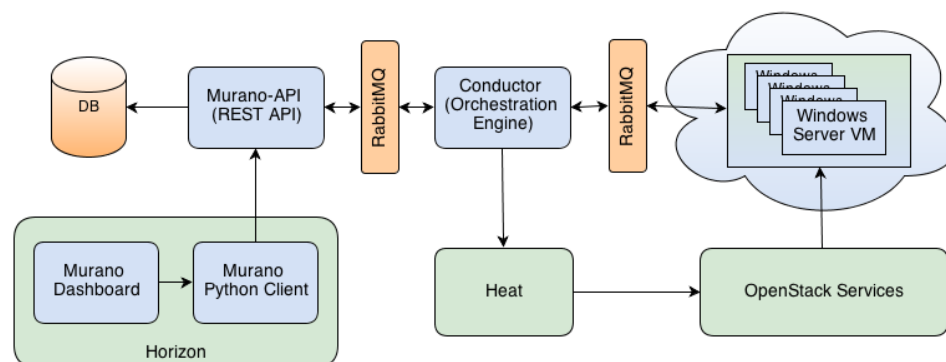

## REST API

Murano exposes a service endpoint for communication with a client. It exposes API functions to manipulate objects such as environment and service.

This component is responsible for translating API function parameters to Object Model attributes and propagating the deployment status from the Orchestration Engine.

## Object Model

An internal representation of Windows Services and Environments. All attributes and entities are described in the API specification.

## Orchestration Engine

This is the core component which evaluates Object Model changes and creates a plan for implementing these changes on the instances or in the cloud. This component will support extensions via plug-ins. Plugins can add new services and extend existing services for integration.

## Releases

- *Release-0.1* has 0.1 tag in all Murano repositories. Released 2013-05-30.
- *Release-0.2* has 0.2 tag in all Murano repositories. Released 2013-09-05.

## Integration with Heat

Heat is a cloud resource management engine that allows you to manipulate resources that represent OpenStack entities (Security Groups, Instances, Floating IPs, Volumes, etc.) and some entities such as AutoScaling groups from a single point of control.

OpenStack resource provisioning is one of the steps required for environment deployment and Heat will be used for that purpose. Heat allows you to define all OpenStack resources in a single document that will be easy to maintain and will not require resorting to multiple OpenStack APIs while keeping the software configuration separate.

## Windows on OpenStack

Windows works on KVM pretty smoothly, and with the RedHat-created open-source VirtIO drivers for Windows, it's possible to work efficiently with KVM exposed devices.

In OpenStack's Grizzly release, Microsoft's hypervisor Hyper-V will be supported. The Hyper-V virtual switch will be also supported as a Quantum plug-in. From the performance viewpoint, Hyper-V Server 2012 compares very favorably with bare metal, processing just over 6% fewer transactions per second compared to the same workload running on a similarly configured physical server.

Also, unlike the current OpenStack, Hyper-V also natively supports Windows Clusters.

---

# Chapter 4. API Specification

Revision Date	Summary of Changes
February 4, 2013	• Initial
February 22, 2013	• Enhance API with latest architecture changes
March 06, 2013	• Fix specification according to remarks from Dmitry Teselkin
Jun 06, 2013	• ASP.NET Application, Web Server Farm and ASP.NET Application Farm Services Added, uri/address/endpoint corrections, hostname assignment section added

## Introduction

Murano Service API is a programmatic interface used for interaction with Murano. Other interaction mechanisms like Murano Dashboard or Murano CLI should use API as underlying protocol for interaction.

## Glossary

For detailed information about entities and terms used in this document, please refer first to architecture.

Environment	<p>Environment is a set of logically related Services managed by a single tenant. Environment defines Windows environment boundaries.</p> <p>Services within single Environment may comprise some complex configuration while Services in different Environments are always independent from one another. Each Environment is associated with single OpenStack project (tenant).</p>
Service	<p>Service is building block of Windows environment. Service is a set of one or more Virtual Machines sharing a common purpose and configured together. Each service belongs to a single Environment and single Service Type.</p> <p>Services are comprised from one or more Service Units.</p>
Service Type	<p>Service type is definition for describing set of features exposed by service.</p>
Service Unit	<p>Service Units are the actual Windows Server VMs instantiated by OpenStack and then configured according to its Service Type (this may also correspond to one of predefined Windows Server roles).</p>
Service Metadata	<p>Service Metadata is a JSON-encoded definition of Environment, its Services and their Service Units along with all their attributes. Service Metadata may describe both current and the intended state of the Environment.</p>
Session	<p>All changes to environment done in scope of Session. After all changes to Environment state are accumulated, changes actually are applied only after session is deployed.</p>



## Return codes and errors

All REST API calls return the natural HTTP response codes for the operations, e.g. a successful GET returns a HTTP 200, a successful PUT returns a HTTP 201, a GET for a non-existent entity returns HTTP 404, unauthorized operations return HTTP 401 or HTTP 403, internal errors return HTTP 500.

## Response of POSTs and PUTs


All POST and PUT requests by convention should return the created object (in the case of POST, with a generated ID) as if it was requested by GET.

## Authentication

All requests include a Keystone authentication token header (X-Auth-Token). Clients must authenticate with Keystone before interacting with the Murano service.

## Workflow

**Figure 4.1. Sample Workflow**

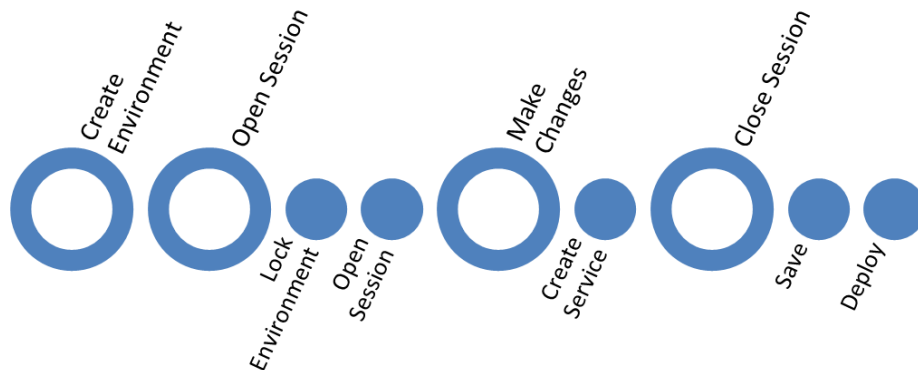

Let's review a sample workflow (series of API calls) for creating new Environment with Active Directory Service deployment:

1. POST /environments/ - Creating new Environment
2. POST /environments/id/configure – Creating new configuration session for Environment
3. POST /environments/id/services – Creating new ActiveDirectory service
4. POST /environments/id/sessions/session\_id/deploy – Saving and deploying changes

## Hostname assignment

Each Service Object definition may have an attribute "unitNamingPattern" that is used to control hostnames that will be assigned to spawned VM instances of the service.

Hostname pattern has the form of "name#" where "#" character is replaced with sequential number of unit within the service (starting with 1) and all other characters remain intact. For example Service with unitNamingPatter equal to "ad#-loc" will have units with hostnames "ad1-loc", "ad2-loc" etc.

"unitNamingPattern" attribute is optional. If it is omitted then a unique random hostname would be assigned.

# API

## Environment API

This section describes API calls for Environment management.

### Get a List of existing Environments

**Table 4.1. Environment Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name
created	datetime	Creation date and time in ISO format
updated	datetime	Modification date and time in ISO format
tenant_id	string	OpenStack tenant ID
version	int	Current version
status	string	Deployment status: ready, pending, deploying

### Call

**Table 4.2. GET /environments Call**

Method	URI	Description
GET	/environments	Get a list of existing Environments

### Payload

None

### Returns

This call returns list of environments. Only the basic properties are returned. For details see "Get Environment Instance Detailed Information":

```
{
 "environments": [
 {
 "id": "0ce373a477f211e187a55404a662f968",
 "name": "dcl",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "tenant_id": "0849006f7ce94961b3aab4e46d6f229a",
```

```
 "version": 1,
 "status": "ready"
 },
 {
 "id": "c697bd2429304820a928d145aa42af59",
 "name": "dc2",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "tenant_id": "0849006f7ce94961b3aab4e46d6f229a",
 "version": 2,
 "status": "deploying"
 }
]
}
```

## Create Environment instance

**Table 4.3. Environment Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name

## Call

**Table 4.4. POST /environments Call**

Method	URI	Description
POST	/environments	Create new Environment

## Payload

```
{
 "name": "env1"
}
```

## Returns

This call returns created environment:

```
{
 "id": "ce373a477f211e187a55404a662f968",
 "name": "env1",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
}
```

```
 "tenant_id": "0849006f7ce94961b3aab4e46d6f229a",
 "version": 0
 }
```

## Update Environment Instance

**Table 4.5. Environment Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name

### Call

**Table 4.6. PUT /environments/<id> Call**

Method	URI	Description
PUT	/environments/<id>	Update properties of Environment instance

**Table 4.7. Error Response Codes**

Code	Description
401	User is not authorized to access this tenant resources

### Payload

```
{
 "name": "env1-changed"
}
```

### Returns

This call returns modified environment object:

```
{
 "id": "ce373a477f211e187a55404a662f968",
 "name": "env1-changed",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "tenant_id": "0849006f7ce94961b3aab4e46d6f229a",
 "version": 0
}
```

## Get Environment Instance Detailed Information

### Call

**Table 4.8. GET /environments/<id> Call**

Method	URI	Description
GET	/environments/<id>	Returns detailed information about Environment including child entities

**Table 4.9. Error Response Codes**

Code	Description
401	User is not authorized to access this tenant resources

### Payload

None

### Returns

This call returns environment object with underlying services:

```
{
 "environments": [{
 "id": "0ce373a477f211e187a55404a662f968",
 "name": "dc1",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "tenant_id": "0849006f7ce94961b3aab4e46d6f229a",
 "version": 1,
 "status": "deploying",
 "services": [
 "activeDirectories": [{
 "id": "96365940588b479294fe8e6dc073db04",
 "name": "acme.dc",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "status": "deploying",
 "units": [{
 "id": "d08887df15b94178b244904b506fe85b",
 "isMaster": true,
 "location": "west-dc"
 }, {
 "id": "dcf0de317e7046bea555539f19b8ea84",
 "isMaster": false,
 "location": "west-dc"
 }
]
]
 }
]
```

```
}
```

## Remove Environment

### Call

**Table 4.10. DELETE /environments/<id> Call**

Method	URI	Description
DELETE	/environments/<id>	Remove specified Environment.

**Table 4.11. Error Response Codes**

Code	Description
401	User is not authorized to access this tenant resources

### Payload

None

### Returns

None

## Environment Configuration API

Multiple sessions could be opened for one environment simultaneously, but only one session going to be deployed. First session that starts deploying is going to be deployed; other ones become invalid and could not be deployed at all. User could not open new session for environment that in `deploying` state (that's why we call it "almost lock free" model).

**Table 4.12. Configuration Session Object**

Attribute	Type	Description
id	string	Session unique ID
environment_id	string	Environment that going to be modified during this session
created	datetime	Creation date and time in ISO format
updated	datetime	Modification date and time in ISO format
user_id	string	Session owner ID
version	int	Environment version for which configuration session is opened
state	string	Session state. Could be: open, deploying, deployed

## Configure Environment / Open session

During this call new working session is created, and session ID should be sent in header (X-Configuration-Session) to all next API calls.

## Call

**Table 4.13. POST /environments/<id>/configure Call**

Method	URI	Description
POST	/environments/<id>/configure	Creating new configuration session

**Table 4.14. Error Response Codes**

Code	Description
403	Could not open session for environment, environment has deploying status

## Payload

None

## Returns

This call returns created session:

```
{
 "id": "4aecdc2178b9430cbbb8db44fb7ac384",
 "environment_id": "4dc8a2e8986fa8fa5bf24dc8a2e8986fa8",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:54Z",
 "user_id": "d7b501094caf4daab08469663a9e1a2b",
 "version": 12,
 "state": "open"
}
```

## Deploy changes from Session

## Call

**Table 4.15. POST /environments/<id>/sessions/<sessionId>/deploy Call**

Method	URI	Description
POST	/environments/<id>/sessions/<sessionId>/deploy	Deploying changes made in session with specified <sessionId>

**Table 4.16. Error Response Codes**

Code	Description
403	Session is invalid
403	Session is already deployed or deployment is in progress

## Payload

None

## Returns

None

## Get session information

### Call

**Table 4.17. GET /environments/<id>/sessions/<sessionId> Call**

Method	URI	Description
GET	/environments/<id>/sessions/<sessionId>	Getting details about session with specified <sessionId>

**Table 4.18. Error Response Codes**

Code	Description
401	User is not authorized to access this session
403	Session is invalid

## Payload

None

## Returns

This call returns session information:

```
{
 "id": "4aecdc2178b9430cbbb8db44fb7ac384",
 "environment_id": "4dc8a2e8986fa8fa5bf24dc8a2e8986fa8",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:54Z",
 "user_id": "d7b501094caf4daab08469663a9e1a2b",
 "version": 0,
 "state": "deploying"
}
```

## Delete Session

### Call

**Table 4.19. DELETE /environments/<id>/sessions/<sessionId> Call**

Method	URI	Description
DELETE	/environments/<id>/sessions/<sessionId>	Delete session with specified <sessionId>



**Table 4.20. Error Response Codes**

Code	Description
401	User is not authorized to access this session
403	Session is in deploying state and could not be deleted

**Payload**

None

**Returns**

None

## Services API

This section describes API calls for managing all types of services.

### Calls and Endpoints

**GET**

Using GET calls to services endpoint user works with list containing all services for specified environment. User can request whole list, specific service, or specific attribute of specific service using tree traversing. To request specific service user should add to endpoint part with service id, e.g.: `/environments/<id>/services/<service_id>`. For selection of specific attribute on service, simply appending part with attribute name will work. For example to request service name, user should use next endpoint: `/environments/<id>/services/<service_id>/name`

**Call****Table 4.21. GET /environments/<id>/services Call**

Method	URI
GET	/environments/<id>/services

**Table 4.22. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	no	ID of valid configuration session

**Payload**

None

**Returns**

Json Object

**PUT**

Using PUT calls user can update or add any attribute on any service.

**Call****Table 4.23. PUT /environments/<id>/services Call**

Method	URI
PUT	/environments/<id>/services

**Table 4.24. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	yes	ID of valid configuration session

**Payload**

Json Object

**Returns**

Json Object

**POST**

POST calls used for adding new elements to lists with objectes.

**Call****Table 4.25. POST /environments/<id>/services Call**

Method	URI
POST	/environments/<id>/services

**Table 4.26. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	yes	ID of valid configuration session

**Payload**

Json Object

**Returns**

Json Object

**DELETE**

User can remove any attribute or list item using DELETE calls.

**Call****Table 4.27. DELETE /environments/<id>/services Call**

Method	URI
DELETE	/environments/<id>/services

**Table 4.28. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	yes	ID of valid configuration session

**Payload**

None

**Returns**

None

## Example Calls using Web Server as example

Please use this example for constructing general CRUD calls to services.

### Get a List of existing services

**Call****Table 4.29. GET /environments/<id>/services Call**

Method	URI	Description
GET	/environments/<id>/services	Get a list of existing WebServers

**Table 4.30. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	no	ID of valid configuration session

**Payload**

None

**Returns**

This call returns list of services:

```
[
 {
 "id": "0ce373a477f211e187a55404a662f968",
 "name": "frontend",
 "type": "webServer",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "domain": "ACME",
 "uri": "http://10.0.0.2",
 "units": [{
 "id": "1bf3491c409b4541b6f18ea5988a6437",
 "address": "10.0.0.2",
```

```
 "location": "west-dc"
 }
],
 },
 {
 "id": "c697bd2429304820a928d145aa42af59",
 "name": "backend",
 "type": "webServer",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "domain": "ACME",
 "uri": "http://10.0.0.3",
 "units": [{
 "id": "eb32f97866d24001baa430cb34e4049f",
 "address": "10.0.0.3",
 "location": "west-dc"
 }]
 }
}
```

## Create Web Server instance

### Call

**Table 4.31. POST /environments/<id>/services Call**

Method	URI	Description
POST	/environments/<id>/services	Create new Web Server

**Table 4.32. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	yes	ID of valid configuration session

### Payload

```
{
 "name": "frontend",
 "type": "webServer",
 "adminPassword": "password",
 "domain": "acme.dc",
 "units": [{
 "location": "west-dc"
 }]
}
```

### Returns

This call returns created web server:

```
{
 "id": "ce373a477f211e187a55404a662f968",
 "name": "frontend",
 "type": "webServer",
 "created": "2010-11-30T03:23:42Z",
 "updated": "2010-11-30T03:23:44Z",
 "domain": "ACME",
 "units": [{
 "id": "1bf3491c409b4541b6f18ea5988a6437",
 "location": "west-dc"
 }]
}
```

## Remove Web Server

### Call

**Table 4.33. DELETE /environments/<id>/services/<service\_id> Call**

Method	URI	Description
DELETE	/environments/<id>/services/<service_id>	Remove specified service.

**Table 4.34. Headers**

Name	Type	Required	Description
X-Configuration-Session	string	yes	ID of valid configuration session

### Payload

None

### Returns

None

## Shared Attributes

This section describes attributes common to all services.

## Request Object Specs

**Table 4.35. Service Object Specs**

Attribute	Type	Description
type	string	Service Type
created	datetime	Creation date and time in ISO format

Attribute	Type	Description
updated	datetime	Modification date and time in ISO format
unitNamingPattern	string	Unit instances naming pattern
availabilityZone	string	Availability where service is located
flavor	string	Active Directory Unit object
osImage	string	Name of image used to power instance

## Create Object Specs

**Table 4.36. Service Object Specs**

Attribute	Type	Description
type	string	Service Type
unitNamingPattern	string	Unit instances naming pattern
availabilityZone	string	Availability where service is located
flavor	string	Active Directory Unit object
osImage	string	Name of image used to power instance

## Active Directory Specs

This section describes objects specs for Active Directory service.

Please, refer to Shared Attributes article for shared/common attributes specification.

## Request Object Specs

**Table 4.37. Active Directory Object**

Attribute	Type	Description
id	string	Unique ID
name	string	Domain name
domain	string	Domain name
units	object	Active Directory Unit object

**Table 4.38. Active Directory Unit Object**

Attribute	Type	Description
id	string	Unique ID
isMaster	boolean	true for primary domain controller, false otherwise

## Create Object Specs

**Table 4.39. Active Directory Object**

Attribute	Type	Required	Description
name	string	yes	Domain name

Attribute	Type	Required	Description
adminPassword	string	yes	Password from domain administrator account
domain	string	yes	Domain name
units	object	yes	Active Directory Unit object

**Table 4.40. Active Directory Unit Object**

Attribute	Type	Required	Description
isMaster	boolean	yes	true for primary domain controller, false otherwise
recoveryPassword	string	yes	Recovery password

## Web Server Specs

This section describes API calls for managing Windows web-server software – IIS.

Please, refer to Shared Attributes article for shared/common attributes specification.

## Request Object Specs

**Table 4.41. Web Server Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name
uri	string	URI of the Service
domain	string	Domain name. This attribute may be empty/null/omitted if machine is not a domain member
units	object	Web Server Unit object

**Table 4.42. Web Server Unit Object**

Attribute	Type	Description
id	string	Unique ID

## Create Object Specs

**Table 4.43. Web Server Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name
domain	string	no	Domain name
units	object	yes	Web Server Unit object

**Table 4.44. Web Server Unit Object**

Attribute	Type	Required	Description
-	-	-	-

## ASP.NET Application Specs

This section describes API calls for managing ASP.NET Applications

Please, refer to Shared Attributes article for shared/common attributes specification.

### Request Object Specs

**Table 4.45. ASP.NET Application Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name
repository	string	URL of git repository containing the application source files
uri	string	URI of the Service
domain	string	Domain name. This attribute may be empty/null/omitted if machine is not a domain member
units	object	ASP.NET Application Unit object

**Table 4.46. ASP.NET Application Unit Object**

Attribute	Type	Description
id	string	Unique ID

### Create Object Specs

**Table 4.47. ASP.NET Application Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name
repository	string	yes	URL of git repository containing the application source files
domain	string	no	Domain name
units	object	yes	ASP.NET Application Unit object

**Table 4.48. ASP.NET Application Unit Object**

Attribute	Type	Required	Description
-	-	-	-

## Web Server Farm Specs

This section describes API calls for managing Web Server (IIS) Web Farm services

Please, refer to Shared Attributes article for shared/common attributes specification.



## Request Object Specs

**Table 4.49. Web Server Farm Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name
uri	string	URI of the Service
loadBalancerPort	integer	Port number of the Farm
domain	string	Domain name. This attribute may be empty/null/omitted if machine is not a domain member
units	object	Web Server Farm Unit object

**Table 4.50. Web Server Farm Unit Object**

Attribute	Type	Description
id	string	Unique ID

## Create Object Specs

**Table 4.51. Web Server Farm Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name
loadBalancerPort	integer	yes	Port number for the Farm
domain	string	no	Domain name
units	object	yes	Web Server Farm Unit object

**Table 4.52. Web Server Farm Unit Object**

Attribute	Type	Required	Description
-	-	-	-

## ASP.NET Application Farm Specs

This section describes API calls for managing ASP.NET Web Farm Application Services

Please, refer to Shared Attributes article for shared/common attributes specification.

## Request Object Specs

**Table 4.53. ASP.NET Application Farm Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name

Attribute	Type	Description
uri	string	URI of the Service
repository	string	URL of git repository containing the application source files
loadBalancerPort	integer	Port number of the Farm
domain	string	Domain name. This attribute may be empty/null/omitted if machine is not a domain member
units	object	ASP.NET Application Farm Unit object

**Table 4.54. ASP.NET Application Farm Unit Object**

Attribute	Type	Description
id	string	Unique ID

## Create Object Specs

**Table 4.55. ASP.NET Application Farm Object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name
repository	string	yes	URL of git repository containing the application source files
loadBalancerPort	integer	yes	Port number for the Farm
domain	string	no	Domain name
units	object	yes	ASP.NET Application Farm Unit object

**Table 4.56. ASP.NET Application Farm Unit Object**

Attribute	Type	Required	Description
-	-	-	-

## MS SQL Server Specs

This section describes API calls for managing MS SQL Server Service.

Please, refer to Shared Attributes article for shared/common attributes specification.

## Request Object Specs

**Table 4.57. MS SQL Server Object**

Attribute	Type	Description
id	string	Unique ID
name	string	User-friendly name
mixedModeAuth	bool	Use LDAP to access SQL Server
saPassword	string	SQL Server admin password

Attribute	Type	Description
domain	string	Domain name. This attribute may be empty/null/omitted if machine is not a domain member
adminPassword	string	Domain password
units	object	SQL Server Unit object

**Table 4.58. SQL Server Unit object**

Attribute	Type	Description
id	string	Unique ID

## Create Object Specs

**Table 4.59. SQL Server Unit object**

Attribute	Type	Required	Description
name	string	yes	User-friendly name
mixedModeAuth	bool	yes	Use LDAP to access SQL Server
saPassword	string	no	SQL Server admin password
domain	string	no	Domain name
adminPassword	string	no	Domain admin password
units	object	yes	SQL Server Unit object

**Table 4.60. MS SQL Server Unit Object**

Attribute	Type	Required	Description
-	-	-	-

---

# Chapter 5. Workflows XML DSL

## XML DSL

Workflows are written using XML markup language. This XML has no fixed structure but instead XML tags are translated into Python function calls. Thus such XML can be considered as a simplified programming language.

Consider the following XML fragment:

```
<func arg1="value1" arg2="value2" />
```

This is an equivalent to `func(arg1='value1', arg2='value2')` in Python. Tag name is mapped to a function name, one that Murano Conductor knows. Each attribute corresponds to function argument.

XML functions may also have a body. It is evaluated to "body" argument. Thus

```
<func arg1="value1" arg2="value2">some text</func>
```

is translated to `func(arg1='value1', arg2='value2', body='some text')`

In example above all function arguments were constant values. But they also can be evaluated:

```
<foo arg="value">
 <bar/>
</foo>
```

turns to

```
body_value = bar()
foo(arg='value', body=body_value)
```

Tag body may consist of several function invocations. In such case all values would be concatenated. For example if

```
def foo(**kwargs):
 return "foo"

def bar(**kwargs):
 return "bar"
```

then `<func><foo/> - <bar/></func>` will result in `func(body = 'foo - bar')`

Function parameters can also be function calls using `<parameter>` tag

```
<foo arg="value"/>
```

can be rewritten as

```
<foo>
 <parameter name="arg">value</parameter>
</foo>
```

while that later form is more verbose it allows having dynamically evaluated values as function arguments:

```
<foo>
 <parameter name="arg"><bar/></parameter>
</foo>
```

Functions may also have other custom tags in their body that interpreted in a way different from plain function invocation.

## DSL functions

There are a number of functions in Murano Conductor that can be used in XML DSL:

- `<true/>` - returns True
- `<false/>` - False
- `<null/>` - None
- `<text><foo/></text>` - converts body to string (`str(foo())`)
- list - form list (array) object -

```
<list>
 <item>item1</item>
 <item>item2</item>
 <item><true/></item>
</list>
```

equals to `["item1", "item2", True]`

- map - form dictionary (map) object

```
<map>
 <item name="key1">value1</item>
 <item name="key2">value2</item>
</map>
```

equals to `{ "key1": "value1", "key2": "value2" }` For both list and map functions names of item nodes ("item" in examples above) is irrelevant and can be changed to better match structure usage. For example

```
<map>
 <set name="key"><null/></set>
```

```
</map>
```

Structures can be nested:

```
<list>
 <item>
 <map>
 <item name="name 1">value 1</item>
 <item name="name 2">value 2</item>
 </map>
 </item>
 <item>
 <map>
 <item name="name 1">value 3</item>
 <item name="name 2">value 4</item>
 </map>
 </item>
</list>
```

equals to

```
[
 { 'name 1': 'value 1', 'name 2': 'value 2' },
 { 'name 1': 'value 3', 'name 2': 'value 4' }
]
```

## Workflows

Workflows are XML DSL scripts that describe the steps that conductor need to perform in order to deploy specified environment. All workflow constructs are just ordinary DSL functions similar to those described above.

Usually workflows extract some data from input environment definition (Object Model) and then invoke one of the actions with these data as a input arguments.

Actions are:

- Heat commands that update or delete Heat Stack: <update-cf-stack>, <delete-cf-stack>
- Send command to Murano Agent: <send-command>
- Report state to API: <report>

Workflow logic can be described in 6 steps:

1. Choose a node (set of nodes) to update. If none of the nodes can be updated we are done.
2. According to the current state of node (that is a part of input Object Model) choose appropriate command to execute (update Heat stack or issue PowerShell command)
3. Select appropriate information from Object Model and substitute it into chosen template
4. Execute command

5. Update Object Model according to command execution result

6. Go to step 1

## Accessing Object Model

Object Model is a definition of environment that Murano Conductor was asked to deploy.

Lets take the following Object Model that describes Active Directory service with single controller for our further examples:

```
{
 "name": "MyDataCenter",
 "id": "adc6d143f9584d10808c7ef4d07e4802",
 "services": [{
 "name": "TestAD",
 "type": "activeDirectory",
 "osImage": { "name": "ws-2012-std", "type": "ws-2012-std" },
 "availabilityZone": "nova",
 "flavor": "ml.medium",
 "id": "9571747991184642B95F430A014616F9",
 "domain": "acme.loc",
 "adminPassword": "SuperP@ssw0rd",
 "units": [{
 "id": "273c9183b6e74c9c9db7fdd532c5eb25",
 "name": "dc01",
 "isMaster": true,
 "recoveryPassword": "SuperP@ssw0rd!2"
 }]
 }]
}
```

There are several functions to select values from Object Model and function to modify it so that the Workflow can persist the changes made during deployment.

All reads and writes to Object Model are relative to some cursor position which is managed by workflow rule. Lets call it current cursor position.

The simplest method of accessing Object Model is a select function. Suppose current cursor position points to a single unit of our single service. Then `<select path="name"/>` is "dc01" and `<select path="isMaster"/>` is True.

Path parameter may start with colon to indicate navigation to one level up or slash to go to Model root:

```
<select path=":"/>
```

is

```
[
 {
 "id": "273c9183b6e74c9c9db7fdd532c5eb25",
 "name": "dc01",
 "isMaster": true,
```

```
 "recoveryPassword": "SuperP@ssw0rd!2"
 }
]
```

`<select path="::domain">` is "acme.loc" and `<select path="/name" />` is "MyDataCenter"

The path also supports drill-down notation: `<select path="::osImage.name">` is "ws-2012-std" `<select path="::units.0.name">` equals to `<select path="/services.0.units.0.name">` that is "dc01"

If the path does not exist then result of a select would be None: `<select path="::noSuchProperty"/>` = None

`<select/>` without path results in object pointed by current cursor position.

It also possible to select multiple values using JSONPath selection language (<http://goessner.net/articles/JsonPath/>):

```
<select-all path="/$.services[?(@.type == 'activeDirectory')].units[*]"/>
```

- returns array of all units of all services of type 'activeDirectory'

JSONPath expressions by default select data relative to current cursor position and has no way for navigating up the Model tree. But Conductor has several improvements to JSONPath language:

- JSONPath expression may start with one or more colon characters to perform query relative to current cursor parent (grandparent etc.)
- JSONPath expression may also start with slash as in example above to query the whole Model from the tree root
- Expressions may reference nonexistent Model attributes in the same way as `<select/>` function does. Such attributes considered to have None values

`<select-single path="JSONPath expression"/>` is similar to `<select-all/>`, but returns only the first value matched by a JSONPath query or None.

Object Model can also be modified using `<set/>` function. `<set/>` is very similar to `<select/>` with the only difference in that `<select/>` writes values while `<set/>` reads them: `<set path="name">dc02</set>` changes unit name (eg. the object pointed by current cursor position) to "dc02". `<set>` can also introduce new attributes, even nested ones: `<set path="newProperty">value</set>` creates new attribute "newProperty" with given value, `<set path="state.property">value</set>` makes current unit have property "state": `{ "property": "value" }`

In this case "state" is just a convention - a reserved property that would never be used for service our units input properties. There is also a special property called "temp". The contents of this property (on all services and units and environment itself) is wiped after each deployment.

## Function context

Function context is an equivalent to Python stack frame. This allows functions to have local variables that are visible only to the function XML body.

Function context may be considered as a key-value storage. If a key does not exist in current context then parent context is searched for the key.



Data may be published to function context using ordinary `<set/>` function by using path in a form of `"#key": <set path="#myKey">value</set>` sets "myKey" function context value to "value". This value may be later accessed in inner block using select: `<select path="#myKey"/>`

Values in function context may be not just scalars but a whole objects: `<set path="#myKey"><select/></set>` sets myKey local variable to an object pointed by current cursor position. Because this is a reference to a model part rather than its copy if one edits its content the changes will be also present in original Model. To edit content of local variable (eg. value in function context) "target" argument of `<set/>` function is used: `<set path="property" target="myKey">value</set>`. Because target always denotes a key in function context there is no need for # sign.

Function context values may also be the source for the `<select/>` and other selection functions: `<select path="property" source="myKey"/>`

## Workflow rules

Workflow consists of rules. Rule is a function with the following parameters:

- **match** - JSONPath expression to be executed relative to current cursor position
- **desc** - optional human-readable free-form rule description
- **id** - optional rule ID (auto-generated if not provided)

for example

```
<rule match="$.services[?(@.type == 'msSqlClusterServer' and @.domain)].units[
 <set path="domain">
 <select path="::domain"/>
 </set>
</rule>
```

The logic of rule is simple:

1. Execute given JSONPath expression
2. For each of matched objects make current cursor position point to it and then execute function XML body
3. If JSONPath hasn't matched any object execute `<empty>...</empty>` block if present

Rules can be nested. In this case nested rule's JSONPath expression would be executed relative to parent's rule current cursor position. For outermost rules current cursor position is the Object Model itself.

Rules are grouped into workflows:

```
<workflow>
 <rule id="rule1" match="...">
 ...
 </rule>

 <rule id="rule2" match="...">
```

```
...
 </rule>
</workflow>
```

Workflow which is happen to be a XML DSL function and also a root element of workflow XML files. Workflow function executes rules one by one. If one of the rules has modified some part of Object Model then all rules executed once again. This repeats until there are no more actions that can be performed by workflow. At this point all pending actions (e.g. all the invocations of update-cf-stack, send-command etc.) got executed and the workflow loop is repeated. When there no more actions that can be performed by workflow and also no pending commands then we are done and Object Model with all modifications made by workflows (except for "temp" attributes) returned back to Murano API service.

## Workflow actions

There are several actions (functions) that can be invoked by rules to do the actual deployment. When action is invoked it is not executed immediately but enqueued and executed later when there are no more actions that can be performed by workflow.

The following actions are available for workflow rules:

- **update-cf-stack** - updates Heat stack by substituting values into Heat template and merging it into Heat stack definition. It has the following parameters:
  - **template** - Heat template filename without extension
  - **error** - function context variable to be populated with command error info in case of command failure
  - **mappings** - dictionary to be used for values substitution into template. All values in JSON template file in the form of "\$myKey" are replaced with a value under key "myKey" in this parameter
  - **arguments** - optional dictionary of Heat template arguments ("Parameters" section of Heat templates)

update-cf-stack function also searches for 2 predefined tags in its body:

- **<success>** - a block to be executed after successfull stack update
- **<failure>** - block that would be executed in case of function failure

Templates are located in data/cf directory

- **send-command** - sends an execution plan to Murano Agent on specific VM. It has the following parameters:
  - **template** - execution plan template filename without extension
  - **error** - function context variable to be populated with command error info in case of command failure
  - **service** - ID of a service that target units belongs to
  - **unit** - ID of target unit (VM)
  - **mappings** - dictionary to be used for values substitution into template. All values in JSON template file in the form of "\$myKey" are replaced with a value under key "myKey" in this parameter

send-command function also searches for 2 predefined tags in its body:

- **<success>** - a block to be executed after successfull stack update

- **<failure>** - block that would be executed in case of function failure

Templates are located in data/agent directory

- **report** - sends status report back to REST API service. It has the following parameters:
  - **entity** - entity type ("unit", "service", "environment")
  - **level** - log level
  - **id** - ID of unit/service/environment
  - **text** - reported status text

## Workflow control

There are several functions that affect workflow execution. `<stop/>` stops execution of workflows causing Conductor returning current result back to REST API service and stop deployment activities.

`<mute/>` excludes current object from being processed by the current rule during next workflow rounds. Mutes table tracks items using pairs of rule id (that is rule function argument, auto-generated if not provided) and object ID ("id" attribute of current object. If object has no such attribute it cannot be muted). It is possible to explicitly specify rule id via "rule" argument and object id via "id" argument. Missing parameters are auto-guess from current context - current rule ID and current object ID.

Note that objects are automatically muted for every object that matched by the rule but the mutes get reset after each workflow loop round. `<mute/>` places a permanent mute on the object

Mutes can be removed by `<unmute/>` function which has exactly the same arguments as `<mute/>` command but is only usable with explicit specification of rule and id because otherwise if the current object is already muted the rule body would not be executed for the object and thus `<unmute/>` would not be executed either.

When referencing id of a nested rule IDs of all rule chain must be joined by dot. E.g.

```
<rule id="id1">
 <rule id="id2">
 <mute rule="id1.id2"/>
 </rule>
</rule>
```

## Execution Plans

Execution plans are a description of what should be executed on Murano Agent at VM to perform some deployment step.

Execution plans is a JSON document that has 3 keys:

- **Commands** array - list of functions to be executed. Each function has a "Name" property and "Arguments" dictionary which maps function argument names to parameter values.
- **Scripts** - list of PowerShell script file names to be included into execution plans. The scripts contain function implementations that can be referenced in Command array. Script files need to be located in data/templates/agent/scripts directory.

- **RebootOnCompletion** - 0 = do not reboot, 1 = reboot only upon successful plan execution, 2 = reboot always. Murano Agent send execution result after system reboot.

As for other Murano JSON templates keys and values starting with \$ sign will be replaced with a values provided in Workflow.

Example of execution plan:

```
{
 "Scripts":
 [
 "ImportCoreFunctions.ps1",
 "DeployWebApp.ps1"
],
 "Commands":
 [
 {
 "Name": "Deploy-WebAppFromGit",
 "Arguments":
 {
 "URL": "$repository"
 }
 }
],
 "RebootOnCompletion": 0
}
```

Result of execution plan has the following format:

```
{
 "IsException": false,
 "Result":
 [
 {
 "IsException": false,
 "Result": ["result value"]
 }
]
}
```

There are result entry for each source command. Each result can have many values - all the outputs of PowerShell function. If IsException is set to true then Result is an array in form of [ "Exception type", "Error message" ]. IsException at command level means exception during function invocation while root IsException means that execution plan cannot be even started (corrupted data, PowerShell engine failure etc.)

---

# Chapter 6. Known Issues

Actual bug state can be found in Murano launchpad page. [<https://bugs.launchpad.net/murano>]

- Due to current Heat limitation services that involve load-balancer creation (farms) can be deployed only by tenant administrators.
- When Heat creates different clients for Nova, Cinder and others it doesn't pass SSL-related options to clients' constructor. If Nova is configured to have SSL endpoints and self-signed certificates Heat will fail to create instances because there is no way to disable server certificate validation as there is no "insecure" flag passed etc.
- Farm services can't be deployed without KeyPair. If KeyPair is not set load balancer won't be created and these messages will show up in logs:

```
2013-08-06 09:10:07 - Unable to deploy instance ipkrmhk0vzq4b6 (asp-farm_instance)
2013-08-06 09:10:07 - Unable to create a Server Farm load balancer on unit ipkrmhk0vzq4b6
```

And deploy will hang up.

---

# Chapter 7. How To Participate

If you would like to ask some questions or make proposals, feel free to reach us on #murano irc channel at FreeNode. Typically somebody from our team will be online at irc from 6:00 to 20:00 UTC. You can also contact Murano community directly by [openstack-dev@lists.openstack.org](mailto:openstack-dev@lists.openstack.org) [<mailto:openstack-dev@lists.openstack.org>]

We're going to hold public weekly meetings on Mondays at 15:00 UTC on #openstack-meeting-alt irc channel.

If you want to contribute either to docs or to code, simply send us change request via [review.openstack.org](http://review.openstack.org) [<http://review.openstack.org>] (gerrit). You can file bugs and register blueprints at Murano launchpad page [<https://launchpad.net/murano>].

---

# Chapter 8. Appendix

## Murano VM

### Note

Your VM MUST be attached to the network with Internet access and openstack management network (lab network) access.

#### *Ubuntu Server 12.04 LTS x86\_64*

Installation steps:

- Install minimal version of the system
- When prompted, mark OpenSSH Server to be installed
- Login as root
- Enable Cloud Archive repository
- Update installed OS and packages
- Create and add the following lines to the `/etc/apt/sources.list.d/grizzly.list` file

```
deb http://ubuntu-cloud.archive.canonical.com/ubuntu \
 precise-updates/grizzly main
deb http://archive.gplhost.com/debian grizzly main
deb http://archive.gplhost.com/debian grizzly-backports main
```

- Update the system

```
># apt-get update
># apt-get install ubuntu-cloud-keyring
># apt-get install gplhost-archive-keyring
># apt-get upgrade
```

- Install additional packages

```
># apt-get install mc unzip git make gcc
 python-setuptools python-pip
```

#### *CentOS 6.4 x86\_64*

Installation steps:

- Install minimal version of the system.
- When prompted, mark OpenSSH Server to be installed

- Login as root
- Enable RedHat Openstack and Epel repository
- Update installed OS and packages
- Add repositories and update OS

```
># yum install -y http://rdo.fedorapeople.org/openstack/\
 openstack-grizzly/rdo-release-grizzly.rpm
># yum install -y http://mirror.us.leaseweb.net/\
 epel/6/x86_64/epel-release-6-8.noarch.rpm
># yum update
># yum upgrade
```

- Install additional packages

```
># yum install -y mc unzip git make gcc python-setuptools \
 python-pip upstart
```

Most of dependent packages will be installed automatically with setup scripts.

### Note

Some words about pip (python-pip) version. In order to have proper versions of python dependency packages installed, pip version **MUST** be 1.4 or higher!

How-to determine python-pip version:

```
># pip --version
```

To upgrade pip to latest version use

```
># pip install --upgrade pip
```

### Note

You should pay attention to python-pip after upgrade to version 1.4, because its filesystem location can change from /usr/bin/pip to /usr/local/bin/pip!

To handle this situation:

```
># rm /usr/bin/pip
># ln -s /usr/local/bin/pip /usr/bin/pip
```