




PROV classes (shapes)



Entity — requirement

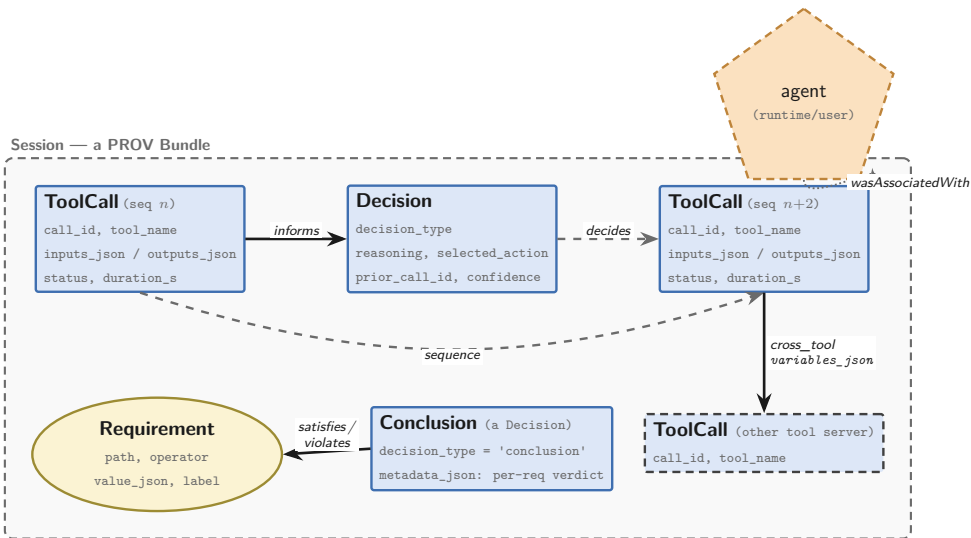

Activity — tool_call, decision, conclusion



Agent (implicit — not stored, S5)

Edges (schema name $\approx$ PROV relation)

→ stored: informs, cross_tool $\approx$ wasInformedBy;
satisfies / violates (domain relation)

--> inferred from seq: sequence $\approx$ precedes,
decides $\approx$ wasInformedBy

.....> agent link $\approx$ wasAssociatedWith

Tables (sdk/provenance/db.py)

sessions · tool_calls · decisions
cross_references · requirements

*Nodes are stored; the Bundle is the shared session_id (a foreign key).
Edges are inferred at read time from each row's monotonic seq order.*