OpenCode v2 Configuration Optimization Report

Prepared for **Murpheux** · 27 September 2026 (America/Edmonton) · Target: OpenCode **v2.0.18**
Config location: `~/opencode/.config/opencode/` (WSL Ubuntu) · Backup: `~/opencode-config-backup-20260927/`

1. Executive summary

The `router`-based multi-agent configuration was reviewed end-to-end against the **v2.0.18 source schema** (fetched from the `sst/opencode` repository at tag `v2.0.18`, because `opencode.ai` is blocked by the corporate proxy). The original config was largely written in v2 shape but contained a number of fields that v2 **silently ignores**, which meant several intended controls — the security guardrails file, reasoning-effort settings, auto-update, formatters and the Warp plugin — were never actually active.

The configuration was rebuilt as native v2 with: a tuned cost-tiered agent team (7 custom agents + pinned built-ins), a rewritten router with explicit routing, delegation, review-gate and loop-limit rules, **108 hard-deny policies** and **152 ordered permission rules** for real enforcement, 7 MCP servers gated per agent, 16 slash commands and 20 on-demand skills (including draw.io/architecture diagrams and image generation). `AGENTS.md` was restructured with all original content preserved (verified programmatically) and extended with the guardrails and new workload sections.

7	108	152	16	20	7
custom agents	hard-deny policies	permission rules	slash commands	skills	MCP servers

2. Discovery

- `~/.config/opencode/` (the working directory) holds an older single-agent config (`murpheux`, v1 shape) that is active on this WSL machine. It does **not** contain the router — it was left untouched.
- `~/opencode/.config/opencode/` (unzipped from `~/opencode.zip`, a local git repo with one commit) holds the router configuration: `opencode.jsonc`, 5 agents, `prompts/routing-policy.md`, `policies/security-guardrails.md`, `AGENTS.md`, `cli.json`, `service.json`. This is the configuration that was optimized.
- The locally installed CLI is v1.17.11; you confirmed the target is **v2.0.18**, so all decisions follow the v2.0.18 schema and docs (`packages/schema/src/config/*`, `services/www/src/docs/content/*.mdx`).


3. Findings in the original configuration

#	Sev.	Finding	Impact	Resolution
1	CRITICAL	`instructions: ["~/.opencode/policies/security-guardrails.md"]` — v2 accepts but **does not load** the `instructions` array (and the path was also wrong).	Security guardrails were never seen by any agent.	Guardrails merged into `AGENTS.md` `§13` (the only instruction file v2 loads) and enforced via `experimental.policies`.

2	CRITICAL	`service.json` (OpenCode service password) is **committed** in the local git repo and included in `opencode.zip`.	Credential exposure if the repo/zip is shared or pushed.	Added to `.gitignore`; agents hard-denied from reading it. **Action:** `git rm --cached opencode/service.json`, rewrite history before any push, rotate the password, delete/re-create the zip.
3	HIGH	`NODE_TLS_REJECT_UNAUTHORIZED=0` in the managed service env.	Disables TLS verification for *all* outbound requests (providers, MCP) — MITM risk.	Documented fix: `opencode service set env NODE_EXTRA_CA_CERTS <ca.pem>` then `unset` the flag.
4	HIGH	v2 base permission policy is **allow-all**; agents without explicit rules (e.g. developer, architect shell) could run any command. `rm *` deny and similar rules were bypassable by "Allow always" or project config.	Weak enforcement of the destructive-operation gate.	Ordered global permissions (shell/edit ask + allowlists) plus non-overridable hard-deny policies.
5	HIGH	1Password MCP enabled with a service-account token.	Any prompt injection could exfiltrate vault secrets via the model.	Server `disabled: true` and all `onepassword_*` tools hard-denied; credentials injected with `op plugin run --` instead.
6	HIGH	Agent `options.reasoningEffort` and top-level `model_settings` are not v2 fields.	Reasoning effort never applied (defaults used) — unpredictable cost/quality.	Explicit model **variants** (`#low/#medium/#high`) defined on the gateway and OpenRouter models and selected per agent.
7	MEDIUM	Developer on `claude-opus-5.5` at high effort for every NORMAL task.	Largest single cost driver.	Developer moved to the workhorse tier (`claude-sonnet-5#medium`); premium model reserved for the security agent.
8	MEDIUM	Router told to "follow `prompts/routing-policy.md`" — a file the router would have to read every session (or never).	Extra tool calls/tokens or policy ignored.	Policy merged into a self-contained `agents/router.md`.
9	MEDIUM	HIGH_RISK workflow referenced a non-existent "Expert" agent; no security or SRE specialist despite the workload.	High-risk and ops work mis-routed.	New `security` (independent HIGH_RISK reviewer) and `sre` agents.
10	MEDIUM	`subagent_depth` at top level (v2: `experimental.subagent_depth`); default depth 1.	Planner/developer could not use the cheap `explore` agent.	`experimental.subagent_depth: 2`, nesting restricted to `explore` via permissions.
11	MEDIUM	`mcp.servers.remote-tools-gateway`: `type: local` with a URL pointing at LiteLLM's `/ui`, placeholder auth.	Invalid server entry.	Replaced by a correctly-typed, disabled `gateway` remote entry.
12	MEDIUM	GitHub MCP via Docker with the PAT on the command line, full toolset.	Container start-up cost, large tool catalog, token visible in process args.	Remote GitHub MCP, `X-MCP-Readonly`, 5 toolsets, header auth from env.

13	LOW	`autoupdate`, `formatters`, `commands` (JSON) and `lsp` are v1/unsupported in v2 (v2 does not run language servers).	Settings silently ignored.	`update: "notify"`, `formatter: true`, markdown commands, LSP block removed.
14	LOW	Plugin `@warp-dot-dev/opencode-warp` 0.1.7 is built on the v1 plugin API.	v1 plugins do not run in v2.	Removed with a note to re-add when a v2 build ships.
15	LOW	`AGENTS.md`: "never PowerShell" conflicted with the PowerShell workload; duplicate lines; legacy `tui.json`, duplicate `user_prompt.md`, unused `router_prompt.md`.	Conflicting guidance, clutter.	Rule reconciled (bash/zsh for macOS/Linux, PowerShell 7 for Windows/Azure or on request); legacy files removed (backed up).

4. New agent architecture

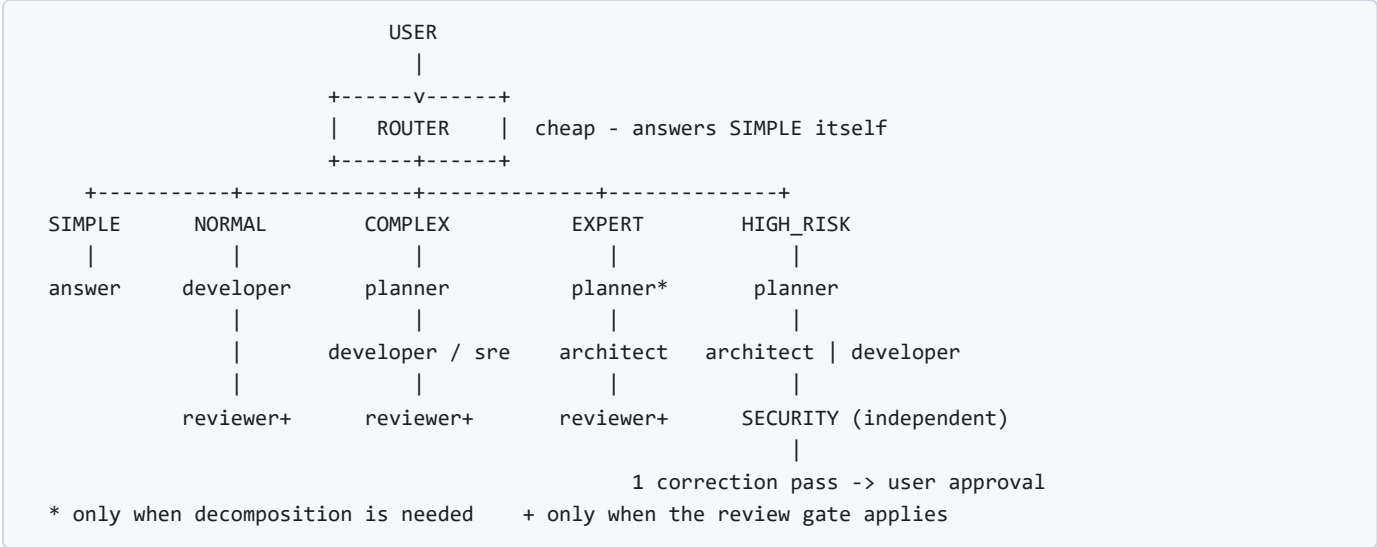

Agent	Role	Model (tier)	Steps	Edit	Shell
router (primary, default)	Classify, answer SIMPLE, delegate, relay	`agentgateway/deepseek-flash` (cheap)	12	deny	deny
explore (built-in)	Cheap codebase search	`agentgateway/deepseek-flash`	15	deny	deny
reviewer	Diff review, verdict PASS/FAIL/ESCALATE	`agentgateway/deepseek-flash`	12	deny	git read-only
planner	Short executable plans (≤ 40 lines)	`openrouter/openai/gpt-6-sol#medium`	15	deny	git read-only
developer	Code, scripts, IaC, CI/CD, diagrams/images + validation	`agentgateway/claude-sonnet-5#medium` (workhorse)	40	allow (workspace)	allowlist + render tools; else ask
sre (new)	Incidents, Swarm/K8s/cloud diagnosis	`agentgateway/claude-sonnet-5#medium`	25	ask	~50 read-only ops commands; else ask
architect	Design, trade-offs, ADRs, diagrams needing decisions	`openrouter/openai/gpt-6-sol#high` (reasoning)	20	docs/diagram files (ask)	render tools; else ask
security (new)	Threat models, IAM/vuln review, HIGH_RISK independent review	`openrouter/anthropic/claude-opus-5.5#high` (premium)	20	report file (ask)	scanners; else ask
build / plan / general	Built-ins, pinned so nothing inherits an expensive model	workhorse / reasoning	40/15/25	default	default
title / summary / compaction	Hidden maintenance agents	`agentgateway/deepseek-flash`	—	—	—

Router design highlights

- Silent classification (SIMPLE / NORMAL / COMPLEX / EXPERT / HIGH_RISK) with **risk overriding size**.
- Structured, self-contained delegation brief (GOAL, CONTEXT, CONSTRAINTS, ACCEPTANCE, PLAN, RISK, RETURN) so children never rediscover context.
- Parallel dispatch of independent subtasks; **resume children by** `sessionID` for follow-ups.
- Review gate (diff size, sensitive areas, uncertainty) and loop caps: 1 fix cycle (NORMAL/COMPLEX), 2 (HIGH_RISK).
- Evidence-based escalation only; explicit approval gate for consequential operations; user overrides (`@agent`, "quick", "just plan").

5. Cost optimizations

Lever	Change	Why it saves
Model tiering	Cheap router/explore/reviewer/maintenance; workhorse developer/sre; reasoning only for planner/architect; premium only for security	Most turns run on the cheapest capable model.
Developer downgrade	Opus-high → Sonnet-medium	Removes the largest recurring cost; architect/security remain for hard cases.
Explicit variants	`#medium` / `#high` only where they matter	Reasoning tokens bounded and predictable.
Pinned built-ins	build, plan, general, explore, title, summary, compaction	Subagents otherwise inherit the (possibly expensive) parent model.
Process discipline	Planner only when useful; review gate; loop caps; no "agreement" calls	Fewer model calls per task.
Context reuse	Delegation brief, session resumption, compact report formats (≤ 15–40 lines)	Less rediscovery; smaller relayed outputs.
Step budgets	12–40 per agent	Caps runaway loops.
Tool output	`tool_output` 1000 lines / 32 KB (default 2000 / 50 KB)	Smaller inputs on every later step.
MCP gating	All MCP tools hidden unless an agent opts in; Code Mode default; GitHub read-only + 5 toolsets	Smaller tool catalogs per request.
Skills	20 skills loaded on demand	Only name + description are in context until needed.
Other	`warming: false`, auto-compaction (`keep 15000`, `buffer 20000`), `formatter: true`, watcher ignores, 128k context hint for deepseek-flash	No keep-alive spend; no tokens on formatting; earlier compaction.

> Optional next step: add `cost` (USD per 1M tokens) to the gateway models you use so OpenCode reports per-session spend.

6. Security guardrails

Three enforcement layers

1. `experimental.policies` **(108)** — hard denies evaluated after permissions and "Allow always" approvals; a project config cannot lift them (global config has higher authority).
2. `permissions` **(152)** — shell and edit default to `ask`; read-only/validation allowlist (git, build/test/lint for Go, .NET, Python, Node, shell, PowerShell, Terraform, Ansible, scanners, `gh` read); `git push` denied; subagents and MCP tools opt-in per agent; `~/AI_Workspace/*` allowed as external directory.
3. `AGENTS.md §13` — explains the rules to every model, including prompt-injection handling and "never work around a denial".

Policy category	Examples (hard-denied)
Disk / filesystem destruction	`rm -rf /`, `rm -rf ~`, `sudo rm`, `srm`, `dd of=/dev/*`, `mkfs*`, `wipefs`, `diskutil erase*/partitionDisk/APFS deleteContainer`, `gpt destroy`, `Format-Volume`, `Clear-Disk`
Security tampering	`csrutil`, `chmod -R 777/000 /`, `chown -R … /`, destructive Homebrew purges
Remote code piping	bare `sh` / `bash` / `zsh` reading stdin, `iex`, `Invoke-Expression`
Irreversible infra/git	`git push --force/-f`, `terraform|tofu destroy`, `-auto-approve`, `aws s3 rb`, recursive `s3 rm`, `kubectl delete namespace`, `docker system prune -a --volumes`
Secret exfiltration	`op read/item get/document get/inject`, `gh auth token`, `aws configure get/export-credentials`, `printenv`, `env`, any command naming a `.env` file (examples/templates allowed), `rg -uu` / `--no-ignore`, key/credential cats
Secret files (read/edit)	`.env*` (examples allowed), `~/.ssh/*` (config and `*.pub` allowed), `~/.aws/credentials`, `~/.gnupg`, `~/.config/op`, `~/.kube/config`, `~/.docker/config.json`, OpenCode data and `service.json`, `*.tfstate*`, `*.key/.pfx/.p12/.kdbx`, private keys; edits to `.git/`, `.ssh`, `.aws`
MCP	every `onepassword_*` tool

> **Trade-off (balanced risk):** v2 permission paths inside the workspace are relative, so edits cannot be limited to `~/AI_Workspace` by path. Edits therefore *ask* for every agent except `developer`, which may edit inside the current workspace (all edits are snapshot-revertible with `/undo`); secret files remain hard-denied for all agents.

7. MCP servers

Server	Type	Status	Enabled for	Notes
github	remote (api.githubcopilot.com)	on	developer, reviewer, sre, security	Read-only, toolsets repos/issues/pull_requests/actions/code_security; `GITHUB_PAT` from env. Writes via `gh` (ask).
context7	remote	on	planner, developer, architect	Library docs; `CONTEXT7_API_KEY`.

mslearn (new)	remote (learn.microsoft.com/api/mcp)	on	developer, architect, security, sre	C#/.NET, Azure, PowerShell, Entra docs; free.
awsdocs (new)	local (`uvx awslabs.aws-documentation-mcp-server`)	on	architect, security, sre	No AWS credentials involved; needs `uv`.
terraform (new)	local (Docker `hashicorp/terraform-mcp-server`)	on	developer, architect	Registry providers/modules; needs Docker.
gateway	remote (`scarlet:4000/mcp/`)	disabled	—	Enable after confirming the gateway MCP path.
onepassword	local	disabled + hard-denied	—	Kept for reference only.

8. Slash commands (16)

Command	Agent / model	Purpose
`/review`	reviewer (cheap)	Review uncommitted diff (overrides built-in with the cheap reviewer)
`/commit`	general + deepseek-flash	ggshield scan of staged changes → signed conventional commit (asks)
`/plan`	planner	Plan only, no changes
`/test`	developer	Run build/lint/tests and fix failures (2-attempt cap)
`/explain`, `/summarize`	explore + deepseek-flash	Cheap read-only explanations / project overview
`/pr`	general + deepseek-flash	Draft PR title/body and `gh pr create` command
`/scaffold`	developer	New repo per conventions (Makefile, CI pinned to SHAs, etc.)
`/security-scan`, `/iac-review`, `/threat-model`	security	Scanner-backed reviews and STRIDE models
`/adr`	architect	MADR architecture decision record
`/cost-review`	architect @ gpt-6-sol#medium	Cloud cost optimisation with C$ estimates
`/incident`	sre	Read-only-first incident triage
`/diagram`	developer	Architecture diagram (draw.io, Mermaid, C4, Python diagrams, D2) + render
`/image`	developer	SVG/chart/processed image, or one AI-generated draft via the gateway

9. Skills (20, loaded on demand)

Area	Skills
Languages & scripting	`dotnet`, `golang`, `python`, `nodejs`, `bash`, `powershell`
IaC & platforms	`terraform`, `ansible`, `kubernetes`, `docker-swarm`, `github-actions`
Cloud	`aws`, `azure`
SRE & security	`incident-response`, `threat-modeling`, `homelab`
Architecture & visuals	`adr`, `architecture-diagrams` (Mermaid, C4/Structurizr, Python `diagrams`, D2, PlantUML, Graphviz), `drawio-diagrams` (mxGraph XML with AWS/Azure/GCP/K8s shapes, CLI export), `image-generation` (SVG, charts, Pillow/ImageMagick, gateway Images API with cost controls)

10. AGENTS.md

- Restructured into 17 numbered sections; **all original content preserved** — verified by a script that checked all 243 code/bold/IP/URL tokens and 35 code-block lines of the original against the new file (only difference: whitespace alignment in one directory-tree line).
- Merged: the Servers and Package-Managers tables; duplicated "Full R+W access" and "alert me" lines de-duplicated.
- Added: workload (SRE/DevOps, security, solution/cloud architecture, scripting), C#/.NET and PowerShell rows and conventions, Windows 11 + WSL2 workstation, Agentgateway endpoint, extended discovery (`*.csproj`, `global.json`), extended destructive gate (kubectl, IAM/firewall/DNS/cert changes), root-cause-first debugging, **§13 Security & Safety Guardrails** (full former policy file + secrets, IAM, encryption/network, prompt-injection, log-secret redaction, enforcement), **§14 Agent team & cost discipline** with **non-interactive shell rules**, Mermaid diagrams, and an explanation of how OpenCode enforces §17 Access & Approvals.
- Reconciled: "never PowerShell" → bash/zsh for macOS/Linux hosts; PowerShell 7 for Windows/Azure targets or on request.

11. File changes

Status	Files
Rewritten	`opencode.jsonc`, `AGENTS.md`, `README.md`, `.gitignore`, `agents/{router,planner,developer,architect,reviewer}.md`
Added	`agents/security.md`, `agents/sre.md`; 16 files in `commands/`; 20 `skills/<id>/SKILL.md`
Removed (merged / superseded; backed up)	`prompts/routing-policy.md` → router.md; `policies/security-guardrails.md` → AGENTS.md §13 + policies; `router_prompt.md` (legacy); `user_prompt.md` (duplicate of AGENTS.md); `tui.json` (v1; superseded by `cli.json`)
Untouched	`cli.json`, `service.json`, `package.json`, `package-lock.json`, `plugins/`, and the separate `~/.config/opencode/` config

Git diff (excluding node_modules): 2,505 insertions, 1,893 deletions. Nothing was committed. Full pre-change backup: `~/opencode-config-backup-20260927/`.

12. Validation performed

- Custom validator against the v2.0.18 schema: all top-level, agent, provider, model, variant, MCP and command keys; permission/policy shapes and effects; model reference syntax (`provider/model#variant`, no variant on root model); every agent/command model resolves to a defined model and variant; default agent is a visible primary; router can launch every subagent; skill IDs kebab-case with descriptions; every skill referenced in prompts exists; no unsupported `${…}` placeholders. **Result: OK.**
- YAML frontmatter of all agents, commands and skills parsed successfully; colours are 6-digit hex.
- The draw.io skill's example mxGraph XML parsed as valid XML with unique cell ids.
- AGENTS.md content-preservation check (section 10).
- **Permission simulation** — a last-match-wins evaluator reproducing the v2 ordering (base policy → built-in agent defaults → global rules → agent rules → hard-deny policies) run against 58 representative cases across all agents (edits of source vs `.env`/`.git`, allowlisted vs destructive commands, subagent and MCP gating, secret reads). **57/58 matched**; the remaining case (`~/.ssh/config` read) is correctly gated by the `external_directory` approval that precedes the read rule — the expectation, not the config, was wrong.
- Not possible here: a live run of OpenCode v2 (only v1.17.11 is installed in WSL and the gateway/OpenRouter are not reachable from this network).

13. Your action items

#	Action
1	**Secrets:** `git rm --cached opencode/service.json`, purge it from history before any push, rotate the service password, re-create `opencode.zip` without it.
2	**TLS:** `opencode service set env NODE_EXTRA_CA_CERTS /path/ca.pem`, `opencode service unset env NODE_TLS_REJECT_UNAUTHORIZED`, `opencode service restart`.
3	**Deploy:** copy `~/opencode/.config/opencode/` to `~/.config/opencode/` on medusa (and on this workstation if wanted — it will replace the old `murpheux` config).
4	**Env:** `AGENTGATEWAY_API_KEY`, `GITHUB_PAT`, `CONTEXT7_API_KEY` for the CLI shell *and* the service (`opencode service set env …`); connect OpenRouter via `/connect`.

5	**Verify:** `opencode service status`, `opencode mcp list`, `/models`; start a session and confirm the router is default and can launch each agent.
6	**Confirm gateway specifics:** that `claude-sonnet-5` accepts `reasoning_effort`; whether the Ollama-cloud entries need `modelID` (the `ollama:…` names); the gateway MCP path before enabling `gateway`; an image model route for `/image`.
7	**Optional tools:** `uv`, Docker, draw.io desktop, graphviz, d2, librsvg, ImageMagick, Node — or remove the MCP servers you don't need.

14. Assumptions & risks

- Model tiers assume the relative capability/price ordering of the models you had already chosen (deepseek-flash < claude-sonnet-5 < gpt-6-sol < claude-opus-5.5). Swap any tier by editing one line in `agents`.
- OpenRouter variants are defined explicitly (`reasoning.effort` body) so `#medium/#high` always resolve; gateway variants send `reasoning_effort`.
- Shell policies match the scanner-produced command text; they are a strong backstop, not a sandbox — the narrow allowlist plus `ask` default is the primary control.
- The Warp plugin remains off until a v2-compatible release exists.

15. Self-review (post-implementation)

After implementation the full configuration was re-reviewed against the v2 permission-merge semantics and the validators above. Issues found and fixed:

#	Issue found in own work	Fix
1	v2 appends global rules *after* built-in agent defaults, so the new global `shell ask` / `edit ask` rules would have **loosened** the read-only built-ins (`explore` could have run allow-listed shell; `plan` edits would ask instead of deny; `title` / `summary` would gain tools).	Built-in overrides now re-assert their restrictions: explore (edit/shell/subagent/question deny), plan (edit deny except `~/.opencode/plan/*`), title/summary (deny all).
2	Allow-listed read commands (`rg`, `jq`, …) could print `.env` contents, bypassing the read policy.	Policies deny any shell command naming a `.env` file (examples/templates lifted) and ripgrep's ignore-bypass flags.
3	A literal `rm -rf /\*` pattern was ineffective (the matcher has no escapes); `read:*.tfvars` and `read:*service.json` were over-broad.	Removed/narrowed (`service.json` now only under `~/.config/opencode`; tfvars readable — secrets belong in secret managers, per the terraform skill).
4	Commands used bash-style `${1:-default}` placeholders that v2 does not support.	Rewritten to `$ARGUMENTS` with stated defaults; validator now rejects `${…}`.
5	AGENTS.md renamed "Backend development" to "Software development" (content-preservation check caught it).	Original term restored.
6	Interactive programs (editors, pagers, REPLs, `git rebase -i`) would hang the TTY-less shell until timeout, wasting steps and tokens.	Denied by permission and documented with non-interactive alternatives in AGENTS.md §14; `git --no-pager` forms allow-listed.

16. Review of awesome-opencode

The awesome-opencode list (≈ 230 entries: plugins, themes, agents, projects, resources) was reviewed for anything that would improve this setup. **Key constraint:** almost every plugin listed targets the v1 plugin API (`@opencode-ai/plugin`), and v1 plugins do not run in v2 — so none were enabled. Their *ideas* were adopted natively where v2 allows it.

Adopted into the configuration

Source entry	Idea	How it was applied (v2-native)
opencode-shell-strategy	Non-interactive shell discipline (no pagers/editors/REPLs, `-y` / `--no-edit`, `ssh -o BatchMode=yes … accept-new`, `sudo -n`)	Its delivery via `instructions` is ignored by v2 → rules added to AGENTS.md §14 and enforced with 20 deny permissions.
Opencode Log Sanitizer	Redact secrets in pasted logs	AGENTS.md §13 rule: never echo tokens/JWTs/keys from pasted content; recommend rotation.
Envsitter Guard, CC Safety Net	Prevent `.env` leaks; catch destructive commands	Hard-deny policies (read/edit/shell) — stronger than a plugin because project config cannot lift them.

Cupcake (policy layer), OpenCode Swarm (architect/review/test/security gates)	Policy enforcement; verification-gated specialist team	Native `experimental.policies`; router review gate with independent `security` reviewer for HIGH_RISK.
Oh My Opencode Slim, Dynamic Context Pruning, Token Monitor	Reduce token usage	Cheap router/explore, pinned built-ins, output caps, compaction, MCP gating, compact report formats.
Opencode Adaptive Thinking, Optimal Model Temps	Right-size reasoning per task	Explicit per-agent variants (`#medium` / `#high`); temperatures are not sent by the v2 runner (`request.body` is preserved but inactive), so not used.

Recommended (outside the config, documented in README)

Tool	Why for you	Caveat
BX.app (successor of `bx-mac`)	Kernel-level macOS sandbox (Seatbelt) for the agent on medusa: only `~/AI_Workspace` visible; `~/.ssh`, `~/.gnupg`, personal folders hidden — defence in depth beyond permissions.	Commercial one-time purchase; the free CLI is archived.
jailoc	Docker sandbox for autonomous or untrusted-repo runs; blocks private networks by default.	Allowlist `scarlet:4000` so the gateway stays reachable.
Opencode Actions	Run `/review` or `/security-scan` headless in GitHub Actions.	Use the cheap model and read-only permissions in CI.
Config sync (your `.dotfiles` repo)	Keep medusa and the Windows/WSL workstation identical (Opencode Synced / agent-dotfiles solve the same problem).	Symlink the folder; keep `service.json` out.
Tokscale / OpenTab / agenttrace	Spend by model/project/session.	Verify v2 session-storage support; adding model `cost` gives native tracking.
Watch list	Dynamic Context Pruning, opencode-plugin-otel (session telemetry into your Prometheus/Grafana), Opencode Notify (Warp replacement).	Adopt when ported to the v2 plugin API.

Not adopted: multi-model "debate"/second-opinion plugins (conflict with the cost rules), memory/RAG plugins (v1-only; the skills and AGENTS.md cover persistent guidance), auth plugins for other subscriptions (you route through agentgateway/OpenRouter), and themes/novelty plugins.