



EXPLANATION FOR TASK 5

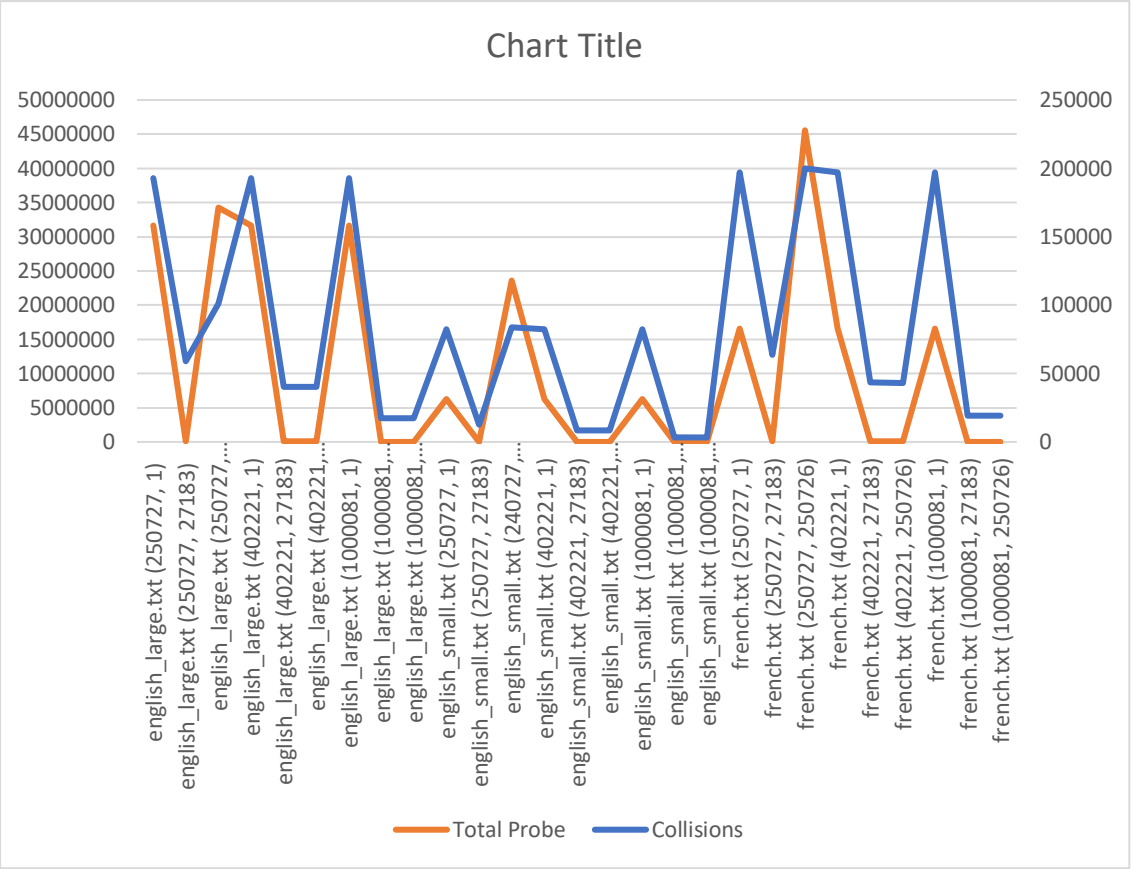

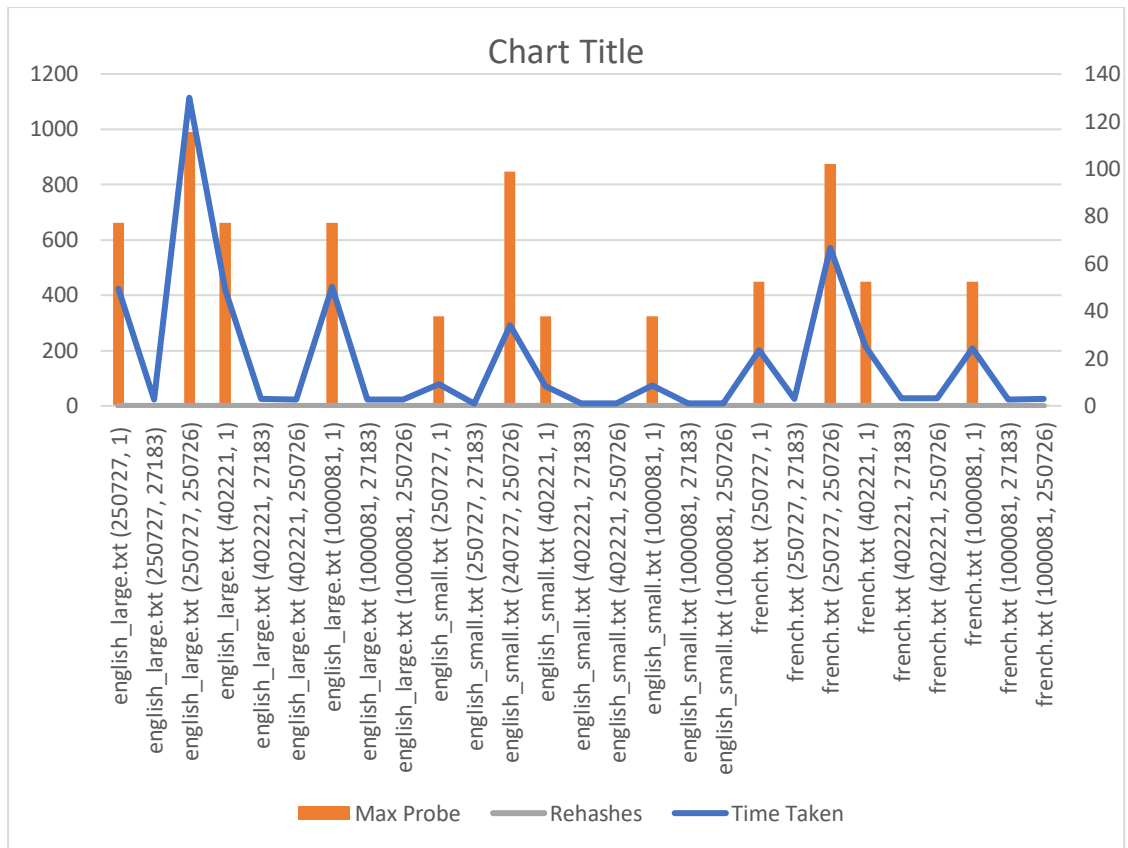

In the separate chaining method, even though the probe length is higher, execution times are faster for most of the combinations as compared to linear or quadratic probing. Since, separate chaining takes a linked data structure approach, pointers are native to the CPU and hence, are faster than the other two methods.