RIA envía

FXGlobal Webservice

Technical Specifications
for
Paying Correspondents
(RiaAsSender Interface)

(See Appendix A for Additions/Modifications specific to this version)

Author : D. Ventre
Revised : September 26, 2013
Version : 1.13

Table of Contents

Main Heading	Topic	Page
Section 1: Overview of FXGlobal Webservice		3
	Purpose of Webservice	4
	Definition of Terms	4
	Authentication/Security	4
	Webservice Description (WSDL)	4
	Webservice Interface Overview	5
	Open Payment Feature	6
	Generic Response Layout Superstructures	7
Section 2: Interface Methods – Input and Response XML Structures		8
	Method: OP_VerifyOrderForPayout()	9
	Method: OP_ConfirmOrderPaid()	12
	Method: OP_VoidOrderPaidConfirmation()	14
	Method: GetSendersCustSvcMsgs()	16
	Method: GetCancelationRequests()	17
	Method: GetOrdersForDownload()	18
	Method: InputPayersCustSvcMsgs()	22
	Method: InputOrderStatusNotices()	24
	Method: InputCancelRequestResponses() (New to ver 1.10)	27
Appendix A	Additions/Modifications Included In This Version	30

Section 1

Overview
of
FXGlobal Webservice

Purpose of Webservice

The FXGlobal webservice is a comprehensive money transfer service that can be used to send money transfer orders to Ria for payment or, conversely, to retreive orders owned by Ria that are awaiting payment by outside paying correspondents. All order-related features such as cancelation requests, bi-directional customer service message exchange, order status inquiries, catalogs of information such as locations, rates, commissions, etc are supported.

FXGlobal is a dual-interface webservice: One interface is used by sending correspondents and the other by those that would like to payout orders owned by Ria. The interfaces are named after the role **Ria** plays in the business relationship. For example, those sending an order to Ria will use the "Paying" interface since in that scenario Ria is the paying correspondent. Likewise, those that want to payout orders owned by Ria will implement the "Sending" interface since in that case Ria is *sending* the order for payment. This document describes the functionality in the interface used by the paying correspondents only (referred to as the "Sending Interface").

Definition of Terms

Term	Definition
SC	Acronym for "Sending Correspondent" (which in the context of this interface is always Ria)
PC	Acronym for "Paying Correspondent".

Authentication/ Security

Authentication and security will be managed by means of x509 certificates. These will be used to establish a peer-to-peer trust relationship. By means of these certificates all incoming and outgoing XML messages will be encrypted/decrypted and sent by way of HTTP for efficiency.

Test Environment:
You have the option of either having Ria generate a certificate for you or purchasing one from a reputable certification authority such as VeriSign®. A purchased certificate could also be used in the production environment.

Production Environment:
You will need to purchase a Class 3 (Secure Server) certificate from VeriSign® or some other publicly known and trusted Security Issuer. The certificate should be in DER encoded binary X.509 format (having a .cer or .crt file extension). You would then need to send us your public key contained in the .cer certificate file as well as any other certificates for certificate authorities that were used to sign your client certificate.

Webservice Description (WSDL)

The webservice description can be accessed at the following url:
http://stagingfxglobalwebsvc.riaenvia.net:9770/FXGlobalSending.svc?wsdl

Note: For clients who would have difficulty managing x509 certificates we also offer the option of establishing a VPN tunnel. A unique URL will be provided to those clients after the VPN tunnel is established.

Webservice Interface Overview:

All methods in the Sending interface of the FXGlobal webservice fall into one of three categories: **Get**, **Input** and **Open Payment (OP)** methods. **Get** refers to requests made by the Paying Correspondent such as for any orders available for downloading , outstanding cancellation requests or customer service messages Ria is holding for the Paying Correspondent. **Input** refers to customer service notices or OrderStatus notifications that the Paying Correspondent wants to submit to Ria for processing. Lastly, the three **Open Payment** methods (whose names are all prefixed with "OP_") as their name implies are for paying out orders that are still in Ria's control at the request of the beneficiary.


I/O Parameters:
All methods in the webservice interface will have a single input parameter. This will be in the form of an XML document. All methods will return a single XML document containing Ria's response to the request or input. The structure of these input and output documents will be specific to the method called. All incoming XML will be validated against schema (XSD) files for accuracy of structure and content. Ria will provide to all clients a set of schema (XSD) files that describe all of the possible responses from the webservice.

NOTE: All values should be represented using ASCII characters only.

Category	Method Name	Purpose
Open Payout	OP_VerifyOrderForPayout	Inquire whether order is valid for payout and retrieve basic order info.
Open Payout	OP_ConfirmOrderPaid	Confirm that order has been paid out to beneficiary and supply BenID info.
Open Payout	OP_VoidOrderPaidConfirmation	Void OrderPaid confirmation if necessary (within 2 minutes of confirming)
Get	GetOrdersForDownload	Retrieve all orders flagged for export to the specific PC calling.
Get	GetCancellationRequests	Retrieve outstanding cancelation requests for orders already downloaded.
Get	GetSendersCustSvcMsgs	Retrieve Ria's outstanding customer service messages.
Input	InputPayersCustSvcMsgs	Submit customer service messages for orders received by PC from Ria.
Input	InputOrderStatusNotices	Submit OrderStatus notices for orders received by PC from Ria.

Open Payment Feature

The FXGlobal webservice makes possible the paying out of orders still in Ria's control that have been earmarked for "Open Payment". The flowchart below describes the interface steps in this process:

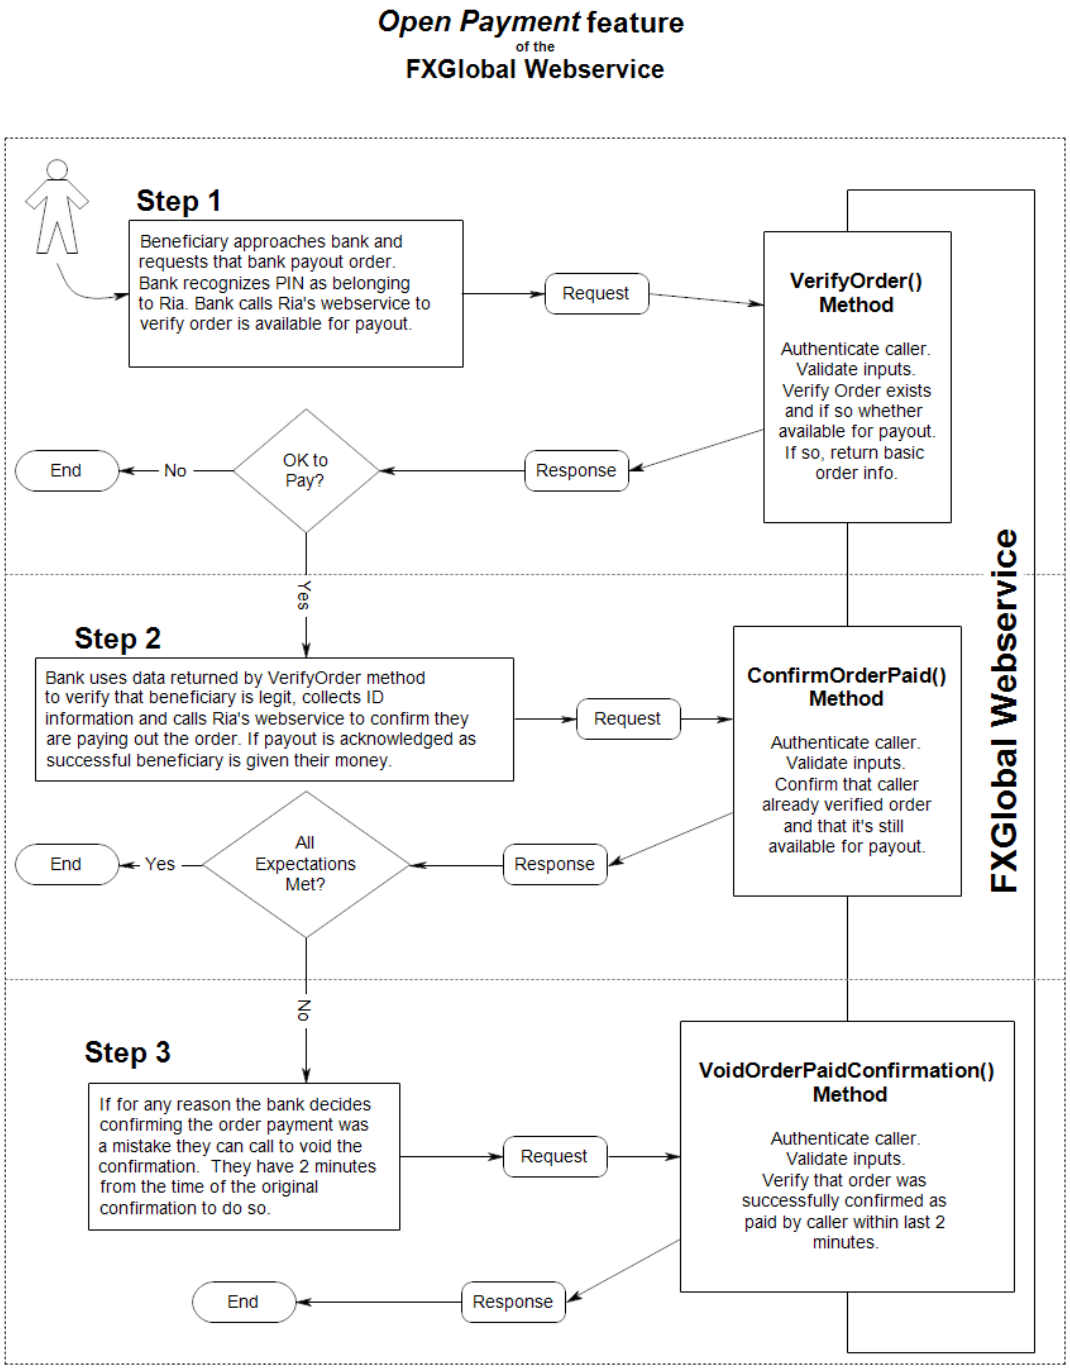

Generic Response Layout Superstructures

Each call to the webservice will receive a response from Ria in the form of an XML document. All responses are ultimately specific to the method called however all response structures will be encapsulated within one of two different superstructures depending on the category the call falls within.

"Open Payout" and "Get" Category Method Calls

The response node structure will be specific to the method called however all responses will be contained within the same general superstructure below:

General structure of Ria's response to requests:

```
<Root>
  <ResponseLayoutVersion />
  <RequestType  />
  <RequestResponses>
     (Request-specific response nodes will go here)
  </RequestResponses>
  <RequestErrors>
     (Any error message nodes will go here)
  </RequestErrors>
</Root>
```

"Input" Category Method Calls

Every input will receive an acknowledgement from Ria. The acknowledgement structure will be specific to the method called however they will all be contained within the same general superstructure below:

General structure of Ria's response to inputs:

```
<Root>
 <ResponseLayoutVersion />
  <InputType/>
  <ItemsProcessed/>
 <Acknowledgements>
     (InputType-specific acknowledgement nodes will go here)
  </Acknowledgements>
  <InputErrors>
     (Any error message nodes will go here)
  </InputErrors>
</Root>
```

Interface Methods

Input and Response XML Structures

MethodName: OP_VerifyOrderForPayout ()

Description:

Used to verify that the PIN and amount the beneficiary is requesting be paid out is legitimate and that the order is still available for payout. If the order is available to be paid the basic order info is returned to enable the PC to verify the beneficiary is legit, etc. **NOTE:** This method MUST be called before calling the OP_ConfirmOrderPaid method and the returned <TransRefID>value passed as an input through the <VerifyOrderTransRefID> element.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
<Root>
  <PayingCorrespID>123456</PayingCorrespID>
  <RequestLayoutVersion>1.0</RequestLayoutVersion>
  <DateTimeLocal>20110504005959</DateTimeLocal>
  <DateTimeUTC>20110504151612</DateTimeUTC>
  <PIN>11199683316</PIN>
  <BeneAmount>76.20</BeneAmount>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
DateTimeLocal	Local Datetime	Text	14	yyyyMMddHHmmss	Yes
DateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
PIN	PIN # supplied by Beneficiary	Text	20		Yes
BeneAmount	Beneficiary Amount	Decimal	8,2	(decimals optional) *	Yes

* new to version 1.5

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="VerifyOrder_Response_1.2.xsd"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.2</ResponseLayoutVersion>
  <RequestType>VerifyOrder</RequestType>
  <RequestResponses>
    <VerifyOrderResponse>
      <TransRefID>18551</TransRefID>
      <OrderFound>true</OrderFound>
      <PIN>11219362665</PIN>
      <OrderNo>UK665091977</OrderNo>
      <SeqIDRA>36959</SeqIDRA>
      <SeqIDPA>854312</SeqIDPA>   (New to Version 1.11 [response layout 1.2])
      <OrderDate>20110809</OrderDate>
      <CountryFrom>US</CountryFrom>
      <CustNameFirst>test</CustNameFirst>
      <CustNameLast1>test</CustNameLast1>
      <CustAddress>13 Perry Vale</CustAddress>
      <CustCity>London</CustCity>
      <CustState>LND</CustState>
      <CustCountry>UK</CustCountry>
      <CustZip>SE23 2NE</CustZip>
      <CustTelNo>44-44 6232247</CustTelNo>
```

```
        <BeneNameFirst>Rocio</BeneNameFirst>
        <BeneNameLast1>Vegas</BeneNameLast1>
        <BeneAddress>1111 Sun</BeneAddress>
        <BeneCity>San Miguel</BeneCity>
        <BeneState>SM</BeneState>
        <BeneCountry>SV</BeneCountry>
        <BeneZip>12345</BeneZip>
        <BeneTelNo>57- 575757</BeneTelNo>
        <BeneCurrency>AUD</BeneCurrency>
        <BeneAmount>1242.50</BeneAmount>
        <ResponseDateTimeUTC>20110810005924</ResponseDateTimeUTC>
        <ResponseCode>1000</ResponseCode>
        <ResponseText>Order is available for payout</ResponseText>
  </VerifyOrderResponse>
  </RequestResponses>
  <RequestErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Order is available for payout.
2001	No order found matching supplied PIN and BeneficiaryAmount.
2002	Order has already been marked as paid to beneficiary.
2003	Order has been cancelled.
2004	Order exists but is not currently available for payout. Contact RIA Customer Service department for explanation.
2005	The Order's delivery method does not allow for Open Payout. It must be downloaded. (New to ver 1.4)
2006	Order Is Not Assigned To Paying Correspondent's Country (New to ver 1.5)
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.
5003	Invalid Client Certificate Thumbprint Presented

Fields:

Element	Desc	Type	Size	Format	Required
TransRefID	Unique transaction reference ID	Integer			Yes
OrderFound	Whether order was located by Ria	Boolean		"true", "false"	Yes
PIN	The order's unique PIN	Text	20		*
OrderNo	Ria's order number	Text	20		*
SeqIDRA	Originating agent's sequence ID	Integer			*
SeqIDPA (New to version 1.11)	Paying agent's sequence ID	Integer			*
OrderDate	Order date	Text	8	yyyyMMdd	*
CountryFrom	Receiving Agent's Country	Text	2		*
CustNameFirst	(Self-explanatory)	Text	50		*
CustNameLast1	(Self-explanatory)	Text	50		*
CustNameLast2	(Self-explanatory)	Text	50		No *
CustAddress	(Self-explanatory)	Text	255		No *
CustCity	(Self-explanatory)	Text	50		No *
CustState	(Self-explanatory)	Text	50		No *
CustCountry	(Self-explanatory)	Text	2		No *
CustZip	(Self-explanatory)	Text	20		No *
CustTelNo	(Self-explanatory)	Text	20		No *
BeneNameFirst	(Self-explanatory)	Text	50		*
BeneNameLast1	(Self-explanatory)	Text	50		*
BeneNameLast2	(Self-explanatory)	Text	50		No *
BeneAddress	(Self-explanatory)	Text	255		No *
BeneCity	(Self-explanatory)	Text	50		No *
BeneState	(Self-explanatory)	Text	50		No *
BeneCountry	(Self-explanatory)	Text	2		No *
BeneZip	(Self-explanatory)	Text	20		No *
BeneTelNo	(Self-explanatory)	Text	20		No *
BeneCurrency	Beneficiary Currency	Text	3		No *
BeneAmount	Beneficiary Amount	Decimal	8,2		*
ResponseDateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes

ResponseCode	(Self-explanatory)	Integer			Yes
ResponseText	(Self-explanatory)	Text	500		Yes

* These fields will be returned only if ResponseCode = 1000 (“Order Is Available For Payout”). Those not required will be supplied only if data is available.

MethodName: OP_ConfirmOrderPaid ()

Description:

Used to Confirm that the order is being paid out to the beneficiary and to supply Ria with the beneficiary's ID info. **NOTE:** This method reconfirms that the order is still available for payout so it should be called just PRIOR to handing any monies to the beneficiary.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
 <Root>
   <PayingCorrespID>123456</PayingCorrespID>
   <RequestLayoutVersion>1.0</RequestLayoutVersion>
   <DateTimeLocal>20110725214057</DateTimeLocal>
   <DateTimeUTC>20110725234057</DateTimeUTC>
   <VerifyOrderTransRefID>18551</VerifyOrderTransRefID>
   <OrderNo>US874005480</OrderNo>
   <PIN>11199683316</PIN>
   <BeneCurrency>EUR</BeneCurrency>
   <BeneAmount>76.20</BeneAmount>
   <PaidDateTimeLocal>20110728030823</PaidDateTimeLocal>
   <PaidDateTimeUTC>20110727160823</PaidDateTimeUTC>
   <CorrespLocID>65153</CorrespLocID>
   <BeneIDType>Drivers License</BeneIDType>
   <BeneIDNumber>N0368532</BeneIDNumber>
   <BeneIDIssuedByCountry>US</BeneIDIssuedByCountry>
   <BeneIDIssuedByState>CA</BeneIDIssuedByState>
   <BeneIDExpirationDate>20120622</BeneIDExpirationDate>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
DateTimeLocal	Local Datetime	Text	14	yyyyMMddHHmmss	Yes
DateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
VerifyOrderTransRefID	Unique transaction reference ID	Integer			Yes
OrderNo	Ria's order number	Text	20		Yes
PIN	The order's unique PIN	Text	20		Yes
BeneCurrency	Beneficiary Currency	Text	3		Yes
BeneAmount	Beneficiary Amount	Decimal	8,2		Yes
PaidDateTimeLocal	Local Datetime	Text	14	yyyyMMddHHmmss	Yes
PaidDateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
CorrespLocID	PC's unique location ID	Text *	20		No
BeneIDType	Beneficiaries' ID Type	Text	50		Yes
BeneIDNumber	Beneficiaries' ID Number	Text	50		Yes
BeneIDIssuedByCountry	ID Issued by Country	Text	2		Yes
BeneIDIssuedByState	ID Issued by State	Text	50		Yes
BeneIDExpirationDate	ID Expiration Date	Text	0/8	Blank or yyyyMMdd	Yes

*Changed from Integer to Text (20) in version 1.9

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="ConfirmOrderPaid_Response_1.0.xsd"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
  <RequestType>ConfirmOrderPaid</RequestType>
<RequestResponses>
  <ConfirmOrderPaidResponse>
      <TransRefID>322</TransRefID>
      <OrderNo>UK665091977</OrderNo>
      <PIN>11199683316</PIN>
      <BeneCurrency>EUR</BeneCurrency>
      <BeneAmount>76.20</BeneAmount>
      <PCCommissionCurrency>GBP</PCCommissionCurrency>  (New to ver 1.4)
      <PCCommissionAmount>3.20</PCCommissionAmount>  (New to ver 1.4)
      <ResponseDateTimeUTC>20110810010709</ResponseDateTimeUTC>
      <ResponseCode>1000</ResponseCode>
      <ResponseText>Order confirmed as paid.</ResponseText>
  </ConfirmOrderPaidResponse>
</RequestResponses>
 <RequestErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Order confirmed as paid.
2000	Invalid CorrespID Value
2001	No order found matching supplied PIN and BeneficiaryAmount.
2002	Order has already been marked as paid to beneficiary.
2003	Order has been cancelled.
2004	Order exists but is not currently available for payout. Contact RIA Customer Service department for explanation.
2005	Order must be successfully verified using the VerifyOrderForPayout method prior to confirming payment.
2006	One or both paid datetime values are illegitimate.
2007	One or both paid datetime values differ by more than 24 hours from current UTC time.
2008	Order could not be marked paid. Please contact RIA Customer Service department for assistance.
2009	Beneficiary Currency And/Or Amount Is Incorrect. (New to ver 1.5)
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.
5003	Invalid Client Certificate Thumbprint Presented

Fields:

Element	Desc	Type	Size	Format	Required
TransRefID	Unique transaction reference ID	Integer			Yes
OrderNo	Ria's order number	Text	20		*
PIN	The order's unique PIN	Text	20		*
BeneCurrency	Beneficiary Currency	Text	3		*
BeneAmount	Beneficiary Amount	Decimal	8,2		*
PCCommissionCurrency	Payer's Commission Currency	Text	3		#
PCCommissionAmount	Payer's Commission Amount	Decimal	8,2		#
ResponseDateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
ResponseCode	(Self-explanatory)	Integer			Yes
ResponseText	(Self-explanatory)	Text	500		Yes

* These fields will be returned only if request passes minimum validation such as Valid CorrespID, proper XML, etc.
These fields will be returned only if order is successfully confirmed as PAID.

MethodName: OP_VoidOrderPaidConfirmation()

Description:

Used to reverse a paid confirmation that was made by calling the OP_ConfirmOrderPaid method. This method is provided as a convenience in the event that the PC feels confirming the order as paid was a mistake or they experience a timeout when calling to confirm the order as paid. It can only be used within 2 minutes of the initial call to the OP_ConfirmOrderPaid method.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
<Root>
  <PayingCorrespID>123456</PayingCorrespID>
  <RequestLayoutVersion>1.0</RequestLayoutVersion>
  <DateTimeLocal>20110727075959</DateTimeLocal>
  <DateTimeUTC>20110727152612</DateTimeUTC>
  <OrderPaidTransRefID>18951</OrderPaidTransRefID>
  <OrderNo>US874005480</OrderNo>
  <PIN>11199683316</PIN>
  <BeneCurrency>EUR</BeneCurrency>
  <BeneAmount>76.20</BeneAmount>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
DateTimeLocal	Local Datetime	Text	14	yyyyMMddHHmmss	Yes
DateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
OrderPaidTransRefID	The TransRefID value returned by the ConfirmPaid method **OR** the VerifyOrderForPayout method.	Integer			Yes
OrderNo	Ria's order number	Text	20		Yes
PIN	The order's unique PIN	Text	20		Yes
BeneCurrency	Beneficiary Currency	Text	3		Yes
BeneAmount	Beneficiary Amount	Decimal	8,2		Yes

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="VoidOrderPaidConfirmation_Response_1.0.xsd"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
  <RequestType>VoidOrderPaidConfirmation</RequestType>
  <RequestResponses>
    <VoidOrderPaidConfirmResponse>
      <TransRefID>522</TransRefID>
      <OrderNo> US874005480</OrderNo>
      <PIN>11199683316</PIN>
      <BeneCurrency>EUR</BeneCurrency>
      <BeneAmount>76.20</BeneAmount>
      <ResponseDateTimeUTC>20110810010858</ResponseDateTimeUTC>
      <ResponseCode>1000</ResponseCode>
      <ResponseText>Paid confirmation has been voided successfully.</ResponseText>
    </VoidOrderPaidConfirmResponse>
  </RequestResponses>
  <RequestErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Paid confirmation has been voided successfully.
2000	Invalid CorrespID Value
2010	Order cannot be confirmed as having been paid. Please contact Ria Customer Service department.
2011	Payment confirmations can only be voided within two minutes of their receipt. Please contact Ria Customer Service department.
2012	Paid confirmation could not be voided. Please contact RIA Customer Service department for assistance.
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.
5003	Invalid Client Certificate Thumbprint Presented

Fields:

Element	Desc	Type	Size	Format	Required
TransRefID	Unique transaction reference ID	Integer			Yes
OrderNo	Ria's order number	Text	20		Yes
PIN	The order's unique PIN	Text	20		Yes
BeneCurrency	Beneficiary Currency	Text	3		Yes
BeneAmount	Beneficiary Amount	Decimal	8,2		Yes
ResponseDateTimeUTC	UTC Datetime	Text	14	yyyyMMddHHmmss	Yes
ResponseCode	(Self-explanatory)	Integer			Yes
ResponseText	(Self-explanatory)	Text	500		Yes

MethodName: GetSendersCustSvcMsgs ()

Description:

Used to retrieve Ria's outstanding customer service messages for orders previously sent to the PC for payment.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
 <Root>
   <PayingCorrespID>123456</PayingCorrespID>
   <RequestLayoutVersion>1.0</RequestLayoutVersion>
   <RequestType>SendersCustSvcMsgs</RequestType>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
RequestType	Literal value (enumeration) (see DataRequestType in GenericTypes.xsd file)	Text	(varies)	"SendersCustSvcMsgs"	Yes

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="SendersCustSvcMsgs_1.0.xsd" xmlns=""
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
   <RequestType>SendersCustSvcMsgs</RequestType>
   <RequestResponses>
        <CSMessage>
           <SCOrderNo>ES874073080</SCOrderNo>
           <MessageID>5197812</MessageID>
           <MessageText>Message content goes here</MessageText>
           <EnteredBy>Igor Valdez</EnteredBy>
        </CSMessage>
        <CSMessage>
           <SCOrderNo>ES874073080</SCOrderNo>
           <MessageID>5197912</MessageID>
           <MessageText>Another test message's content goes here</MessageText>
           <EnteredBy>Dina Ferraro</EnteredBy>
         </CSMessage>
   </RequestResponses>
   <RequestErrors />
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
RequestType	(Same Enumeration as Request layout)	Text	(varies)		Yes
SCOrderNo	Ria's order number	Text	20		Yes
MessageID	Ria's Message ID	Integer			Yes
MessageText	Message content	Text	1000		Yes
EnteredBy	Name of user who entered message	Text	30		Yes

MethodName: GetCancelationRequests()

Description:
Used to retrieve Ria's outstanding cancelation requests for orders previously sent to the PC for payment.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
 <Root>
   <PayingCorrespID>123456</PayingCorrespID>
   <RequestLayoutVersion>1.0</RequestLayoutVersion>
   <RequestType>CancelationRequests</RequestType>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
RequestType	Literal value (enumeration) (see DataRequestType in GenericTypes.xsd file)	Text	(varies)	"CancelationRequests"	Yes

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="CancelationRequests_1.0.xsd" xmlns=""
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
   <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
   <RequestType>CancelationRequests</RequestType>
   <RequestResponses>
      <CancellationRequest SCOrderNo="ES873815680" />
      <CancellationRequest SCOrderNo="ES873815780" />
      <CancellationRequest SCOrderNo="IT873815880" />
   </RequestResponses>
   <RequestErrors />
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
RequestType	(Same Enumeration as Request layout)	Text	(Varies)		Yes
SCOrderNo (Attribute)	Ria's order number	Text	20		Yes

MethodName: GetOrdersForDownload()

Description:

Used to retrieve all previously unsent orders flagged for payment at locations owned or controlled by the specific PC calling. **NOTE:** A call to the InputOrderStatusNotices() method should be made within 5 minutes of downloading the orders with a value of RECEIVED for each order downloaded.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="utf-8" ?>
 <Root>
   <PayingCorrespID>123456</PayingCorrespID>
   <RequestLayoutVersion>1.0</RequestLayoutVersion>
   <RequestType>OrdersForDownload</RequestType>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
RequestLayoutVersion	Layout Version	Decimal	3,1		Yes
RequestType	Literal value (enumeration) (see DataRequestType in GenericTypes.xsd file)	Text	(Varies)	"OrdersForDownload"	Yes

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="DownloadedOrders_1.4.xsd" xmlns=""
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.4</ResponseLayoutVersion>
  <RequestType>OrdersForDownload</RequestType>
  <RequestResponses>
     <Order>
        <OrderNo>DE12545295</OrderNo>
        <PIN>1166836282</PIN>
        <PayingCorrespSeqID>606082</PayingCorrespSeqID>
        <SalesDate>20110806</SalesDate>
        <SalesTime>082918</SalesTime>
        <CountryFrom>DE</CountryFrom>
        <CountryTo>BR</CountryTo>
        <SendingCorrespSeqID>36959</SendingCorrespSeqID> (New to Version 1.11 [response layout 1.4])
        <PayingCorrespLocID>26451</PayingCorrespLocID>
        <SendingCorrespBranchNo>DE6</SendingCorrespBranchNo>
        <BeneQuestion />
        <BeneAnswer />
        <PmtInstructions />
        <BeneficiaryCurrency>EUR</BeneficiaryCurrency>
        <BeneficiaryAmount>100.00</BeneficiaryAmount>
        <DeliveryMethod>1</DeliveryMethod>
        <PaymentCurrency>EUR</PaymentCurrency>
        <PaymentAmount>100.00</PaymentAmount>
        <CommissionCurrency>EUR</CommissionCurrency>
        <CommissionAmount>1.30</CommissionAmount>
        <CustomerChargeCurrency />
        <CustomerChargeAmount />
        <BeneID>29235119</BeneID>
```

```
<BeneFirstName>INNA</BeneFirstName>
<BeneLastName>BURKUT OLEXANDRIVNA</BeneLastName>
<BeneLastName2 />
<BeneAddress>123 Anywhere Street</BeneAddress>
<BeneCity>CHERKASSY</BeneCity>
<BeneState>CHERKASSY</BeneState>
<BeneZipCode />
<BeneCountry>UA</BeneCountry>
<BenePhoneNo>80931537873</BenePhoneNo>
<BeneMessage />
<CustID>70890495</CustID>
<CustFirstName>OLENA</CustFirstName>
<CustLastName>HAMMERSTEIN</CustLastName>
<CustLastName2 />
<CustCountry>DE</CustCountry>
<CustID1Type>Reisepass</CustID1Type>
<CustID1No>5AK536901</CustID1No>
<CustID1IssuedBy>DMV</CustID1IssuedBy>
<CustID1IssuedByState>Florence</CustID1IssuedByState>          (New to response layout 1.3)
<CustID1IssuedByCountry>AL</CustID1IssuedByCountry>            (New to response layout 1.3)
<CustID1IssuedDate>20100101</CustID1IssuedDate>                (New to response layout 1.3)
<CustID1ExpirationDate>20161108</CustID1ExpirationDate>
<CustID2Type />
<CustID2No />
<CustID2IssuedBy />
<CustID2IssuedByState />                                       (New to response layout 1.3)
<CustID2IssuedByCountry />                                     (New to response layout 1.3)
<CustID2IssuedDate />                                          (New to response layout 1.3)
<CustID2ExpirationDate />
<CustTaxID>555555555</CustTaxID>
<CustTaxCountry>DE</CustTaxCountry>
<CustCountryOfBirth>IT</CustCountryOfBirth>                    (New to response layout 1.3)
<CustNationality>DZ</CustNationality>                          (New to response layout 1.3)
<CustDateOfBirth>19841031</CustDateOfBirth>
<CustOccupation>Clerical</CustOccupation>
<CustSourceOfFunds>Occupation<CustSourceOfFunds>
<CustPaymentMethod>Cash</CustPaymentMethod>                    (New to response layout 1.3)
<TransferReason>Family Assistance</TransferReason>
<BankName>BANCO ABN AMRO S A</BankName>
<BankAccountType>Checking</BankAccountType>
<BankAccountNo>47356371</BankAccountNo>
<BeneIDType>CPF</BeneIDType>                                   (New to response layout 1.3)
<BeneIDNo>04225512606</BeneIDNo>
<BeneTaxID>987654321</BeneTaxID>                               (New to response layout 1.3)
<BankCity>Rio de Janeiro</BankCity>
<BankBranchNo>611</BankBranchNo>
<BankBranchName>Banco Paulista</BankBranchName>
<BankBranchAddress>Av Brigadeiro Faria Lima</BankBranchAddress>
<BankCode>611</BankCode>
<BankRoutingCode>RO72RNCB0221040587290004</BankRoutingCode>    (New to layout 1.3)
<BankRoutingType>ABA</BankRoutingType>                         (New to response layout 1.3)
<BIC_SWIFT>PRDTNGLA</BIC_SWIFT>                                (New to response layout 1.3)
<UnitaryBankAccountNo />                                       (New to response layout 1.3)
<UnitaryType />                                                (New to response layout 1.3)
<Valuetype>Same Day</Valuetype>                                (New to response layout 1.3)
</Order>
</RequestResponses>
<RequestErrors />
```

</Root>

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
RequestType	(Same Enumeration as Request layout)	Text	(varies)		Yes
ResponseLayoutVersion	Ria's Unique Order Number	Text	20		Yes
RequestType	Unique PIN number	Text	20		Yes
SendingCorrespSeqID (New to version 1.11)	SC's Sequential orderID	Integer	10	(0 if not req'd by SC)	Yes
PayingCorrespSeqID	PC's Sequential orderID	Integer	10	(0 if not req'd by PC)	Yes
SalesDate	Ria's Order Sales Date	Text	8	YYYYMMDD	Yes
SalesTime	Ria's Order Sales Time	Text	6	HHMMSS	Yes
CountryFrom	Country From (ISO code)	Text	2		Yes
CountryTo	Country To (ISO code)	Text	2		Yes
PayingCorrespLocID	PC's LocationID. (External LocID to Ria)	Text	20		Yes
SendingCorrespBranchNo	SC's LocationID where the order was received.	Text	20		
BeneQuestion	Beneficiary Question	Text	50		
BeneAnswer	Beneficiary Answer	Text	50		
PmtInstructions	Payment Instructions	Text	100		
BeneficiaryCurrency	Payment Currency to Beneficiary	Text	3		Yes
BeneficiaryAmount	Payment Amount to Beneficiary	Decimal	13	ZZZZZZZZZ9.99 (2 decimals)	Yes
DeliveryMethod	DeliveryMethod Codes: 2 = Bank Deposit 3 = Home Delivery 30 = Debit Card 31 = Bank Transfer 32 = ATM Pickup	Integer			Yes
PaymentCurrency	Payment Currency (ISO) to PC	Text	3		Yes
PaymentAmount	Payment Amount to PC	Decimal	13	ZZZZZZZZZ9.99 (2 decimals)	Yes
CommissionCurrency	Currency Ria will Pay PC in.	Text	3	Currency ISO Symbol	Yes
CommissionAmount	Commission Amount RIA will pay to PC.	Decimal	13	ZZZZZZZZZ9.99 (2 decimals)	Yes
CustomerChargeCurrency	Currency Customer Paid Ria In	Text	3		Conditional
CustomerChargeAmount	Amount Customer Paid Ria	Decimal	13	ZZZZZZZZZ9.99 (2 decimals)	Conditional
BeneID	Ria's Beneficiary ID	Text	20		
BeneFirstName	Beneficiary First Name	Text	50		Yes
BeneLastName	Beneficiary Last Name	Text	50		Yes
BeneLastName2	Beneficiary Second Last Name	Text	50		
BeneAddress	Beneficiary Address	Text	255		
BeneCity	Beneficiary City	Text	50		
BeneState	Beneficiary State	Text	20		Yes
BeneZipCode	Beneficiary Zip Code	Text	20		
BeneCountry	Beneficiary Country (ISO Code)	Text	2		Yes
BenePhoneNo	Beneficiary Phone No.	Text	20		
BeneMessage	Beneficiary Message	Text	255		
CustID	Ria's Customer ID	Text	20		Yes
CustFirstName	Customer First Name	Text	50		Yes
CustLastName	Customer Last Name	Text	50		Yes
CustLastName2	Customer Second Last Name	Text	50		
CustAddress	Customer Address	Text	255		
CustCity	Customer City	Text	50		
CustState	Customer State	Text	20		
CustZipCode	Customer Zip Code	Text	20		
CustCountry	Customer Country (ISO Code)	Text	2		Yes
CustPhoneNo	Customer Phone No	Text	20		
CustID1Type	Customer ID Type	Text	50		
CustID1No	Customer ID No	Text	20		
CustID1IssuedBy	Customer ID Issued by Agency	Text	50		
CustID1IssuedByState	Customer ID Issued by State	Text	20		
CustID1IssuedByCountry	Customer ID Issued by Country	Text	2		
CustID1IssuedDate	Customer ID Issued Date	Text	8	YYYYMMDD	

CustID1ExpirationDate	Customer ID Expiration	Text	8	YYYYMMDD	
CustID2Type	Customer ID2 Type	Text	50		
CustID2No	Customer ID2 No	Text	20		
CustID2IssuedBy	Customer ID2 Issued by Agency	Text	50		
CustID2IssuedByState	Customer ID2 Issued by State	Text	20		
CustID2IssuedByCountry	Customer ID2 Issued by Country	Text	2		
CustID2IssuedDate	Customer ID2 Issued Date	Text	8	YYYYMMDD	
CustID2ExpirationDate	Customer ID2 Expiration	Text	8	YYYYMMDD	
CustTaxID	Customer SSN or TAX id	Text	30		
CustTaxCountry	Customer TAX Country	Text	2		
CustCountryOfBirth	Customer Country of Birth	Text	2		
CustNationality	Customer Nationality	Text	2		
CustDateOfBirth	Customer Date Of Birth	Text	8	YYYYMMDD	
CustOccupation	Customer Occupation	Text	50		
CustSourceOfFunds	Customer Source Of Funds	Text	50		
CustPaymentMethod	Customer Payment Method	Text		**Enumeration:** Cash, Check, Bank Deposit, Credit Card, Debit Card, PayPal	
TransferReason	Transfer Reason	Text	100		
BankName	Bank Name	Text	50		Yes if Delivery Method = 2 or 31
BankAccountType	Bank Account Type	Text		**Enumeration:** Checking, Savings, Credit, Loan	Yes if Delivery Method =2 or 31
BankAccountNo	Account No.	Text	50		*
BeneIDType	Beneficiary ID Type	Text	50		*
BeneIDNo	Beneficiary ID Number.	Text	50		*
BeneTaxID	Beneficiary Tax ID	Text	50		*
BankCity	Bank City	Text	50		*
BankBranchNo	Bank Branch Number	Text	20		*
BankBranchName	Bank Branch Name	Text	100		*
BankBranchAddress	Bank Branch Address	Text	50		*
BankCode	Bank Code	Text	20		*
BankRoutingCode	Bank Routing Code	Text	50		*
BankRoutingType	Bank Routing Type			**Enumeration:** ABA, ABI/CAB, ABM, BankCode, Bankleitzahl, Banque/Guichet BIC, BLZ, BSB, Country, KND Banky, Konstant Symbol, Sort Code, Transit Code	*
BIC_SWIFT	BIC or SWIFT number	Text	20		*
UnitaryBankAccountNo	Unitary Account Number	Text	50		*
UnitaryType	Unitary Account Type	Text		**Enumeration:** IBAN, Clave	*
Valuetype	Value Type	Text		**Enumeration:** Next Business Day, Same Day	*

*** Conditional if Delivery Method is 2, 31 or 32.**

Section 2 (Cont.)

MethodName: InputPayersCustSvcMsgs ()

Description:

Used to submit the PC's outstanding customer service messages for orders previously received from Ria for payment.

Input Structure (including sample data)

```
<Root>
  <PayingCorrespID>123456</PayingCorrespID>
  <InputLayoutVersion>1.0</InputLayoutVersion>
  <CSMessages>
     <CSMessage>
        <PCOrderNo>234621580</PCOrderNo>
        <SCOrderNo>IT66625199</SCOrderNo>
        <MessageID>5193612</MessageID>
        <MessageText>A CSMessage for FXGlobal</MessageText>
        <EnteredBy>Tony Messina</EnteredBy>
     </CSMessage>
     <CSMessage>
        <PCOrderNo>84621580</PCOrderNo>
        <SCOrderNo>US809196297</SCOrderNo>
        <MessageID>5193712</MessageID>
        <MessageText>A second message for Ria</MessageText>
        <EnteredBy>Anthony Vasilli</EnteredBy>
     </CSMessage>
  </CSMessages>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
InputLayoutVersion	Layout Version	Decimal	3,1		Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
MessageID	PC's MessageID	Integer			No
MessageText	Message content	Text	1000		Yes
EnteredBy	Name of user who entered msg	Text	30		Yes

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="Ack_PayersCustSvcMsgs_1.0.xsd"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
  <InputType>PayersCustSvcMsgs</InputType>
  <ItemsProcessed>5</ItemsProcessed>
  <Acknowledgements>
      <CSMessageAcknowledgement>
        <PCOrderNo>237621580</PCOrderNo>
        <SCOrderNo>UK665091977</SCOrderNo>
        <PCMessageID>5193412</PCMessageID>
        <ProcessDate>20110809</ProcessDate>
        <ProcessTime>181742</ProcessTime>
        <NotificationCode>1000</NotificationCode>
        <NotificationDesc>Success</NotificationDesc>
      </CSMessageAcknowledgement>

      ....

  </Acknowledgements>
  <InputErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Success
2000	Invalid CorrespID Value
2001	Error ocurred during order lookup. CS message rejected.
2002	CSMessage Insertion Error (No longer used as of ver 1.5)
2003	Order not found. CS Message rejected.
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
InputType	Literal value	Text	17	"PayersCustSvcMsgs"	Yes
ItemsProcessed	Number of items processed	Integer			Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
PCMessageID	PC's Message ID	Integer			Yes
ProcessDate	(Self-explanatory)	Text	8	yyyyyMMdd	Yes
ProcessTime	(Self-explanatory)	Text	6	HHmmss	Yes
NotificationCode	(Self-explanatory)	Integer			Yes
NotificationDesc	(Self-explanatory)	Text	255		Yes

MethodName: InputOrderStatusNotices()

Description:
Used to submit the PC's outstanding OrderStatus notices for orders previously received from Ria for payment.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="UTF-8" standalone="yes" ?>
<Root>
  <PayingCorrespID>123456</PayingCorrespID>
  <InputLayoutVersion>1.1</InputLayoutVersion>
  <OrderStatusNotices>
     <OrderStatusNotice>
        <PCOrderNo>1968000</PCOrderNo>
        <SCOrderNo>SE874647580</SCOrderNo>
        <NotificationID>123460</NotificationID>
        <OrderStatus>RECEIVED</OrderStatus>
        <StatusDate>20110801</StatusDate>
        <StatusTime>103925</StatusTime>
     </OrderStatusNotice>
     <OrderStatusNotice>
        <PCOrderNo>1968000</PCOrderNo>
        <SCOrderNo>SE874647580</SCOrderNo>
        <NotificationID>123460</NotificationID>
        <OrderStatus>REJECTED</OrderStatus>
        <StatusDate>20110801</StatusDate>
        <StatusTime>104001</StatusTime>
        <Reason>Payout location no longer available</Reason>
     </OrderStatusNotice>
     <OrderStatusNotice>
        <PCOrderNo>1968001</PCOrderNo>
        <SCOrderNo>IT104548699</SCOrderNo>
        <NotificationID>123463</NotificationID>
        <OrderStatus>PAID</OrderStatus>
        <StatusDate>20110703</StatusDate>
        <StatusTime>114639</StatusTime>
        <BenIDType>Passport</BenIDType>
        <BenIDNo>1337262</BenIDNo>
        <BenIDExpDate>20121005</BenIDExpDate>
        <BenIDIssuedBy>Germany</BenIDIssuedBy>
        <PaidByCorrespID>3158735</PaidByCorrespID>  (New to ver 1.6)
     </OrderStatusNotice>
     <OrderStatusNotice>
        <PCOrderNo>1963761</PCOrderNo>
        <SCOrderNo>ES1461529099</SCOrderNo>
        <NotificationID>123465</NotificationID>
        <OrderStatus>CANCELED</OrderStatus>
        <StatusDate>20110801</StatusDate>
        <StatusTime>110820</StatusTime>
        <Reason>Request to cancel received from Ria</Reason>
     </OrderStatusNotice>
   </OrderStatusNotices>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Required
PayingCorrespID	PC's Unique ID (Assigned by Ria)	Integer			Yes
InputLayoutVersion	Layout Version	Decimal	3,1		Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
NotificationID	PC's NotificationID	Integer			No
OrderStatus	Enumeration (see Format).	Text		Accepted Values: "RECEIVED", "REJECTED", "PAID", "CANCELED"	Yes
StatusDate	(Self-explanatory)	Text	8	yyyyyMMdd	Yes
StatusTime	(Self-explanatory)	Text	6	HHmmss	Yes
Reason	Reason why order was CANCELED or REJECTED	Text	1000		No
BenIDType	Beneficiaries' ID Type	Text	50		*
BenIDNo	Beneficiaries' ID Number	Text	50		*
BenIDExpDate	Beneficiaries' ID Expiration Date	Text	0/8	Blank or yyyyMMdd	* #
BenIDIssuedBy	Country that issued BenID	Text	50		*
PaidByCorrespID	ID of Sub-Correspondent that actually paid the order if different from the PayingCorrespID.	Integer			No

* Only required if OrderStatus = "PAID".
\# BenIDExpDate not required for certain ID types.

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="Ack_OrderStatus_1.0.xsd" xmlns=""
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
  <InputType>OrderStatusNotices</InputType>
  <ItemsProcessed>3</ItemsProcessed>
  <Acknowledgements>
      <OrderStatusNoticeAcknowledgement>
        <PCOrderNo>1968000</PCOrderNo>
        <SCOrderNo>SE874647580</SCOrderNo>
        <PCNotificationID>123460</PCNotificationID>
        <ProcessDate>20110809</ProcessDate>
        <ProcessTime>182333</ProcessTime>
        <NotificationCode>1000</NotificationCode>
        <NotificationDesc>Success</NotificationDesc>
      </OrderStatusNoticeAcknowledgement>

      ....

  </Acknowledgements>
  <InputErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Success
2000	Invalid CorrespID Value
2020	Sending Correspondent Cannot Locate SCOrderNo: <SCOrderNo>. Notification Refused.
2021	Cannot Verify PayingCorrespondent Controls SCOrderNo: <SCOrderNo>. Notification Refused.
2022	PAID Notification Rejected. Order Was Already Marked as <"CANCELED"/"PAID"/"VOID">
2023	CANCELED Notification Rejected. Order Was Already Marked as <"CANCELED"/"PAID"/"VOID">
2030	Invalid PaidBy CorrespondentID (New to ver 1.6)
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.
6000	Processing Error

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
InputType	Literal value	Text	18	"OrderStatusNotices"	Yes
ItemsProcessed	Number of items processed	Integer			Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
PCNotificationID	PC's Notification ID	Integer			Yes
ProcessDate	(Self-explanatory)	Text	8	yyyyyMMdd	Yes
ProcessTime	(Self-explanatory)	Text	6	HHmmss	Yes
NotificationCode	(Self-explanatory)	Integer			Yes
NotificationDesc	(Self-explanatory)	Text	255		Yes

MethodName: InputCancelRequestResponses()

Description:

Used to submit the PC's responses to Ria's cancellation requests retrieved through a preceding call to the **GetCancelationRequests** interface method.

Applies to: Orders previously downloaded from Ria for payment via the **GetOrdersForDownload** method.

Input Structure (including sample data)

```
<?xml version="1.0" encoding="UTF-8" standalone="yes" ?>
<Root>
  <PayingCorrespID>123456</PayingCorrespID>
  <InputLayoutVersion>1.0</InputLayoutVersion>
  <CancelRequestResponses>
      <CancelRequestResponse>
          <PCOrderNo>1968000</PCOrderNo>
          <SCOrderNo>SE874647580</SCOrderNo>
          <ResponseCode>1000</ResponseCode>
          <ResponseDesc>Accepted</ResponseDesc>
          <ResponseDate>20120912</ResponseDate>
          <ResponseTime>103925</ResponseTime>
          <Comments />
      </CancelRequestResponse>
      <CancelRequestResponse>
                . . . .
          <ResponseCode>2000</ResponseCode>
          <ResponseDesc>Rejected - Order Not Found</ResponseDesc>
                . . . .
      </CancelRequestResponse>
      <CancelRequestResponse>
                . . . .
          <ResponseCode>2001</ResponseCode>
          <ResponseDesc>Rejected - Order Already Paid</ResponseDesc>
                . . . .
      </CancelRequestResponse>
      <CancelRequestResponse>
                . . . .
          <ResponseCode>2002</ResponseCode>
          <ResponseDesc>Rejected - Order Already Canceled</ResponseDesc>
                . . . .
      </CancelRequestResponse>
      <CancelRequestResponse>
                . . . .
          <ResponseCode>2003</ResponseCode>
          <ResponseDesc> Rejected - Other </ResponseDesc>
          <ResponseDate>20120912</ResponseDate>
          <ResponseTime>153942</ResponseTime>
          <Comments>Any reason not covered by the standard responses can be
        communicated here.</Comments>
      </CancelRequestResponse>
   </CancelRequestResponses>
</Root>
```

Fields:

Element	Desc	Type	Size	Format	Req'd
PayingCorrespID	PC's Unique ID	Integer			Yes
InputLayoutVersion	Layout Version	Decimal	3,1		Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
ResponseCode	Enumeration (see Format).	Integer		Accepted Values: 1000, 2000, 2001, 2002, 2003	Yes
ResponseDesc	Enumeration (see Format).	Text		Accepted Values: "Accepted", "Rejected - Order Not Found", "Rejected - Order Already Paid", "Rejected - Order Already Canceled", "Rejected - Other"	Yes
ResponseDate	(Self-explanatory)	Text	8	yyyyyMMdd	Yes
ResponseTime	(Self-explanatory)	Text	6	HHmmss	Yes
Comments	Used to communicate any reason not covered in the standard responses.	Text	255		No

Response Structure (including sample data)

```
<Root xsi:noNamespaceSchemaLocation="Ack_CancReqResponses_1.0.xsd" xmlns=""
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <ResponseLayoutVersion>1.0</ResponseLayoutVersion>
  <InputType>CancelRequestResponses</InputType>
  <ItemsProcessed>5</ItemsProcessed>
  <Acknowledgements>
      <CancelRequestResponseAcknowledgement>
        <PCOrderNo>1968000</PCOrderNo>
        <SCOrderNo>SE874647580</SCOrderNo>
        <ProcessDate>20110809</ProcessDate>
        <ProcessTime>182333</ProcessTime>
        <NotificationCode>1000</NotificationCode>
        <NotificationDesc>Success</NotificationDesc>
      </CancelRequestResponseAcknowledgement>

      ....

  </Acknowledgements>
  <InputErrors />
</Root>
```

Possible Response Codes:

Code	Text
1000	Success
2000	Invalid CorrespID Value
2020	Sending Correspondent Cannot Locate SCOrderNo: <SCOrderNo>. Notification Refused.
2021	Cannot Verify PayingCorrespondent Controls SCOrderNo: <SCOrderNo>. Notification Refused.
5000	Input XML is Invalid. Mandatory <PayingCorrespID> element not found or contains an invalid value.
5001	Input XML is Invalid. Schema Messages: <Messages>
5002	Exception occurred while doing generic input document validation.
5003	Invalid Client Certificate Thumbprint Presented
5004	Exception Occurred While Authenticating Caller
6000	Processing Error

Fields:

Element	Desc	Type	Size	Format	Required
ResponseLayoutVersion	Layout version	Decimal	3,1		Yes
InputType	Literal value	Text	18	"CancelRequestResponses"	Yes
ItemsProcessed	Number of items processed	Integer			Yes
PCOrderNo	PC's order number	Text	20		Yes
SCOrderNo	Ria's order number	Text	20		Yes
ProcessDate	(Self-explanatory)	Text	8	yyyyyMMdd	Yes
ProcessTime	(Self-explanatory)	Text	6	HHmmss	Yes
NotificationCode	(Self-explanatory)	Integer			Yes
NotificationDesc	(Self-explanatory)	Text	255		Yes

Appendix A – Additions/Modifications

Included In Version 1.3

Effective Date: Oct 5, 2011

Item	Page(s)
Interface renamed from "Sending" to 'RiaAsSender"	Title Page
New BasicHttp binding option is available for compatibility with Java/PHP/Linux clients	N/A

Included In Version 1.4

Effective Date: Nov 21, 2011

#	Item	Page(s)
1	New version (1.1) of response layout to **OP_VerifyOrderForPayout** method. New <CountryFrom> element added.	9,10
2	New schema (XSD) file available for response layout change listed in item #1 (VerifyOrder_Response_1.1.xsd)	N/A
3	New fields returned in response layout to **OP_ConfirmOrderPaid** method. New <PCCommissionCurrency> and <PCCommissionAmount> elements added.	13
4	New schema (XSD) file available for response layout change listed in item #3 (ConfirmOrderPaid_Response_1.1.xsd)	N/A
5	Beginning with this release the client certificate's thumbprint (if applicable) will be validated against the <PayingCorrespID> value. Calls that fail this validation will be rejected with the following response: **OP methods -** Return Code/Text of 5003/"Invalid Client Certificate Thumbprint Presented" **All other methods –** The ErrorMsg attribute of the <Error> element will read "Invalid Client Certificate Thumbprint Presented">	N/A
6	Corrected encoding to "UTF-8" on several XSD files. Please use the corrected versions (available upon request).	N/A
7	New possible response code for the **OP_VerifyOrderForPayout** method. Code/Desc: (2005 – "The Order's delivery method does not allow for Open Payout. It must be downloaded.")	10

Included In Version 1.5

Effective Date: Feb 14, 2012

#	Item	Page(s)
1	The order lookup logic for the **OP_VerifyOrderForPayout** method will now ignore any decimal places in the amount. For example: If the order amount is $225.76, any amount submitted betweeen $225.00 and $225.99 will be considered a match.	9
2	New possible response code for the **OP_ConfirmOrderPaid** method. Code/Desc: (2009 – "Beneficiary Currency And/Or Amount Is Incorrect.")	12
3	Updated **Production Environment** paragraph regarding client certificates.	4
4	Code 2002 removed from possible return codes	22
5	New possible response code for **OP_VerifyOrderForPayout** method if caller's country does not match the Order's CountryTo value. Code/Desc: (2006 – "Order Is Not Assigned To Paying Correspondent's Country.")	10
6	Three new fields have been added to the **GetOrdersForDownload** response layout: BankBranchNo, BankBranchName, BankBranchAddress. These are required for bank deposit transactions in some countries.	20
7	New schema (XSD) file available for response layout change listed in item #6. (DownloadedOrders_1.1.xsd)	N/A

Included In Version 1.6

Effective Date: March 10, 2012

1	New Optional <PaidByCorrespID> element in the OrderStatus Notification layout.	23, 24
2	<InputLayoutVersion> element value changed to "**1.1**" to reflect change listed in item #1.	23
3	New schema (XSD) file available for OrderStatus Notification layout change listed in item #1. (Import_OrderStatusNotices_1.1.xsd)	N/A
4	New possible response code to **InputOrderStatusNotices** method. Code/Desc: (2030 – "Invalid PaidBy CorrespondentID.")	25

Included In Version 1.7

Effective Date: April 10, 2012

1	Modified schema (XSD) file (DownloadedOrders_1.0.xsd). Added minOccurs = "0" on Order element.	N/A
2	New <BankCode> element in downloaded orders layout.	18, 20
3	New schema (XSD) file available for downloaded orders layout change listed in item #2. (DownloadedOrders_1.2.xsd)	N/A
4	Corrected data type and size of the <PayingCorrespLocID> element on downloaded orders from Integer (10) to Text (20).	17
5	Two new response codes for InputPayersCustSvcMsgs method (2001, 2003)	22

Included In Version 1.8

Effective Date: April 25, 2012

#	Item	Page(s)
1	Proof reader corrections to documentation only – No webservice changes.	

Included In Version 1.9

Effective Date (Staging): July 16, 2012

#	Item	Page(s)
1	New version (1.3) of the Downloaded orders layout to add the following 17 new fields: CustID1IssuedByState CustID1IssuedByCountry CustID1IssuedDate CustID2IssuedByState CustID2IssuedByCountry CustID2IssuedDate CustCountryOfBirth CustNationality CustPaymentMethod BeneIDType BeneTaxID BankRoutingCode BankRoutingType BIC_SWIFT UnitaryBankAccountNo UnitaryType Valuetype	19-21
2	New schema (XSD) file available for downloaded orders layout change listed in item #1. (DownloadedOrders_1.3.xsd)	N/A

3	The <ConfirmPaidTransRefID> value of the OP_VoidOrderPaidConfirmation method can now be either the TransRefID returned by the OP_VerifyOrderForPayout method **OR** the OP_ConfirmOrderPaid method in case the client experiences a timeout when calling the OP_ConfirmOrderPaid method which would prevent the client from receiving the later confirmation TransRefID.	14
4	The data type of the <CorrespLocID> element of the OP_ConfirmOrderPaid method has been changed from Integer to Text(20). This allows for the fact that some correspondents use alpha characters in their location IDs. When confirming an order as paid the correspondent should use this element to provide Ria with the location ID that actually paid out the order. It is assumed that these location IDs have already been communicated to Ria for cross referencing to our internal location ID numbers. Please contact the Correspondent Administration department for any questions regarding this process which is outside of the scope of this interface.	12
5	The schema file for the OP_ConfirmOrderPaid method (OP_ConfirmOrderPaid_1.0.xsd) has been modified to accommodate the change in item number 4 above. No new version of the schema file was created since this modification will not break the existing interface.	N/A

Included In Version 1.10

Effective Date (Staging): September 17, 2012

#	Item	Page(s)
1	New interface method (**`InputCancelRequestResponses`**) added for communicating back to Ria the Paying Correspondent's exact response to cancellation requests retrieved by calling the **`GetCancellationRequests()`** method.	27
2	New schema (XSD) file available for input of cancellation request responses listed in item #1. (Import_CancReqResponses_1.0.xsd)	N/A
3	New schema (XSD) file available for Ria's acknowledgement of cancellation request responses listed in item #1. (Ack_CancReqResponses_1.0.xsd)	N/A

Included In Version 1.10.1 (Documentation changes only)

#	Item	Page(s)
1	Fixed a typo on p. 29	29
2	Added note regarding VPN tunnel option	4

Included In Version 1.11

Effective Date (Staging): March 11, 2013

#	Item	Page(s)
1	New element to contain the paying correspondent's sequence ID (<SeqIDPA>) in the **OP_VerifyOrderForPayout** response layout.	9, 10
2	<ResponseLayoutVersion> element value changed to "**1.2**" to reflect change listed in item #1 above.	9
3	New schema (XSD) file available for **OP_VerifyOrderForPayout** response layout change listed in item #1 above. (VerifyOrder_Response_1.2.xsd)	N/A
4	New element to contain the originating correspondent's sequence ID (<SendingCorrespSeqID>) in the **GetOrdersForDownload** response layout.	18, 20
5	<ResponseLayoutVersion> element value changed to "**1.4**" to reflect changes listed in item #5 above.	18
6	New schema (XSD) file available for **GetOrdersForDownload** response layout change listed in item #5 above. (DownloadedOrders_1.4.xsd)	N/A

Included In Version 1.12

Effective Date: May 30, 2013

#	Item	Page(s)
1	**Documentation change only:** Changed all <PayingCorrespID> element values in XML samples to the fictitious value "123456".	

Included In Version 1.13

Effective Date: September 26, 2013

#	Item	Page(s)
1	**Documentation change only:** Changed three fields prefixed with "CustID1" to the more correct "CustID2" in the **GetOrdersForDownload** response layout.	19